




FCC PART 74, SUBPART H TEST AND MEASUREMENT REPORT

For

Lectrosonics, Inc.

581 Laser Road NE Rio Rancho, NM 87124, USA

FCC ID: DBZDPR

Report Type: Original Report	Product Type: Digital Wireless Microphone Transmitter
Prepared By	Christian McCaig Test Engineer 
Report Number	R1903012-74
Report Date	2019-04-18
Reviewed By	Xiao Lin RF Lead 
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Ave Sunnyvale, CA 94089, USA Tel: (408) 732-9162, Fax: (408) 732 9164	



Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" (Rev-12)

TABLE OF CONTENTS

1	GENERAL DESCRIPTION	5
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2	MECHANICAL DESCRIPTION OF EUT	5
1.3	OBJECTIVE	5
1.4	RELATED SUBMITTAL(S)/GRANT(S).....	5
1.5	TEST METHODOLOGY	5
1.6	MEASUREMENT UNCERTAINTY.....	6
1.7	TEST FACILITY REGISTRATIONS	6
1.8	TEST FACILITY ACCREDITATIONS.....	6
2	EUT TEST CONFIGURATION.....	9
2.1	JUSTIFICATION.....	9
2.2	EUT EXERCISE SOFTWARE.....	9
2.3	DUTY CYCLE CORRECTION FACTOR.....	9
2.4	SPECIAL EQUIPMENT	9
2.5	EQUIPMENT MODIFICATIONS	9
2.6	LOCAL SUPPORT EQUIPMENT.....	10
2.7	INTERFACE PORTS AND CABLES	10
3	SUMMARY OF TEST RESULTS.....	11
4	FCC §2.1093 - RF EXPOSURE	12
5	FCC §74.861(E) (1) - RF OUTPUT POWER	13
5.1	APPLICABLE STANDARDS	13
5.2	TEST PROCEDURE	13
5.3	TEST EQUIPMENT LIST AND DETAILS	13
5.4	TEST ENVIRONMENTAL CONDITIONS	13
5.5	TEST RESULTS	14
6	FCC §74.861(E) (5) (7) - OCCUPIED BANDWIDTH & EMISSION MASK	15
6.1	APPLICABLE STANDARDS	15
6.2	TEST PROCEDURE	15
6.3	TEST EQUIPMENT LIST AND DETAILS	15
6.4	TEST ENVIRONMENTAL CONDITIONS.....	16
6.5	TEST RESULTS	16
7	FCC §74.861(E) (7) - CONDUCTED SPURIOUS EMISSIONS AT ANTENNA PORT	20
7.1	APPLICABLE STANDARDS	20
7.2	TEST PROCEDURE	20
7.3	TEST EQUIPMENT LIST AND DETAILS	20
7.4	TEST ENVIRONMENTAL CONDITIONS.....	21
7.5	TEST RESULTS	21
8	FCC §74.861(E) (7) - FIELD STRENGTH OF SPURIOUS RADIATION	24
8.1	APPLICABLE STANDARDS	24
8.2	TEST PROCEDURE	24
8.3	TEST EQUIPMENT LIST AND DETAILS	24
8.4	TEST ENVIRONMENTAL CONDITIONS.....	25
8.5	TEST RESULTS	25
9	FCC §74.861(E) (4) - FREQUENCY STABILITY.....	26
9.1	APPLICABLE STANDARDS	26
9.2	TEST PROCEDURE	26
9.3	TEST EQUIPMENT LIST AND DETAILS	27
9.4	TEST ENVIRONMENTAL CONDITIONS.....	27
9.5	TEST RESULTS	28
10	APPENDIX A - EUT TEST SETUP PHOTOGRAPHS.....	35

11 APPENDIX B - EUT EXTERNAL PHOTOGRAPHS.....36

12 APPENDIX C - EUT INTERNAL PHOTOGRAPHS.....37

13 APPENDIX D - A2LA ELECTRICAL TESTING CERTIFICATE38

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1903012-74	Original Report	2019-04-18

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report has been compiled on behalf of *Lectrosonics, Inc.* and their product model: *DPR, FCC ID: DBZDPR*, which henceforth is referred to as the EUT (Equipment Under Test). The EUT is a Digital wireless microphone transmitter.

The EUT operates in the frequency range: 470.1-607.95 MHz.

1.2 Mechanical Description of EUT

The UUT measures approximately 11 cm (L) x 4 cm (W) x 3.5 cm (H) and weighs approximately 0.2 kg.

The data gathered are from a typical production sample provided by the Lectrosonics, Inc. with serial number:3

1.3 Objective

The following type approved report is prepared on behalf of *Lectrosonics, Inc.* in accordance with Part 74, Subparts H of the Federal Communications Commission rules.

The objective is to determine compliance with Part 74 of the FCC Rules, limits for RF output power, Modulation characteristics, Emission bandwidth, Field strength of spurious radiation and Frequency stability for license-exempt, low-power radio apparatus operating in the television bands.

1.4 Related Submittal(s)/Grant(s)

N/A

1.5 Test Methodology

All measurements contained in this report were conducted in accordance with FCC KDB 971168 D01 Power Meas License Digital Systems v03r01, and EN 300 422-1 v1.4.2 Electromagnetic compatibility and Radio Spectrum Matters; Wireless microphones in the 25MHz to 3GHz frequency range.

All tests were performed at Bay Area Compliance Laboratories Corp.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR16-4-2:2011, The Treatment of Uncertainty in EMC Measurements, the values ranging from ± 2.0 dB for Conducted Emissions tests and ± 4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

1.7 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.8 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3279.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body

- - For the USA (Federal Communications Commission):

- 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
- 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
- 3- All Telephone Terminal Equipment within FCC Scope C.

- For the Canada (Industry Canada):

- 1- All Scope 1-Licence-Exempt Radio Frequency Devices;
- 2- All Scope 2-Licensed Personal Mobile Radio Services;
- 3- All Scope 3-Licensed General Mobile & Fixed Radio Services;
- 4- All Scope 4-Licensed Maritime & Aviation Radio Services;
- 5- All Scope 5-Licensed Fixed Microwave Radio Services
- 6- All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.

For Singapore (Info-Communications Development Authority (IDA)):

- 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2

- For the Hong Kong Special Administrative Region:

- 1 All Radio Equipment, per KHCA 10XX-series Specifications;
- 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
- 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.

- For Japan:

- 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
- 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes & Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)
 - for Imaging Equipment (ver. 2.0)
 - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products

- for Residential Ceiling Fans (ver. 3.0)
- for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D. A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Industry Canada - IC) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA)
APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Development Authority - IDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC;
 - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;

2 EUT Test Configuration

2.1 Justification

The EUT was configured for testing according to KDB 971168 D01 v03r01.

2.2 EUT Exercise Software

None

2.3 Duty Cycle Correction Factor


Frequency (MHz)	Total On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
470.100	100	100	100	0.00

Duty Cycle = On Time (ms)/ Period (ms)

Duty Cycle Correction Factor (dB) = $10 \cdot \log(1/\text{Duty Cycle})$

Please refer to the following plots.

Duty Cycle

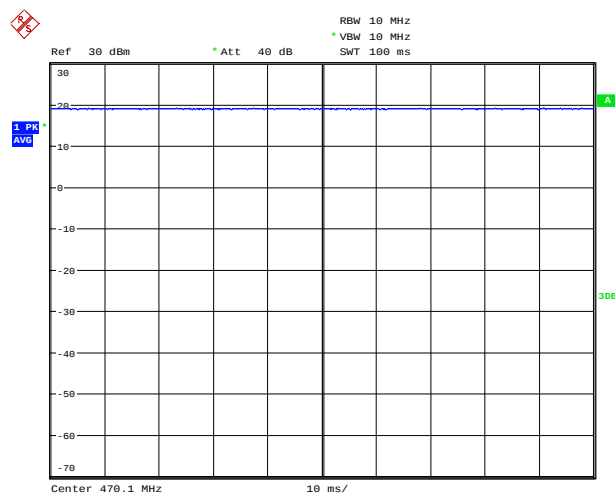

2.4 Special Equipment

There were no special accessories were required, included, or intended for use with EUT during these tests.

2.5 Equipment Modifications

Customer modified the EUT to add a SMA connector for testing purposes.

2.6 Local Support Equipment

None

2.7 Interface Ports and Cables

None

3 Summary of Test Results

FCC Rules	Descriptions of Test	Result (s)
FCC §2.1093	RF exposure	Compliant ¹
FCC §74.861(e)(1)	RF output power	Compliant
FCC §74.861(e)(3)	Modulation characteristics	Not applicable ²
FCC §74.861(e)(5)(7)	Operating bandwidth & Emission mask	Compliant
FCC §74.861(e)(7)	Spurious emissions at the antenna port	Compliant
FCC §74.861(e)(7)	Field strength of spurious emissions	Compliant
FCC §74.861(e)(4)	Frequency Tolerance	Compliant

Note 1: Please refer to report R1903012-SAR

Note 2: Not applicable: The EUT only supports digital modulation (8PSK).

4 FCC §2.1093 - RF Exposure

Please refer to report R1903012-SAR for results.

5 FCC §74.861(e) (1) - RF Output Power

5.1 Applicable Standards

According to FCC §74.861 (e) (1): the power may not exceed the following values:

- (i) 54-72, 76-88, and 174-216 MHz bands—50 mW EIRP
- (ii) 470-608 and 614-698 MHz bands—250 mW Conducted power
- (iii) 600 MHz duplex gap: 20 mW EIRP

5.2 Test Procedure

KDB 971168 D01 v03r01

5.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
ETS-LINDGREN	Power Sensor	7002-006	160097	2018-12-31	2 years
-	RF Cable	-	-	Each time ¹	N/A
-	20dB Attenuator	-	-	Each time ¹	N/A

Note¹: cable included in the test set-up will be checked each time before testing.

Statement of Traceability: **BACL Corp.** attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) “A2LA Policy on Metrological Traceability”.

5.4 Test Environmental Conditions

Temperature:	22 °C
Relative Humidity:	45 %
ATM Pressure:	101.2 kPa

The testing was performed by Christian McCaig on 2019-03-26 at RF site.

5.5 Test Results

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limits (dBm)	Rated Power (mW/dBm)
Low	470.100	16.30	24	50/17
		13.43	24	25/14
Middle	539.025	16.54	24	50/17
		13.52	24	25/14
High	607.950	16.51	24	50/17
		13.37	24	25/14

6 FCC §74.861(e) (5) (7) - Occupied Bandwidth & Emission Mask

6.1 Applicable Standards

According to FCC §74.861 (e) (5) (7):

The operating bandwidth shall not exceed 200 kHz.

Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 (Figure 4) of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2 (2011-08).

6.2 Test Procedure

The OBW is according to KDB 971168 D01 v03r01

The Emission mask is according to sections 8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08).

6.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Rohde & Schwarz	Spectrum Analyzer	FSQ26	200749	2019-03-14	2 years
-	RF Cable	-	-	Each time ¹	N/A

Note¹: cable included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) "A2LA Policy on Metrological Traceability".

6.4 Test Environmental Conditions

Temperature:	22 °C
Relative Humidity:	45 %
ATM Pressure:	101.2 kPa

The testing was performed by Christian McCaig on 2019-03-26 at RF site.


6.5 Test Results

Center Frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)	Result	Power Setting
539.025	151.9	200	Pass	High (50 mW)
539.025	150.0	200	Pass	Low (25 mW)

Please refer to the following plots for detailed test results


(50 mW power setting)

Occupied Bandwidth

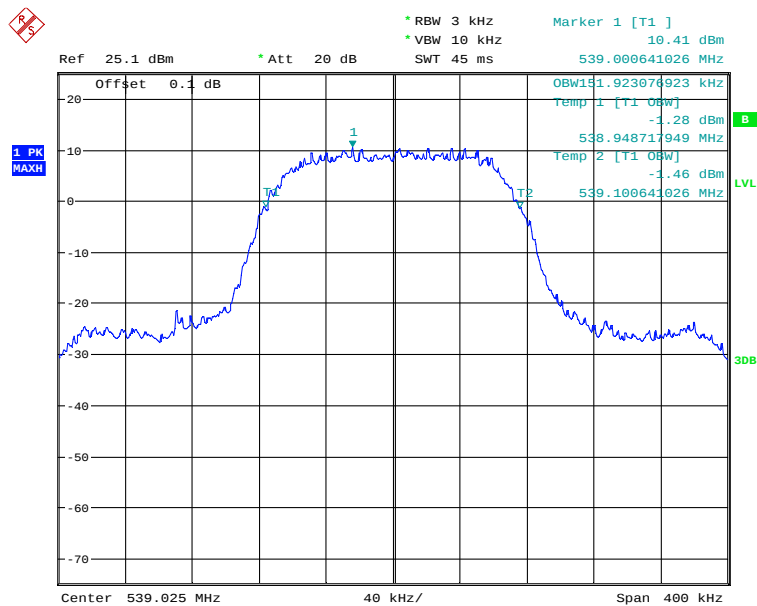


Date: 26.MAR.2019 08:45:14

Emission Mask 1

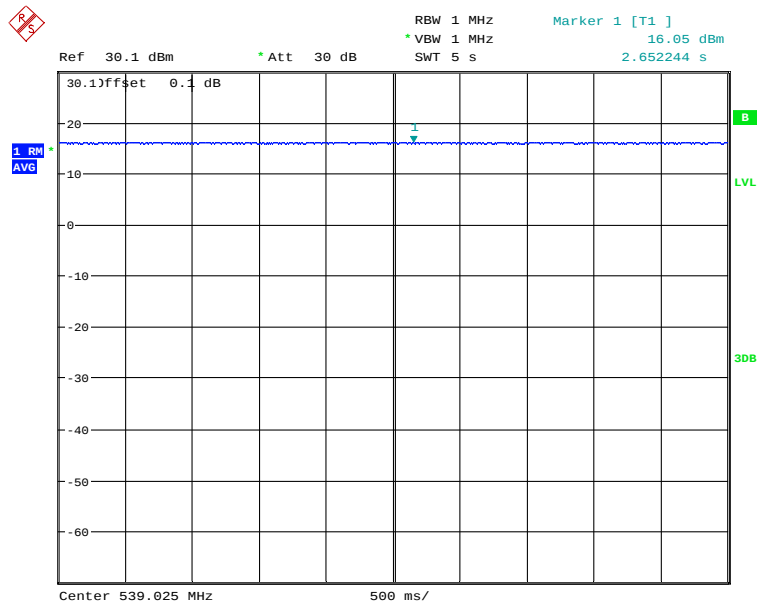


Date: 26.MAR.2019 11:15:10

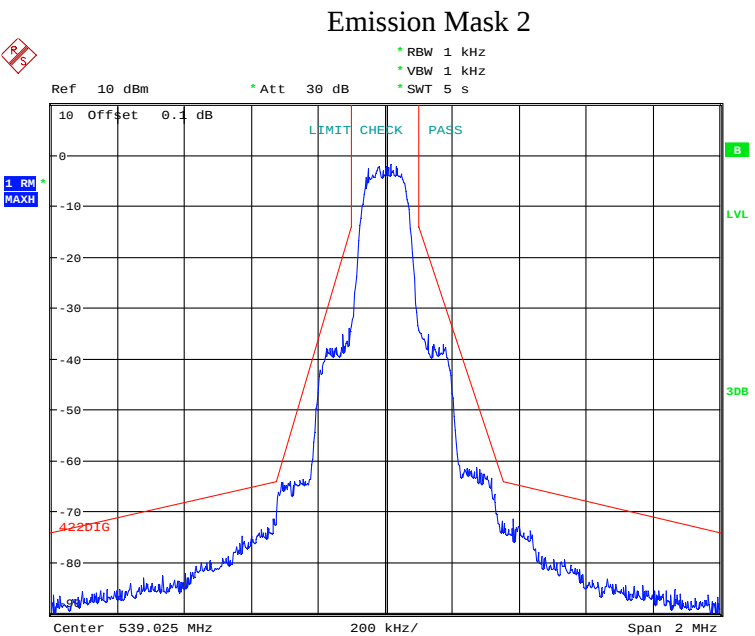

Date: 26.MAR.2019 11:20:25

(25 mW power setting)

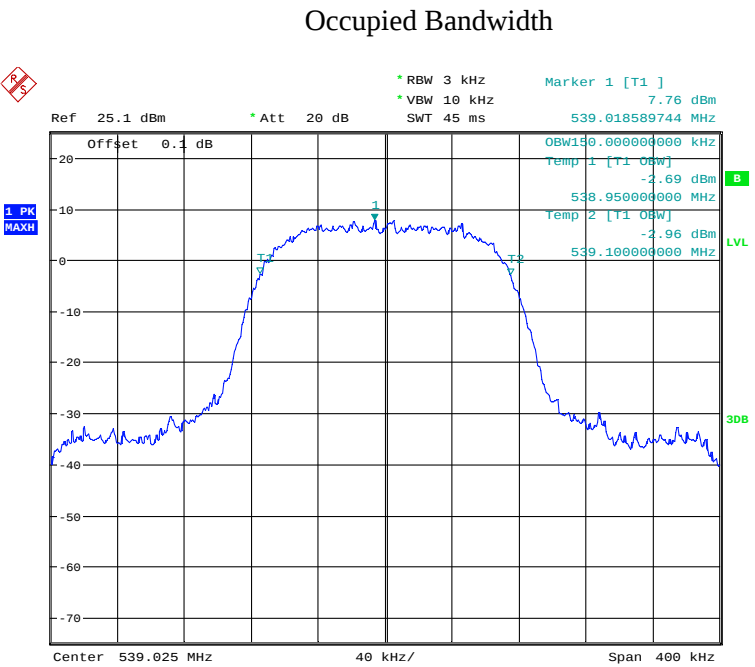

Date: 26.MAR.2019 08:44:18

Ref 30.1 dBm * Att 30 dB RBW 1 MHz VBW 1 MHz SWT 5 s Marker 1 [T1] 12.98 dBm 3.501603 s

30.1 Offset 0.1 dB


1 RM AVG

20 10 0 -10 -20 -30 -40 -50 -60

Center 539.025 MHz 500 ms/

B LVL 30dB

Emission Mask 2

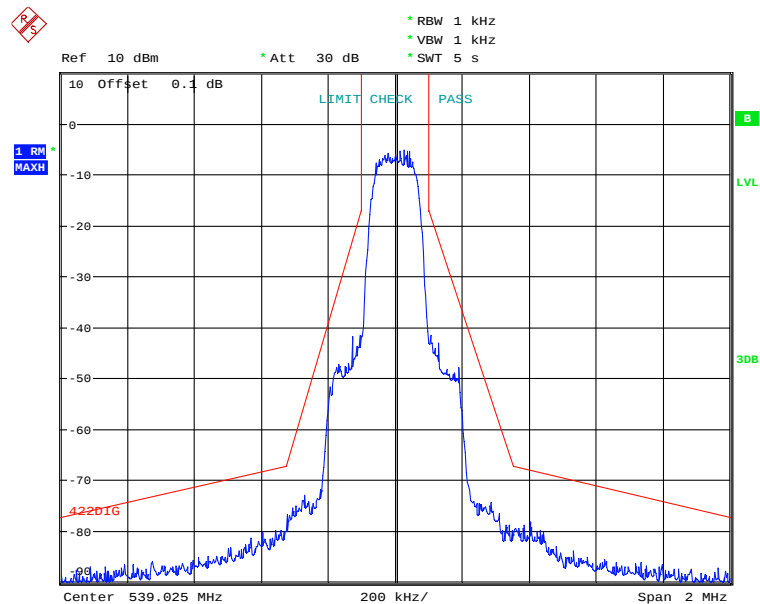

FCC Part 74 Test Report

7 FCC §74.861(e) (7) - Conducted Spurious Emissions at Antenna Port

7.1 Applicable Standards

According to FCC §74.861 (e) (7):

Analog emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.1.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 (Figure 4) of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2 (2011-08). The requirements of this paragraph (e)(7) shall not apply to applications for certification of equipment in these bands until nine months after release of the Commission's Channel Reassignment Public Notice, as defined in §73.3700(a)(2) of this chapter.

7.2 Test Procedure

KDB 971168 D01 v03r01 and ETSI EN 300 422-1 V1.4.2 (2011-08).

7.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Rohde & Schwarz	Spectrum Analyzer	FSQ26	200749	2019-03-14	2 years
-	RF Cable	-	-	Each time ¹	N/A

Note¹: cable included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) "A2LA Policy on Metrological Traceability".


7.4 Test Environmental Conditions

Temperature:	22 °C
Relative Humidity:	45 %
ATM Pressure:	101.2 kPa


The testing was performed by Christian McCaig on 2019-03-25 at RF site.

7.5 Test Results

Please refer to the following table plots for detailed test results, testing was done at the highest power setting and limits from ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and radio spectrum matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; Part 1: Technical characteristics and methods of measurement were used for worst case limits.

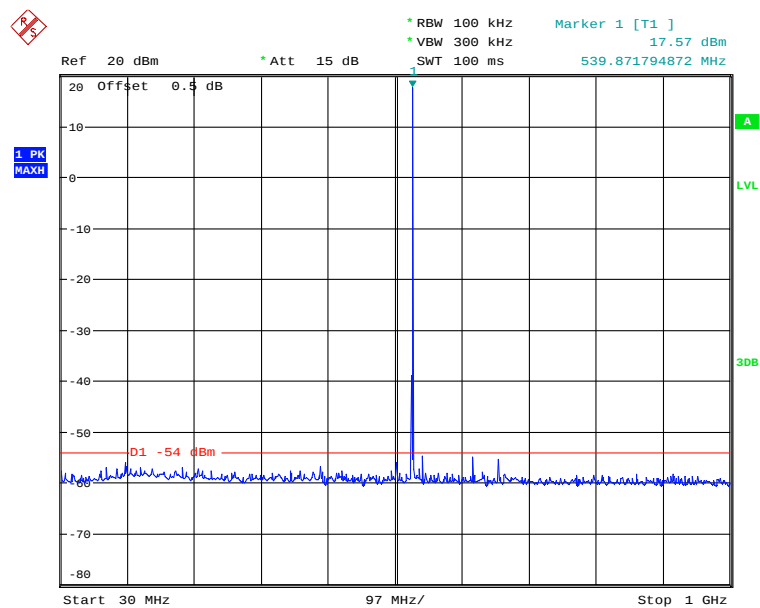539.025 MHz:**30 MHz to 1 GHz**


Date: 23.APR.2019 11:37:43

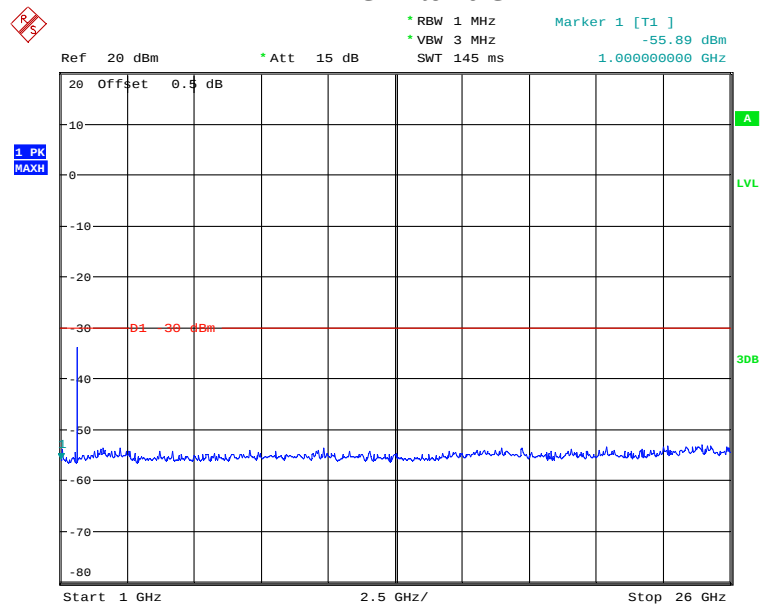1 GHz to 26 GHz

Date: 23.APR.2019 11:39:10


Standby:

30 MHz to 1 GHz

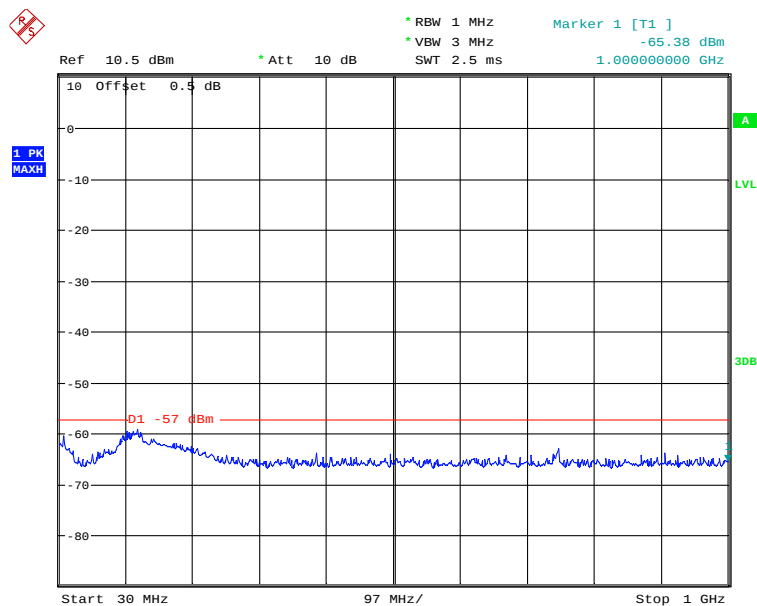

Date: 23.APR.2019 11:43:14

1 GHz to 26 GHz

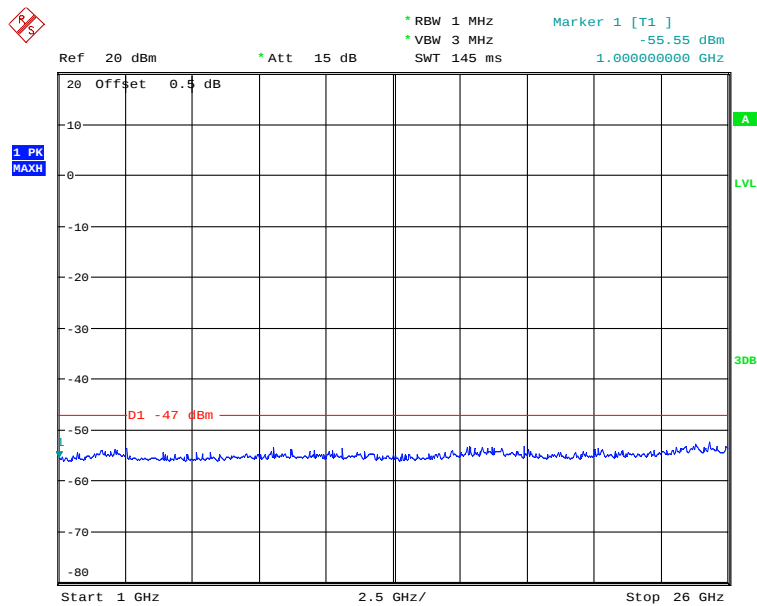

Date: 23.APR.2019 11:40:35

8 FCC §74.861(e) (7) - Field Strength of Spurious Radiation

8.1 Applicable Standards

According to FCC §74.861 (e) (7):

Analog emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.1.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 (Figure 4) of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2 (2011-08). The requirements of this paragraph (e)(7) shall not apply to applications for certification of equipment in these bands until nine months after release of the Commission's Channel Reassignment Public Notice, as defined in §73.3700(a)(2) of this chapter.

8.2 Test Procedure

KDB 971168 D01 v03r01 and ETSI EN 300 422-1 V1.4.2 (2011-08).

8.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2019-03-19	1 year
Sunol Science Corp	System Controller	SC99V	011003-1	N/R	N/A
Sunol Sciences	Antenna, Biconi-Log	JB1	A013105-3	2018-02-26	2 years
Agilent	Amplifier, Pre	8447D	2944A10187	2019-04-11	1 year
HP	Pre-Amplifier	8449B OPT HO2	3008A0113	2018-08-10	1 year
EMCO	Antenna, Horn	3115	9511-4627	2018-03-28	2 years
A.R.A.	Antenna, Horn	DRG-118/A	1132	2018-02-13	2 years
Keysight Technologies	Generator, Signal	N5182B	MY51350070	2019-01-29	1 year
-	RF Cable	-	-	Each time ¹	N/A
COM-POWER	Antenna, Dipole	AD-100	721033DB1, 2, 3, 4	2019-03-06	2 years

Note¹: cable included in the test set-up will be checked each time before testing.

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) "A2LA Policy on Metrological Traceability".

8.4 Test Environmental Conditions

Temperature:	22 °C
Relative Humidity:	40 %
ATM Pressure:	101.0 kPa

The testing was performed by Zhao Zhao on 2019-04-15 at 5 meter chamber 3.

8.5 Test Results

EUT was configured to the highest power setting on worst case channel.

TX Mid channel 539.025 MHz

Freq. (MHz)	S.A. Amp. (dBmV)	Table Azimuth (Degrees)	Test Antenna		Substitution				Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Freq. (MHz)	S.G. Level (dBm)	Antenna Gain (dB)	Cable Loss (dB)			
553	28.68	0	100	H	553	-71.61	0	0.18	-71.79	-54	-17.79
553	42.99	256	167	V	553	-58.97	0	0.18	-59.15	-54	-5.15
663	28.89	0	100	H	663	-70.47	0	0.23	-70.7	-54	-16.7
663	40.87	308	187	V	663	-59.93	0	0.23	-60.16	-54	-6.16
1550	51.95	0	100	H	1550	-54.52	8.373	1.05	-47.197	-30	-17.197
1550	50.82	0	100	V	1550	-55.72	8.373	1.05	-48.397	-30	-18.397

Standby mode:

Freq. (MHz)	S.A. Amp. (dBmV)	Table Azimuth (Degrees)	Test Antenna		Substitution				Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Freq. (MHz)	S.G. Level (dBm)	Antenna Gain (dB)	Cable Loss (dB)			
553	28.65	0	100	H	553	-71.64	0	0.18	-71.82	-57	-14.82
553	28.81	0	100	V	553	-73.15	0	0.18	-73.33	-57	-16.33
627	28.73	0	100	H	627	-70.63	0	0.23	-70.86	-57	-13.86
627	28.79	0	100	V	627	-72.01	0	0.23	-72.24	-57	-15.24
1550	50.95	0	100	H	1550	-55.52	8.373	1.05	-48.197	-47	-1.197
1550	50.82	0	100	V	1550	-55.72	8.373	1.05	-48.397	-47	-1.397

9 FCC §74.861(e) (4) - Frequency Stability

9.1 Applicable Standards

According to FCC §74.861 (e) (4):

The frequency tolerance of the transmitter shall be 0.005 percent

9.2 Test Procedure

According to RSS- Gen issue 5 Section 6.11, frequency stability is a measure of frequency drift due to temperature and supply voltage variations with reference to the frequency measurement at an appropriate reference temperature and the rated supply voltage.

Unless specified otherwise in the RSS that is applicable to the device, the reference temperature for transmitters is +20°C.

A hand-held device that is only capable of operating using internal batteries shall be tested using a new battery without any further requirement to vary the supply voltage. Alternatively, an external supply voltage can be used and set at the battery nominal voltage, and again at the battery operating end point voltage which must be specified by the equipment manufacturer.

The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency-determining circuit element shall be made subsequent to this initial set-up.

With the transmitter installed in an environment test chamber, the unmodulated carrier frequency shall be measured under the conditions specified below. A sufficient stabilization period at each temperature shall be used prior to each frequency measurement. The following temperatures and supply voltage ranges apply, unless specified otherwise in the applicable RSS.

- a) At temperature of -30°C, +20°C and +50°C, and at the manufacturer's rated supply voltage; and
- b) At a temperature of +20°C and at ± 15 percent of the manufacturer's rated supply voltage.

If the frequency stability limits are only met at a different temperature range than specified in (a), the frequency stability requirement will be deemed met if the transmitter is automatically inhibited from operating outside this different temperature range and the published equipment operating characteristics are revised to reflect this different temperature range.

If an unmodulated carrier is not available, the measurement method shall be described in the test report.

9.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Rohde & Schwarz	Spectrum Analyzer	FSQ26	200749	2019-03-14	2 years
BACL	Temp and Humi Chamber	BTH-150-40	30078	2019-03-26	1 year
InterPower	Power Source	85510510	39711	Not Required	N/A
-	RF Cable	-	-	Each time ¹	N/A

Note¹: cable included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) "A2LA Policy on Metrological Traceability".

9.4 Test Environmental Conditions

Temperature:	23 °C
Relative Humidity:	43 %
ATM Pressure:	101.1 kPa

The testing was performed by Christian McCaig on 2019-03-26 at RF site.

9.5 Test Results

539.025 MHz:

Varying temperature:


Temperature (°C)	Measured Frequency (MHz)	Channel Frequency (MHz)	Frequency Tolerance (ppm)	Limits (+/-ppm)
-30	539.024759615	539.025	-0.44596262	50
-20	539.024839744	539.025	-0.29730717	50
-10	539.024919872	539.025	-0.14865359	50
0	539.025	539.025	0	50
10	539.025080128	539.025	0.15079078	50
20	539.025240385	539.025	0.44596262	50
30	539.025320513	539.025	0.59462051	50
40	539.025320513	539.025	0.59462051	50
50	539.025400641	539.025	0.74326979	50

Varying supply voltage:

Voltage	Measured Frequency (MHz)	Channel Frequency (MHz)	Frequency Tolerance (ppm)	Limits (+/-ppm)
2.55 V	539.025400641	539.025	0.74326979	50
3.45 V	539.025400641	539.025	0.74326979	50


Please refer to plots for detailed test results.

539.025 MHz:

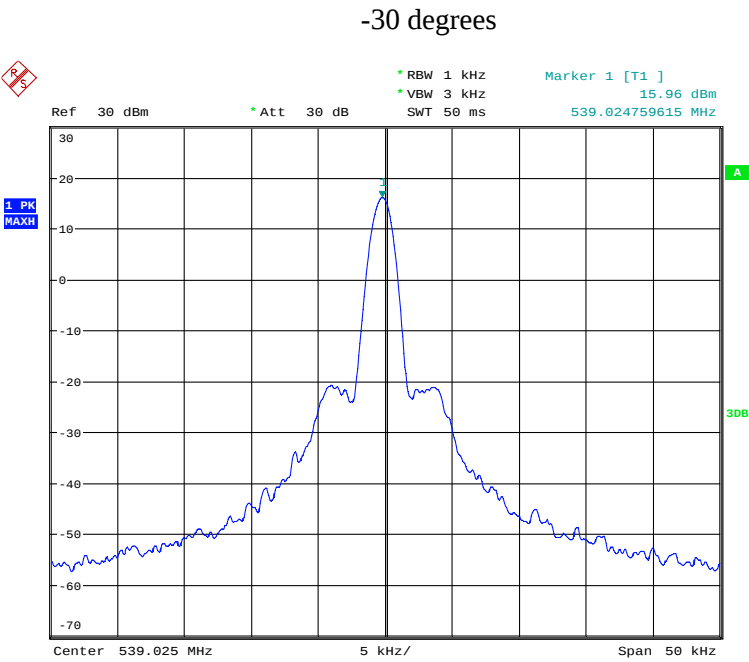


Date: 26.MAR.2019 14:01:36

-20 degrees

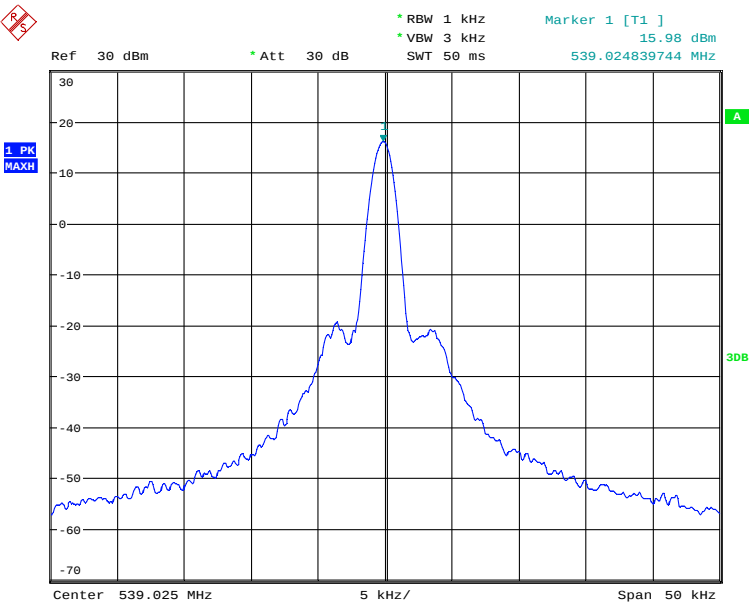


Date: 26.MAR.2019 13:52:46

-10 degrees

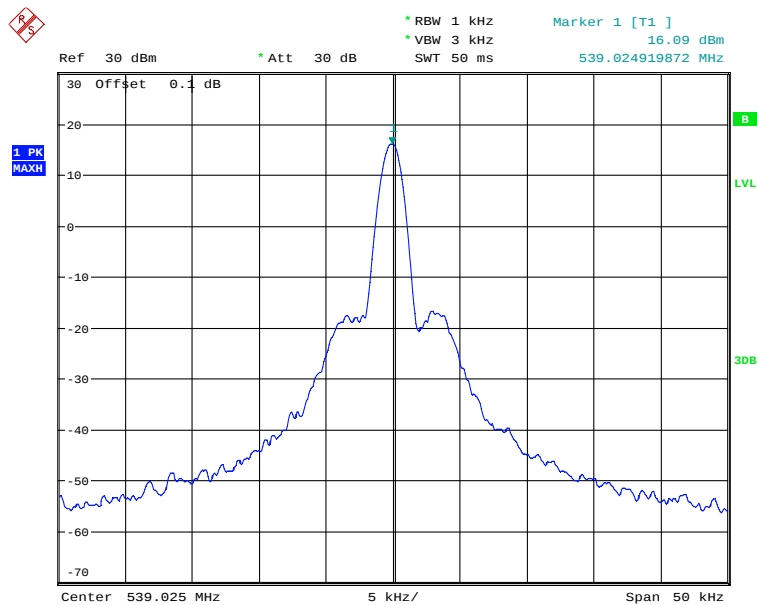


Date: 26.MAR.2019 13:44:46

0 degrees

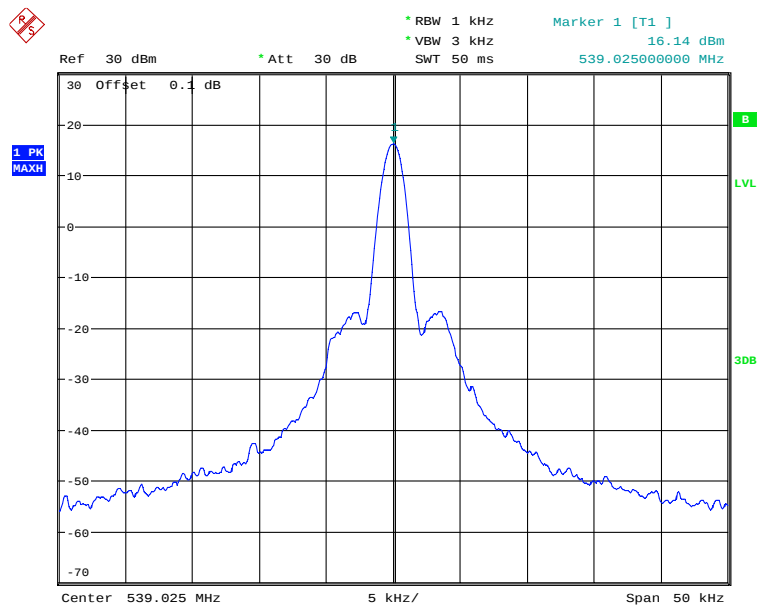


Date: 26.MAR.2019 13:35:30

10 degrees

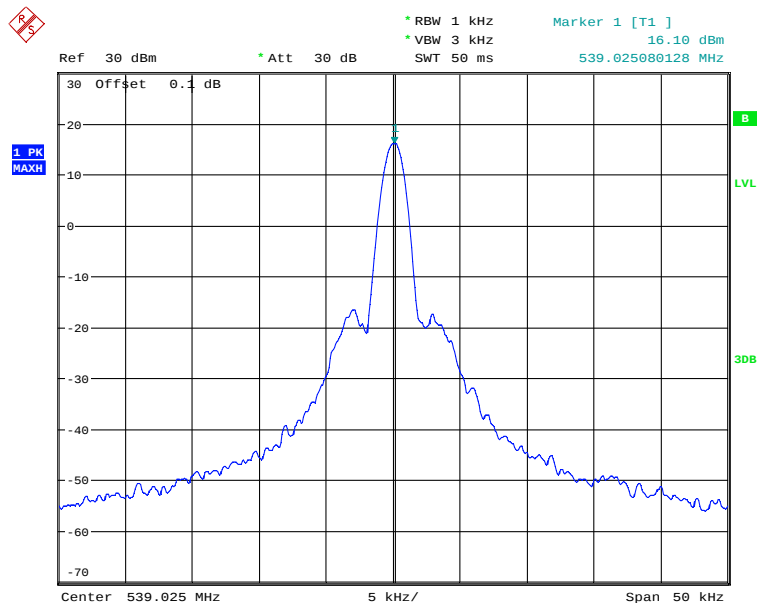


Date: 26.MAR.2019 13:26:59

20 degrees Nominal Voltage

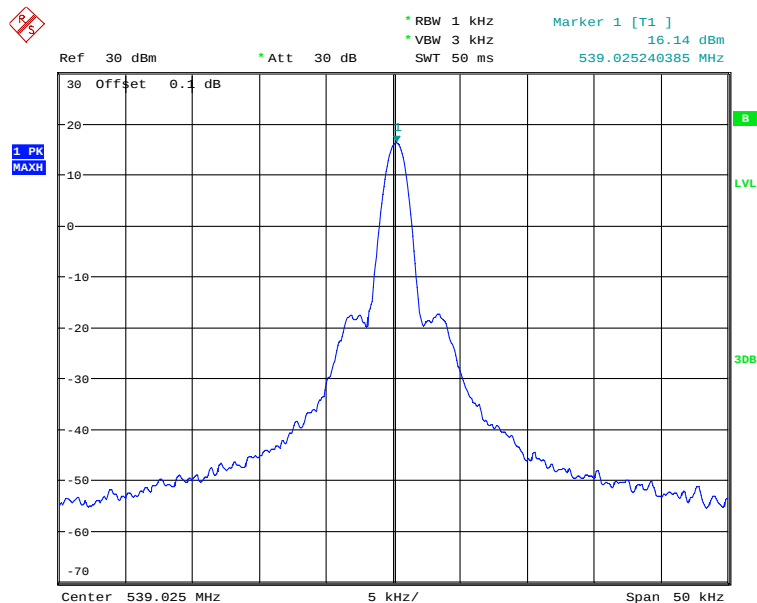


Date: 26.MAR.2019 13:19:17

20 degrees Low Voltage

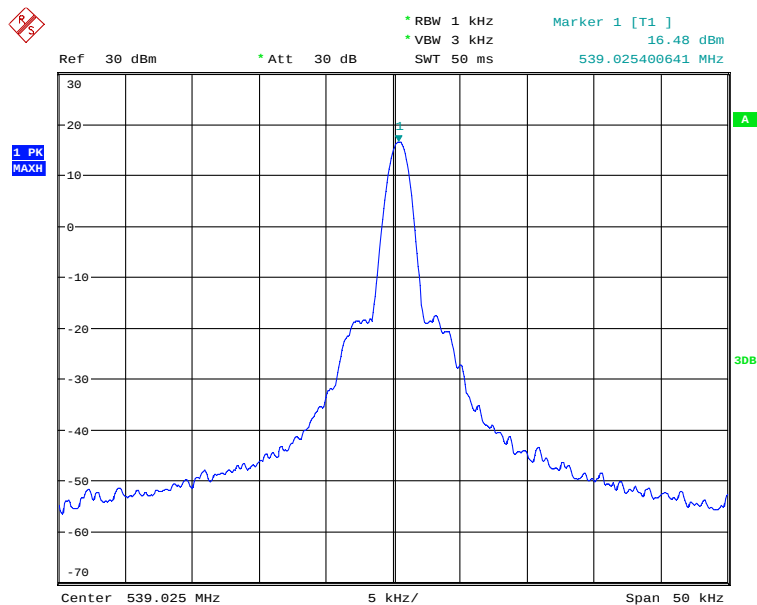


Date: 27.MAR.2019 05:46:51

20 degrees High Voltage

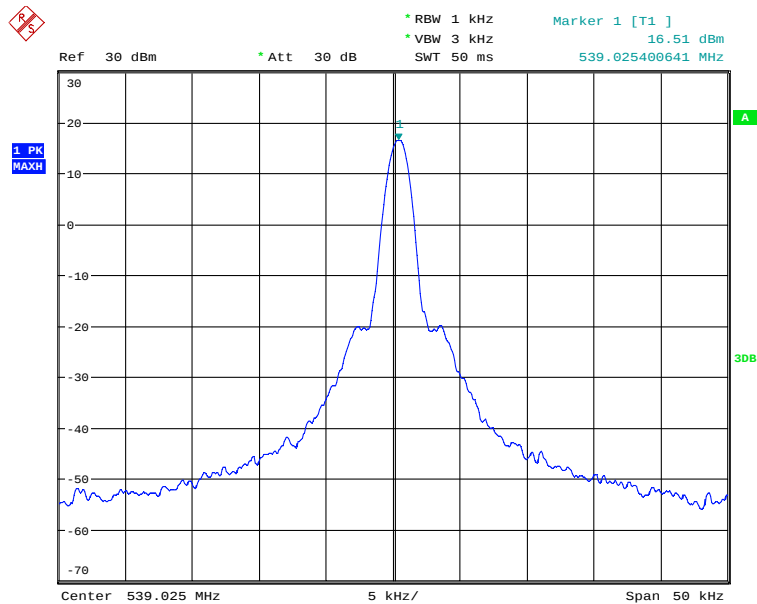


Date: 27.MAR.2019 05:49:04

30 degrees

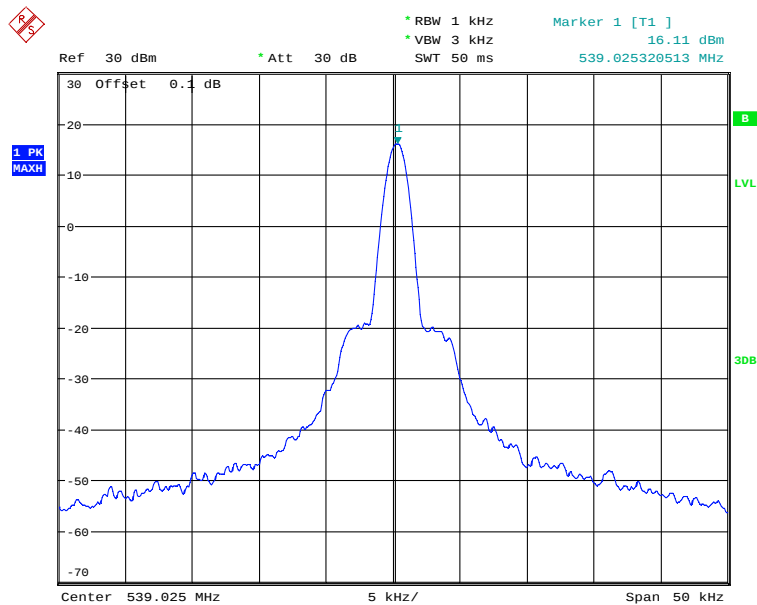


Date: 26.MAR.2019 13:12:35

40 degrees

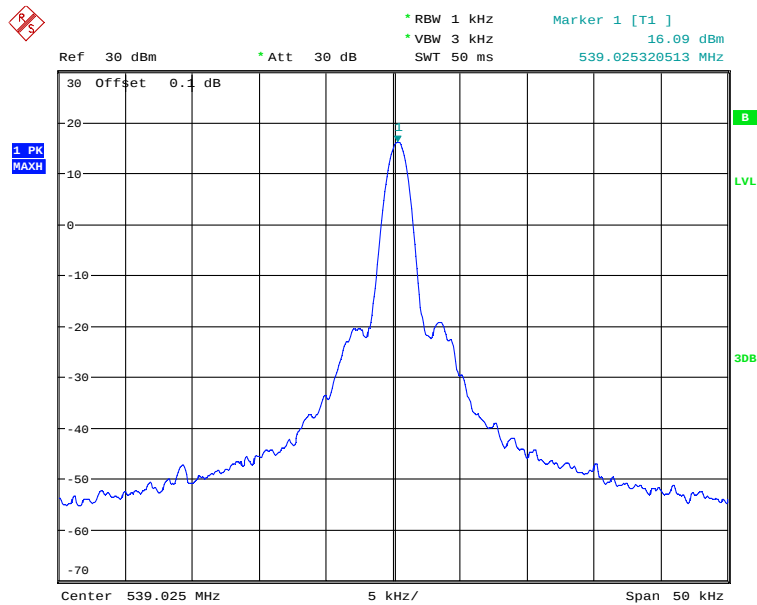

Date: 26.MAR.2019 13:06:49

50 degrees

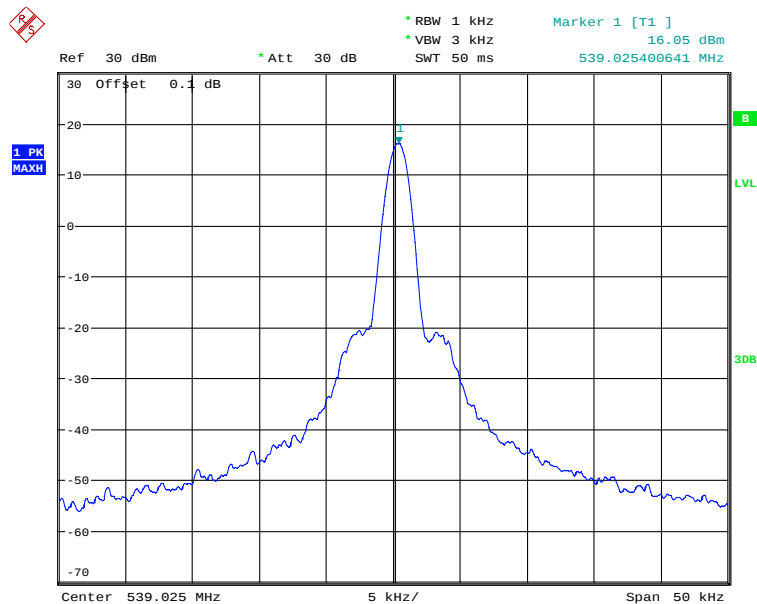

Date: 26.MAR.2019 13:00:44

10 Appendix A - EUT Test Setup Photographs

Please refer to the attachment

11 Appendix B - EUT External Photographs

Please refer to the attachment

12 Appendix C - EUT Internal Photographs

Please refer to the attachment

13 Appendix D - A2LA Electrical Testing Certificate



Accredited Laboratory

A2LA has accredited

BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This laboratory also meets A2LA R222 - Specific Requirements EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 2nd day of October 2018.

A blue ink signature of the Vice President, Accreditation Services.

Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3297.02
Valid to September 30, 2020
Revised February 21, 2019

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

--- END OF REPORT ---