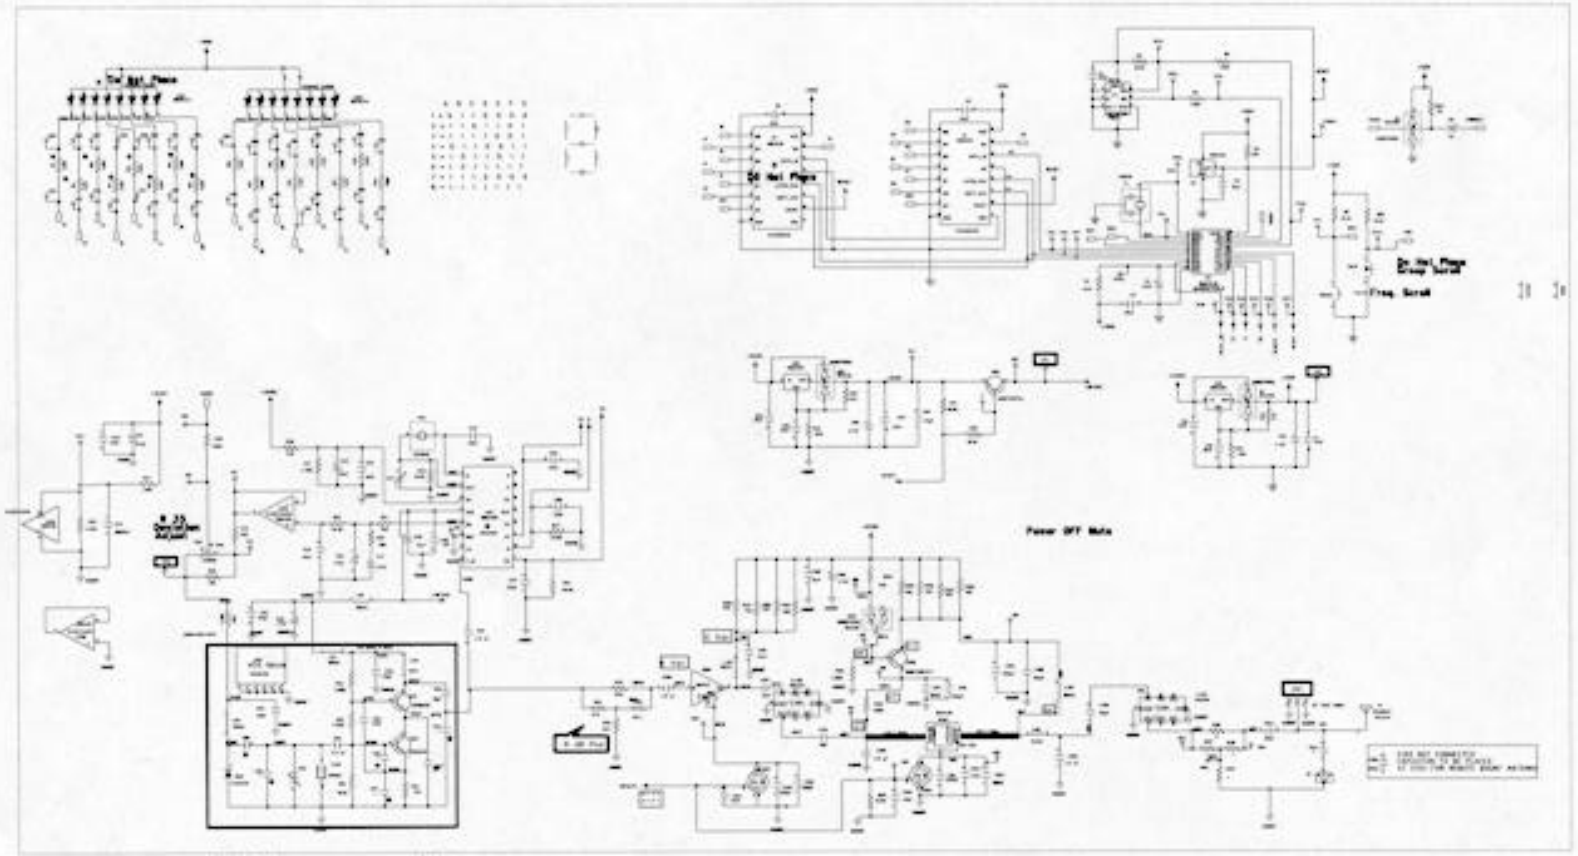

Group Indicator



	FREQ.RANGE	C51	C52	C56	C57	C58	R484	R487	R492	R58	R59	IC501 PIN 5 (LOCK DET) PIN 6 (LOCK DET) PIN 8 (SDA)	CHANGE VOLTAGE ▶ CH1
H (CH1/2/3)	(723~748)MHz	4.7pF	0.5pF	4.7pF	2.2pF	4.7pF	0.33MΩ	Not Placed	Not Placed	Not Placed	0.01MΩ	Not Placed	(1)700.000 MHz[SET]± = 1kHz
M (CH1/2/3)	(806~830)MHz	2.0pF	Not Placed	1.0pF	4.7pF	4.7pF	Not Placed	0.33MΩ	Not Placed	Not Placed	0.01MΩ	Not Placed	(1)806.000 MHz[SET]± = 1kHz
L (CH1/2/3)	(830~864)MHz						Not Placed	Not Placed	0.33MΩ	Not Placed	0.01MΩ	Not Placed	(1)832.000 MHz[SET]± = 2kHz

Refer to page 4 for Digital section
Refer to page 5 for phase lock loop
Refer to page 6 for voltage cont section
Refer to page 7 for RF_OUT
Refer to page 8 for RF_amplifier

NOTICE

This drawing is the property of Clear Wireless Incorporated and is disclosed to you in strict confidence and for the understanding that it is not to be reproduced copied or used except in the process of producing items or products manufactured for Clear Wireless Incorporated. Copies of this drawing are to be made only when necessary for the purpose stated above and all copies must contain this Notice. This drawing may be returned on request.