



TEST SPECIFICATION:

FCC "Rules and Regulations", Part 74,
Experimental Radio, Auxiliary, Special Broadcast and Other Program
Distribution Services for Operation in the

614 MHz to 806 MHz Band

Subpart H, Low Power Auxiliary Stations
Sections 74.801 to 74.882

THE FOLLOWING **"MEETS"** THE ABOVE TEST SPECIFICATION

Formal Name: Antenna Combiner

Kind of Equipment: Antenna Combiner

Test Configuration: Four transmitters feeding combiner, antenna connected to combiner.

Emission Designator: 196KF8E

Transmitter FCC ID: DD4PA770

Model Number: PA770

Serial Number: NA

Dates of Test: March 12 & 24, 1999

Test Conducted For: Shure Brothers Inc.

222 Hartrey Avenue

Evanston, Illinois 60202

NOTICE: Please see change information listed inside of this report. This report must not be used by the customer to claim product endorsement by NVLAP or any agency of the United States Government, and it cannot be reproduced (except in full), without the approval of D.L.S. Electronic Systems Inc.



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 7253
06/28/01

SIGNATURE PAGE

Report Written By:

A handwritten signature in cursive script, reading "Anna C. Rowe".

Test Engineer
EMC-001375-NE

Report Reviewed by:

A handwritten signature in cursive script, reading "Jack Prawica".

Jack Prawica
Lab Manager

Report Approved by:

A handwritten signature in cursive script, reading "Brian J. Mattson".

Brian J. Mattson
General Manager

Company Official:

Shure Brothers Inc.

United States Department of Commerce
National Institute of Standards and Technology



ISO/IEC GUIDE 25:1990
ISO 9002:1987



D.L.S. ELECTRONIC SYSTEMS, INC.
WHEELING, IL

is recognized under the National Voluntary Laboratory Accreditation Program for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. These criteria encompass the requirements of ISO/IEC Guide 25 and the relevant requirements of ISO 9002 (ANSI/ASQC Q92-1987) as suppliers of calibration or test results. Accreditation is awarded for specific services, listed on the Scope of Accreditation for:

**ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS
FCC**

September 30, 1999

Effective through


For the National Institute of Standards and Technology

NVLAP Lab Code: 100276-0

NVLAP-01C (11-95)

National Institute
of Standards and Technology



National Voluntary
Laboratory Accreditation Program

ISO/IEC GUIDE 25:1990
ISO 9002:1987

Scope of Accreditation



Page: 1 of 1

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

NVLAP LAB CODE 100276-0

D.L.S. ELECTRONIC SYSTEMS, INC.

1250 Peterson Drive
Wheeling, IL 60090-6454
Mr. Brian J. Mattson
Phone: 847-537-6400 Fax: 847-537-6488

NVLAP Code Designation / Description

International Special Committee on Radio Interference (CISPR) Methods

12/CIS22 IEC/CISPR 22:1993: Limits and methods of measurement of radio disturbance characteristics of information technology equipment

Federal Communications Commission (FCC) Methods

12/F01 FCC Method - 47 CFR Part 15 - Digital Devices
12/F01a Conducted Emissions, Power Lines, 450 KHz to 30 MHz
12/F01b Radiated Emissions

Australian Standards referred to by clauses in AUSTEL Technical Standards

12/T51 AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment

September 30, 1999

Effective through

A handwritten signature in black ink, appearing to read "John L. Galt".

For the National Institute of Standards and Technology



1.	Cover Page	i
2.	Signature Page	ii
3.	NBS Certificate of Accreditation	iii
5.	Table of Contents	iv
7.	Summary of Test Report	1.0
7.	Introduction	2.0
7.	Object	3.0
7.	Test Set-up	4.0
8.	Test Equipment (Bandwidths and Detector Function)	5.0
8.	RF Power Output	6.0
9.	Graphs taken of the RF Power Output Measurements	6.0
13.	Modulation Characteristics	7.0
14.	Graphs taken of the Modulation Characteristics	7.0
15.	Occupied Bandwidth	8.0
16.	Graphs taken of the Occupied Bandwidth	8.0
20.	Frequency Deviation	9.0
21.	Graphs taken of the Frequency Deviation	9.0
22.	Spurious Emission Measurements at Antenna Terminals	10.0
23.	Conducted Emission Data taken	10.0
27.	Conducted Emission Graphs Taken	10.0



30.	Field Strength of Spurious Emission Measurements	11.0
32.	Radiated Data taken for Field Strength Measurements	11.0
37.	Radiated Graphs taken for Field Strength Measurements	11.0
42.	Frequency Stability (Temperature)	12.0
43.	Graphs taken of Frequency Stability (Temperature)	12.0
44.	Frequency Stability (Voltage Variation)	13.0
45.	Graphs taken of Frequency Stability	13.0
46.	Photo Information and Test Set-Up	14.0
47.	Photos Taken During Testing	15.0
49.	Change Information	16.0
51.	Results of Tests	17.0
51.	Conclusion	18.0
52.	Equipment List	TABLE 1



1.0 SUMMARY OF TEST REPORT

It was found that the Antenna Combiner S/N NA **“meets”** the radio interference emission requirements of the FCC "Rules and Regulations", Part 74, Subpart H, Sections 74.801 to 74.882 for Low Power Auxiliary Stations operating in the 722 MHz to 746 MHz Frequency Band.

2.0 INTRODUCTION

On March 12 & 24, 1999, a series of radio frequency interference measurements were performed on Antenna Combiner (Transmitter), S/N NA. The tests were performed according to the procedures of FCC as stated in Part 2 Subpart J, Equipment Authorization Procedures of the Code of Federal Regulations 47, by personnel of D.L.S. Electronic Systems, Inc. who are responsible to Donald L. Sweeney, Senior EMC Engineer.

3.0 OBJECT

The purpose of this series of tests was to determine if the test sample could meet the radio frequency emission requirements of the FCC "Rules and Regulations", Part 74, Subpart H, Sections 74.801 to 74.882 for Low Power Auxiliary Stations operating in the 722 MHz to 746 MHz Frequency Band.

4.0 TEST SET-UP

All radiated emission tests were performed at D.L.S. Electronic Systems, Inc. The radiated tests were made with the test item placed on a wooden turntable located in the Test Room with the receive antenna placed one meter from the device under test.



5.0 TEST EQUIPMENT (Bandwidths and Detector Function)

All data was automatically plotted using peak detector function. This information was then used to determine the frequencies of maximum emissions. Manual measurements were performed on these frequencies using a peak detector function of the Analyzer with the bandwidths specified by the FCC. From 200 MHz to 1000 MHz a bandwidth of 100 kHz was used (except for Occupied Bandwidth), and above 1000 MHz, wide enough bandwidths were used, depending upon the test being made, to ensure proper measurement of the narrowband signal. A list of the equipment used can be found in Table 1. All equipment was calibrated per the instruction manuals supplied by the manufacturer.

6.0 RF POWER OUTPUT - PART 2.985

As stated in PART 74.861 (e-1), the output power should not exceed 250 milliwatts (24 dBm). The Antenna Combiner was tuned according to the tune-up procedures specified in Part 2.983 (d-5), and adjusted for its maximum output power. The RF output power was measured in the open field, using the following test method:

The radiated signal from the EUT was measured. The EUT was then substituted with a signal generator and a tuned dipole antenna. The output of the signal generator was increased until the level received by the tuned dipole equaled that of the previous measured from the EUT.

Actual Measurements Taken:

-3.3	dBuV	Measured output of the transmitter
+20.8	dBuV	<u>Total system losses (Antenna, Pads & Cable)</u>
17.50	dBuV	which equals 0.06 watts

LIMIT:

Manufacturer's rated output power = 0.1 watts
Tolerance = NA

MARGIN:

0.25 watts - 0.06 watts = 0.04 watts

NOTE:

See the following pages for the graphs of the actual measurements made:





EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA



Report No. 7253
06/28/01



GRAPHS TAKEN OF THE RF POWER

OUTPUT MEASUREMENTS

PART 2.985

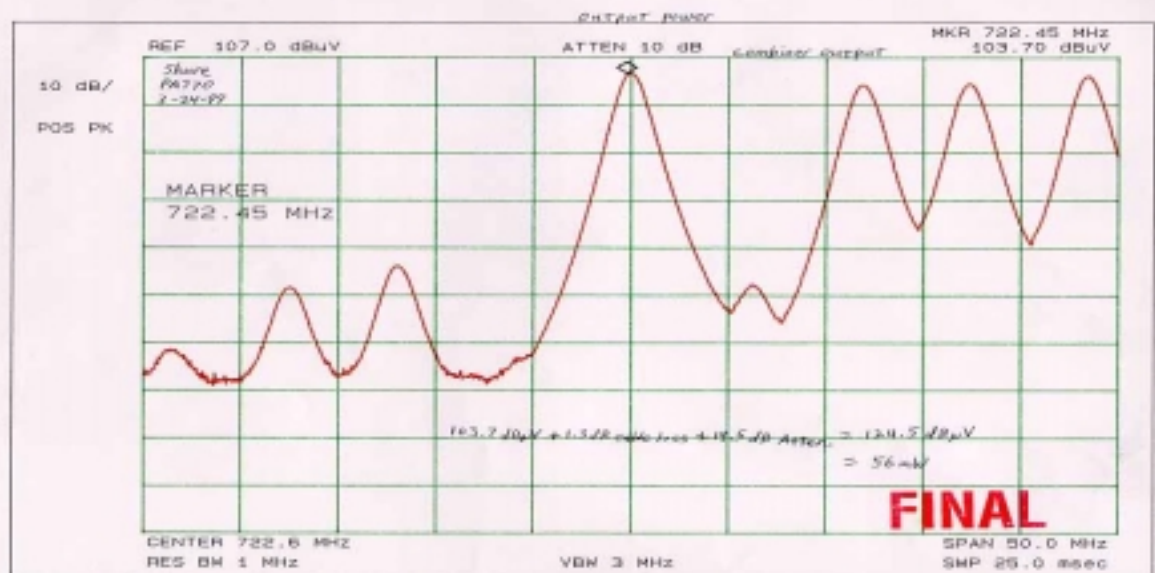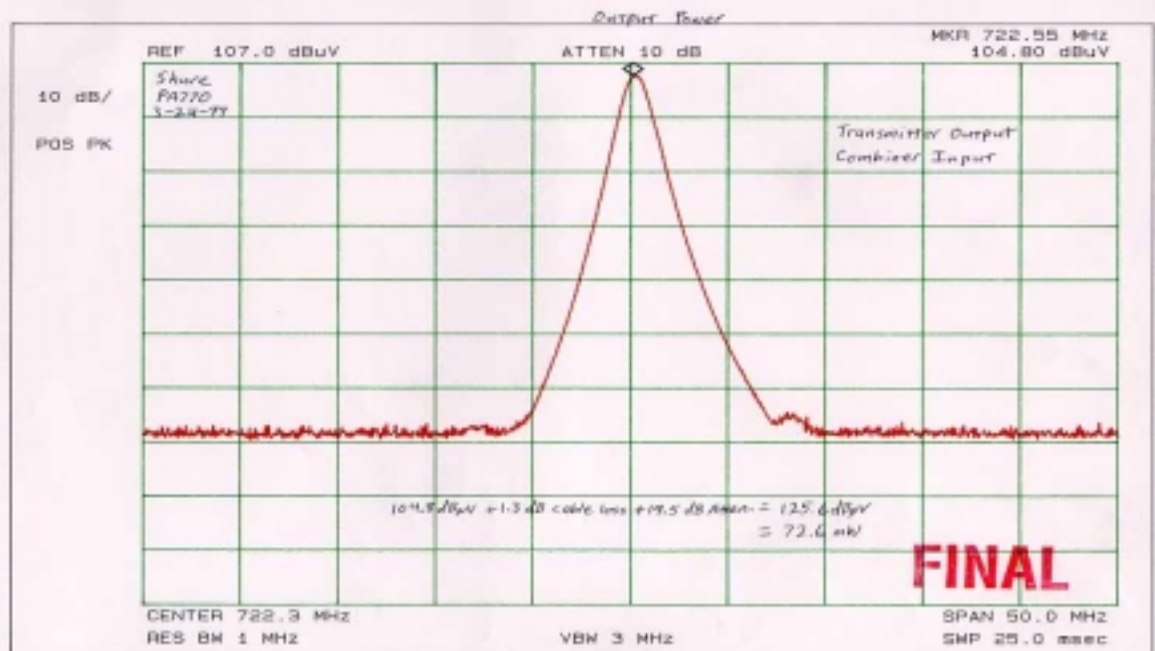

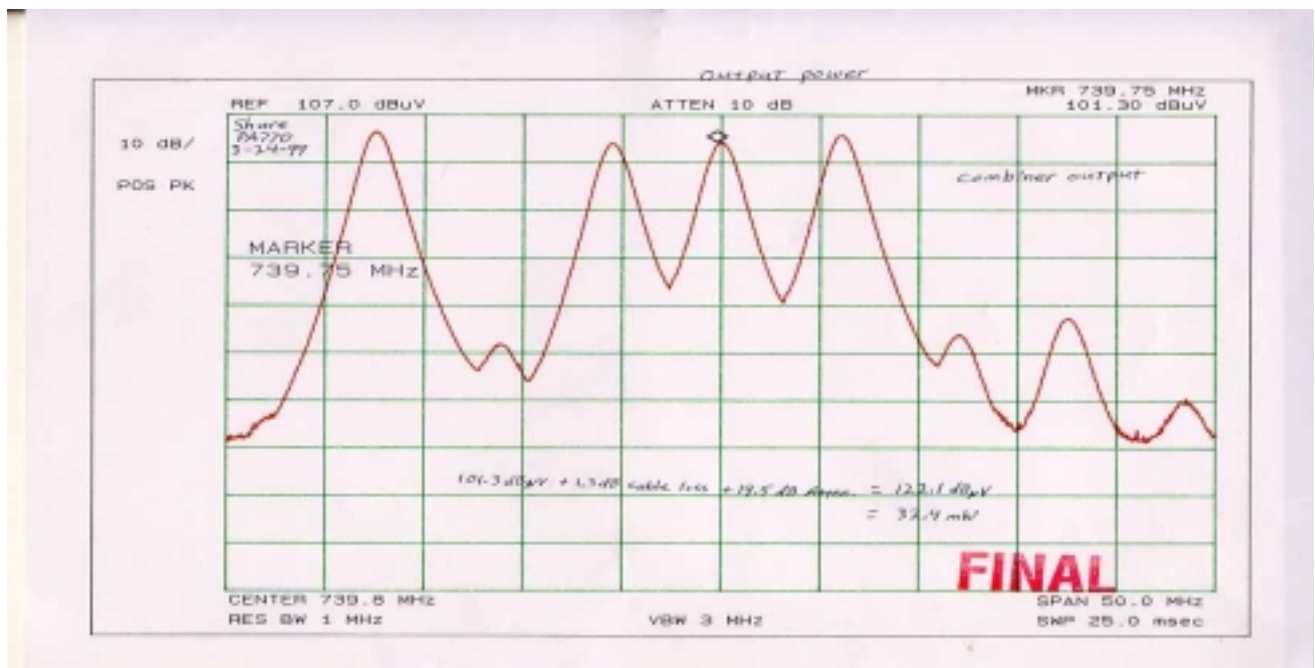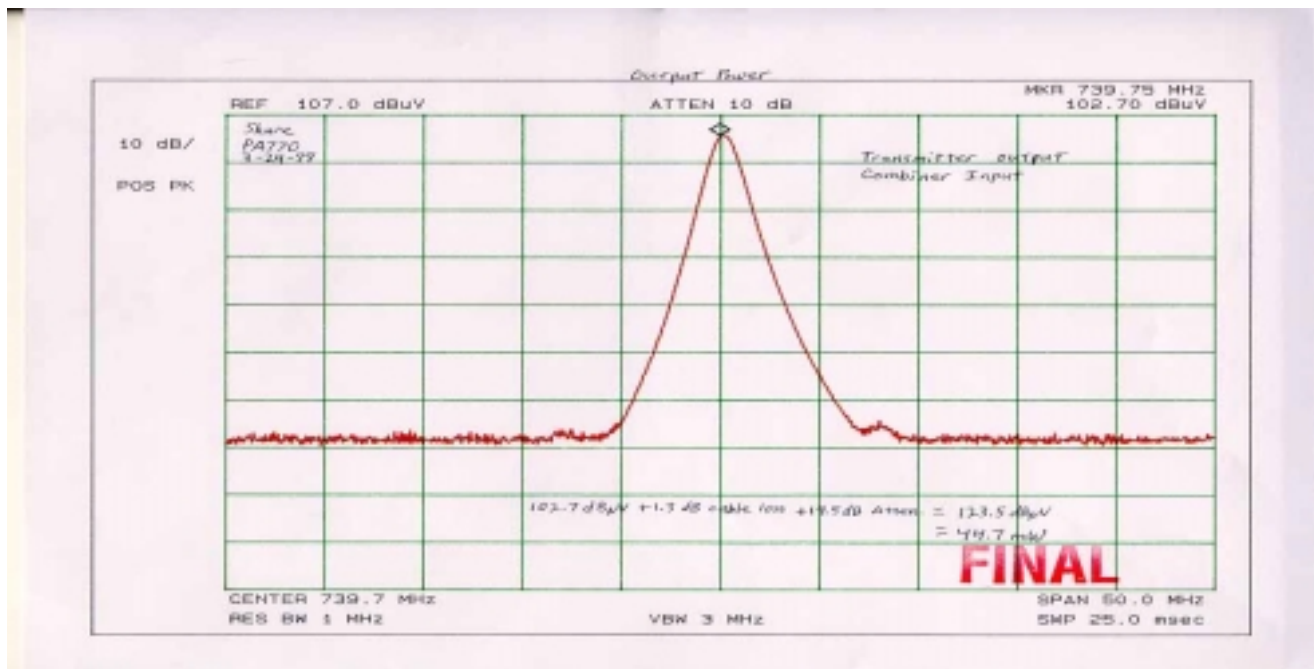

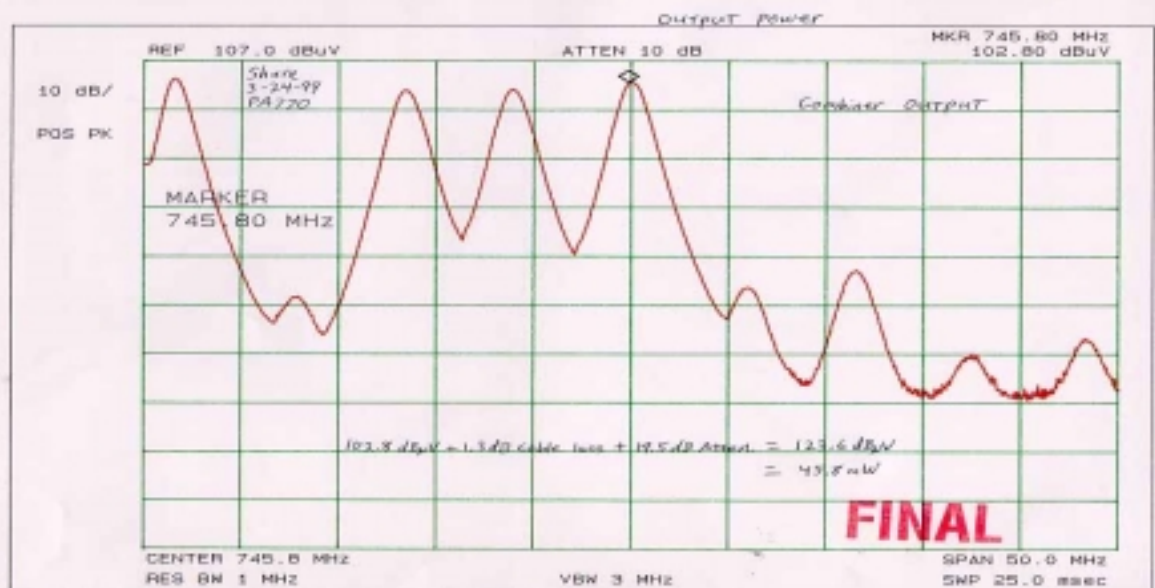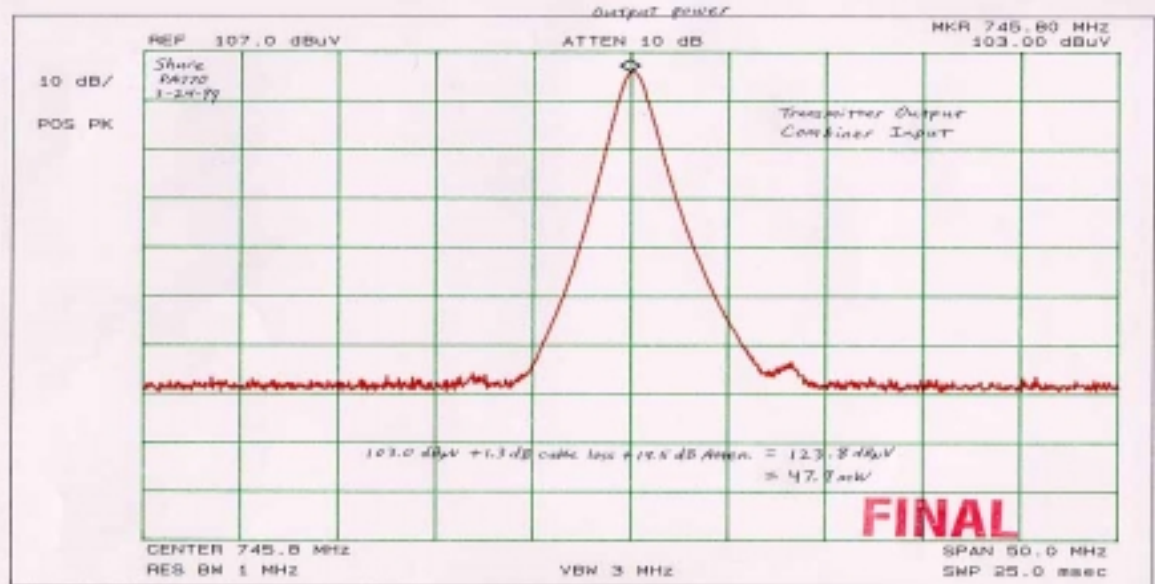



7.0 Modulation Characteristics - Part 2.987

a. Voice modulated communication equipment

A curve showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz is submitted with this report.

b. Equipment which employs modulation limiting

A family of curves showing the percentage of modulation versus the modulation input voltage with sufficient information showing the modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.

NOTE:

Graphs were not run because this device is not a transmitter or power amplifier.



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 7253
06/28/01

GRAPHS TAKEN SHOWING THE FREQUENCY

RESPONSE OF THE

AUDIO MODULATING CIRCUIT

PART 2.987

NOTE:

**GRAPHS WERE NOT RUN BECAUSE THIS DEVICE IS NOT A TRANSMITTER OR
POWER AMPLIFIER.**



8.0 OCCUPIED BANDWIDTH – PART 2.989

The frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to .5% of the total mean power radiated by a given emission.

As stated in Part 2.989 c-1 the Antenna Combiner was modulated by a 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation. This input level was established at the frequency of maximum response of the audio modulating circuit.

The Antenna Combiner uses the same frequency range as television broadcast monaural transmitters so the test was also run using a 15 kHz input signal modulated by 85% as stated in Part 2.989 e-6.

Paragraph e-5 states that the maximum authorized bandwidth shall be 200 kHz for all emissions inside these frequency bands.

Carson's Rule:

Section 2.202 (g)

$B_n = 2M_{2DK}, K=1$ B_n = Bandwidth

$M = 15 \text{ kHz},$ M = Maximum Modulating Frequency

$D = 45 \text{ kHz},$ D = Peak Deviation

$B_n = 2(15) + 2(45)(1) = 120 \text{ kHz}$

NOTE: See the following pages for the graphs of the actual measurements made:






EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA



Report No. 7253
06/28/01

GRAPHS TAKEN OF THE OCCUPIED BANDWIDTH

PART 2.989

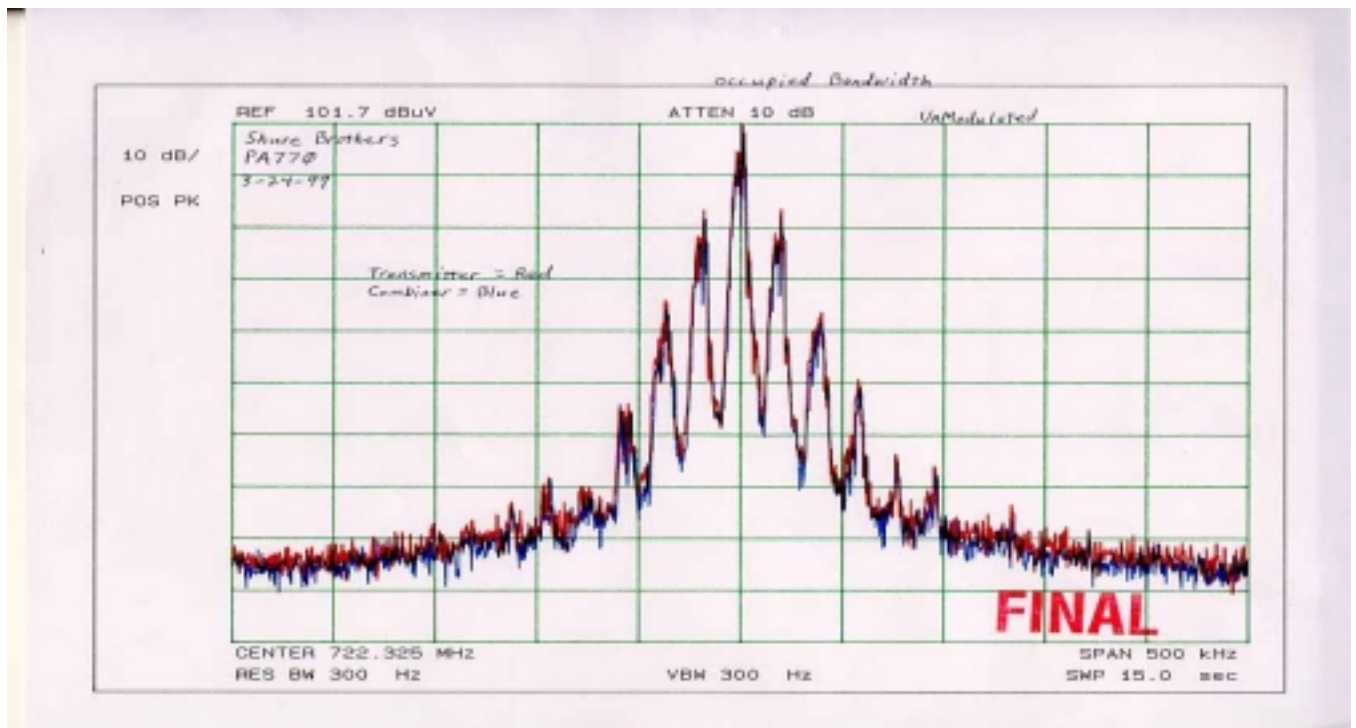

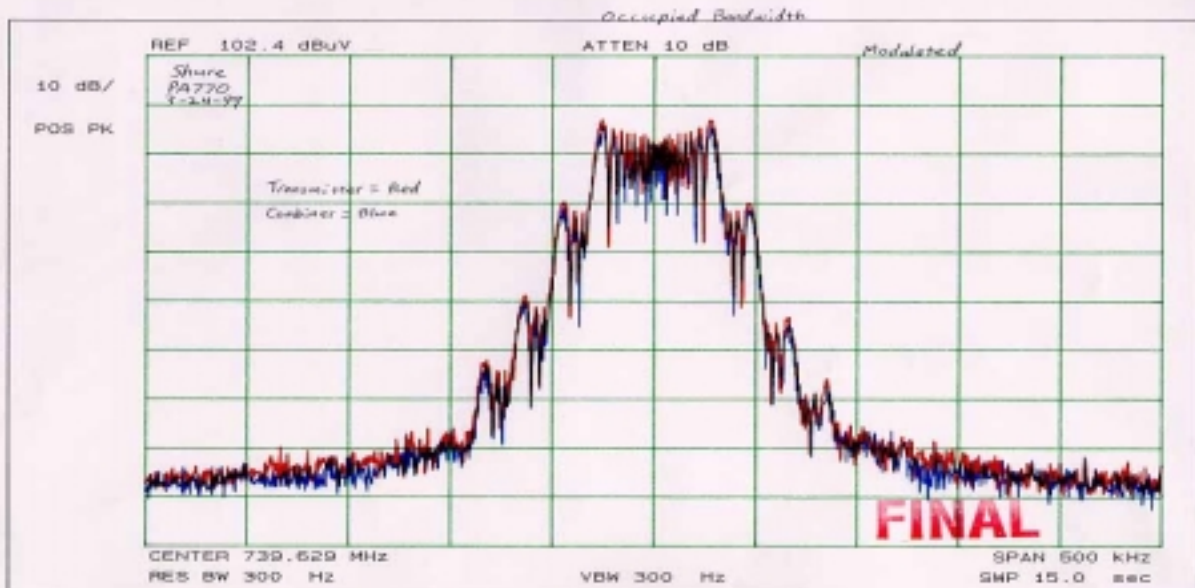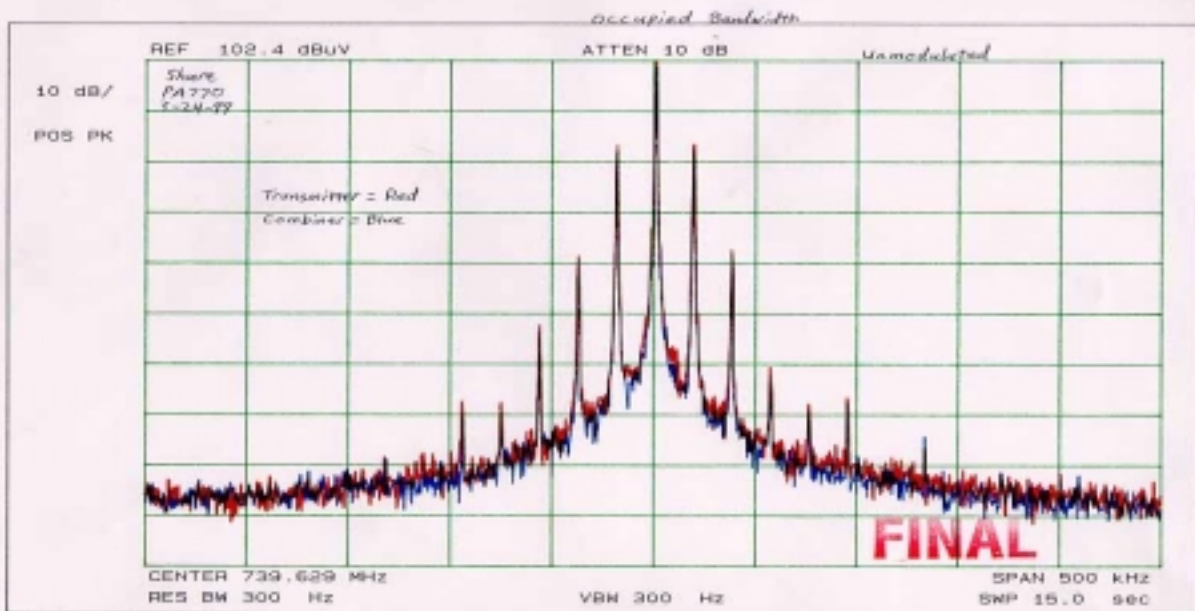

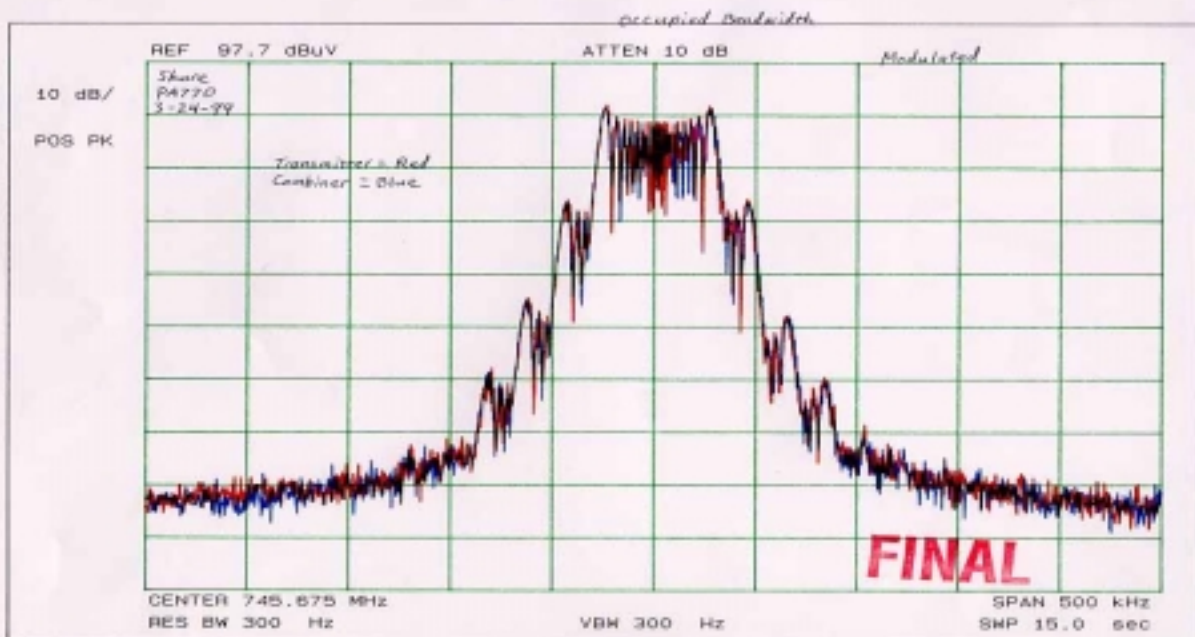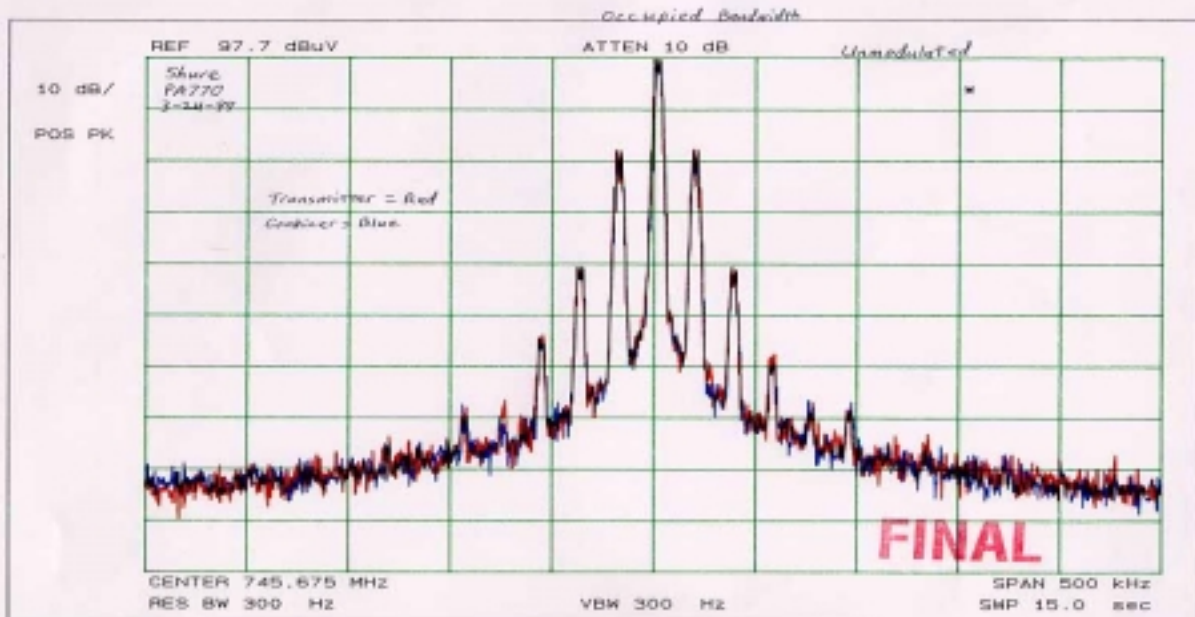



9.0 Frequency Deviation and Tolerance - PART 74.861

Paragraph e-3 states that the maximum authorized deviation shall be 75 kHz for all frequency modulation emissions in the frequency bands 722 MHz to 746 MHz.

Frequency Deviation used:

Paragraph e-4 states that the frequency tolerance of the transmitter shall be .005 percent.

NOTE:

Graphs were not run because this device is not a transmitter or power amplifier.



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 7253
06/28/01

GRAPHS TAKEN OF THE FREQUENCY DEVIATION

WITH MODULATION

PART 2.989


NOTE:

**GRAPHS WERE NOT RUN BECAUSE THIS DEVICE IS NOT A TRANSMITTER OR
POWER AMPLIFIER.**

10.0 SPURIOUS CONDUCTED EMISSION MEASUREMENTS AT ANTENNA TERMINALS

PART 2.991

Spurious conducted emissions were measured at the antenna terminals using an artificial load. Plots were made showing the amplitude of each harmonic emission with the equipment operated as specified in 2.989. As shown by the radiated charts there was no reason to believe that there were any spurious emissions other than the harmonics that were than individually investigated when doing the conducted test at the antenna terminals. Measurements were made up to the 10th Harmonic of the fundamental. The following setup was used showing placement of the attenuators:

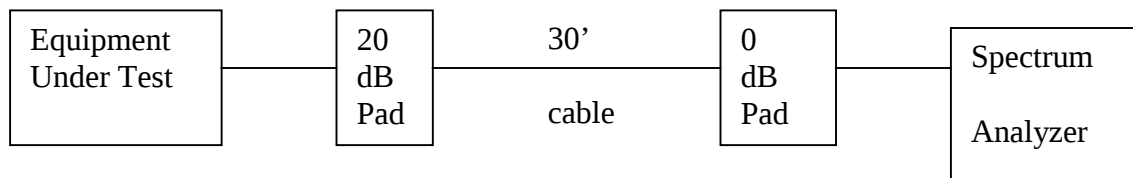

The allowed emissions for transmitters operating in the 722 MHz to 746 MHz bands for Antenna Combiner equipment are found under Part 74, Section 74.861, Paragraph e-6 for Low Power Auxiliary Stations. This paragraph states the mean power of the emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (1) On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB.
- (2) On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB.
- (3) On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least $43 + 10\log_{10}$ (mean output power in watts) dB.

NOTE: See the following pages for the data and graphs of the actual measurements made:

Antenna measurements were made at the antenna port, because the antenna is removable.



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 7253
06/28/01

CONDUCTED EMISSION DATA TAKEN FOR

SPURIOUS EMISSION MEASUREMENTS MADE

AT THE ANTENNA TERMINALS

PART 2.991

Antenna measurements were made at the antenna port, because the antenna is removable.



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 7253
06/28/01

SUMMARY DATA SHEET OF **OUT-OF-BAND** CONDUCTED EMISSIONS

TEST DATE:----- March 24, 1999
MANUFACTURER:----- Shure Brothers Inc.
MODEL NO:----- PA770
S/N:----- NA
CONFIGURATION:----- **Combiner Output - 722 MHz**
DETECTOR:----- **QUASI-PEAK**

TEST SPECIFICATION: FCC "RULES AND REGULATION", PART 74
SUBPART H / SECTION 74.861

*****LOW POWER AUXILIARY STATIONS*****

TEST EQUIPMENT: Spectrum Analyzer ----- HP 8566B
Quasi Peak Adapter ----- HP 85650A

TYPE OF TEST: MEASUREMENTS MADE AT THE ANTENNA TERMINALS

THE FOLLOWING ARE SIGNIFICANT CONDUCTED LEVELS FOUND:

FREQ	PAD & CABLE			
IN	TOTAL	LOSSES	LIMIT	MARGIN
MHz.	dBuV	USED	dB	dB
752.00	62.90	20.80	73.20	10.30
1468.00	55.20	21.10	72.90	17.70



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 7253
06/28/01

SUMMARY DATA SHEET OF **OUT-OF-BAND** CONDUCTED EMISSIONS

TEST DATE:----- March 24, 1999
MANUFACTURER:----- Shure Brothers Inc.
MODEL NO:----- PA770
S/N:----- NA
CONFIGURATION:----- **Combiner Output - 739 MHz**
DETECTOR:----- **QUASI-PEAK**

TEST SPECIFICATION: FCC "RULES AND REGULATION", PART 74
SUBPART H / SECTION 74.861

*****LOW POWER AUXILIARY STATIONS*****

TEST EQUIPMENT: Spectrum Analyzer ----- HP 8566B
Quasi Peak Adapter ----- HP 85650A

TYPE OF TEST: MEASUREMENTS MADE AT THE ANTENNA TERMINALS

THE FOLLOWING ARE SIGNIFICANT CONDUCTED LEVELS FOUND:

FREQ	PAD & CABLE			
IN	TOTAL	LOSSES	LIMIT	MARGIN
MHz.	dBuV	USED	dB	dB
752.00	62.90	20.80	73.20	10.30



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 7253
06/28/01

SUMMARY DATA SHEET OF **OUT-OF-BAND** CONDUCTED EMISSIONS

TEST DATE:----- March 24, 1999
MANUFACTURER:----- Shure Brothers Inc.
MODEL NO:----- PA770
S/N:----- NA
CONFIGURATION:----- **Combiner Output - 745 MHz**
DETECTOR:----- **QUASI-PEAK**

TEST SPECIFICATION: FCC "RULES AND REGULATION", PART 74
SUBPART H / SECTION 74.861

*****LOW POWER AUXILIARY STATIONS*****

TEST EQUIPMENT: Spectrum Analyzer ----- HP 8566B
Quasi Peak Adapter ----- HP 85650A

TYPE OF TEST: MEASUREMENTS MADE AT THE ANTENNA TERMINALS

THE FOLLOWING ARE SIGNIFICANT CONDUCTED LEVELS FOUND:

FREQ IN MHz.	PAD & CABLE		LIMIT dB	MARGIN dB
	TOTAL dBuV	LOSSES USED		
752.00	62.90	20.80	73.20	10.30



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 7253
06/28/01



CONDUCTED EMISSION GRAPHS TAKEN FOR



SPURIOUS EMISSION MEASUREMENTS MADE

AT THE ANTENNA TERMINALS

PART 2.991

Antenna measurements were made at the antenna port, because the antenna is removable.

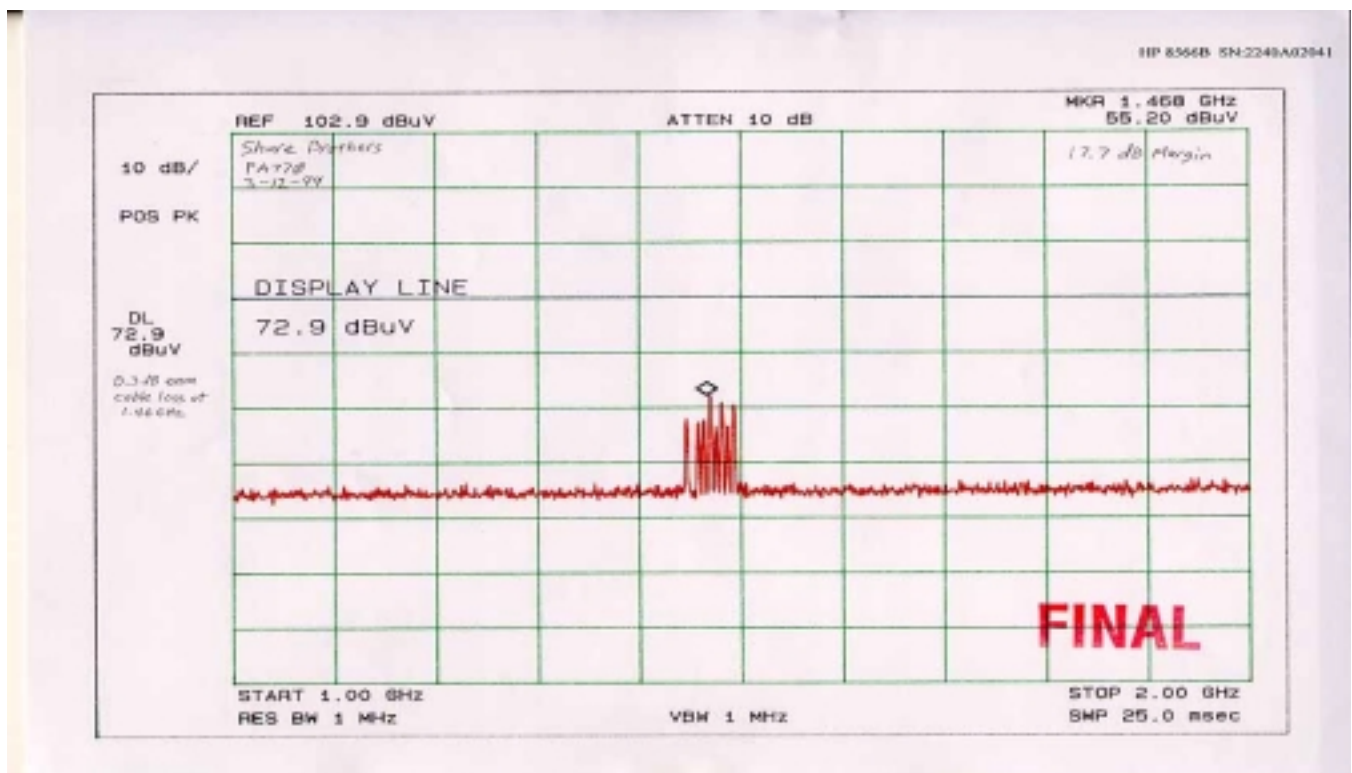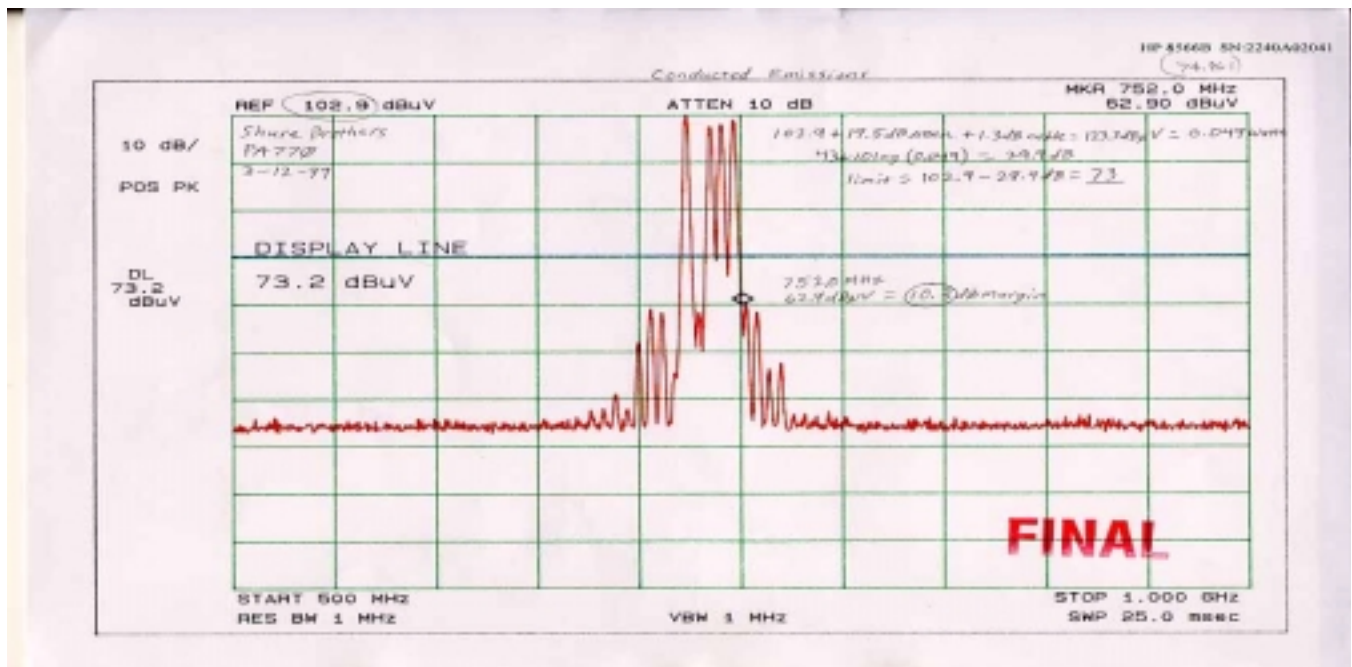

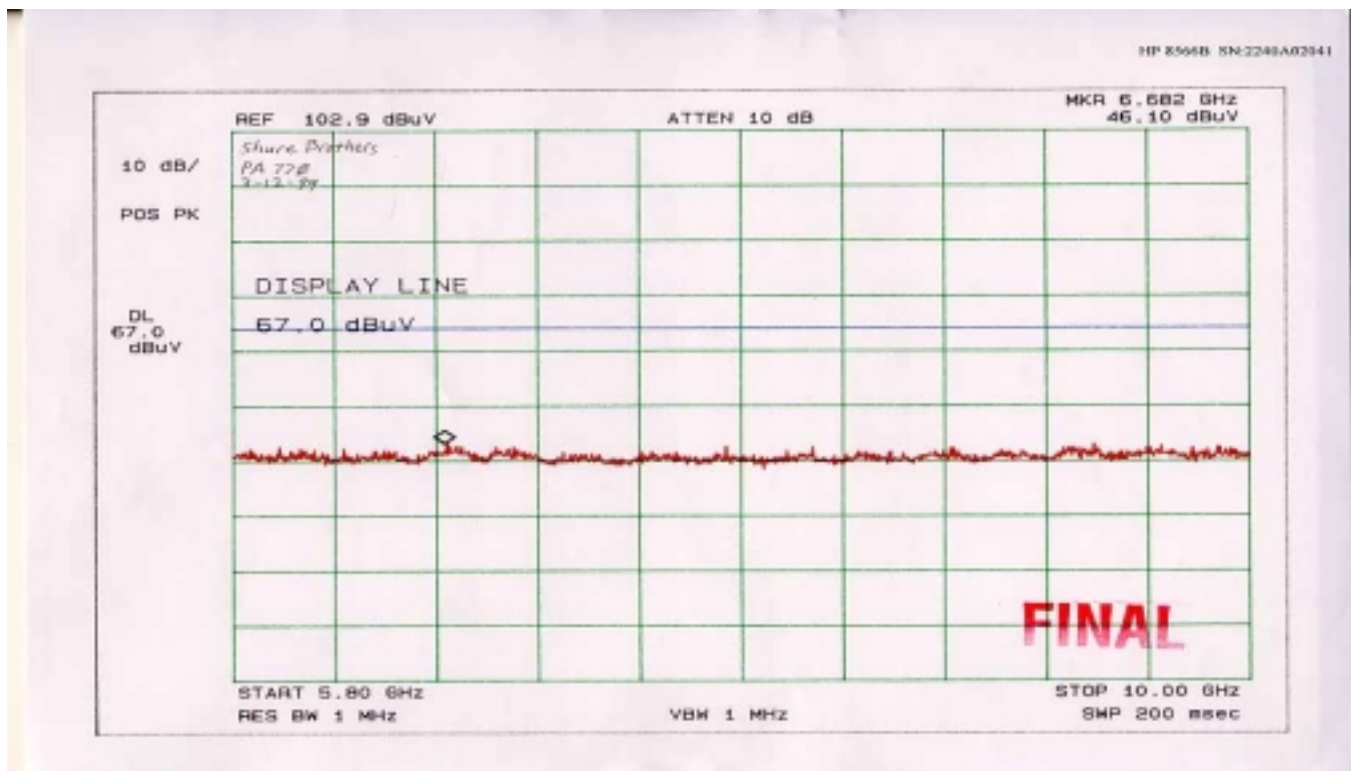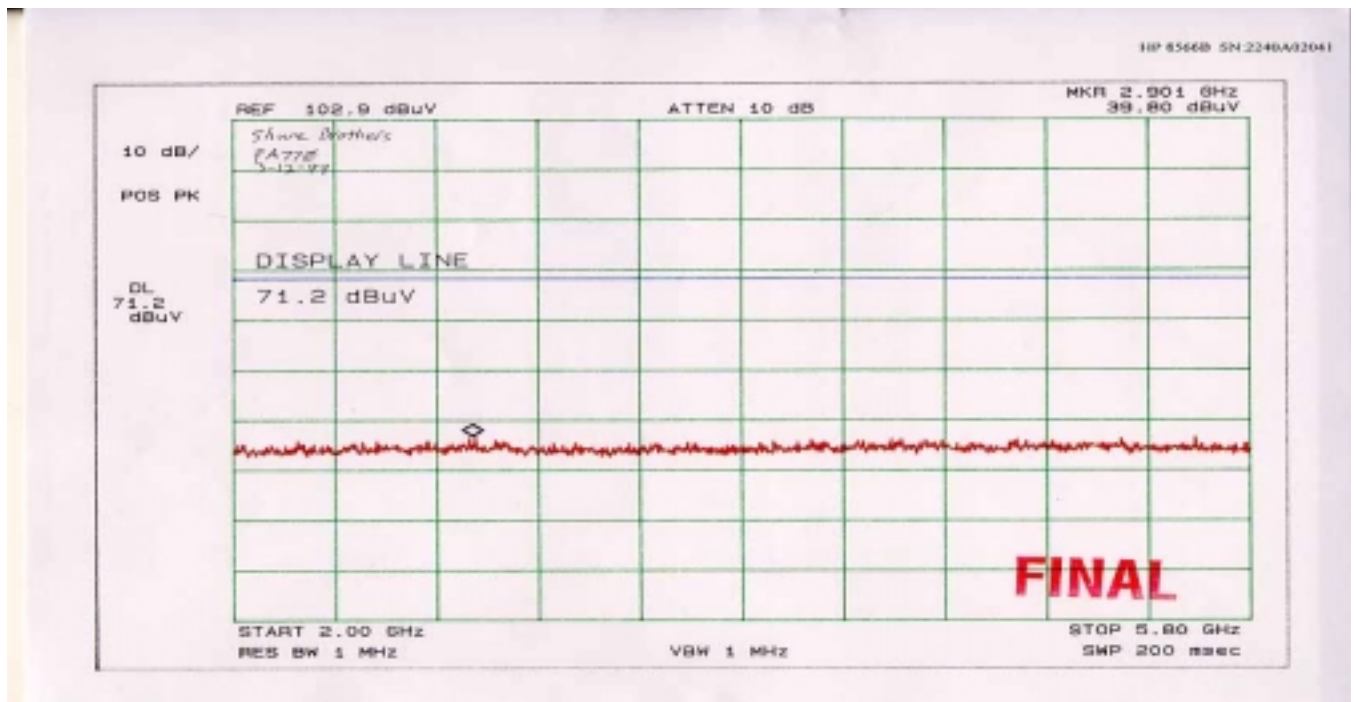

11.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS PART 2.993

Radiated measurements were performed at a 1 or 3 meter test distance automatically scanning the frequency range from 200 MHz to 10000 MHz, depending upon the fundamental frequency.

For the Antenna Combiner, the highest fundamental frequency is 745 MHz so the scans were made up to 10000 MHz, to cover the tenth harmonic.

All signals in the frequency range of 30 MHz to 200 MHz were measured with a Biconical Antenna and from 200 MHz to 1000 MHz a Log Periodic Antenna was used as the pickup devices. From 1000 MHz to 10000 MHz, a Double Ridge Horn Antenna was used. The cables and equipment were placed and moved within the range of positions likely to find their maximum emissions. Tests were made in both the horizontal and vertical planes of polarization.

The allowed emissions for transmitters operating in the 722 MHz to 746 MHz bands for Antenna Combiner equipment are found under Part 74, Section 74.861, Paragraph e-6 for Low Power Auxiliary Stations. This paragraph states the mean power of the emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (1) On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB.
- (2) On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB.
- (3) On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least $43 + 10 \log_{10}$ (mean output power in watts) dB.



11.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS (CON'T) PART 2.993

To determine the limit for all spurious & harmonic emissions, the following method was used:

LIMIT for Spurious Emissions:

As stated in Part 74, Section 74.861 (e-1 ii) the limit is 250 mW in the frequency range 614 MHz to 806 MHz.

$$43 + 10 * \text{LOG}_{10}(0.25 \text{ watts}) = 33.00 \text{ dB}$$

-13.86dBm extrapolated level for 0.1 watts

-33.00 dB required reduction below the unmodulated fundamental

-46.86 dBm or 60.14 dBuV/m at 1 meter maximum spurious emissions allowed

Extrapolating the level to 3 meters:

$$60.14 \text{ dBuV/m} - 9.54 \text{ dB} = \textbf{50.60 dBuV/m at 3 meters}$$



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 7253
06/28/01

RADIATED DATA TAKEN FOR FIELD STRENGTH

SPURIOUS EMISSION MEASUREMENTS

PART 2.993



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 7253
06/28/01

SUMMARY DATA SHEET OF **RADIATED EMISSIONS <1000 MHz**

TEST DATE:----- March 12, 1999
MANUFACTURER:----- Shure Brothers Inc.
MODEL NO:----- PA770
S/N:----- NA
CONFIGURATION:----- **NA**
RATED POWER:----- **0.1000**

TEST SPECIFICATION: FCC "RULES AND REGULATION", PART 74
SUBPART H / SECTION 74.861

******LOW POWER AUXILIARY STATIONS******

TEST EQUIPMENT: Spectrum Analyzer ----- HP 8566B
Quasi Peak Adapter ----- HP 85650A

TYPE OF TEST: RADIATED **VERTICAL** MEASURED **AT 3 METERS**

THE FOLLOWING ARE SIGNIFICANT RADIATED LEVELS FOUND:

FREQ IN MHz.	METER READING dBuV	CABLE LOSSES dB	ANTENNA FACTOR dBuV	TOTAL dBuV	LIMIT dB	MARGIN dB
757.00	47.40	1.50	20.97	69.87	84.46	14.59



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 7253
06/28/01

SUMMARY DATA SHEET OF **RADIATED EMISSIONS <1000 MHz**

TEST DATE:----- March 12, 1999
MANUFACTURER:----- Shure Brothers Inc.
MODEL NO:----- PA770
S/N:----- NA
CONFIGURATION:----- **NA**
RATED POWER:----- **0.1000**

TEST SPECIFICATION: FCC "RULES AND REGULATION", PART 74
SUBPART H / SECTION 74.861

******LOW POWER AUXILIARY STATIONS******

TEST EQUIPMENT: Spectrum Analyzer ----- HP 8566B
Quasi Peak Adapter ----- HP 85650A

TYPE OF TEST: RADIATED **HORIZONTAL** MEASURED **AT 3 METERS**

THE FOLLOWING ARE SIGNIFICANT RADIATED LEVELS FOUND:

FREQ IN MHz.	METER READING dBuV	CABLE LOSSES dB	ANTENNA FACTOR dBuV	TOTAL dBuV	LIMIT dB	MARGIN dB
757.00	52.00	1.50	20.97	74.47	84.46	9.99



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 7253
06/28/01

SUMMARY DATA SHEET OF **RADIATED EMISSIONS >1000 MHz**

TEST DATE:----- March 12, 1999
MANUFACTURER:----- Shure Brothers Inc.
MODEL NO:----- PA770
S/N:----- NA
CONFIGURATION:----- **NA**
RATED POWER:----- **0.1000**

TEST SPECIFICATION: FCC "RULES AND REGULATION", PART 74
SUBPART H / SECTION 74.861

******LOW POWER AUXILIARY STATIONS******

TEST EQUIPMENT: Spectrum Analyzer ----- HP 8566B
Quasi Peak Adapter ----- HP 85650A

TYPE OF TEST: RADIATED EMISSIONS USING **VERTICAL** POLARIZATION

THE FOLLOWING ARE THE HIGHEST NOISE FLOOR READINGS TAKEN:

FREQ IN MHz.	METER READING dBuV	ANTENNA PLUS CABLE	PRE-AMP GAIN dB	TOTAL dBuV	ANTENNA DISTANCE IN METERS	LIMIT dBuV	MARGIN dB
1445.00	45.40	29.10	0.00	74.50	3	84.46	9.96
1479.00	47.50	29.10	0.00	76.60	3	84.46	7.86
1492.00	47.30	29.10	0.00	76.40	3	84.46	8.06
2163.00	49.40	30.16	0.00	79.56	1	94.00	14.44
2201.00	45.00	30.60	0.00	75.60	1	94.00	18.40
2236.00	47.50	30.60	0.00	78.10	1	94.00	15.90



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 7253
06/28/01

SUMMARY DATA SHEET OF **RADIATED EMISSIONS >1000 MHz**

TEST DATE:----- March 12, 1999
MANUFACTURER:----- Shure Brothers Inc.
MODEL NO:----- PA770
S/N:----- NA
CONFIGURATION:----- **NA**
RATED POWER:----- **0.1000**

TEST SPECIFICATION: FCC "RULES AND REGULATION", PART 74
SUBPART H / SECTION 74.861

******LOW POWER AUXILIARY STATIONS******

TEST EQUIPMENT: Spectrum Analyzer ----- HP 8566B
Quasi Peak Adapter ----- HP 85650A

TYPE OF TEST: RADIATED EMISSIONS USING **HORIZONTAL** POLARIZATION

THE FOLLOWING ARE THE HIGHEST NOISE FLOOR READINGS TAKEN:

FREQ IN MHz.	METER READING dBuV	ANTENNA PLUS CABLE	PRE-AMP GAIN dB	TOTAL dBuV	ANTENNA DISTANCE IN METERS	LIMIT dBuV	MARGIN dB
1445.00	42.00	29.10	0.00	71.10	3	84.46	13.36
1479.00	48.60	29.10	0.00	77.70	3	84.46	6.76
1492.00	47.20	29.10	0.00	76.30	3	84.46	8.16
2163.00	45.60	30.16	0.00	75.76	1	94.00	18.24
2201.00	41.80	30.60	0.00	72.40	1	94.00	21.60
2236.00	44.90	30.60	0.00	75.50	1	94.00	18.50





EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA



Report No. 7253
06/28/01



RADIATED GRAPHS TAKEN FOR FIELD STRENGTH



SPURIOUS EMISSION MEASUREMENTS

PART 2.993

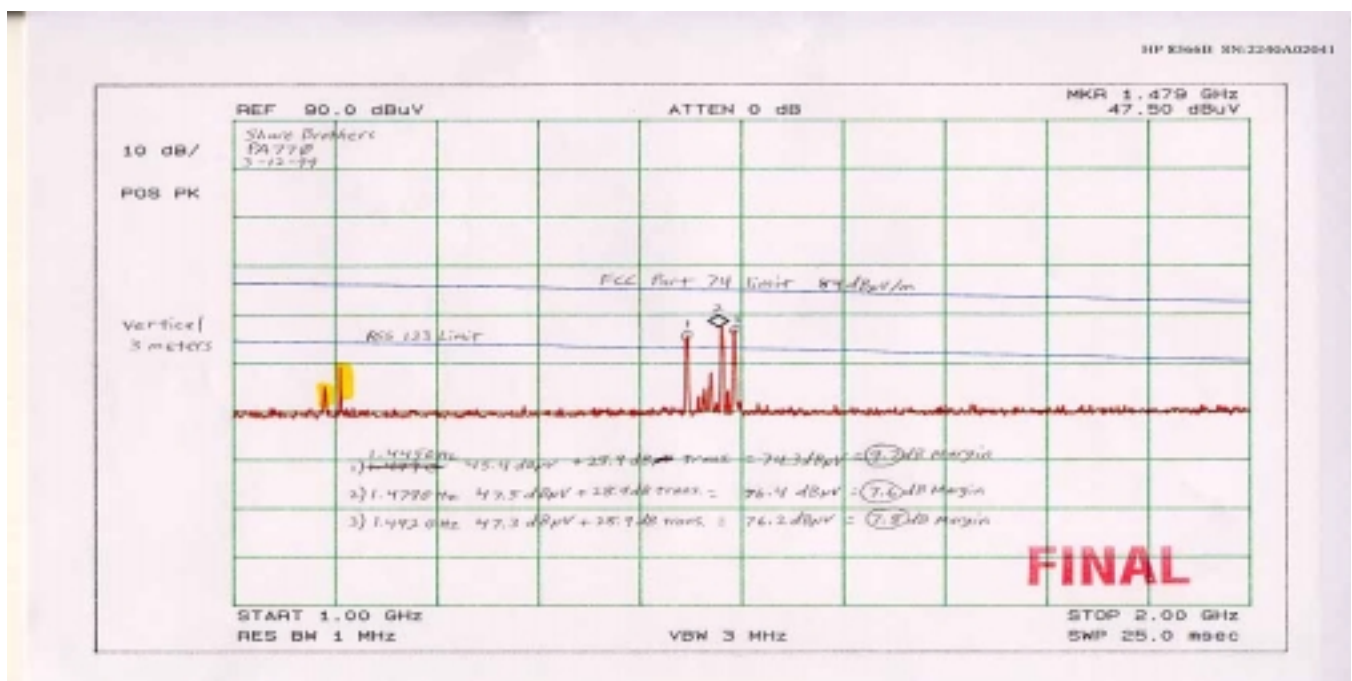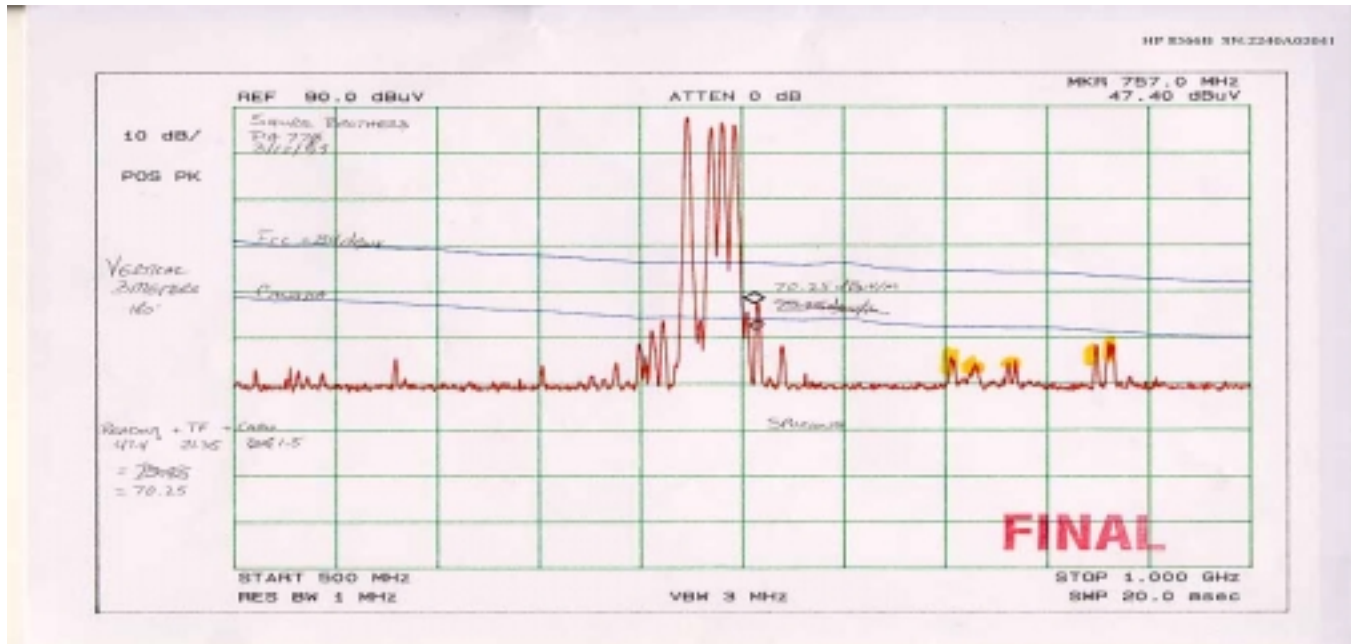

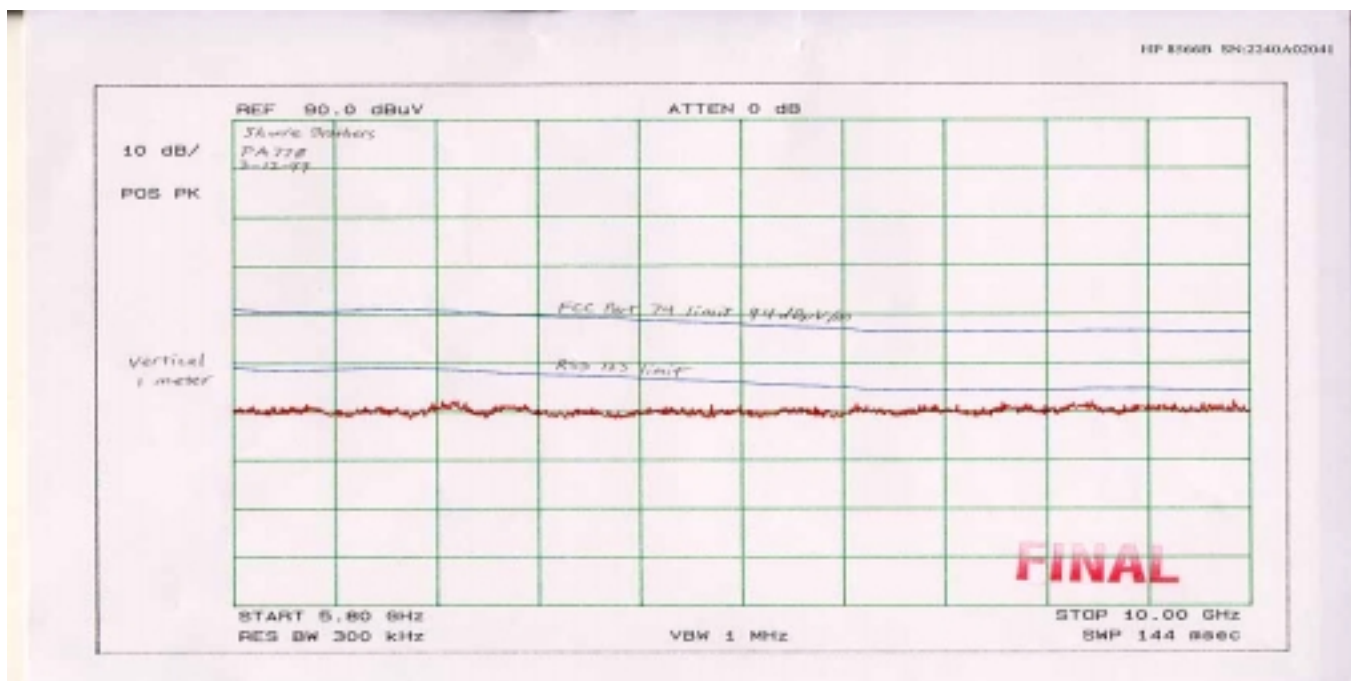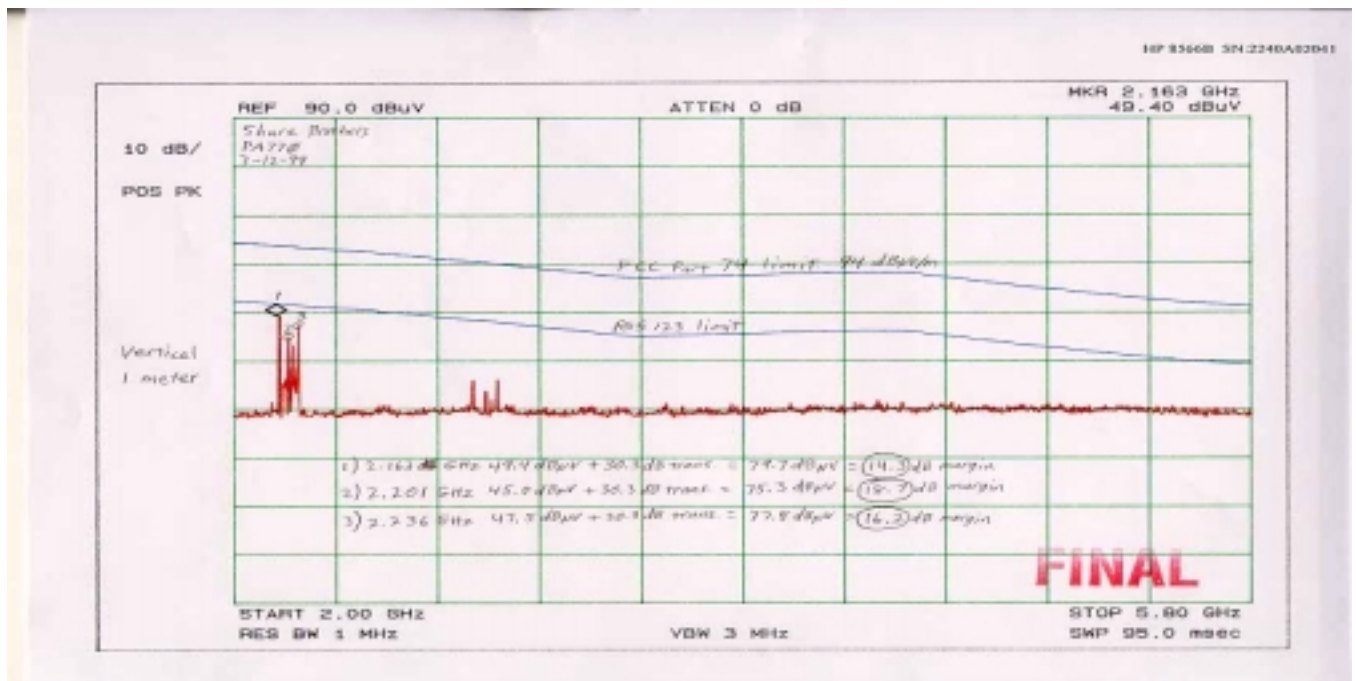

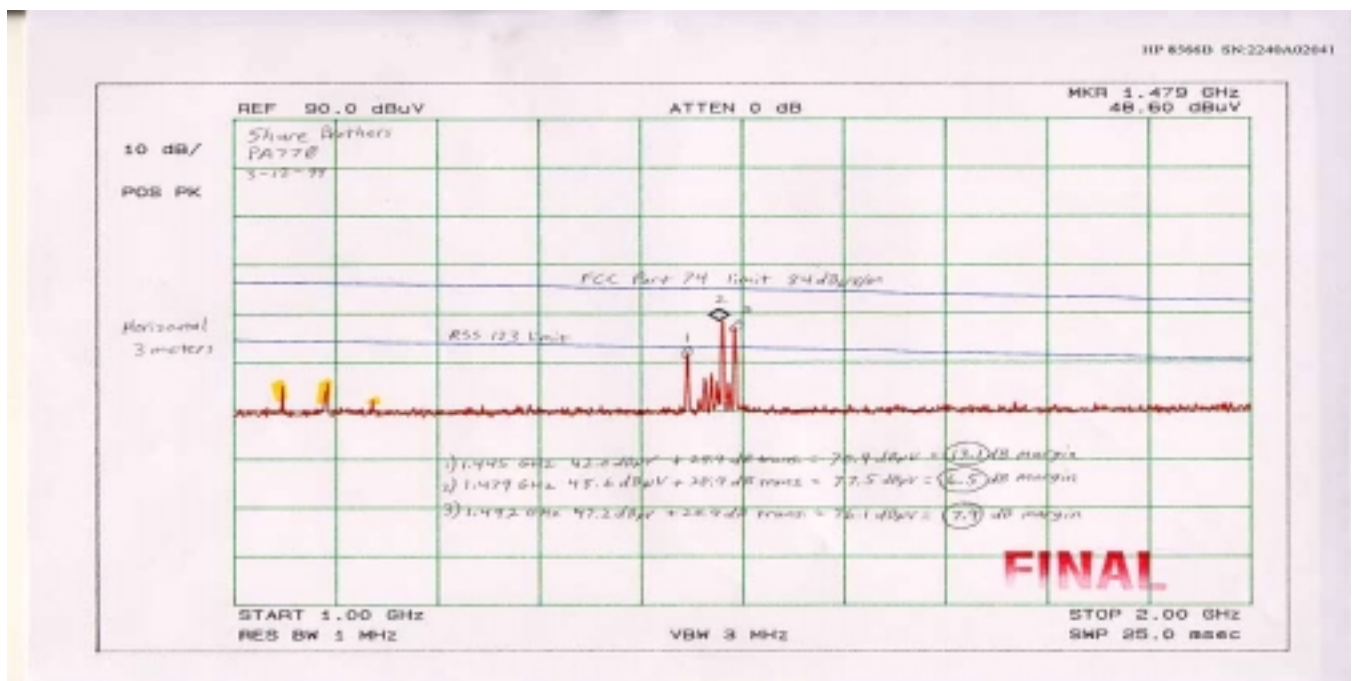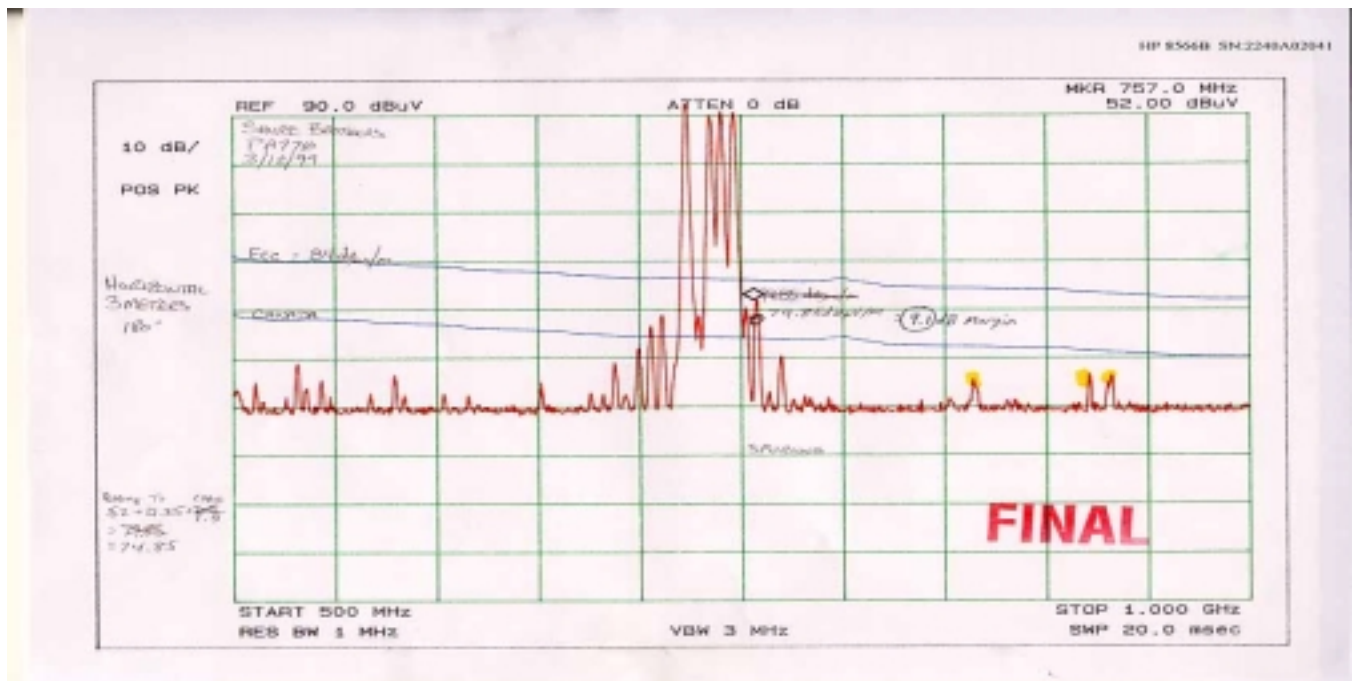

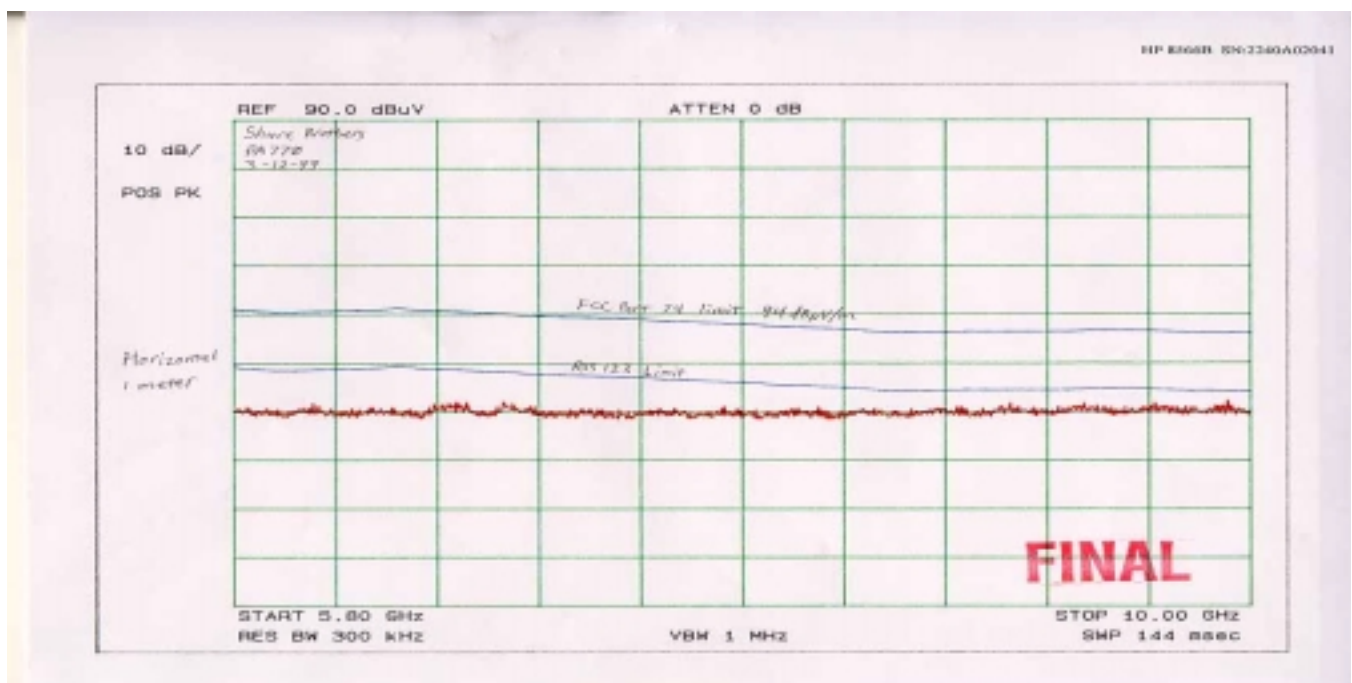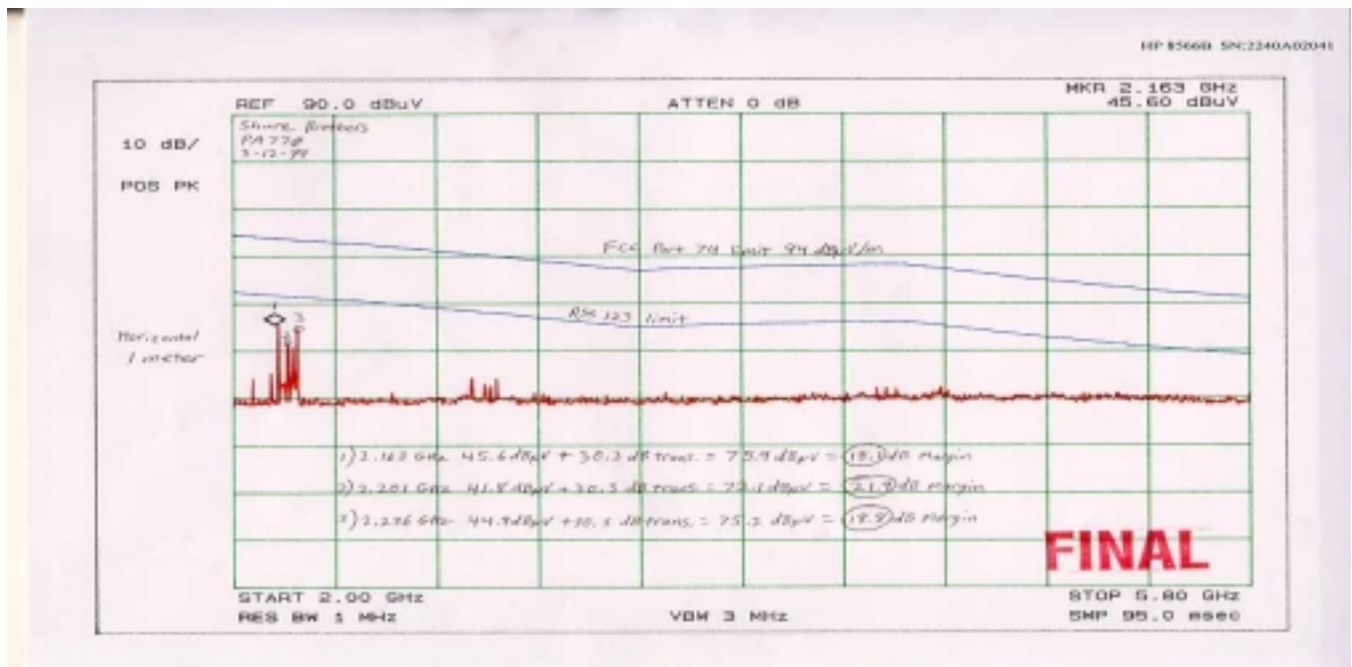



12.0 FREQUENCY STABILITY - PART 2.995a (Temperature)

The frequency stability was measured from -30° to +50° centigrade at intervals of 10° centigrade throughout the range. Prior to each frequency measurement, the equipment was left alone for a sufficient period of time (approximately 30 minutes or more) to allow the components of the Antenna Combiner oscillator circuitry to stabilize. The following information was taken:

FREQUENCY STABILITY FOR TEMPERATURE VARIATION IN MHz:

-30°	0
-20°	0
-10°	0
0°	0
+10°	0
+20°	0
+30°	0
+40°	0
+50°	0

Worst Case Variance:

0 Hz

As stated in Part 74, Section 74.861 e-4 the Frequency Tolerance and Margin for this range are as follows:

Frequency Tolerance: = **0%**

0 * 0% = **0 Hz**

0 - 0 = **0 Hz**

NOTE:

Since this device is not a transmitter or power amplifier the Frequency Stability test for the temperature variation is not required.



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 7253
06/28/01

GRAPHS TAKEN FOR FREQUENCY

STABILITY WHEN VARYING THE TEMPERATURE

PART 2.995A

NOTE:

Since this device is not a transmitter or power amplifier the Frequency Stability test for the temperature variation is not required.



13.0 FREQUENCY STABILITY - PART 2.995d (Voltage)

The frequency stability of Antenna Combiner was measured by varying the primary supply voltage from 85% to 115% of nominal value for all equipment other than hand carried battery equipment.

FREQUENCY STABILITY FOR VOLTAGE VARIATION:

85%	0
100%	0
115%	0

FREQUENCY STABILITY FOR HAND HELD DEVICES:

For hand carried, battery powered equipment, the supply voltage was reduced to the battery operating end point specified by the manufacturer. Readings were taken at the reduced end point and with a fresh battery:

Fresh Battery verses Battery end point:

Frequency #1 **0 Hz**
Frequency #2 **0 Hz**
Frequency #3 **0 Hz**
Frequency #4 **0 Hz**
Frequency #5 **0 Hz**
Frequency #6 **0 Hz**

As stated in Part 74, Section 74.861 e-4 the Frequency Tolerance and Margin for this range are as follows:

Frequency Tolerance: 0%

Limit: 0 Hz

Note:

Since this device is not a transmitter or power amplifier, the Frequency Stability test for the voltage variation is not required.

.



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 7253
06/28/01

GRAPHS TAKEN FOR FREQUENCY

STABILITY WHEN VARYING THE

PRIMARY SUPPLY VOLTAGE

PART 2.995d

Note:

Since this device is not a transmitter or power amplifier, the Frequency Stability test for the voltage variation is not required.




14.0 PHOTO INFORMATION AND TEST SET-UP

The test set-up can be seen on the accompanying photo page.

- Item 0 Antenna Combiner
 FCC ID#: DD4PA770 SN: NA
- Item 1 Four Shure Brothers Transmitters. (not part of EUT)
- Item 2 FP33 Microphone Mixer. (1kHz tone generator)
- Item 3 Five non-shielded Power Cords. 2m
- Item 4 Four shielded, unbalanced Audio Input Cables with Metal Shells. 18"
 Four shielded coax Input Cables with Metal Shells. 18"
 One shielded coax Bulkhead Cable with Metal Shells. 18"
- Item 5
- Item 6
- Item 7
- Item 8
- Item 9
- Item 10

RADIATED PHOTOS TAKEN DURING TESTING.

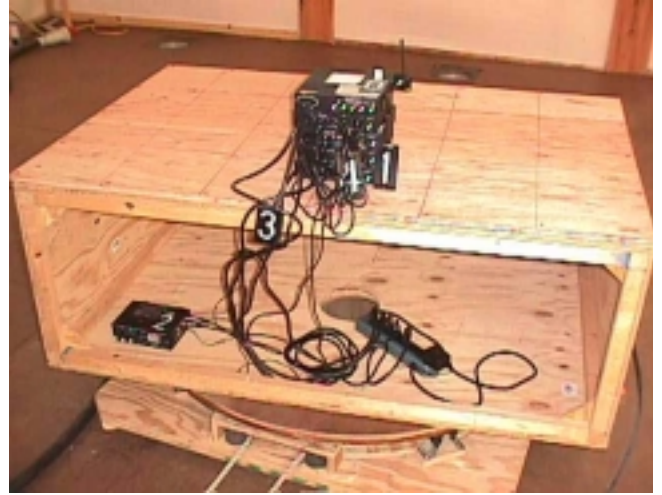

15.0 CONDUCTED PHOTOS TAKEN DURING TESTING





16.0 CHANGE INFORMATION

The following changes were implemented during the testing and must be incorporated into the production units to ensure compliance.

Change 1. There were no changes made at D.L.S. Electronic Systems, Inc.

Change 2.

Change 3.

Change 4.

Change 5.



16.0 CHANGE INFORMATION (CON'T)

Change 6.

Change 7.

Change 8.

Change 9.

Change 10.

The responsibility of implementing the changes listed in this report is accepted or I certify that no changes were made

by _____
Signature Title

for _____
Company Name Date



17.0 RESULTS OF TESTS

The emission test results can be seen on pages at the end of this report. Data sheets indicating the open field radiated measurements can also be found with this report. Those points on the radiated charts shown with a yellow mark are background frequencies which were verified during the test.

18.0 CONCLUSION

It was found that the Antenna Combiner (Transmitter), S/N NA **“meets”** the radio interference emission requirements of the FCC "Rules and Regulations", Part 74, Subpart H, Sections 74.801 to 74.882 for Low Power Auxiliary Stations operating in the 614 MHz to 806 MHz Frequency Band. This test report relates only to the items tested.

This report contains the following number of pages.

Text: 52 pages

Data Summary: 7

Charts: 29



TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer/Description	Model Number	Serial Number	Frequency Range	Cal Due Date
*Spectrum Analyzer	Hewlett/Packard	8566B	2240A 02041	5 Hz - 22GHz	4/99
Quasi-Peak Adapter	Hewlett/Packard	85650A	2043A 00121	10 kHz - 1GHz	4/99
Receiver	Electrometrics	EMC-25 Mark-III	772	.01-1000 MHz	10/99
Meter Module	Electrometrics	CRM-25	162	.01-1000 MHz	10/99
Receiver	Electrometrics	EMC-25 Mark-III	804	.01-1000 MHz	10/99
Meter Module	Electrometrics	CRM-25	138	.01-1000 MHz	10/99
Antenna	Electrometrics	BIA-25	2453	20-200 MHz	10/99
Antenna	Electrometrics	LPA-25	1114	200-1000 MHz	10/99
Antenna	Electrometrics	BIA-25	2614	20-200 MHz	10/99
Antenna	Electrometrics	LPA-25	1205	200-1000 MHz	10/99
Antenna	D.L.S.	Dipoles		20-1000 MHz	I/O
Antenna	Electro-Mechanics Co	3115	2479	1 – 18 GHz	I/O

*Firmware Version	29.9.86	Software Version	85864C Rev A
**Firmware Version	14.1.85	Software Version	85864C Rev A
***Firmware Version	5.1.3	Software Version	82301-12029 Rev C

I/O Initial Calibration Only