



ELITE ELECTRONIC ENGINEERING INC.

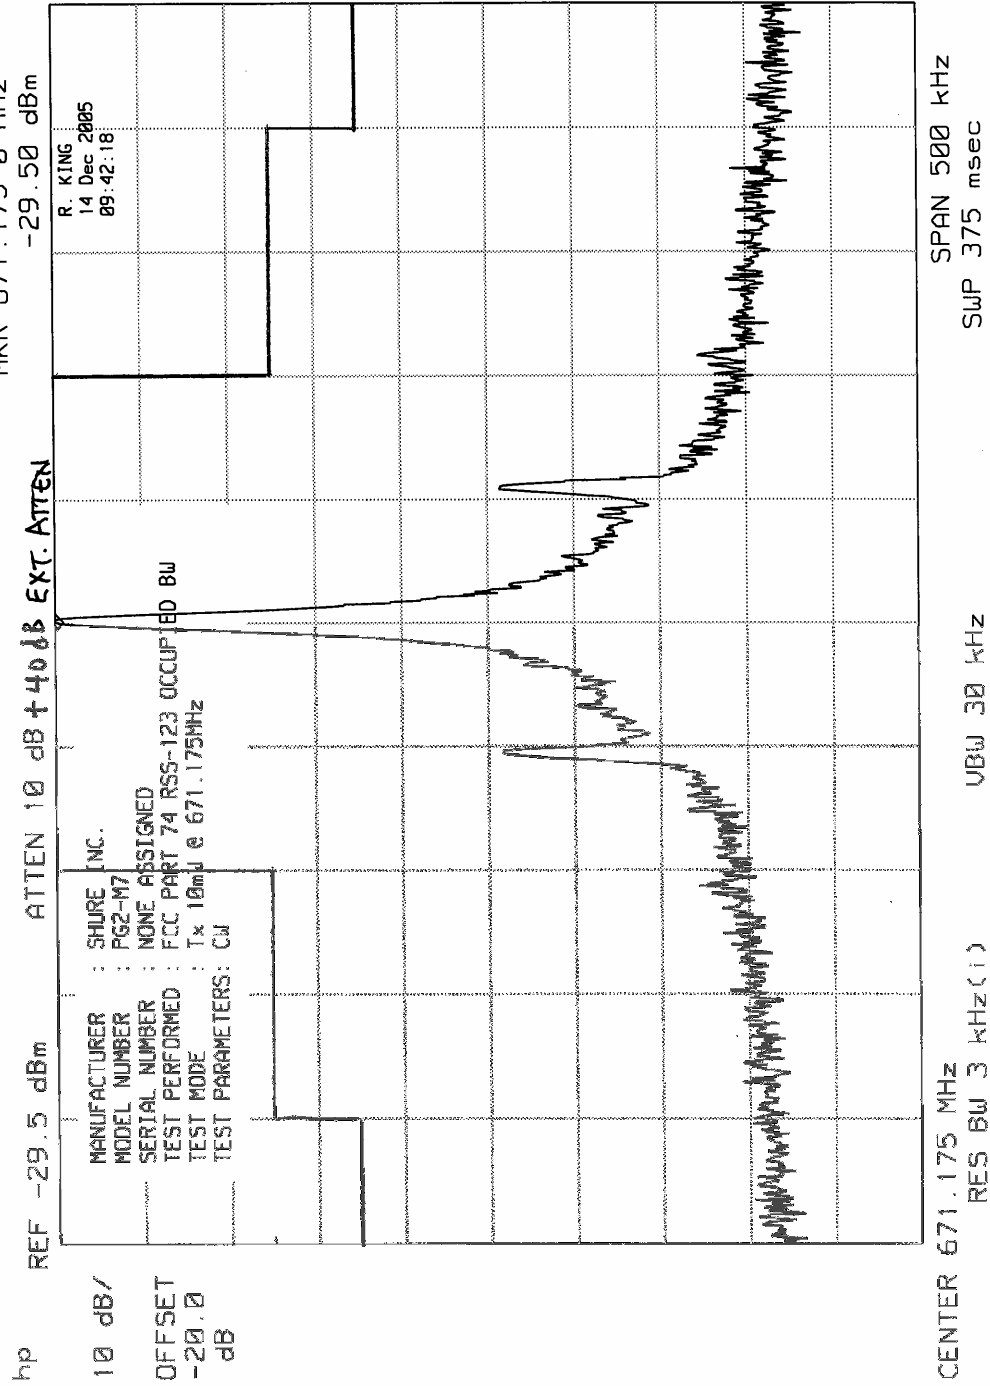

ELITE ELECTRONIC ENGINEERING Inc.

MR 671.175 0 MHz
-39.10 dBm

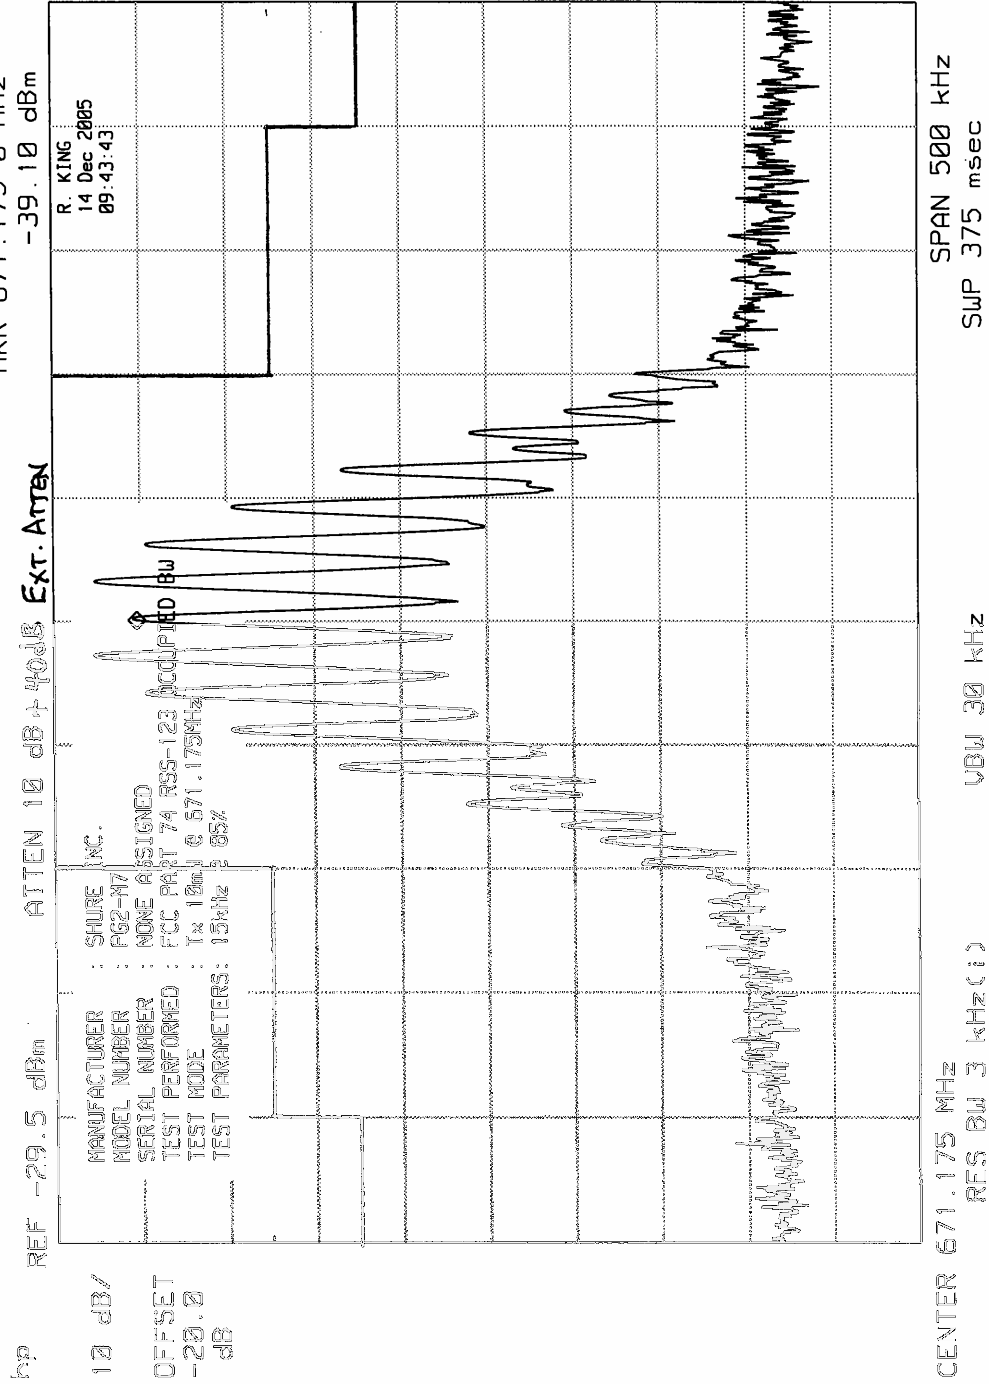




ELITE ELECTRONIC ENGINEERING INC.

MR 671.196 0 MHz
-36.90 dBm

REF -29.5 dBm

ATTEN 10 dB + 40dB Ext. Atten


10 dB/
OFFSET
-20.0
dB

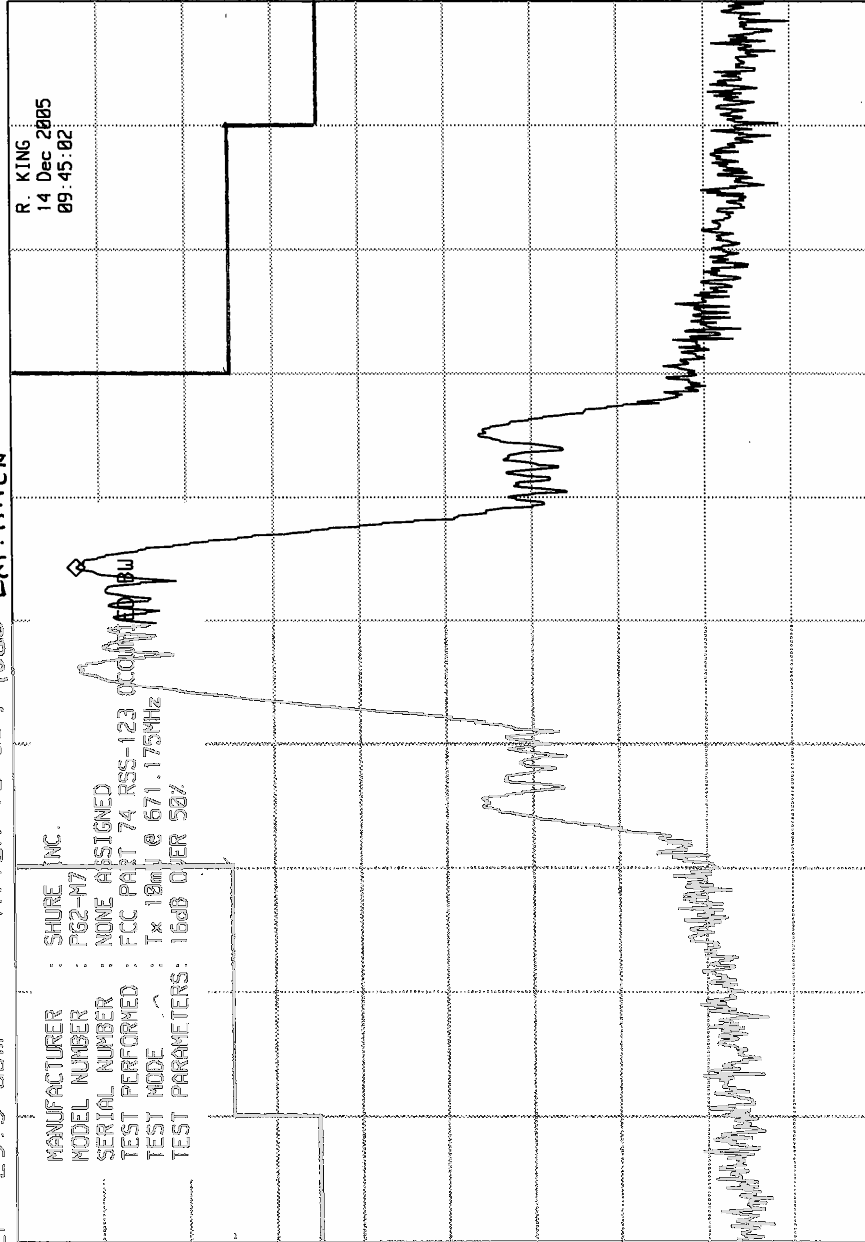

CENTER 671.175 MHz
RES BW 3 kHz (1)
SPAN 500 kHz
SWP 375 msec
UBW 30 kHz

ELITE ELECTRONIC ENGINEERING INC.


MR 805.850 5 MHz
-31.10 dBm

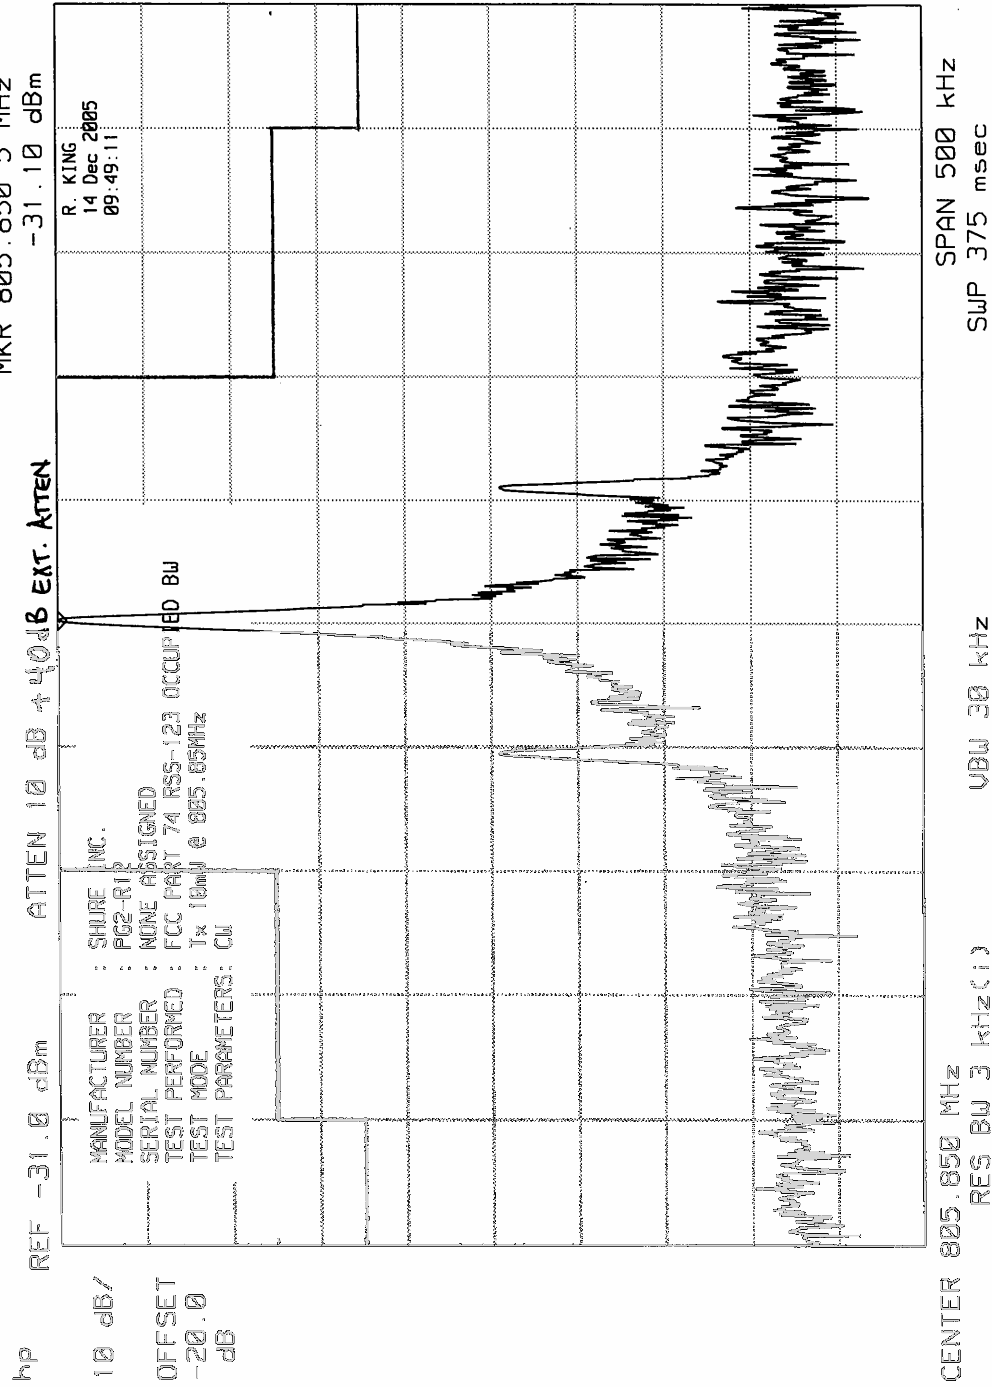



ELITE ELECTRONIC ENGINEERING Inc.

MR 805.850 5 MHz
-42.00 dBm

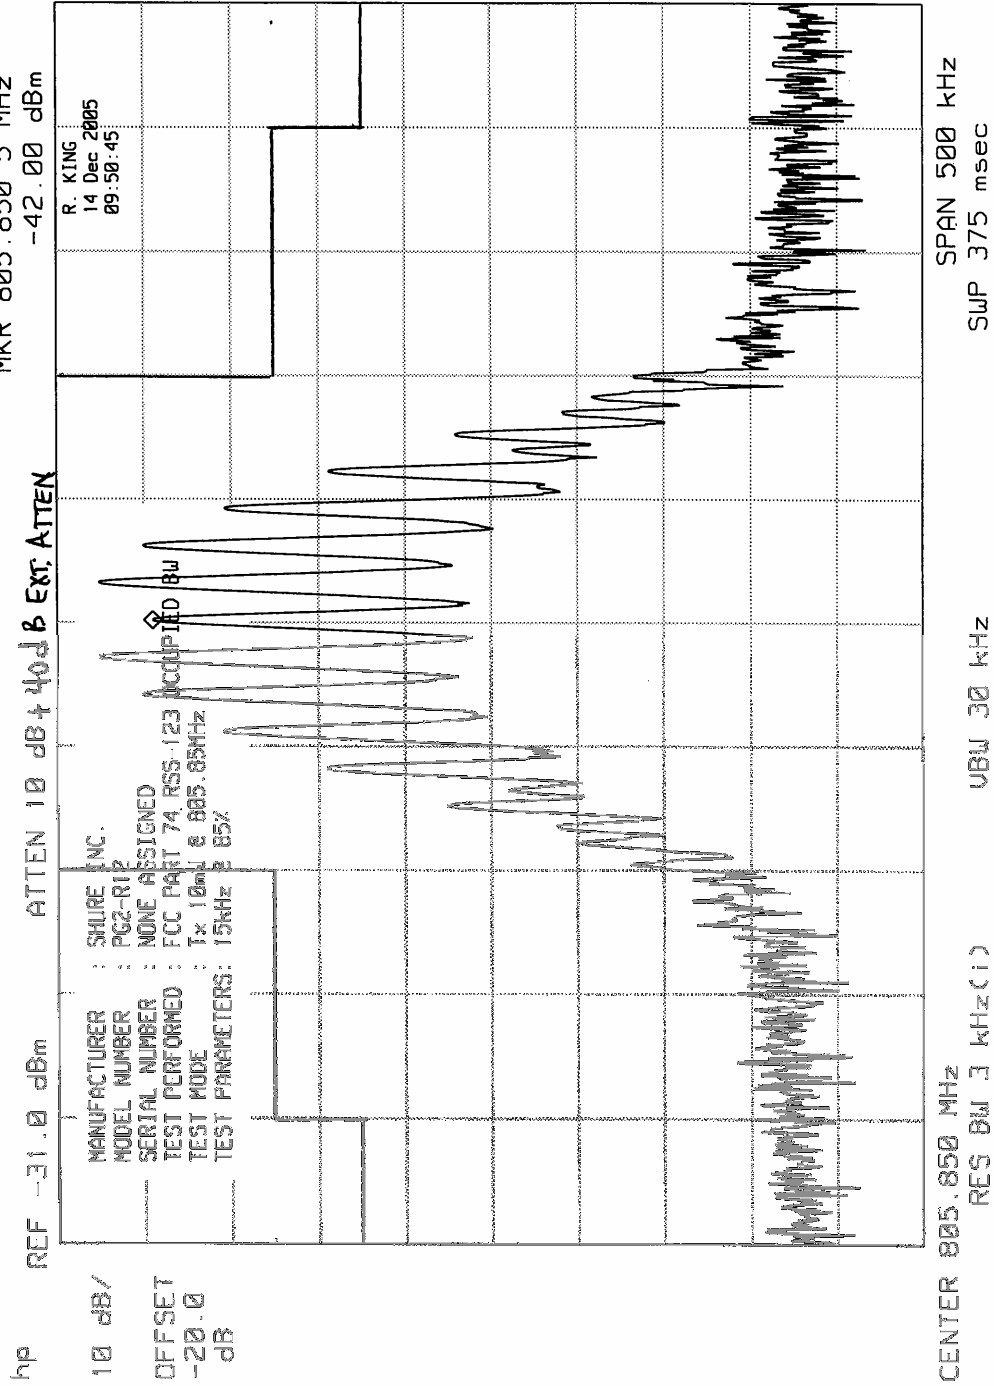




ELITE ELECTRONIC ENGINEERING Inc.


MR 805.850 5 MHz
-43.10 dBm


REF -31.0 dBm


ATTEN 10 dB $\rightarrow$ 40 dB EXT. ATTN

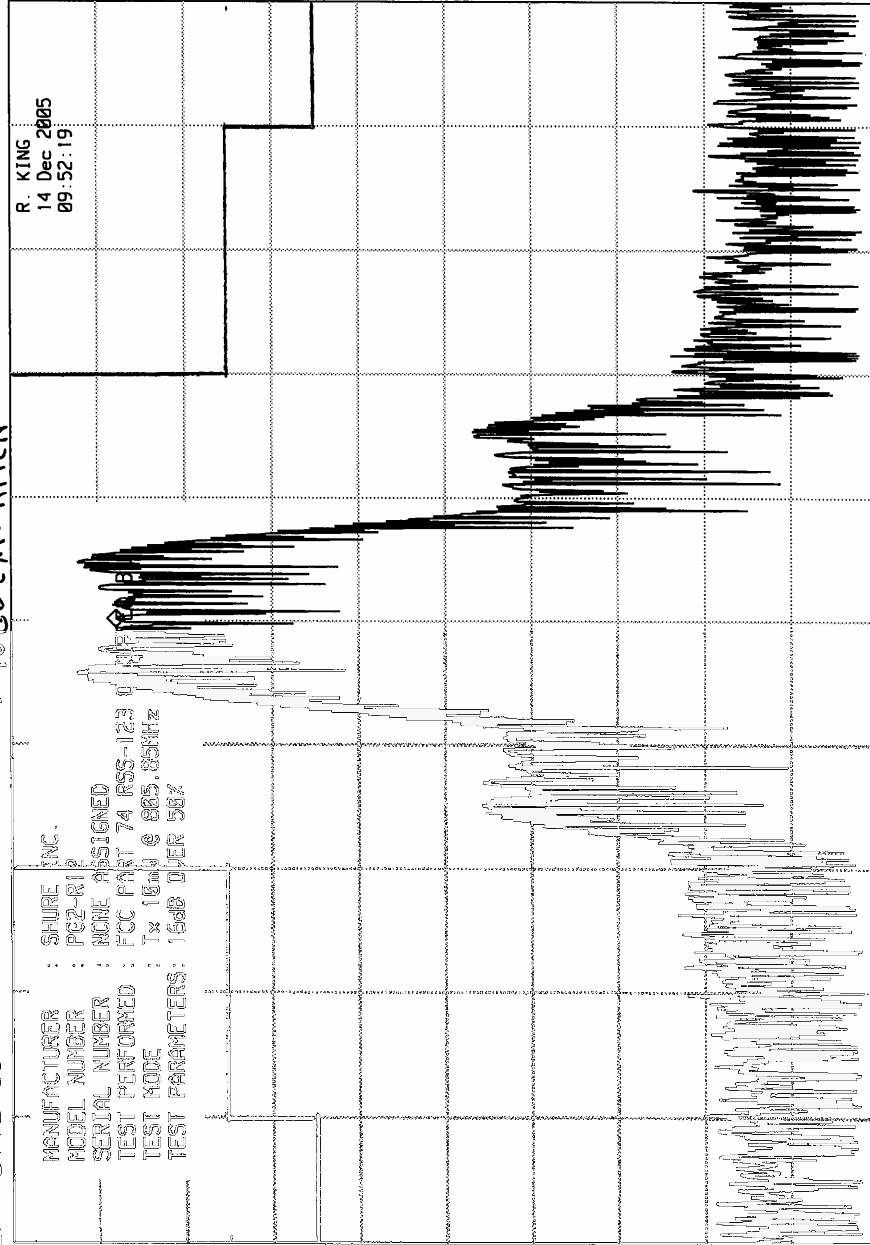



CENTER 805.850 MHz
RES BW 3 kHz(1)
SPAN 500 kHz
SWP 375 msec
VBW 30 kHz

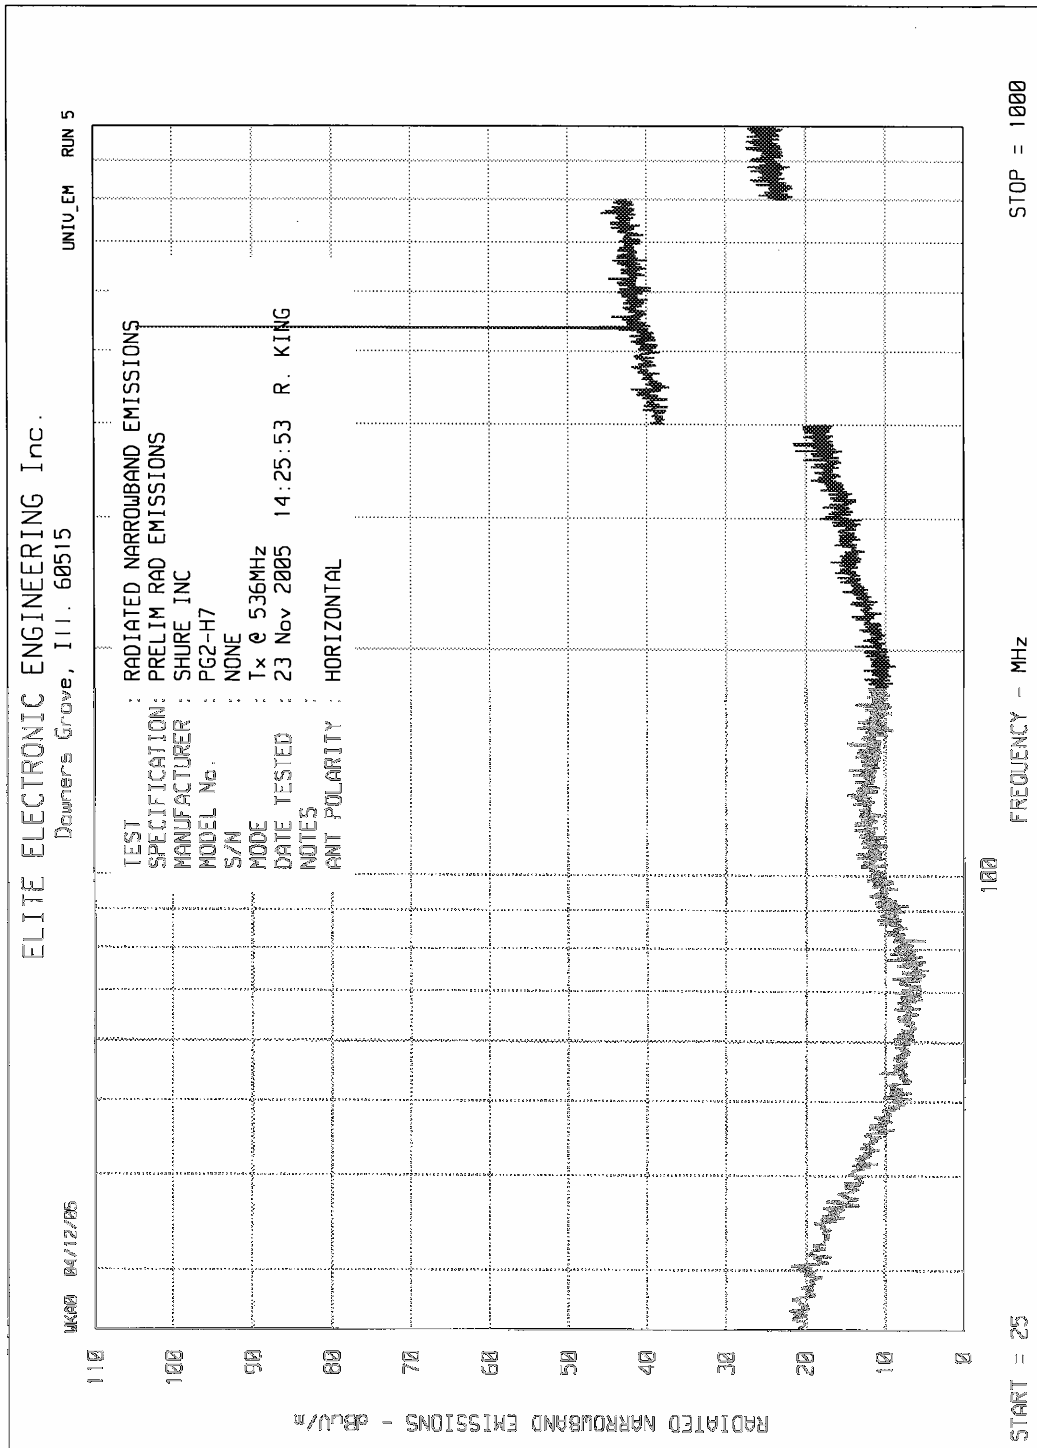


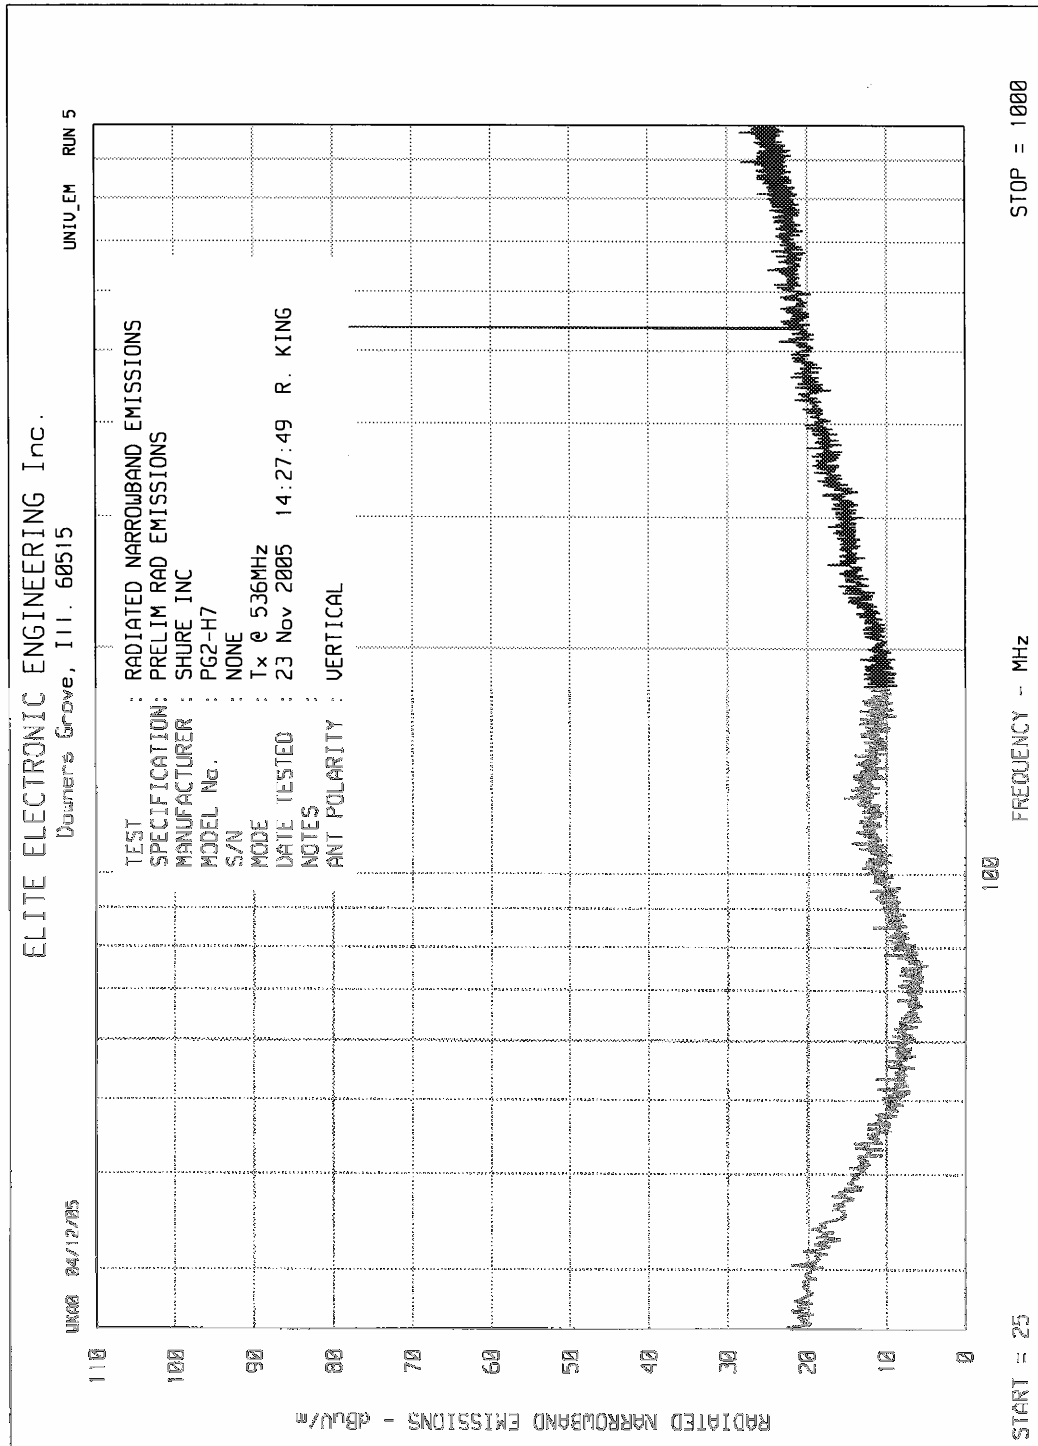


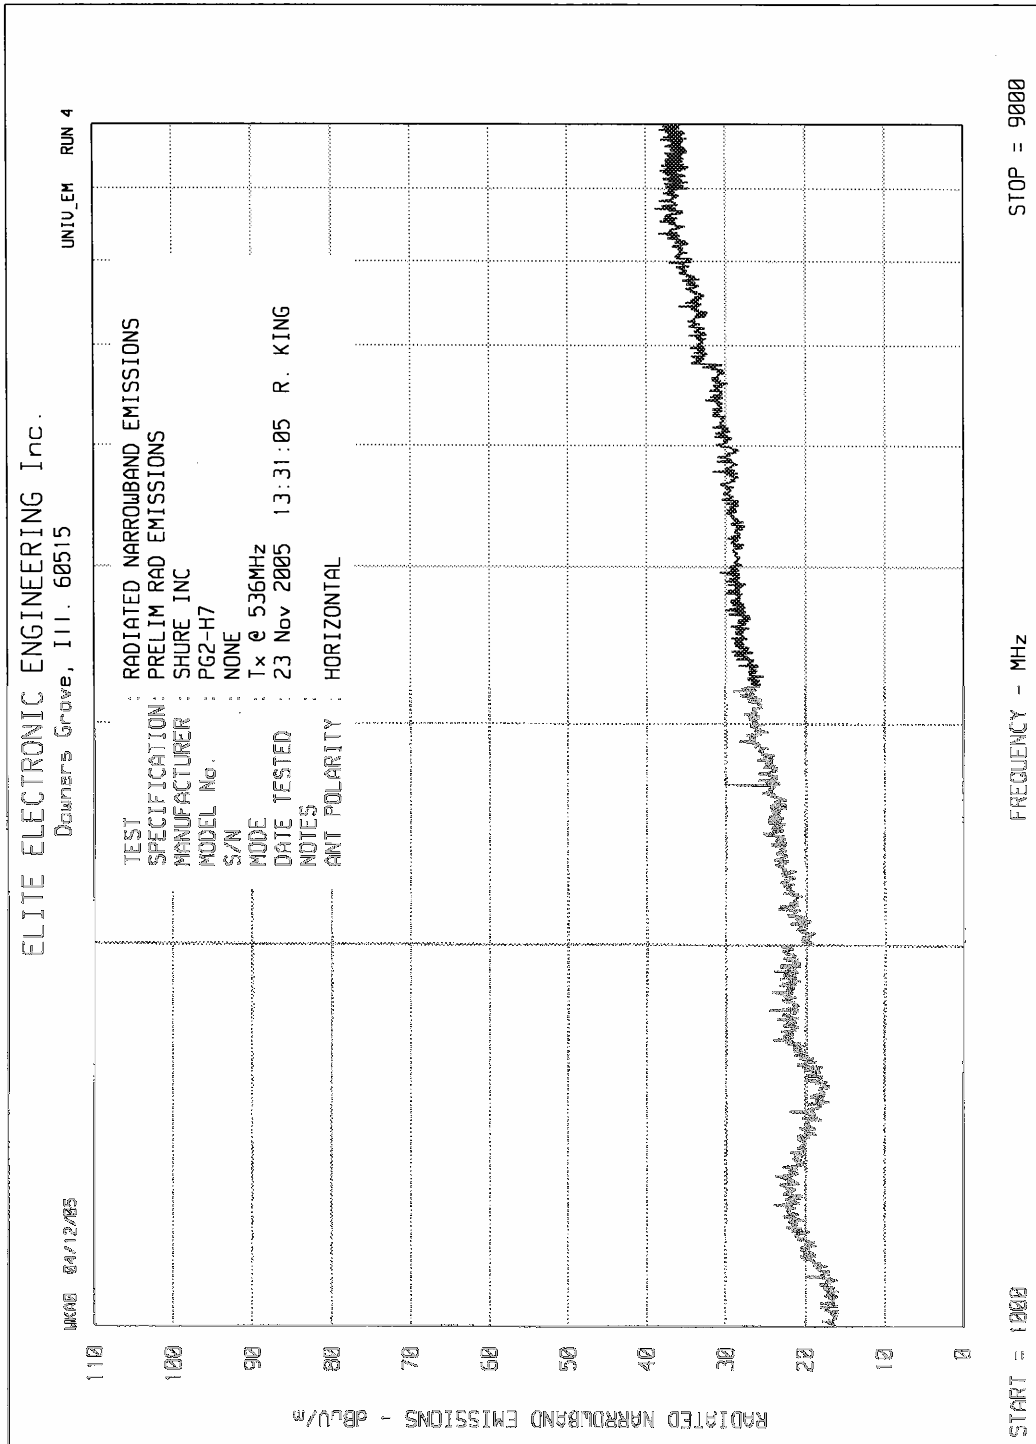


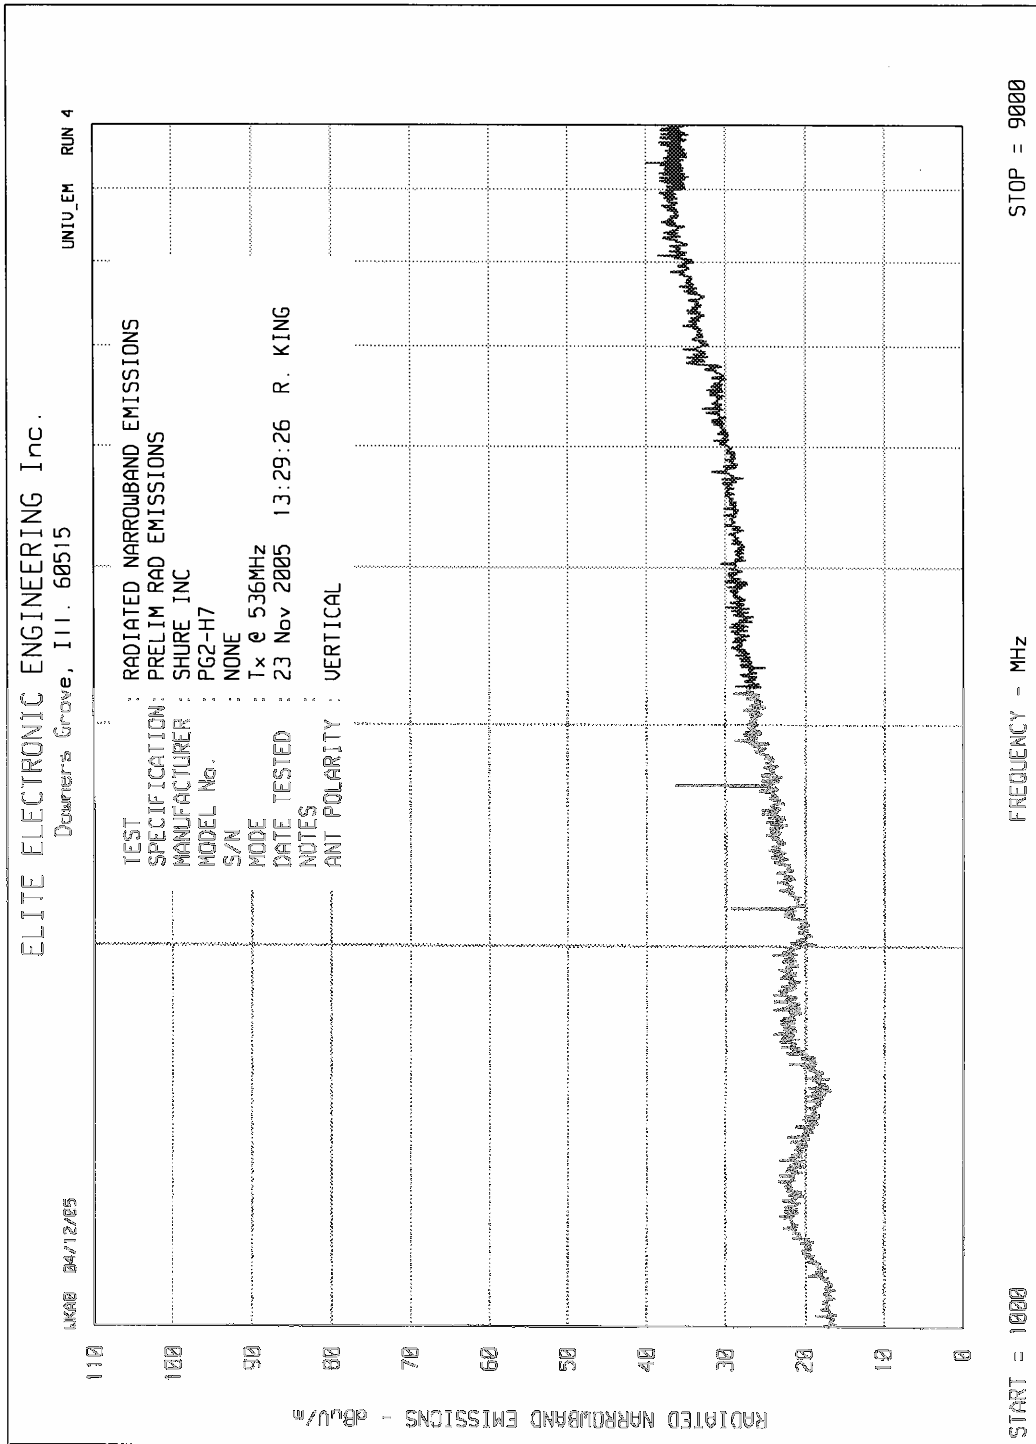


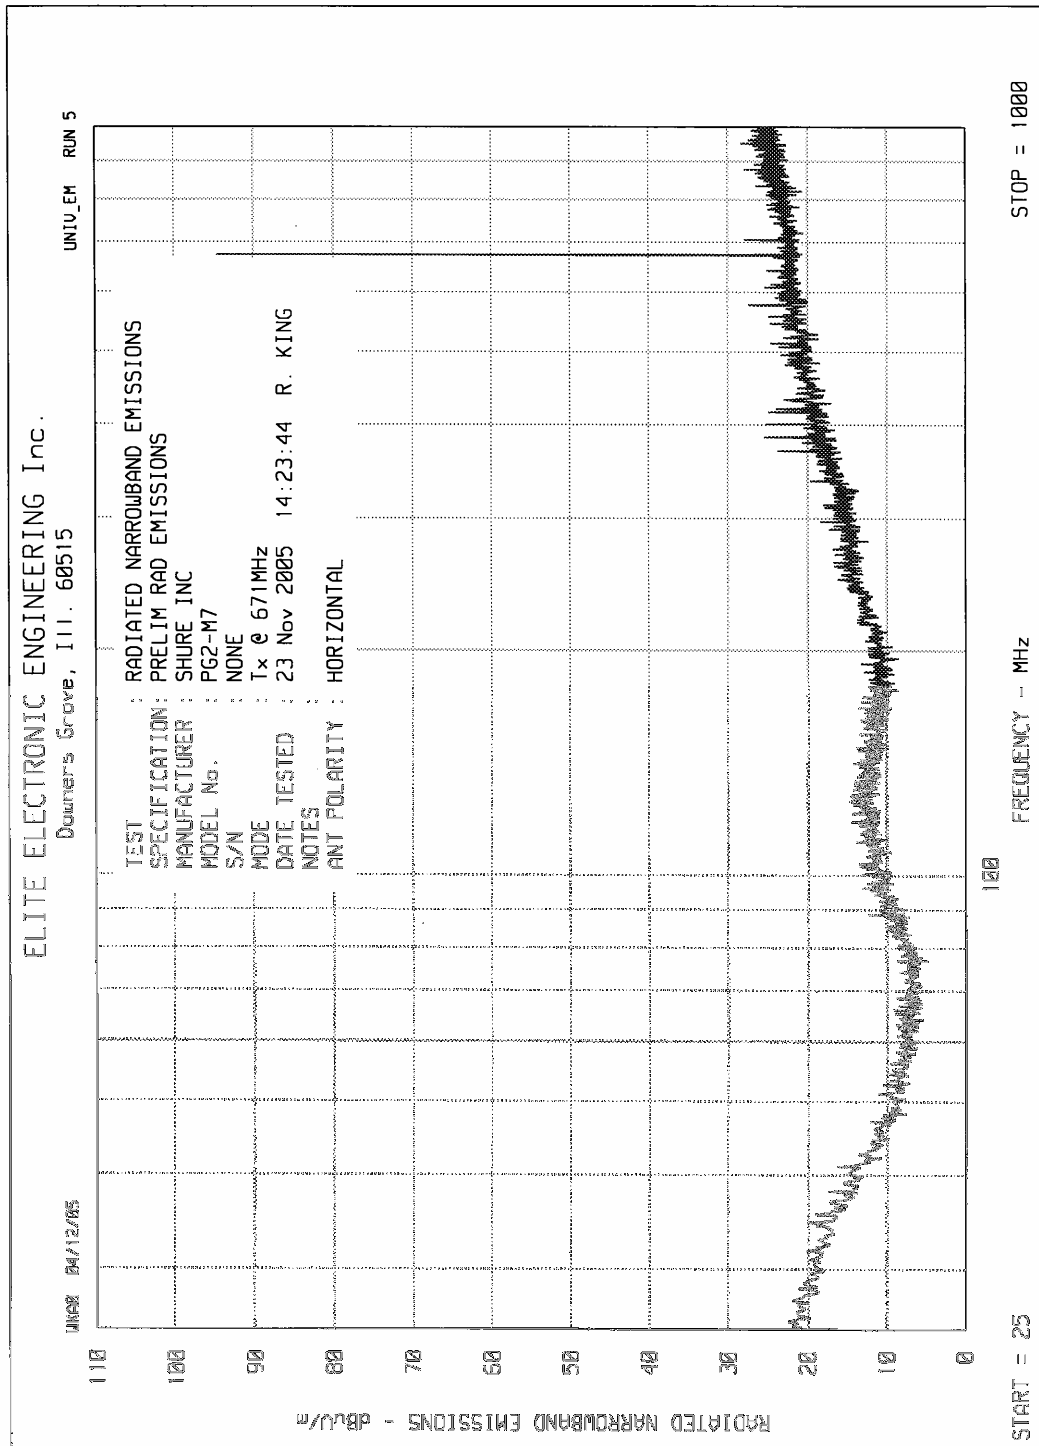


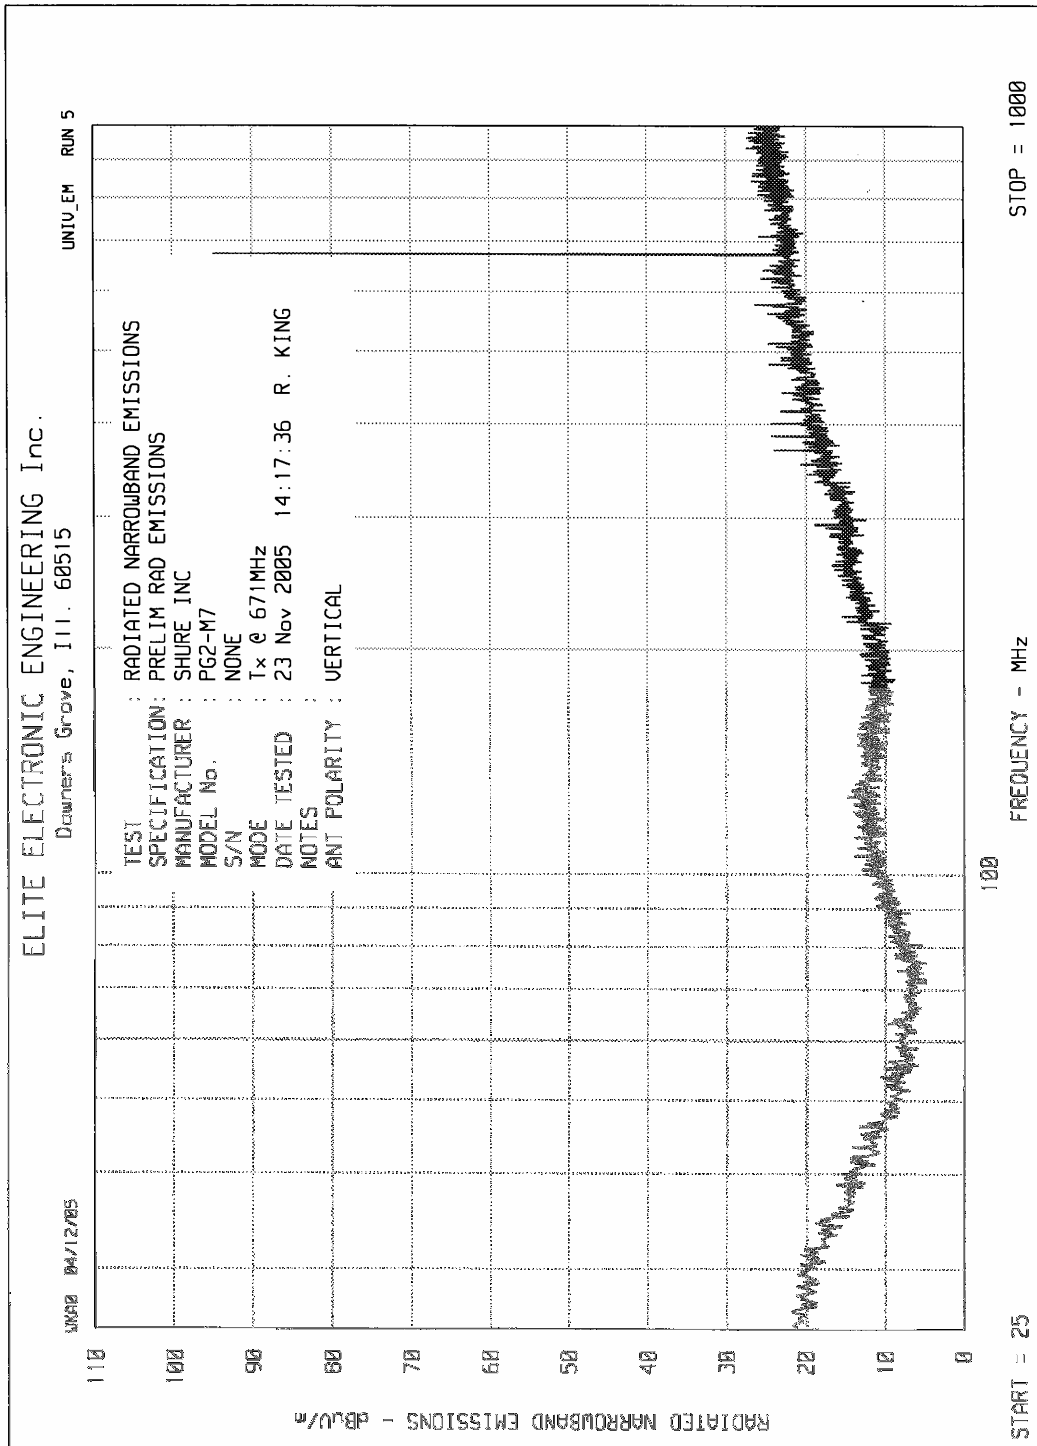


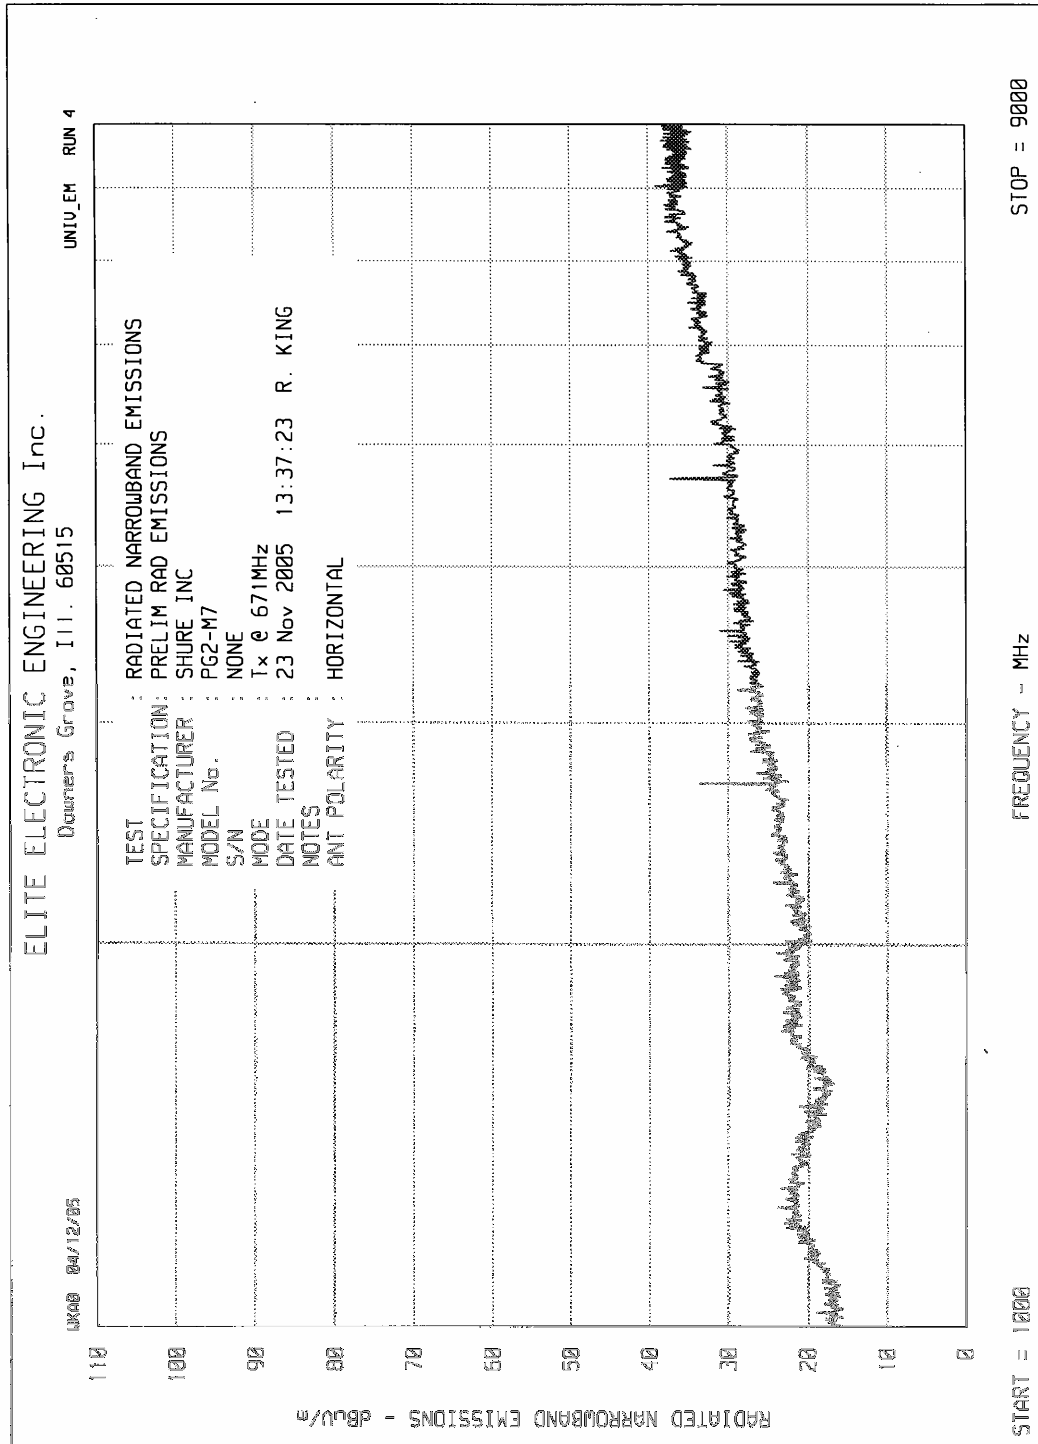


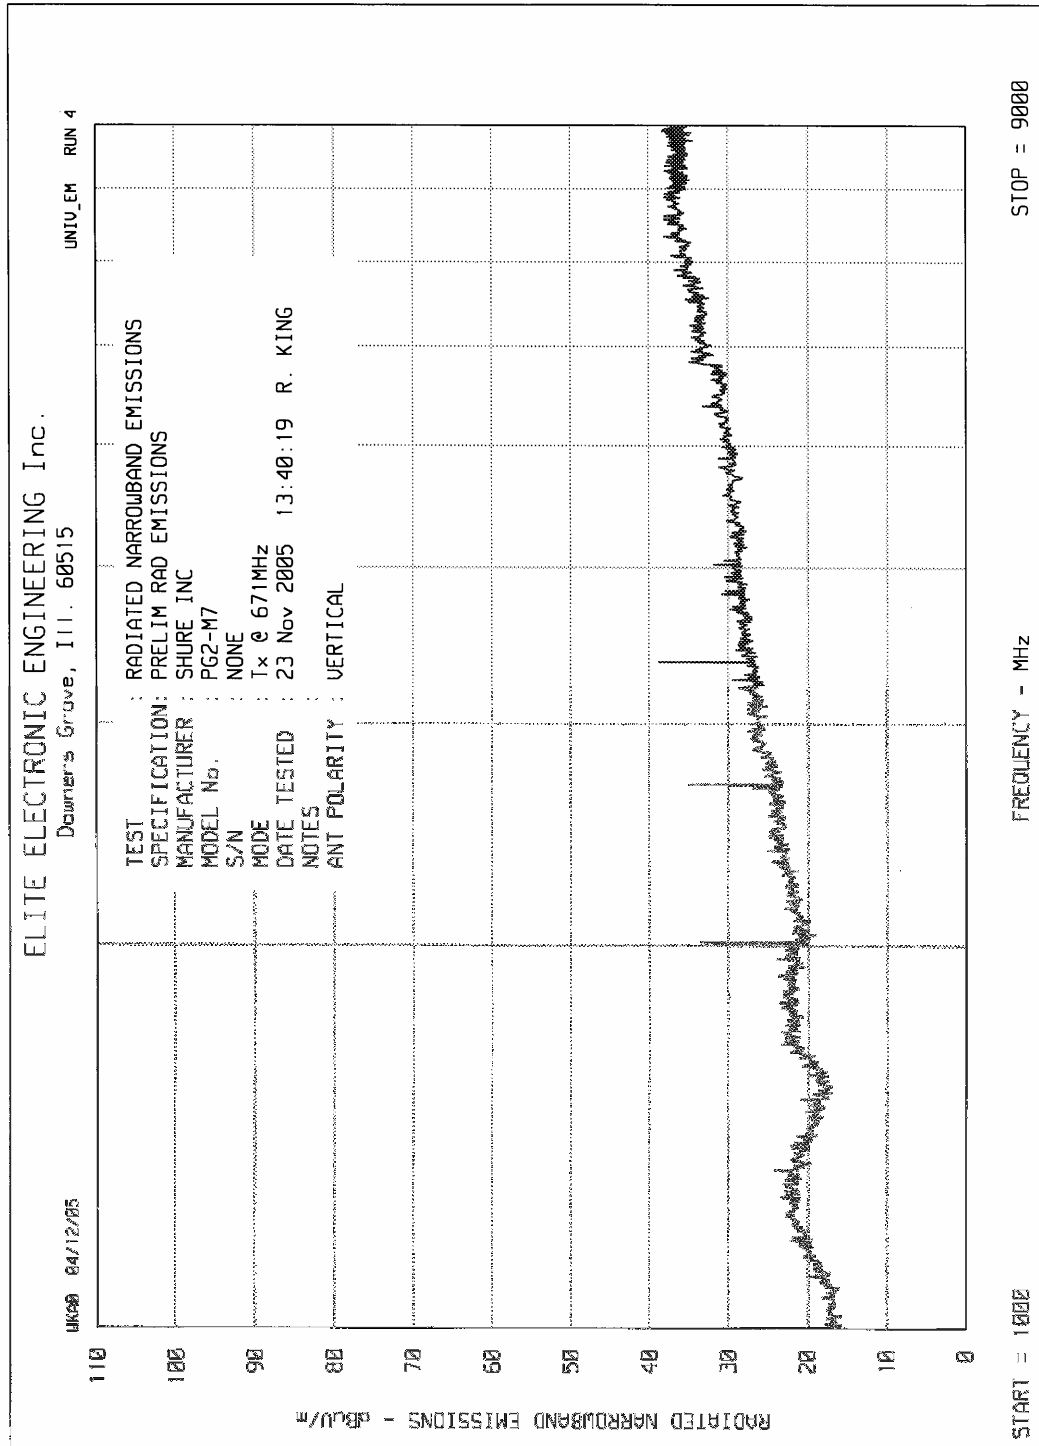

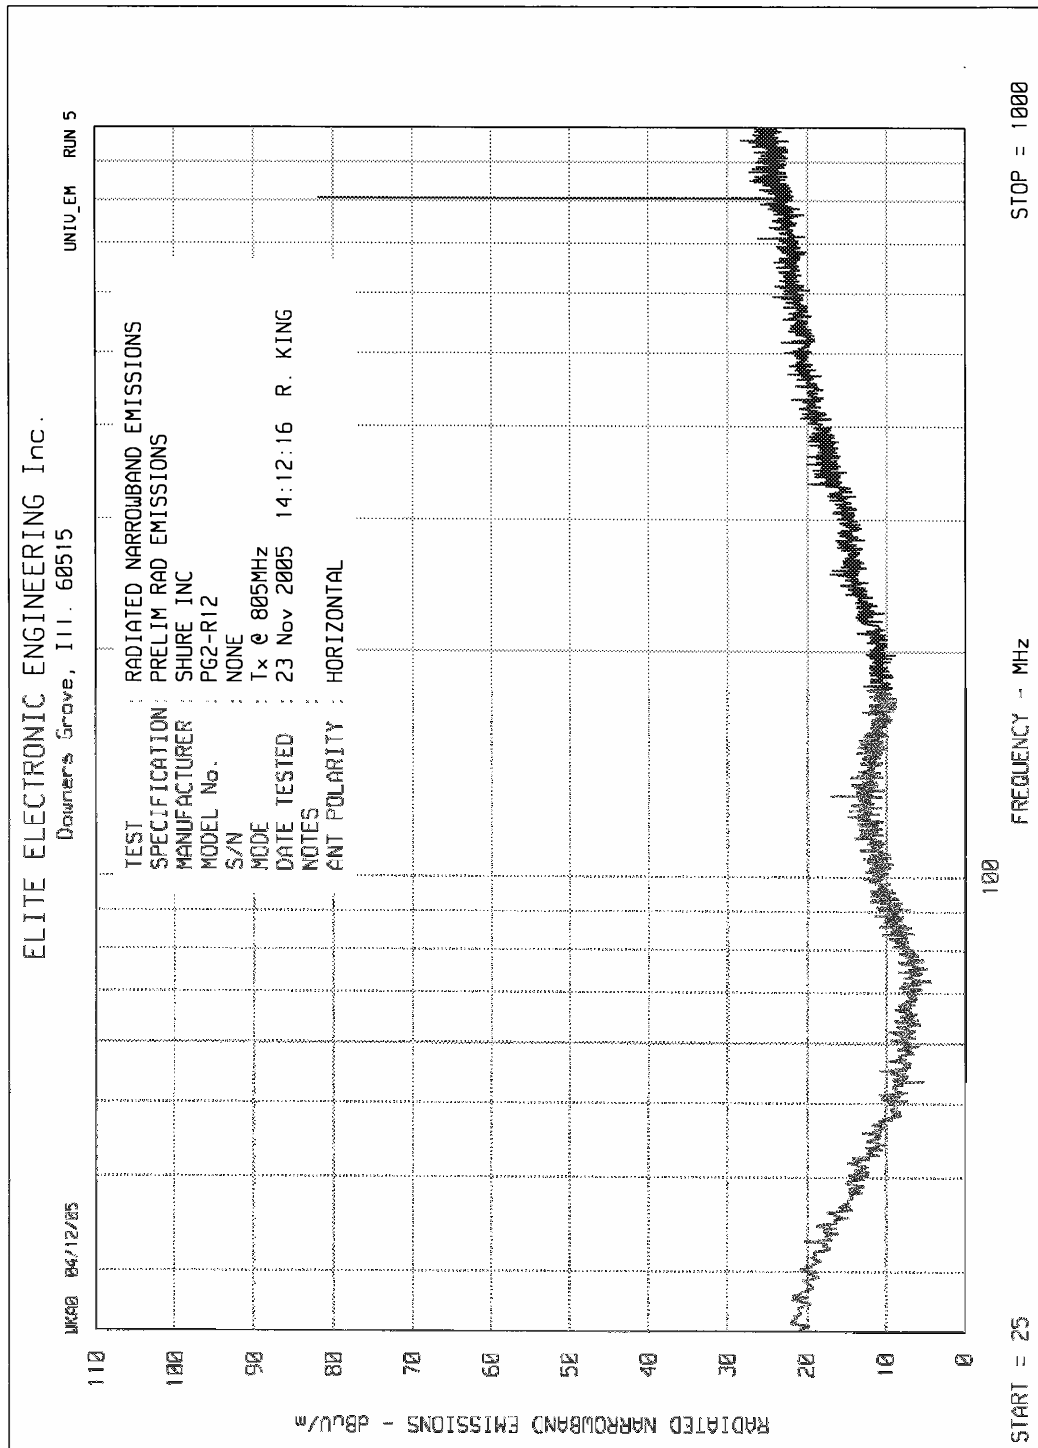

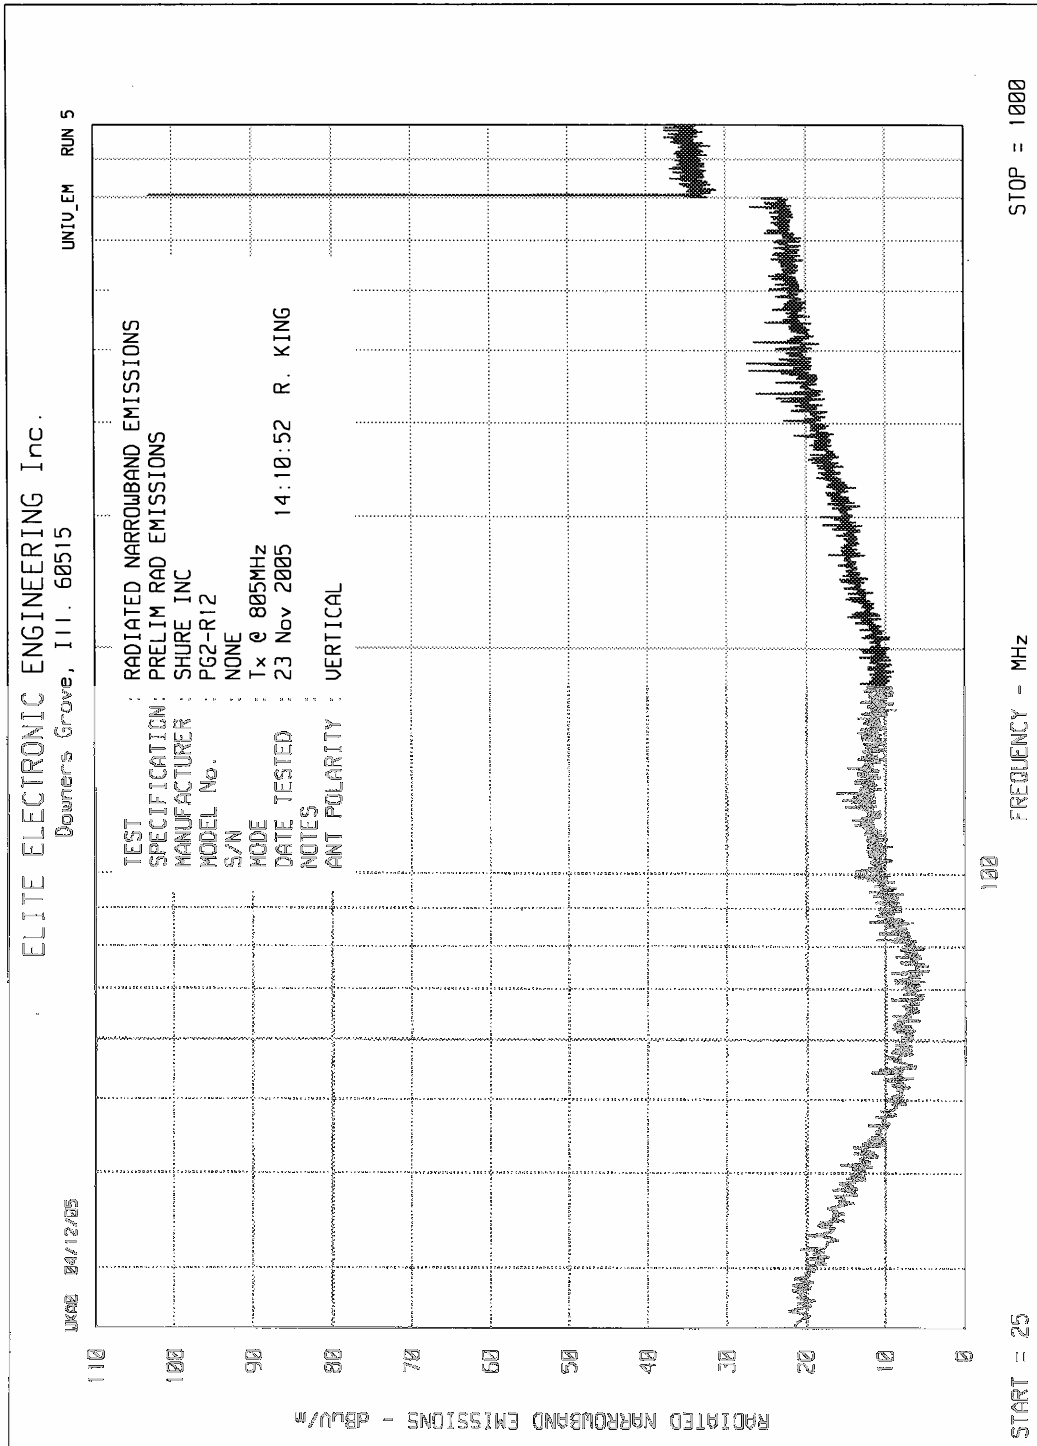

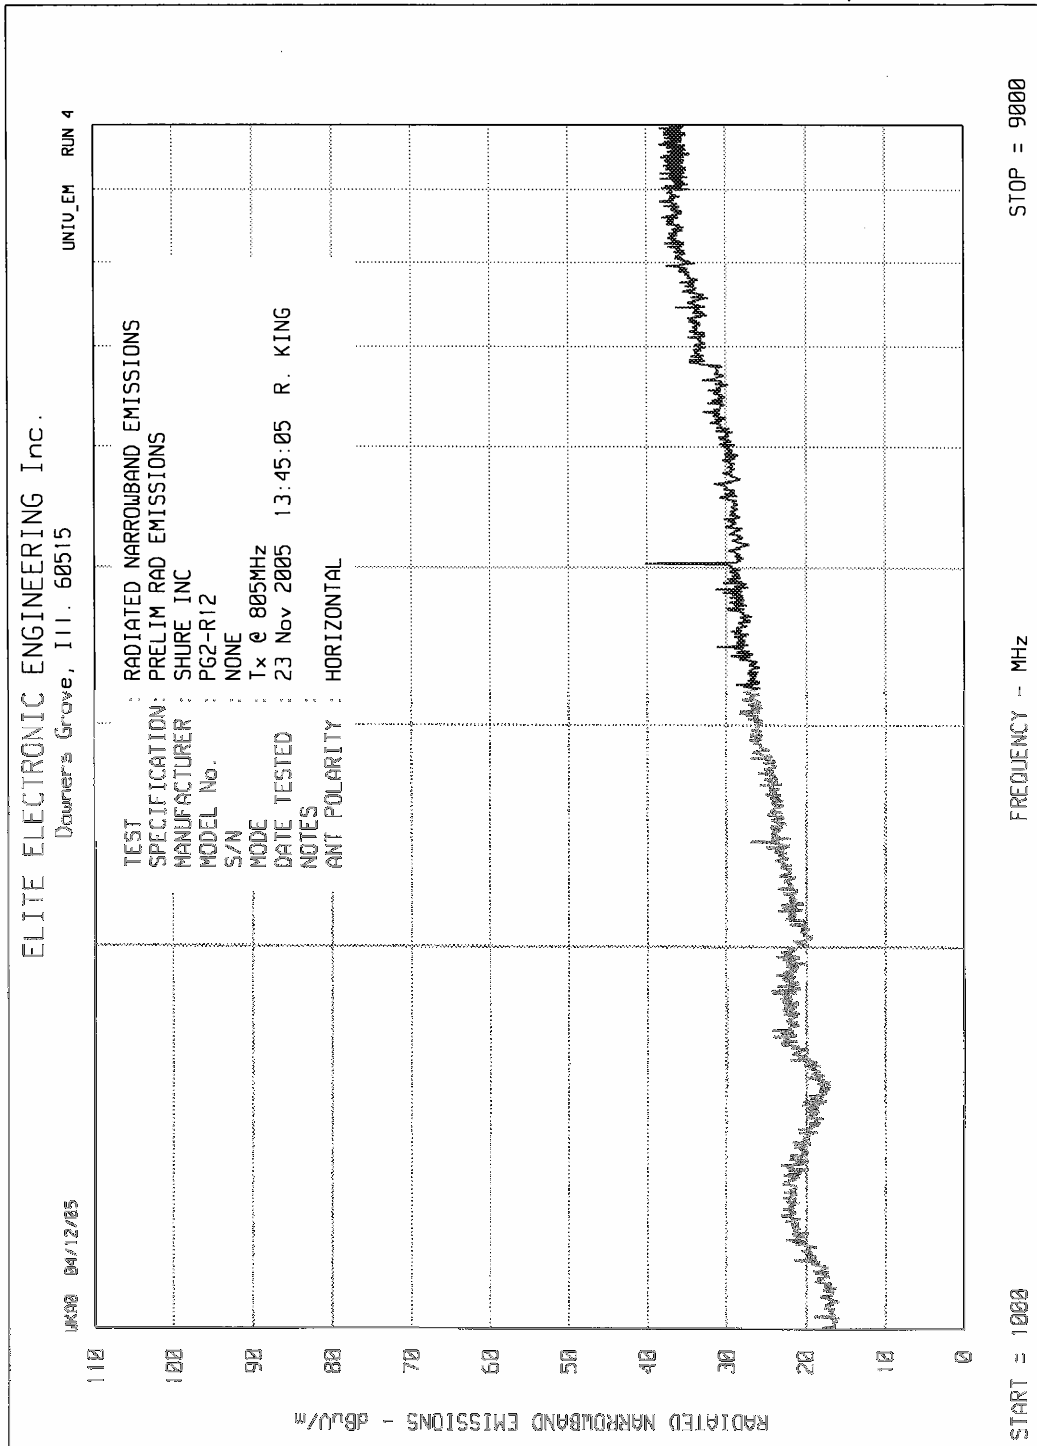

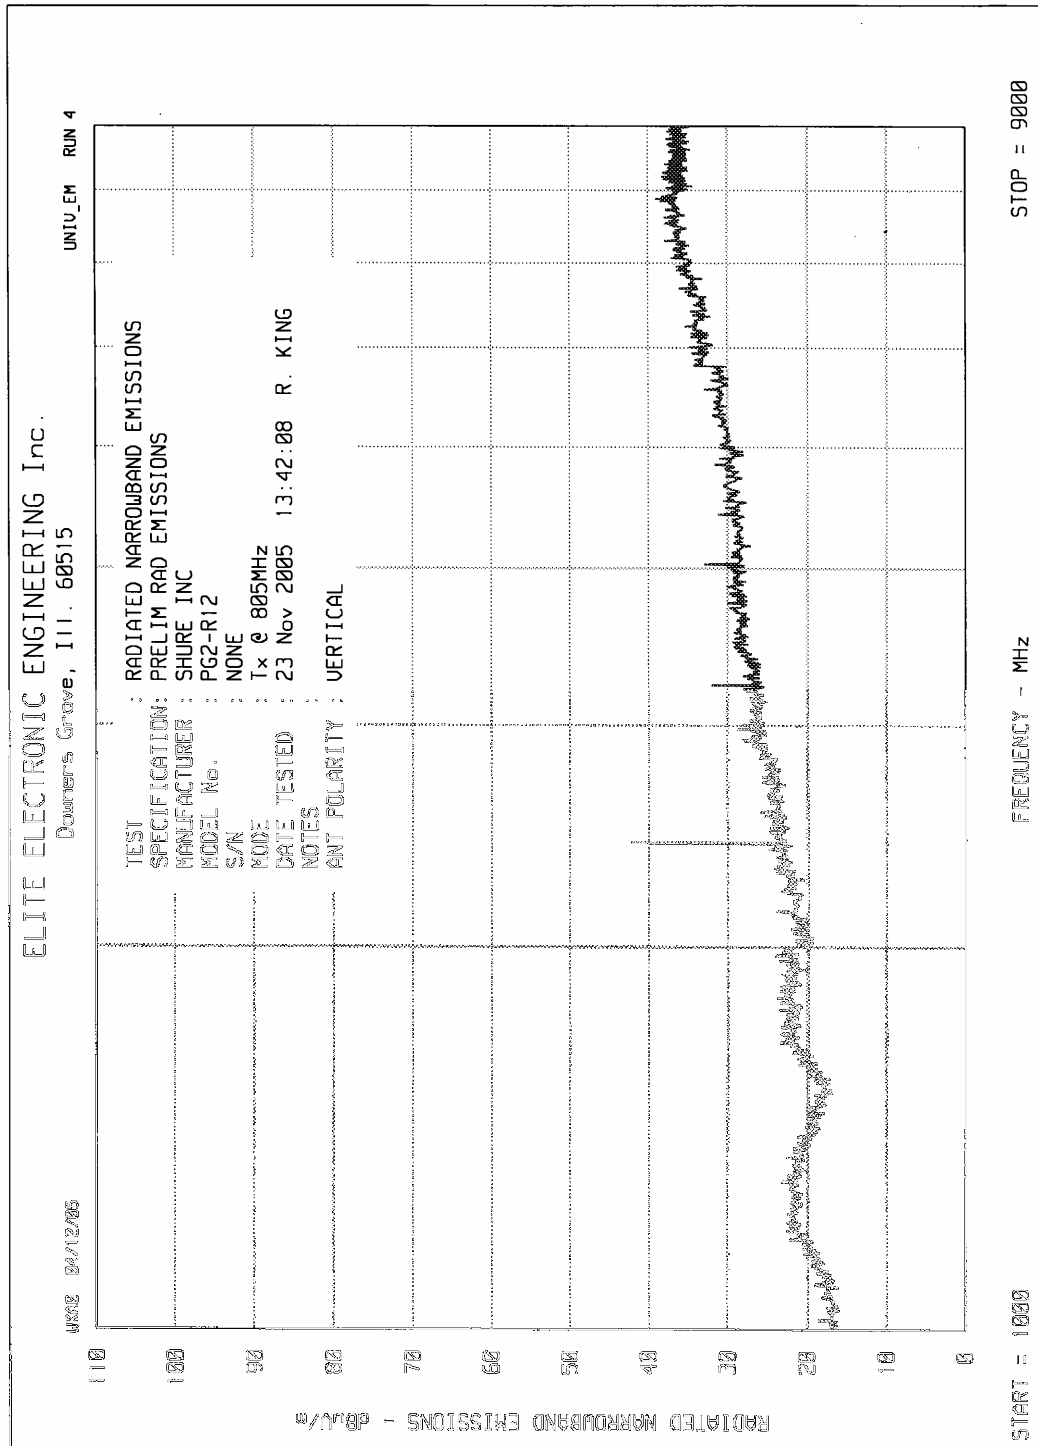



MANUFACTURER : Shure Inc.
MODEL NO. : PG2-H7 10mW
SERIAL NO. : None assigned
SPECIFICATION : FCC-74 Spurious Radiated Emissions
DATE : November 22, 2005
NOTES : Test Distance is 3 Meters

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig Gen (dBm)	Antenna Gain (dB)	Cable Factor (dB)	ERP Total (dBm)	Part 74 Atten. (dB)	Part 74 Min. Atten. (dB)
1072.0	H	12.4		-65.0	2.6	3.0	-65.4	75.4	23
1072.0	V	14.7		-65.3	2.6	3.0	-65.7	75.7	23
1608.0	H	13.4		-69.0	5.0	3.8	-67.8	77.8	23
1608.0	V	15.1		-62.8	5.0	3.8	-61.6	71.6	23
2144.0	H	47.4		-61.6	5.3	4.3	-60.6	70.6	23
2144.0	V	49.5		-61.6	5.3	4.3	-60.6	70.6	23
2680.0	H	48.3		-54.4	5.3	5.0	-54.1	64.1	23
2680.0	V	49.6		-54.4	5.3	5.0	-54.1	64.1	23
3216.0	H	42.7		-55.3	5.9	5.5	-55.0	65.0	23
3216.0	V	42.8		-55.3	5.9	5.5	-55.0	65.0	23
3752.0	H	42.1		-55.8	6.8	5.9	-54.9	64.9	23
3752.0	V	42.1		-55.8	6.8	5.9	-54.9	64.9	23
4288.0	H	38.4	*	-65.4	7.8	6.4	-64.0	74.0	23
4288.0	V	38.5	*	-65.4	7.8	6.4	-64.0	74.0	23
4824.0	H	39.0	*	-62.0	8.0	6.8	-60.8	70.8	23
4824.0	V	38.5	*	-62.0	8.0	6.8	-60.8	70.8	23
5360.0	H	39.6		-57.2	7.5	7.2	-56.9	66.9	23
5360.0	V	39.4		-57.2	7.5	7.2	-56.9	66.9	23

Checked BY :

RICHARD E. KING

Richard E. King



MANUFACTURER : Shure Inc.
MODEL NO. : PG2-H7 10mW
SERIAL NO. : None assigned
SPECIFICATION : RSS-123 Spurious Radiated Emissions
DATE : November 22, 2005
NOTES : Test Distance is 3 Meters

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig Gen (dBm)	Antenna Gain (dB)	Cable Factor (dB)	ERP Total (dBm)	RSS- 123 Atten. (dB)	RSS-123 Min. Atten. (dB)
1072.0	H	12.4		-65.0	2.6	3.0	-65.4	75.4	35
1072.0	V	14.7		-65.3	2.6	3.0	-65.7	75.7	35
1608.0	H	13.4		-69.0	5.0	3.8	-67.8	77.8	35
1608.0	V	15.1		-62.8	5.0	3.8	-61.6	71.6	35
2144.0	H	47.4		-61.6	5.3	4.3	-60.6	70.6	35
2144.0	V	49.5		-61.6	5.3	4.3	-60.6	70.6	35
2680.0	H	48.3		-54.4	5.3	5.0	-54.1	64.1	35
2680.0	V	49.6		-54.4	5.3	5.0	-54.1	64.1	35
3216.0	H	42.7		-55.3	5.9	5.5	-55.0	65.0	35
3216.0	V	42.8		-55.3	5.9	5.5	-55.0	65.0	35
3752.0	H	42.1		-55.8	6.8	5.9	-54.9	64.9	35
3752.0	V	42.1		-55.8	6.8	5.9	-54.9	64.9	35
4288.0	H	38.4	*	-65.4	7.8	6.4	-64.0	74.0	35
4288.0	V	38.5	*	-65.4	7.8	6.4	-64.0	74.0	35
4824.0	H	39.0	*	-62.0	8.0	6.8	-60.8	70.8	35
4824.0	V	38.5	*	-62.0	8.0	6.8	-60.8	70.8	35
5360.0	H	39.6		-57.2	7.5	7.2	-56.9	66.9	35
5360.0	V	39.4		-57.2	7.5	7.2	-56.9	66.9	35

Checked BY : RICHARD E. KING

Richard E. King



MANUFACTURER : Shure Inc.
MODEL NO. : PG2-M7 10mW
SERIAL NO. : None assigned
SPECIFICATION : FCC-74 Spurious Radiated Emissions
DATE : November 22, 2005
NOTES : Test Distance is 3 Meters

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig Gen (dBm)	Antenna Gain (dB)	Cable Factor (dB)	ERP Total (dBm)	Part 74 Atten. (dB)	Part 74 Min. Atten. (dB)
1342.4	H	15.7		-61.7	4.1	2.1	-59.7	69.7	23
1342.4	V	19.4		-58.8	4.1	2.1	-56.8	66.8	23
2013.6	H	52.3		-54.0	5.3	2.5	-51.2	61.2	23
2013.6	V	52.5		-53.1	5.3	2.5	-50.3	60.3	23
2684.8	H	52.6		-51.2	5.3	3.0	-48.9	58.9	23
2684.8	V	50.8		-51.2	5.3	3.0	-48.9	58.9	23
3356.0	H	44.8		-57.3	6.2	3.4	-54.5	64.5	23
3356.0	V	47.9		-57.3	6.2	3.4	-54.5	64.5	23
4027.2	H	43.5		-56.6	7.1	3.7	-53.1	63.1	23
4027.2	V	44.3		-56.6	7.1	3.7	-53.1	63.1	23
4698.4	H	42.7		-54.4	8.1	4.0	-50.3	60.3	23
4698.4	V	41.6		-54.4	8.1	4.0	-50.3	60.3	23
5369.6	H	39.8		-56.0	7.5	4.3	-52.8	62.8	23
5369.6	V	40.1		-56.0	7.5	4.3	-52.8	62.8	23
6040.8	H	40.1	*	-59.6	7.7	4.6	-56.6	66.6	23
6040.8	V	41.3	*	-59.6	7.7	4.6	-56.6	66.6	23
6712.0	H	42.5	*	-53.1	8.0	5.2	-50.3	60.3	23
6712.0	V	41.1	*	-53.1	8.0	5.2	-50.3	60.3	23

Checked BY : *RICHARD E. KING*

Richard E. King



MANUFACTURER : Shure Inc.
MODEL NO. : PG2-M7 10mW
SERIAL NO. : None assigned
SPECIFICATION : RSS-123 Spurious Radiated Emissions
DATE : November 22, 2005
NOTES : Test Distance is 3 Meters

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig Gen (dBm)	Antenna Gain (dB)	Cable Factor (dB)	ERP Total (dBm)	RSS- 123 Atten. (dB)	RSS-123 Min. Atten. (dB)
1342.4	H	15.7		-61.7	4.1	2.1	-59.7	69.7	35
1342.4	V	19.4		-58.8	4.1	2.1	-56.8	66.8	35
2013.6	H	52.3		-54.0	5.3	2.5	-51.2	61.2	35
2013.6	V	52.5		-53.1	5.3	2.5	-50.3	60.3	35
2684.8	H	52.6		-51.2	5.3	3.0	-48.9	58.9	35
2684.8	V	50.8		-51.2	5.3	3.0	-48.9	58.9	35
3356.0	H	44.8		-57.3	6.2	3.4	-54.5	64.5	35
3356.0	V	47.9		-57.3	6.2	3.4	-54.5	64.5	35
4027.2	H	43.5		-56.6	7.1	3.7	-53.1	63.1	35
4027.2	V	44.3		-56.6	7.1	3.7	-53.1	63.1	35
4698.4	H	42.7		-54.4	8.1	4.0	-50.3	60.3	35
4698.4	V	41.6		-54.4	8.1	4.0	-50.3	60.3	35
5369.6	H	39.8		-56.0	7.5	4.3	-52.8	62.8	35
5369.6	V	40.1		-56.0	7.5	4.3	-52.8	62.8	35
6040.8	H	40.1	*	-59.6	7.7	4.6	-56.6	66.6	35
6040.8	V	41.3	*	-59.6	7.7	4.6	-56.6	66.6	35
6712.0	H	42.5	*	-53.1	8.0	5.2	-50.3	60.3	35
6712.0	V	41.1	*	-53.1	8.0	5.2	-50.3	60.3	35

Checked BY :

RICHARD E. KING

Richard E. King



MANUFACTURER : Shure Inc.
MODEL NO. : PG2-R12 10mW
SERIAL NO. : None assigned
SPECIFICATION : FCC-74 Spurious Radiated Emissions
DATE : November 22, 2005
NOTES : Test Distance is 3 Meters

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig Gen (dBm)	Antenna Gain (dB)	Cable Factor (dB)	ERP Total (dBm)	Part 74 Atten. (dB)	Part 74 Min. Atten. (dB)
1611.7	H	18.6		-57.4	5.0	2.3	-54.7	64.7	23
1611.7	V	13.9		-61.7	5.0	2.3	-59.0	69.0	23
2417.6	H	54.5		-49.3	5.3	2.8	-46.8	56.8	23
2417.6	V	54.7		-49.3	5.3	2.8	-46.8	56.8	23
3223.4	H	48.4		-52.3	5.9	3.3	-49.7	59.7	23
3223.4	V	50.2		-52.3	5.9	3.3	-49.7	59.7	23
4029.3	H	44.1		-56.7	7.1	3.7	-53.2	63.2	23
4029.3	V	44.2		-56.7	7.1	3.7	-53.2	63.2	23
4835.1	H	40.1		-62.0	8.0	4.1	-58.1	68.1	23
4835.1	V	39.5		-62.0	8.0	4.1	-58.1	68.1	23
5641.0	H	38.9		-59.8	7.4	4.4	-56.8	66.8	23
5641.0	V	39.5		-59.8	7.4	4.4	-56.8	66.8	23
6446.8	H	42.1	*	-54.6	8.0	5.0	-51.5	61.5	23
6446.8	V	42.4	*	-54.6	8.0	5.0	-51.5	61.5	23
7252.7	H	39.9	*	-54.0	7.6	5.6	-52.0	62.0	23
7252.7	V	39.3	*	-54.0	7.6	5.6	-52.0	62.0	23
8058.5	H	40.5	*	-54.3	8.6	6.2	-52.0	62.0	23
8058.5	V	39.3	*	-54.3	8.6	6.2	-52.0	62.0	23

Checked BY : RICHARD E. KING

Richard E. King



MANUFACTURER : Shure Inc.
MODEL NO. : PG2-R12 10mW
SERIAL NO. : None assigned
SPECIFICATION : RSS-123 Spurious Radiated Emissions
DATE : November 22, 2005
NOTES : Test Distance is 3 Meters

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig Gen (dBm)	Antenna Gain (dB)	Cable Factor (dB)	ERP Total (dBm)	RSS- 123 Atten. (dB)	RSS-123 Min. Atten. (dB)
1611.7	H	18.6		-57.4	5.0	2.3	-54.7	64.7	35
1611.7	V	13.9		-61.7	5.0	2.3	-59.0	69.0	35
2417.6	H	54.5		-49.3	5.3	2.8	-46.8	56.8	35
2417.6	V	54.7		-49.3	5.3	2.8	-46.8	56.8	35
3223.4	H	48.4		-52.3	5.9	3.3	-49.7	59.7	35
3223.4	V	50.2		-52.3	5.9	3.3	-49.7	59.7	35
4029.3	H	44.1		-56.7	7.1	3.7	-53.2	63.2	35
4029.3	V	44.2		-56.7	7.1	3.7	-53.2	63.2	35
4835.1	H	40.1		-62.0	8.0	4.1	-58.1	68.1	35
4835.1	V	39.5		-62.0	8.0	4.1	-58.1	68.1	35
5641.0	H	38.9		-59.8	7.4	4.4	-56.8	66.8	35
5641.0	V	39.5		-59.8	7.4	4.4	-56.8	66.8	35
6446.8	H	42.1	*	-54.6	8.0	5.0	-51.5	61.5	35
6446.8	V	42.4	*	-54.6	8.0	5.0	-51.5	61.5	35
7252.7	H	39.9	*	-54.0	7.6	5.6	-52.0	62.0	35
7252.7	V	39.3	*	-54.0	7.6	5.6	-52.0	62.0	35
8058.5	H	40.5	*	-54.3	8.6	6.2	-52.0	62.0	35
8058.5	V	39.3	*	-54.3	8.6	6.2	-52.0	62.0	35

Checked BY : RICHARD E. KING

Richard E. King