

EMC TEST REPORT



Standard(s):

47 CFR FCC Part 15.225
RSS 210, Issue 11, 2024

FCC ID: DGFPDVC52
IC: 468A-PSDVC52

Product: 3M™ SCOTT™ Vision C5 RDI

Model (p/n): 201503-1

Company Name:
3M Company

Address:
Fire & SCBA Solutions
4320 Goldmine Road, Monroe, NC 28110

Report Number: HRE202604517-2
Report Issue Date: June 3, 2026

Report Prepared by:



Jayden Alstad
EMC Test Engineer

Report Reviewed by:



Yuriy Litvinov
Lead EMC Engineer

Tested by:
3M Company
Hardgoods Regulatory Engineering Laboratory
410 E. Fillmore Avenue, Building 76
St. Paul, Minnesota 55107-1208, USA



TABLE OF CONTENTS

Item		Description	Page
1.0		Test Summary	3
	1.1	Measurement Uncertainty	3
	1.2	Test Facility	3
2.0		Equipment Description	4
	2.1	Equipment Under Test	4
3.0		EUT Configuration	5
	3.1	System Configuration	5
	3.2	Input/Output Ports of EUT	5
	3.3	Cables	5
	3.4	Measurement Arrangements of EUT	5
	3.5	Primary functions(s) of EUT	5
	3.6	Exercising of EUT and Interfaces	5
4.0		Test Conditions and Results	6
	4.1	Occupied Bandwidth	6
	4.2	Radiated Emissions outside of the specified band	7
	4.3	In Band Radiated Spurious Emissions	10
	4.4	Frequency Stability	11
	4.5	Conducted Emissions	12
	4.6	RF Exposure Evaluation	13
5.0		Test Equipment	14
6.0		Revision History	14

3M	3M EMC Laboratory	Report Number: HRE202604517-2 Date: June 3, 2026	Page 3 of 14
-----------	--------------------------	---	--------------

1.0 Test Summary

Based on the results of our investigation, we have concluded the product tested **comply** with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested.

	Requirement – Test	Test Description	Result	Comments
4.1	FCC Part 15.215(c)/RSS-Gen (6.7)	Occupied Bandwidth	pass	
4.2	FCC Part 15.209/RSS210 B.6(a) RSS-Gen, 8.9	Radiated Emissions outside of the specified band	pass	
4.3	FCC Part 15.225(a)(b)(c)/ RSS210 B.6(a)	In Band Radiated Spurious Emissions	pass	
4.4	FCC Part 15.225(e)/ RSS210 B.6(b)	Frequency Stability	pass	
4.5	FCC Part 15.207/ RSS-Gen (8.8)	Conducted Emissions	N/A	See note 1
Note:		1. Device is battery operated.		

1.1 Measurement Uncertainty

The measured value related to the corresponding limit will be used to decide whether the equipment meets the requirements. The measurement uncertainty figures were calculated and correspond to a coverage factor of k=2, providing a confidence level of respectively 95.45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian).

Radiated emissions 30MHz to 1000MHz	4.9 dB
Radiated emissions 1GHz to 18GHz	4.6 dB
Conducted emissions 150KHz to 30MHz (AMN)	2.7 dB
Conducted emissions 150KHz to 30MHz (AAN)	1.92 dB
RF frequency	$\pm 3 \times 10^{-8}$
RF power, conducted	1.4 dB
RF Power Spectral Density	0.96 dB

1.2 Test Facility

Test Facility Accreditations:	ISO/IEC 17025:2017, NVLAP LAB CODE: 200033-0
	FCC US5320
	ISED Canada CAB identifier: US0012



2.0 Equipment Description

2.1	Equipment Under Test			
Description:	3M™ Hands-free Sight Mask for Firefighters or First Responders with Bluetooth (2.4GHz) communications and NFC (13.56MHz) filter recognition.			
Model(s):	201503-01			
Serial number:	N/A			
3M Division:	Personal Safety			
Modifications and Special Measures:	none			
Frequency Range:	13.56 MHz			
Channel No.:	1			
Modulation Type:	ASK			
FCC Classification:	Low Power Communication device transmitter			
RF Conducted Power:	N/A			
NFC Antenna Type and Antenna Assembly Gain:	☐ External	☒ Integral PCB Coil Antenna	☐ Dedicated	
	☐ dBi	☐ Declared by the Manufacturer	☐ Measured	
Test Deviations or Exclusions	☐ Yes	☒ No		
Rated Power:	Voltage:	☐ 120VAC	☐ 230VAC	☒ 5.0VDC
	Phase:	☐ 1ph	☐ 3ph	☒ Battery
	Frequency:	☐ 50Hz	☐ 60Hz	
	Current:	N/A		
Test Dates:	04/20/2026 – 04/23/2026			
Received Date:	04/17/2026			
Received Conditions:	☐ Poor	☒ Good		
	☒ Prototype	☐ Production		

3.0 EUT Configuration

3.1 System Configuration

No.	Product Type	Manufacturer	Model	Comments
1	Facepiece	3M	201503-01	

3.2 Input/Output Ports of EUT

No.	Description	Type	Comments
1	Data	USB-C	Used to program Bluetooth module for test configurations

3.3 Cables

No.	Description	Type	Length	Shielding	Comments

3.4 Measurement Arrangements of EUT

	Intended Operational Arrangement(s)	Comments
☒	Table-top only	
☐	Floor-standing only	
☐	Floor-standing or table-top	
☒	Other	Face-worn

3.5 Primary function(s) of EUT

No.	List of Essential Functions
1	Wireless in-mask voice communications via Bluetooth and RFID
2	

3.6 Exercising of EUT and Interfaces


No.	Mode of Operation
1	Continuous transmission of modulated signal at 13.56MHz.



4.0 Test Conditions and Results


4.1	Occupied Bandwidth	
	Laboratory Ambient Temperature:	23°C
	Relative Humidity:	29%
	Atmospheric Pressure:	836.8 mbars
Reference Standard(s):	☒ ANSI C63.10:2020, Section 6.9 ☒ FCC Part 15.215/RSS 210 ☐	Measurement Point ☐ Conducted ☒ Radiated
Frequency Range:	☒ 13.56MHz	RBW = 300Hz/1KHz VBW ≥ 3 x RBW
Nominal Voltage:	☐ 120VAC ☒ 3.6VDC	
Test Personnel:	Jayden Alstad <i>JA</i>	Date: 06/03/2026

Frequency (MHz) (PR-ASK)	20 dB Bandwidth (KHz)	99% Bandwidth (KHz)	Results
13.553 -13.567	3.147	8.426	pass

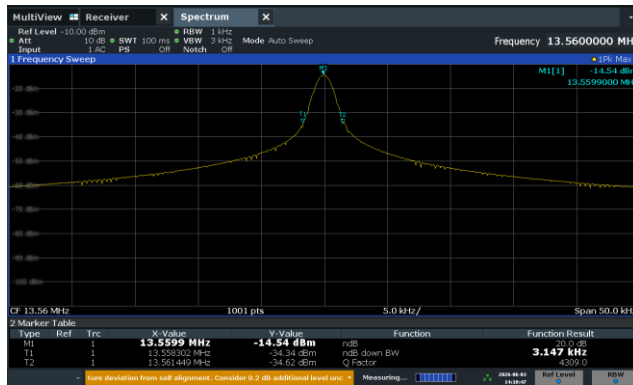


4.2	Radiated Emissions outside of the specified band				
Method:	Measurements were made in a 3-meter semi-anechoic chamber that complies to CISPR 16/ANSI C63.4 standards. EUT was rotated through three orthogonal axes to determine which attitude (orientation) and arrangement produces the highest emission relative to the limit; the attitude and device arrangement that produces the highest emission relative to the limit was used in making final radiated emission measurements. Spurious Radiated emissions measurements were performed with external preamp and a high pass filter. Final measurements were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable.				
Test Verification: ☒	Laboratory Ambient Temperature:		23°C		
	Relative Humidity:		29%		
	Atmospheric Pressure:		836.8 mbars		
Reference Standard(s):	☒ ANSI C63.10:2020, Section 11.12.1 ☒ FCC Part 15.205/15.209/RSS Gen (8.9) ☐		Measurement Distance		
			☒ 3 Meters ☐ 		
Frequency Range:	☒ 9KHz to 30MHz ☒ 30MHz to 1GHz		RBW 200Hz – 9KHz to 150KHz RBW 9KHz – 150KHz to 30MHz RBW 120KHz - 30 MHz to 1000MHz VBW ≥ 3 x RBW		
Nominal Voltage:	☐ 120VAC ☒ 3.6VDC				
Test Personnel:	Jayden Alstad <i>JA</i>			Date: 04/21/2026	
Limits –15.209 and RSS Gen					
Frequency (MHz)	Limit dB (µV/m)			Distance	Results
	Quasi-Peak	Average	Peak		
0.009-0.490		2400/F(KHz)		300	pass
0.490-1.705	24000/F(KHz)			30	pass
1.705-30	30			30	pass
30 to 88	40			3	pass
88 to 216	43.5			3	pass
216 to 960	46			3	pass
Above 960		54	74	3	N/A


Modifications:	
Note:	The lower limit applies at the transition frequency. An inverse proportionality factor of 20 dB per decade has been used to normalize the measured data to the specified distance for determining compliance For emission in the restricted bands, the limit of 15.209 was used. Measurements <30MHz includes Loop Antenna correction factor. Field strength of emissions measurements outside 13.110-14.010MHz band of operation was found to be attenuated below Part 15.209 limits.

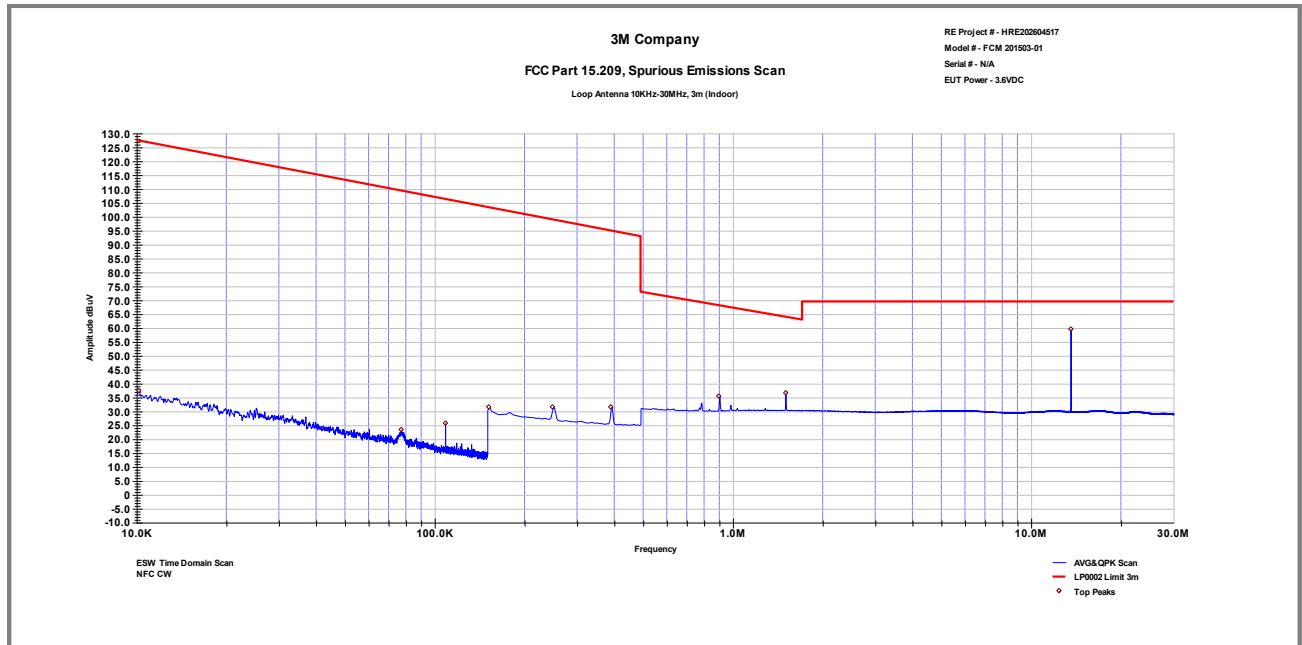

Graph 1

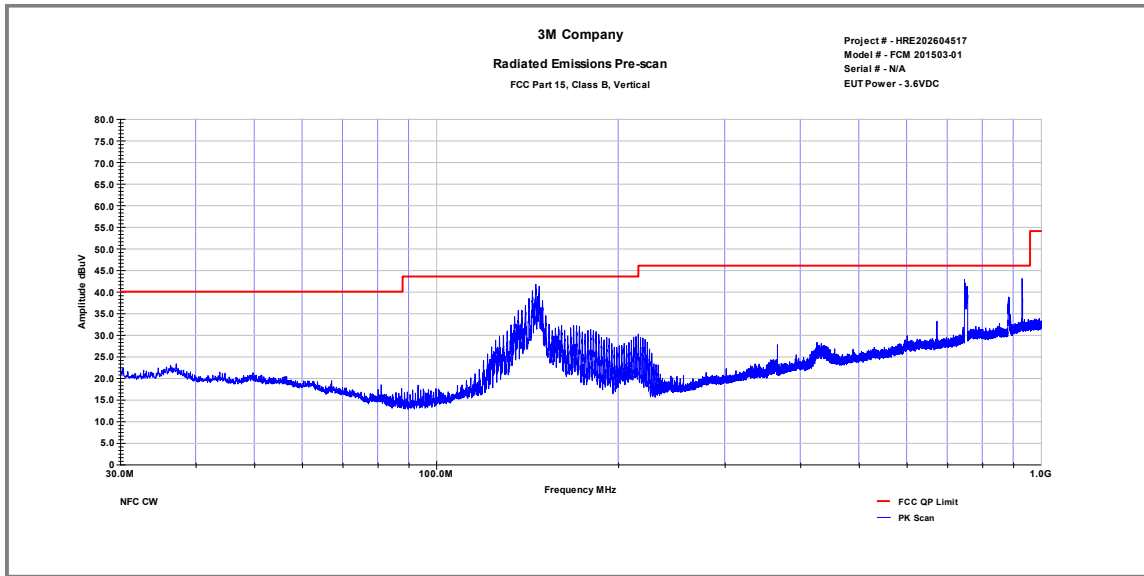

Graph 2

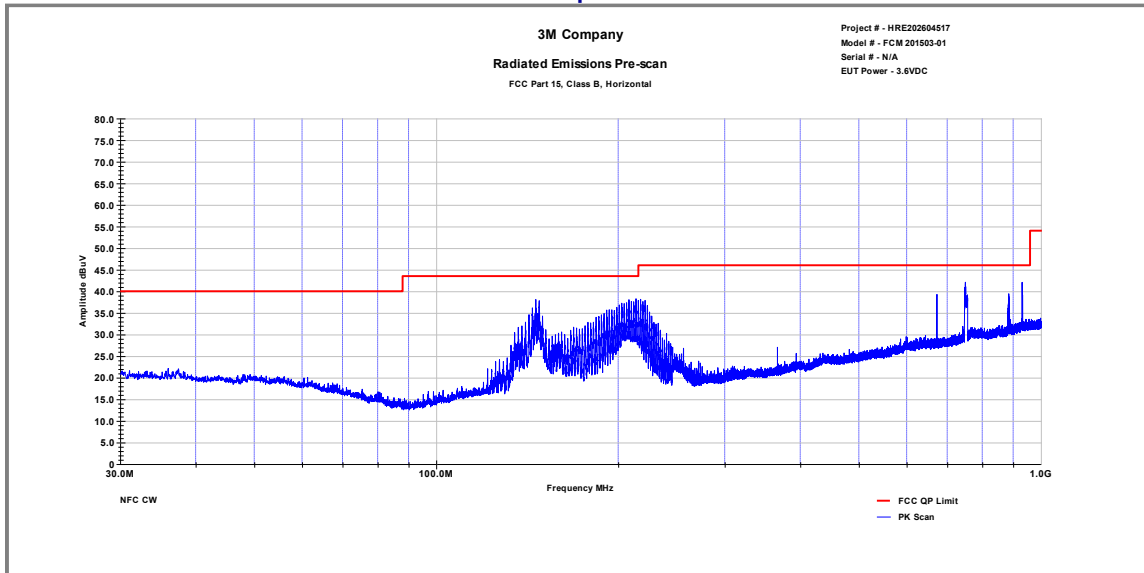


Graph 3

Table 1

Frequency (MHz)	Pol.	QP Reading dBuV/m	Total CF dB	Net at 3 m dBuV/m	Part 15.209 Limit (dBuV/m)	Margin dB
145.88	V	17.1	18	35.1	43.5	-8.4
147.8	V	14.7	18.1	32.7	43.5	-10.8
215.33	H	10.7	14.8	25.5	43.5	-18
746.99	V	8	28	35.9	46	-10.1
882.56	H	3.2	29.1	32.4	46	-13.6
929.93	H	3.5	30.1	33.6	46	-12.4
Notes:		Net Reading (dBuV) = QP Reading (dBuV)+Total CF(dB)				



4.3	In-Band Radiated Spurious Emissions		
Method:	Measurement was performed with modulated carrier at the highest power level at which the transmitter is intended to operate. The analyzer offset was adjusted to compensate for the attenuator and other losses.		
	Laboratory Ambient Temperature:		23°C
	Relative Humidity:		29%
	Atmospheric Pressure:		836.8 mbars
Reference Standard(s):	☒ ANSI C63.10:2020, Section 6 ☒ FCC Part 15.225/RSS210 ☐	Measurement Point ☐ Conducted ☒ Radiated at 3 meters	
Frequency Range:	☒ 13.553 MHz -13.567 MHz		
	Frequency (MHz)	Limit (uV/m) at 30m	Limit (dBuV/m) at 3m
The Field Strength Limit:	1.705-13.110	30	69.5
	13.110-13.410	106	80.5
	13.410-13.553	334	90.5
	13.553-13.567	15848	124.0
	13.567-13.710	334	90.5
	13.710-14.010	106	80.5
	14.010-30.0	30	69.5
Max. field strength at 3m	59.50dBuV/m		
Nominal Voltage:	☐ 120VAC ☒ 3.6VDC		
Test Personnel:	Jayden Alstad <i>JA</i>		Date: 04/20/2026

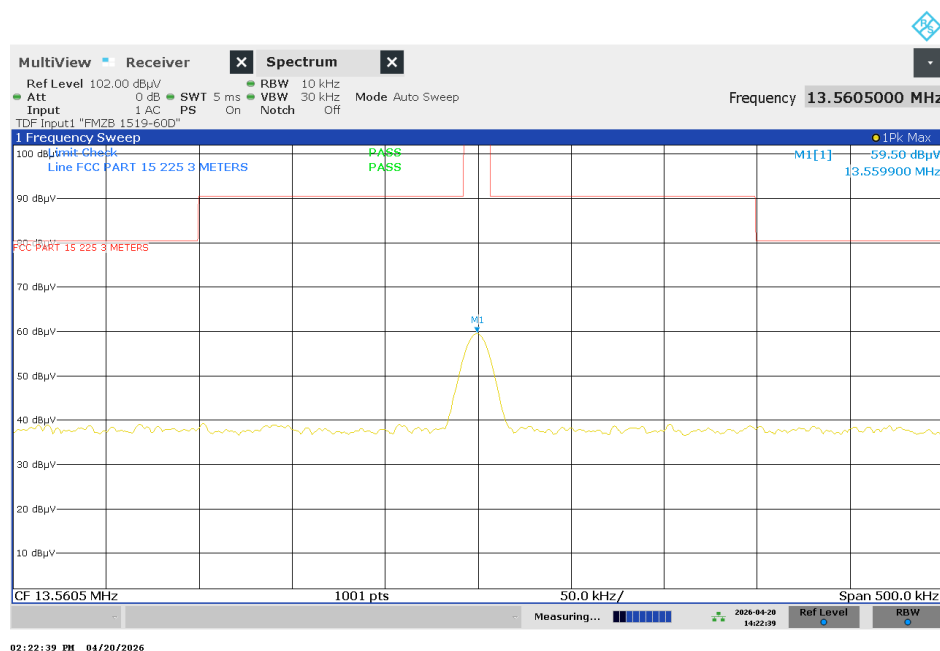

3M	3M EMC Laboratory	Report Number: HRE202604517-2 Date: June 3, 2026	Page 11 of 14
-----------	--------------------------	---	---------------

4.4	Frequency Stability		
Method:	Measurements were performed with modulated carrier at the highest power level at which the transmitter is intended to operate. The frequency was measured under normal and extreme test conditions. The analyzer offset was adjusted to compensate for the attenuator and other losses. During extreme test conditions, both extreme temperature and voltage apply simultaneously.		
	Laboratory Ambient Temperature:	23°C	
	Relative Humidity:	20%	
	Atmospheric Pressure:	836.8 mbars	
Reference Standard(s):	☒ FCC Part 15.225/RSS210 ☒ ANSI C63.10:2020, Section 6.8	Measurement Point ☐ Conducted ☒ Radiated	
Frequency Range:	☒ 13.553 MHz -13.567MHz	Maximum Deviation	
Limit:	☒ ± 100ppm (± 0.01%)	5.60 ppm	
Nominal Voltage:	☐ 120VAC ☒ 3.6VDC		
Extreme Temperature Ranges:	☒ General	☒ - 20.0 to +55.0C°	
	☐ Portable	☐	
	☐ Indoor Use	☐	
Extreme Test Voltages:	☐ Mains Voltage	☐ ± 15%	
	☐ Battery	☐ 0.85 ☐ 1.15	
Test Personnel:	Jayden Alstad <i>JA</i>		Date: 04/23/2026

Channel Frequency (MHz)	Temperature C°	Battery Pwr (VDC)	Measured Frequency (MHz)	Frequency Deviation (ppm)	Result
13.56MHz	-20	5	13.559942	4.3	pass
	-10	5	13.559984	1.1	pass
	0	5	13.559985	1.1	pass
	10	5	13.559973	2.0	pass
	20	5	13.559956	3.2	pass
	30	5	13.559944	4.1	pass
	40	5	13.559924	5.6	pass
	55	5	13.559931	5.1	pass

4.5	Conducted Emissions Data			
Method:	The AMN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane. This distance was between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the AMN. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on mains lines were made at the output of the AMN.			
	All power was connected to the system through Artificial Mains Network (AMN). All tested telecommunications lines were connected to an Asymmetric Artificial Network (AAN) and conducted voltage measurements on telecommunications lines were made at the output of the ISN. Where an AAN was not appropriate or available measurements were made using a Capacitive Voltage Probe.			
Test Verification: ☒	Laboratory Ambient Temperature:		°C	
	Relative Humidity:		%	
	Atmospheric Pressure:		mbars	
Reference Standard(s):	☐ RSS GEN/FCC Part 15.207 ☐ ANSI C63.4:2014 ☐ ANSI C63.10:2020		Measurement Point ☐ Mains ☐ Telecommunication ports ☐	
Nominal Voltage:		☐ 120VAC ☐ 230VAC ☐ VDC		
Test Personnel:			Date:	
Limits – Part 15.207/RSS Gen – AC Mains				
Frequency (MHz)	Limit dB (µV)			
	Quasi-Peak	Average	Result	Comments
0.15 to 0.50	66 to 56	56 to 46	N/A	
0.50 to 5	56	46	N/A	
5 to 30	60	50	N/A	

Modifications:	
Note:	



4.6	RF Exposure Evaluation	
Reference Standard(s):	☐ KDB 447498 RF Exposure Guidance v06 ☒ KDB 447498 Interim RF Exposure Guidance v01 ☒ RSS 102, Issue 6 ☐	☒ MPE ☐ SAR Evaluation ☒ SAR Test Exclusion
Frequency Range(s):	☒ 2402-2480.0MHz ☒ 13.56MHz	
Antenna Separation Distance BT/RFID:	>35mm	
RF Exposure Conditions:	Portable (Face-worn)	
BT 2.4GHz Antenna Gain:	0dBi	
BT source-based output power:	18mW(12.56dBm)*0.85(worst case duty cycle)= 15.3mW(11.8dBm)	
BT EIRP/ERP output power:	EIRP=11.8dBm + 0dBi=11.8dBm, ERP=11.8dBm - 2.15dB=9.65dBm(9.22mW)	
The estimated 1-g SAR Value of BT transmitter:	[(max. power of channel, including tune-up tolerance, mW) / (min. test separation distance, mm)]·[√f(GHz)/x] W/kg, for test separation distances ≤ 50 mm; where x = 7.5 for 1-g SAR (9.22mW/100mm)*(√0.92/7.5) = (0.0922)*(0.96/7.5) = 0.012W/Kg	
RFID Maximum Output Power:	60dBuV/m (from the field strength)@3meters EIRPdBm = E(dBmV/m) -95.2=60-95.2= -35.2dBm, ERP=-35.2-2.15dB=-37.35dBm(0.00018mW)	
The estimated 1-g SAR Value of the RFID transmitter:	(0.00018mW/35mm)*(√0.01356/7.5) =<0.01W/Kg	
The sum of ratios (1-g SAR value) for all simultaneously transmitting BT and RFID antennas incorporated in a radio:	(SAR value of BT Transmitter/SAR limit) + (SAR value of RFID Transmitter/SAR limit) = (0.012/1.6) + (0.01/1.6) = 0.013< 1	
The SAR Exclusion Threshold Level		
FCC Part 2.1093	111mW/35mm @2.45GHz	
RSS 102, Issue 6	128mW/35mm @2.45GHz	

Note:

5.0	Test Equipment				
Test Equipment Used					
Description	Manufacturer	Model	Identifier	Last Cal. Date	Check
Biconilog Antenna	Schwarzbeck	VULB 9168	9168-1070	10/16/2025	☒
Horn Antenna	A.H. Systems	SAS 571	1010	10/15/2025	☐
Loop Antenna	A.H. Systems	SAS-565H	1213E	10/16/2024	☒
EMI Receiver	Rohde & Schwarz	ESW26	101412	10/15/2025	☒
Signal Analyzer	Agilent	N9000A	MY53031040	10/16/2025	☐
EMI Receiver	Agilent	E4448A	1530975	10/16/2025	☐
LISN	TESEQ	NNB51	1130	10/16/2025	☐
Coaxial Cable	Insulated Wire	2803	CBL2039	10/20/2024	☒
Environmental Chamber	Envirotronics	EH18-1-1.5-AC	4037	01/13/2026	☒
EMC Software	ETS-Lindgren	TILE 7		N/A	☒
Equipment Calibration Interval:		☐ 12 months ☒ 24 months			

6.0	Report revision history		
Revision Level	Date	Report Number	Notes
0	06/03/2026	HRE202604517-2	Original Issue