

hp

MKA 35.000 msec

REF 107.0 dB μ V

AT 10 dB

.30 dB

PEAK

LOG


10

dB/

VA SB

SC FC

CORR

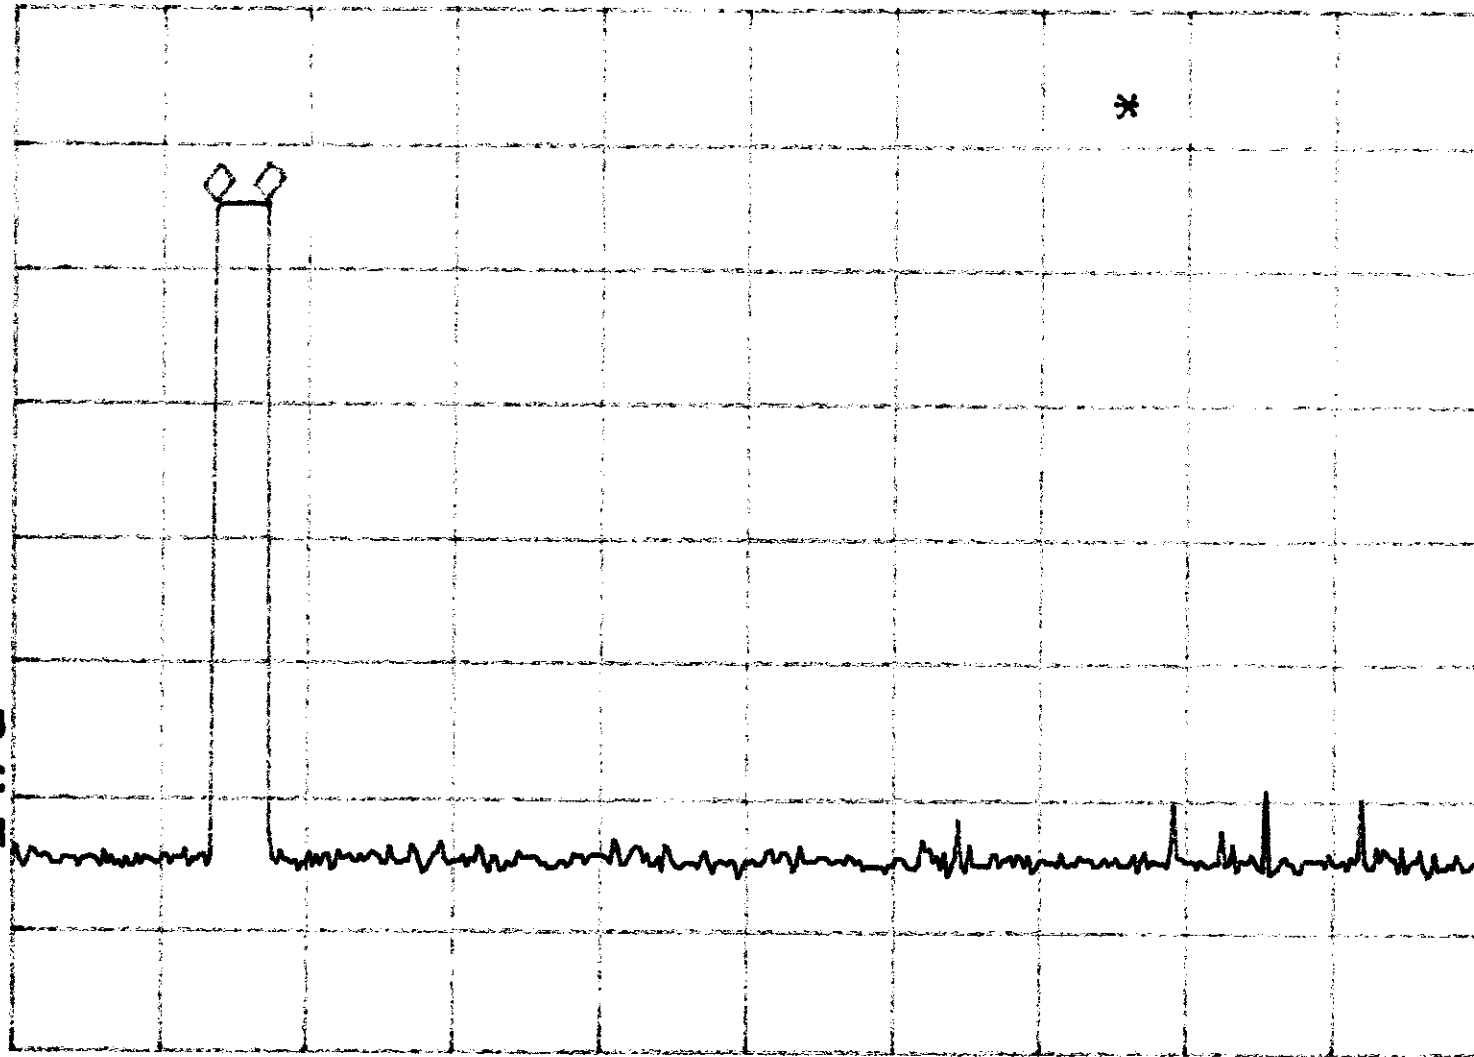

Manual Transmission
Duration

CENTER 350.000 MHz

SPAN 0 Hz

#RES BW 1.0 MHz

#VBW 3 MHz

#SWP 1.00 sec

REF 107.0 dB μ V

AT 10 dB

PEAK

LOG


10

dB/

VA SB

SC VC

CORR

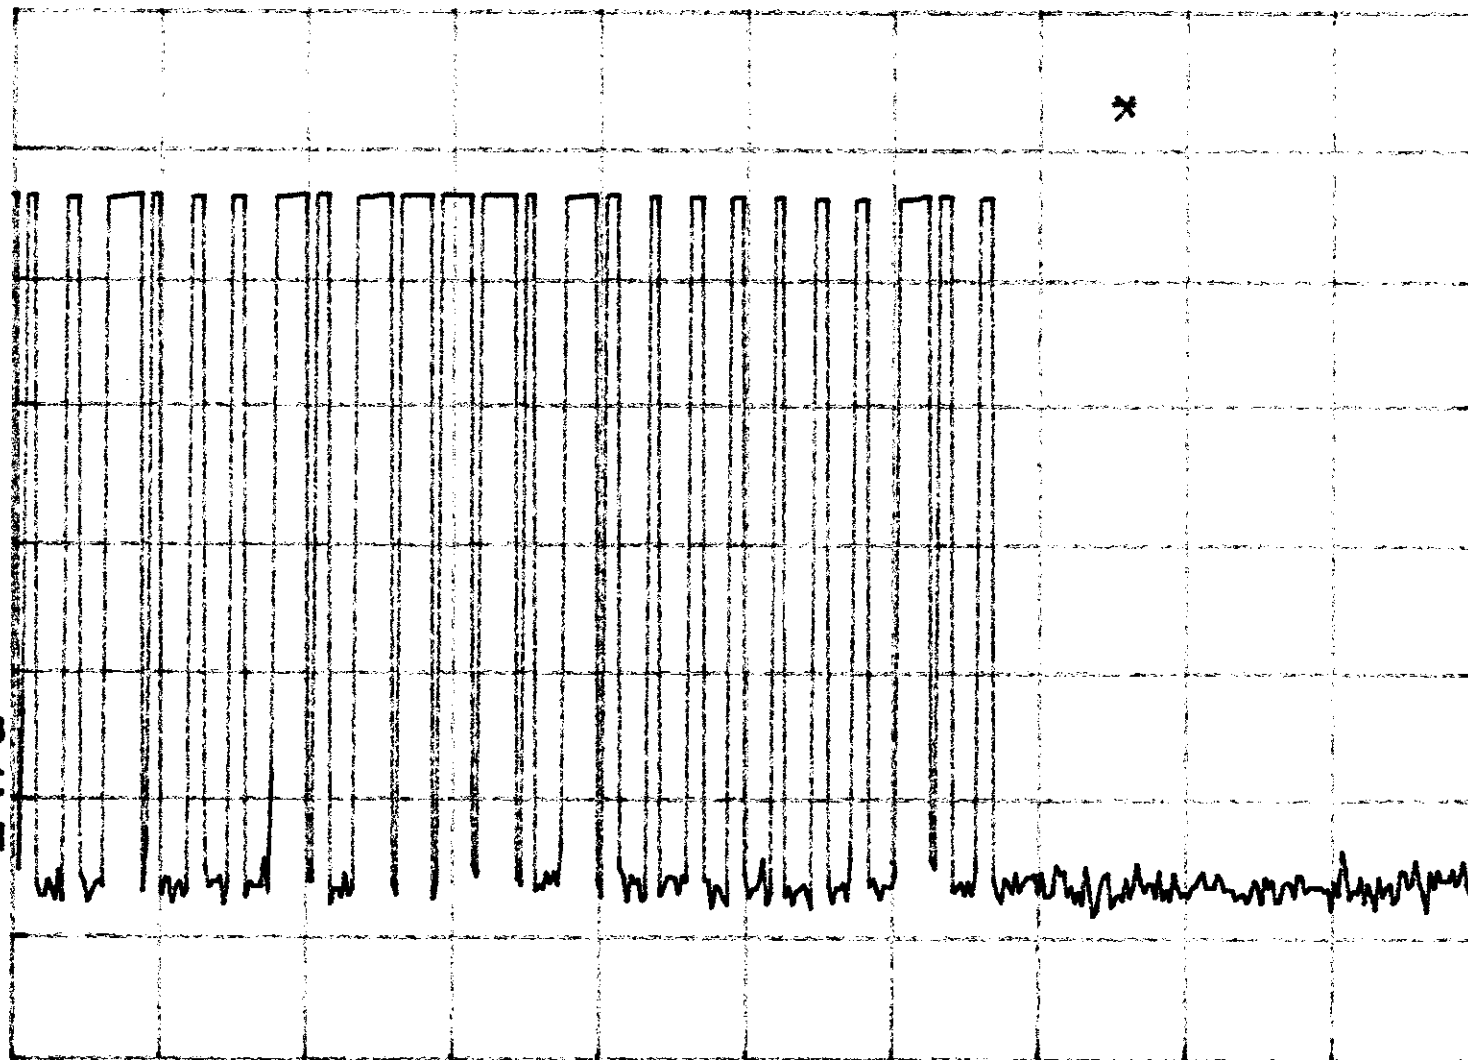

Average Factor

$$= \frac{16 \times 0.34 + 8 \times 1.05}{35}$$

$$= 0.395 \quad \text{or} \quad -8 \text{ dB}$$

CENTER 350.000 MHz

#AES BW 1.0 MHz

#VBW 3 MHz

SPAN 0 Hz

```
#SWP 50.0 msec
```

hp

REF 107.0 dBμV

AT 10 dB

MKR 337.00 μsec

.05 dB

PEAK

LOG


10

dB/

VA SB

SC FC

CORR

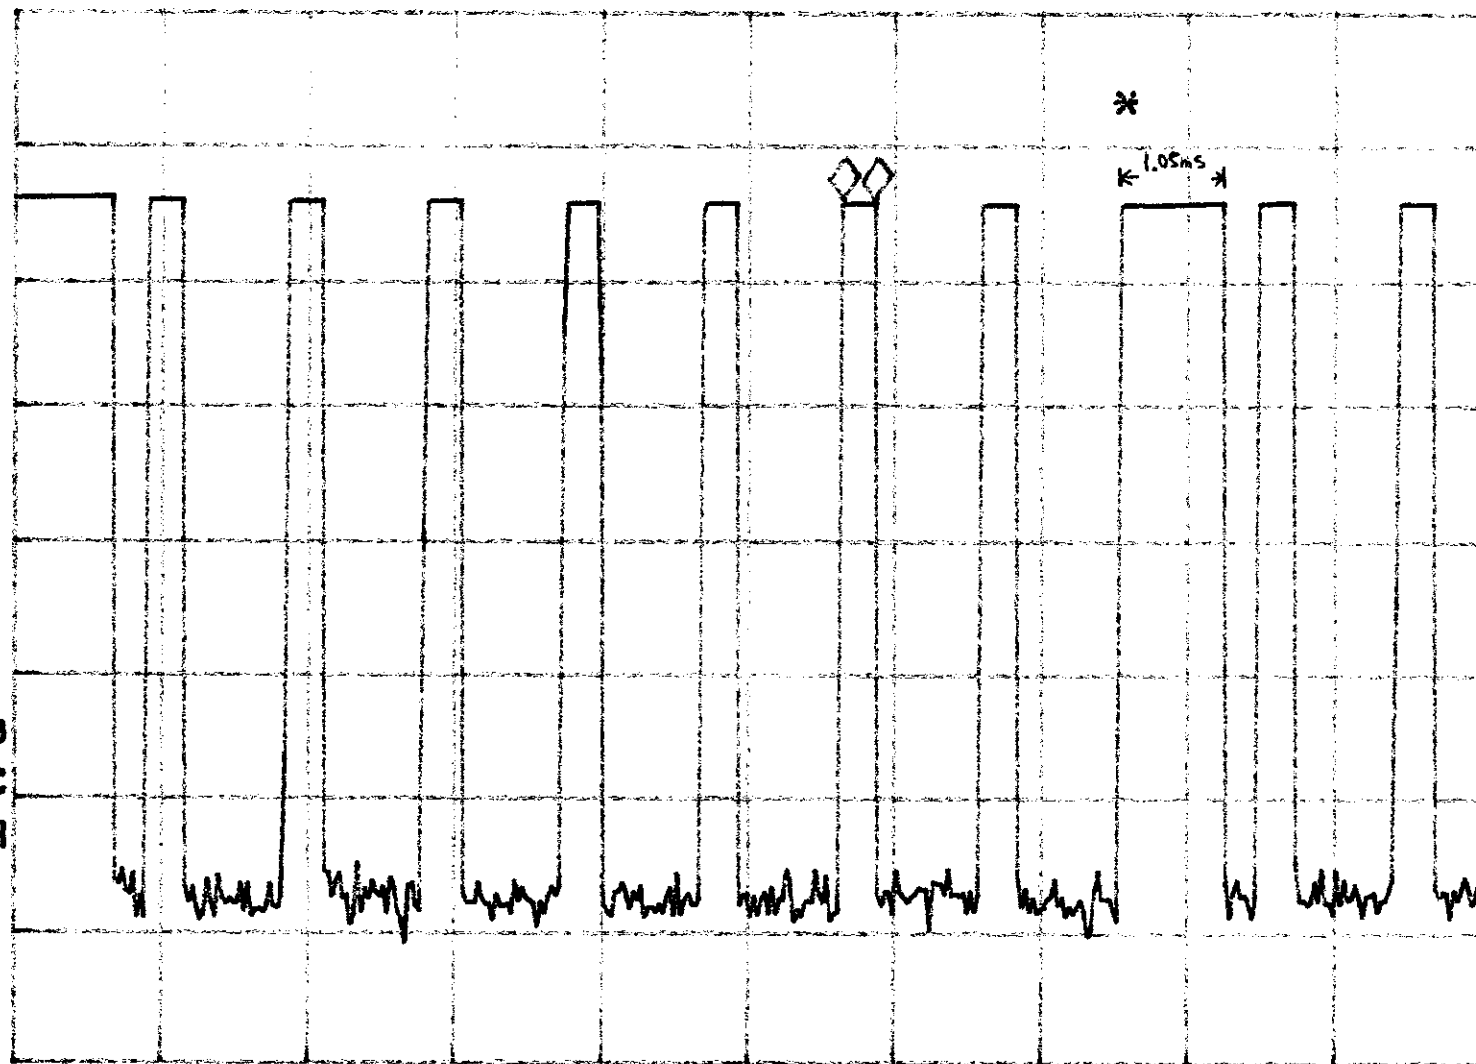

CENTER 350.000 MHz

SPAN 0 Hz

#RES BW 1.0 MHz

#VBW 3 MHz

#SWP 15.0 msec

hp

REF 107.0 dB μ V

AT 10 dB

PEAK

LOG


10

dB/

VA SB

SC VC

CORR

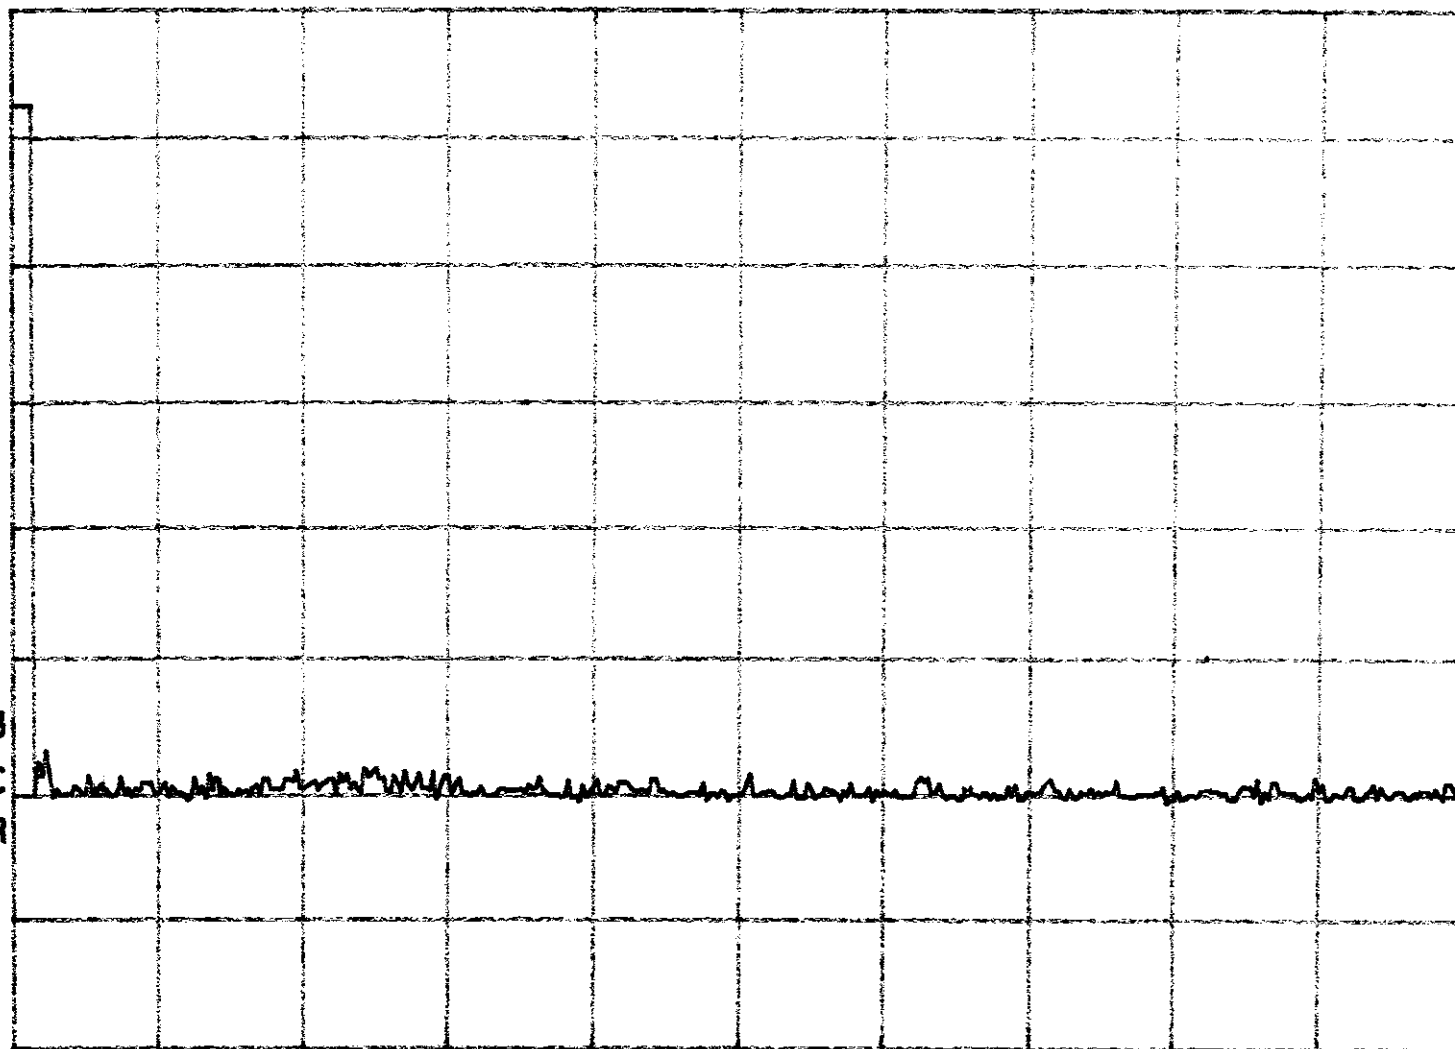

Acknowledge signal timing
(for out-of-range purpose)
detecting

CENTER 350.000 MHz

RES BW 3.0 MHz

VBW 1 MHz

SPAN 0 Hz

#SWP 50.0 sec

hp

REF 107.0 dBμV

AT 10 dB

MKR 2.4875 sec


100.74 dBμV

PEAK

LOG

10
dB/

VA SB
SC VC
CORR

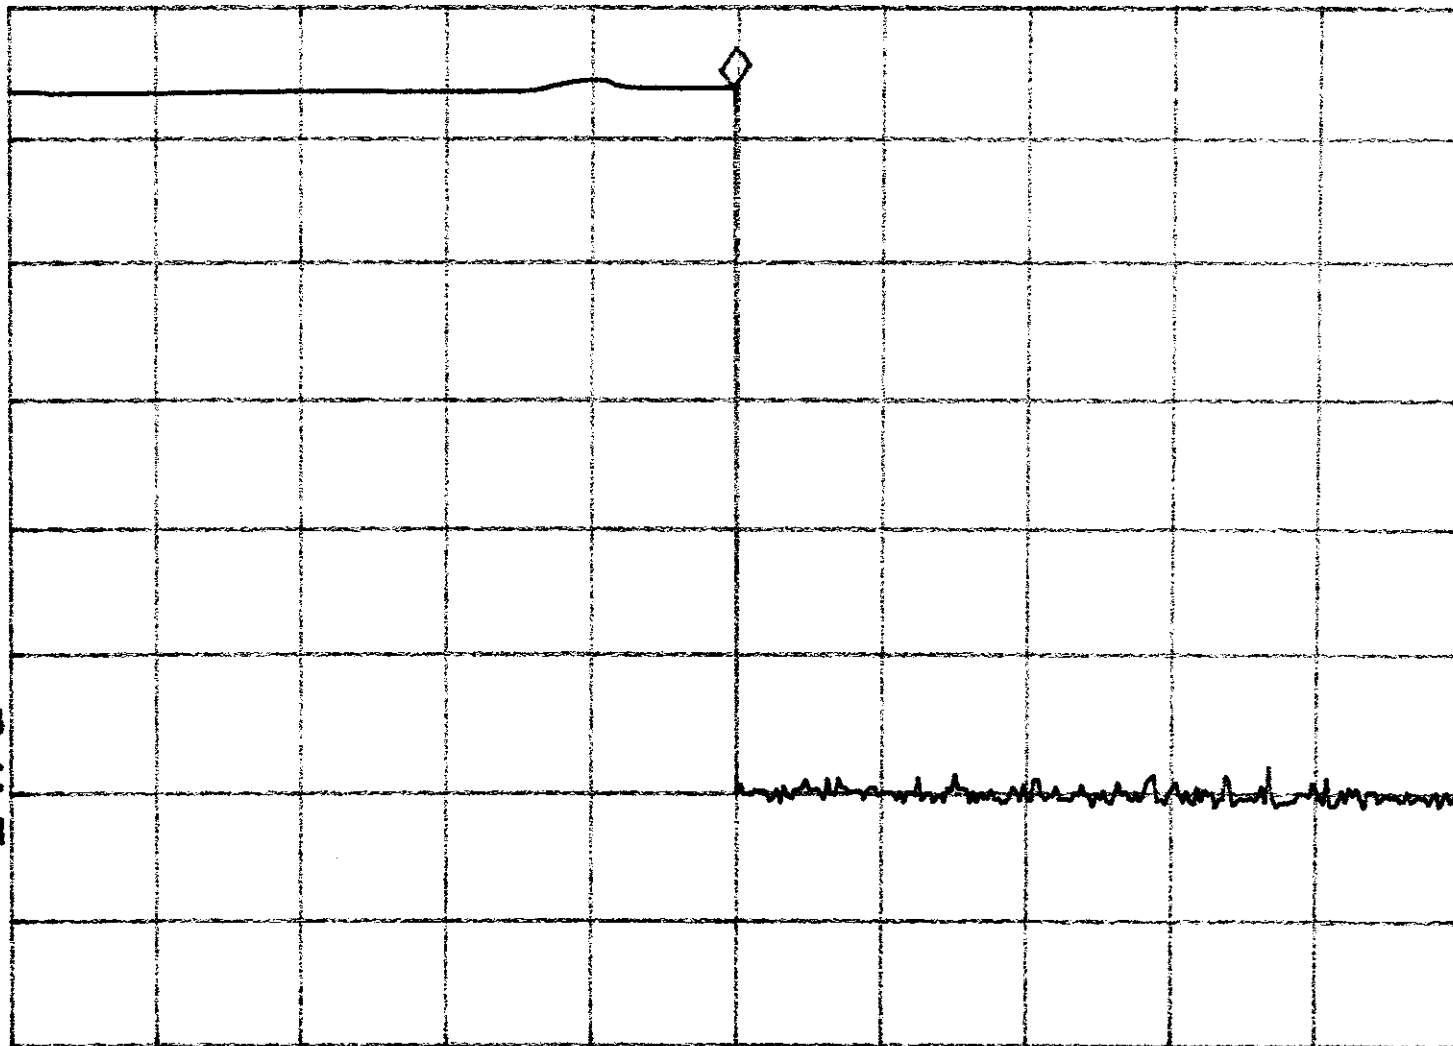

"H:" automatic transmission duration


CENTER 350.000 MHz

#RES BW 1.0 MHz

#VBW 3 MHz

SPAN 0 Hz

#SWP 5.00 sec

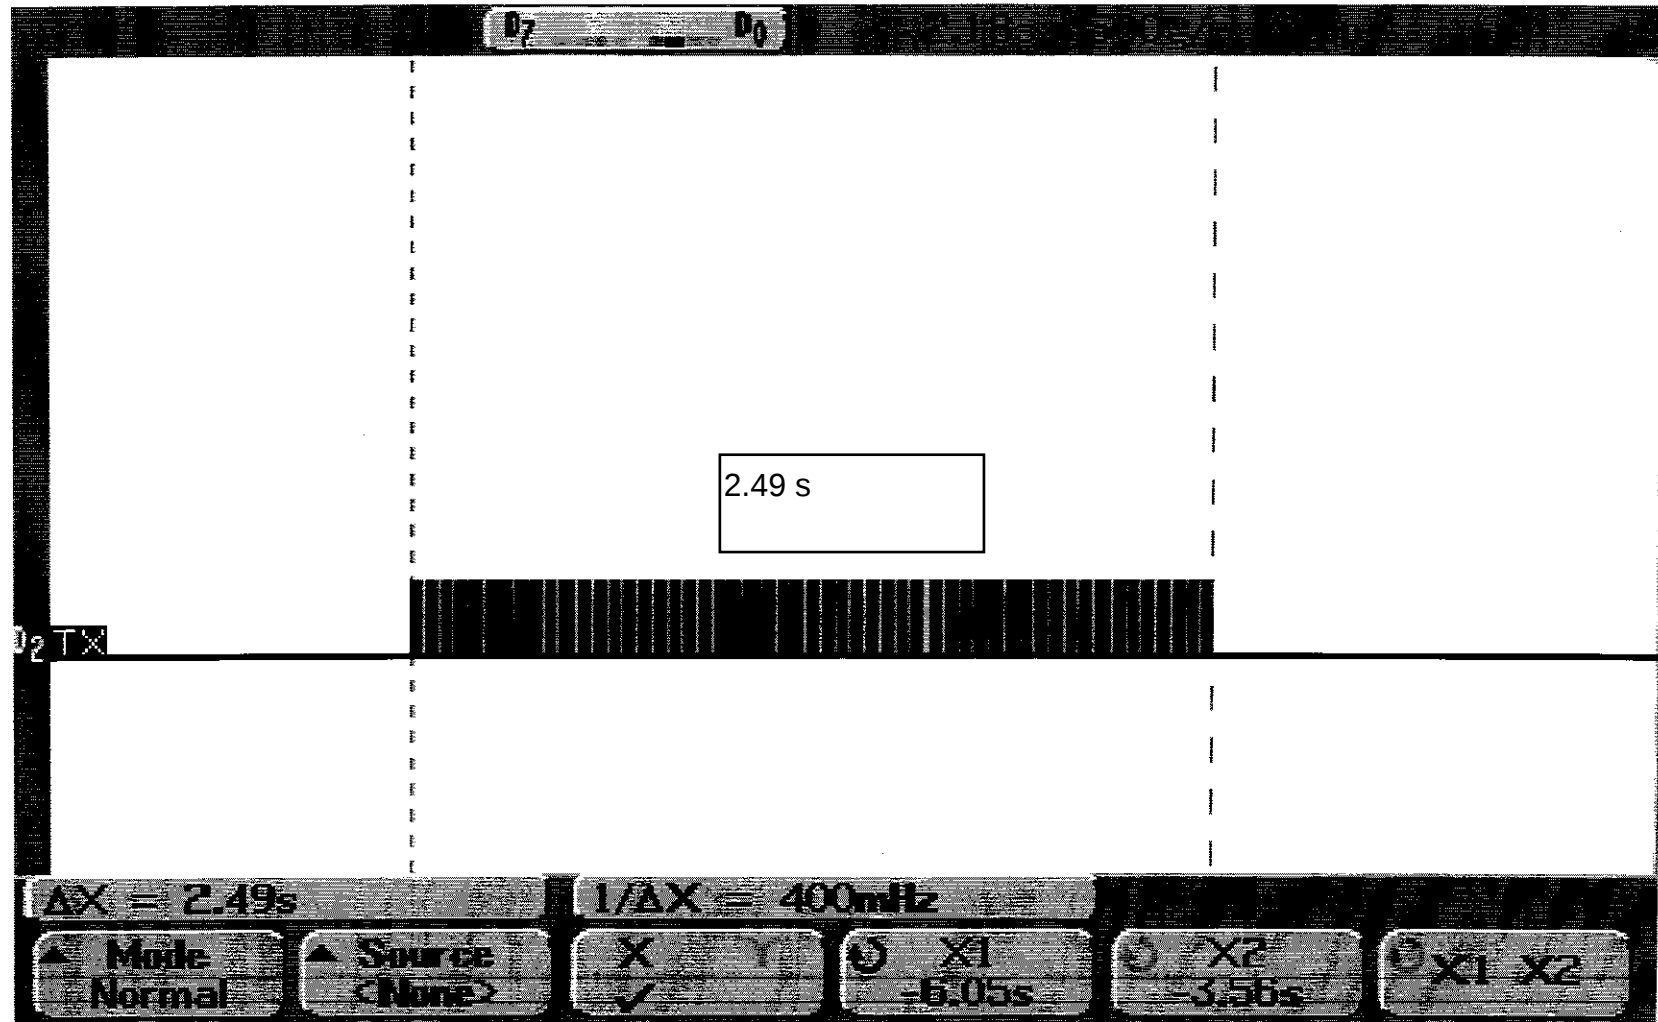

Low battery detection
Transmission timing