



EMC

TEST REPORT

REPORT NO. : F87070908
MODEL NO. : L5MX-TD
DATE OF TEST : July 25, 1998

PREPARED FOR : GVC CORPORATION

ADDRESS : 14F, NO. 76, SEC. 2, TUN HWA S. RD.,
TAIPEI, TAIWAN, R.O.C.

PREPARED BY: ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory

12F, NO.1, SEC.4, NAN-KING EAST RD.,
TAIPEI, TAIWAN, R.O.C.

This test report consists of 16 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory. It should not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. government. The test result in the report only applies to the tested sample.



TABLE OF CONTENTS

1. CERTIFICATION	3
2. GENERAL INFORMATION	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 DESCRIPTION OF SUPPORT UNITS	5
2.3 TEST METHODOLOGY AND CONFIGURATION	5
3. TEST INSTRUMENTS	6
3.1 TEST INSTRUMENTS (EMISSION)	6
3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION	7
4. TEST RESULTS (EMISSION)	8
4.1 RADIO DISTURBANCE	8
4.2 EUT OPERATION CONDITION	8
4.3 TEST DATA OF CONDUCTED EMISSION (A)	9
4.4 TEST DATA OF CONDUCTED EMISSION (B)	10
4.5 TEST DATA OF RADIATED EMISSION	11
5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH MINIMUM MARGIN	13
6. ATTACHMENT 1 - TECHNICAL DESCRIPTION OF EUT	16



1.

CERTIFICATION

Issue Date: Aug. 3, 1998

Product : LCD MONITOR
Trade Name : GVC
Model No. : L5MX-TD
Applicant : GVC CORP.
Standard : FCC Part 15, Subpart B, Class B
ANSI C63.4-1992
CISPR 22:1993+A1+A2

We hereby certify that one sample of the designation has been tested in our facility on July 25, 1998. The test record, data evaluation and Equipment Under Test (EUT) configurations represent herein are true and accurate representation of the measurements of the sample's EMC characteristics under the conditions herein specified.

The test results show that the EUT as described in this report is in compliance with the Class B limits of conducted and radiated emission of applicable standards.

TESTED BY: J. W. KUO , DATE: 8/3/98
(J. W. Kuo)

CHECKED BY: Ariel Hsieh , DATE: 8/3/98
(Ariel Hsieh)

APPROVED BY: Mike Su , DATE: 8/3/98
(Mike Su)

ADVANCE DATA TECHNOLOGY CORPORATION**NVLAP[®]**

Accredited Laboratory



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product	:	LCD MONITOR
Model No.	:	L5MX-TD
Power Supply Type	:	Switching
Power Cord	:	Nonshielded (1.8m)
Data Cable	:	Shielded (1.5m)

Note: The EUT is a LCD Monitor with 15" TFT LCD panel.

The EUT will be sold together with a VGA card whose LCD maximum resolution is up to 1024x768 (48 kHz) and CRT maximum resolution is up to 1280x1024 (80 kHz). During pretest, the worst emission levels were found when there is simultaneous LCD and CRT display mode under 1024x768 (48 kHz) and therefore only this mode is recorded in this report.

There are two AC line conducted test data in this report. One for the LCD display since it has its own internal power supply and one for the VGA card powered by the computer.

There is a ferrite core on the video cable outside the monitor.

For more detailed features description, please refer to ATTACHMENT 1 - TECHNICAL DESCRIPTION OF EUT and User's Manual.



2.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories are used to form representative test configuration during the tests.

No.	Product	Brand	Model No.	FCC ID	I/O Cable
1	PERSONAL COMPUTER	HP	D4579A	FCC DoC APPROVED	Nonshielded Power (1.8m)
2	KEYBOARD	FORWARD	FDA-104GA	F4ZDA-104G	Shielded Signal (1.4m)
3	MONITOR	ADI	PD-959	FCC DoC APPROVED	Shielded Signal (1.2m) Nonshielded Power (1.8m)
4	PRINTER	HP	2225C+	DSI6XU2225	Shielded Signal (2.2m) Nonshielded Power (2.0m)
5	MODEM	ACEEX	1414	IFADM1414	Shielded Signal (1.2m) Nonshielded Power (2.0m)
6	MOUSE	COMPAQ	M-S28	DZL210472	Shielded Signal (1.8m)
7	CCD CAMERA	COMPAQ	YC72-CPQ	EDUYC72-CPQ	Shielded Signal (1.8m)
8	EARPHONE	GAMMA	LH115	N/A	Shielded Signal (2.5m)
9	SOUND CARD	CREATIVE	CT2970	IBACT-SONATE	N/A

Note: 1. An USB cable (1.8m) was connected between EUT and PC.

2. Support unit 7 was connected to the USB port of EUT.

3. An USB cables (1.8m) was connected to the USB ports of EUT to form an USB open loop cables.

4. Two audio cables (1.5m) were connected between EUT and PC.

2.3 TEST METHODOLOGY AND CONFIGURATION

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 1992. Radiated testing was performed at an antenna to EUT distance of 10 m on an open area test site.

Please refer to the photos of test configuration in Item 5.



3. TEST INSTRUMENTS

3.1 TEST INSTRUMENTS (EMISSION)

RADIATED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
HP Spectrum Analyzer	8590L	3544A01176	April 28, 1999
HP Preamplifier	8447D	2944A08485	Oct. 28, 1998
ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Aug. 22, 1998
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 28, 1998
CHASE BILOG Antenna	CBL6112A	2221	Aug. 19, 1998
EMCO Turn Table	1060	1115	N/A
SHOSHIN Tower	AP-4701	A6Y005	N/A
Open Field Test Site	Site 5	ADT-R05	Aug. 18, 1998

Note: 1. The measurement uncertainty is less than +/- 3dB, which is calculated as per NAMA's document NIS81.

2. The calibration interval of the above test instruments is 12 months.
And the calibrations are traceable to NML/ROC and NIST/USA.

CONDUCTED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ Test Receiver	ESHS30	828765/002	July 29, 1999
ROHDE & SCHWARZ Artificial Mains Network	ESH2-Z5	828075/003	July 27, 1999
EMCO-L.I.S.N.	3825/2	90031627	July 27, 1999
Shielded Room	Site 5	ADT-C05	N/A

Note: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per NAMA's document NIS81.

2. The calibration interval of the above test instruments is 12 months.
And the calibrations are traceable to NML/ROC and NIST/USA.



3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION

LIMIT OF RADIATED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 - 230	40	30
230 - 1000	47	37

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 3m)	
	uV/m	dBuV/m	uV/m	dBuV/m
Above 1000	300	49.5	500	54.0

Note: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

LIMIT OF CONDUCTED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



4. TEST RESULTS (EMISSION)

4.1 RADIO DISTURBANCE

Frequency Range : 0.15 - 30 MHz (Conducted Emission)
30 - 1000 MHz (Radiated Emission)
Input Voltage : 120 Vac, 60 Hz
Temperature : 24 °C
Humidity : 43 %
Atmospheric Pressure : 997 mbar

TEST RESULT	Remarks
PASS	Minimum passing margin of conducted emission: -15.7 dB at 2.614 MHz Minimum passing margin of radiated emission: -2.3 dB at 227.82 MHz

4.2 EUT OPERATION CONDITION

1. Turn on the power of all equipments.
2. PC runs a test program to enable all functions.
3. PC reads and writes messages from FDD and HDD.
4. PC sends "H" messages to LCD monitor (EUT) and external monitor, and then LCD monitor and external monitor display "H" patterns on screen.
5. CCD camera captures images and sends the video messages to EUT and External monitor, and then EUT and external monitor display them on their screens.
6. PC sends "H" messages to modem.
7. PC sends "H" messages to printer, and the printer prints them on paper.
8. PC sends audio messages to earphone and external speaker.
9. Repeat steps 3-9.



4.3 TEST DATA OF CONDUCTED EMISSION (A)

EUT: LCD MONITOR

MODEL: L5MX-TD

MODE: 1024x768 (48 kHz)

6 dB Band Width: 10 kHz

TEST PERSONNEL: J.W. KUO

Freq.	L Level		N Level		Limit		Margin [dB (μV)]			
[MHz]	[dB (μV)]		[dB (μV)]		[dB (μV)]		L		N	
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV
0.170	47.20	-	47.80	-	64.96	54.96	-17.8	-	-17.2	-
0.211	45.80	-	46.30	-	63.17	53.17	-17.4	-	-16.9	-
1.337	39.20	-	39.40	-	56.00	46.00	-16.8	-	-16.6	-
2.614	40.30	-	39.00	-	56.00	46.00	-15.7	-	-17.0	-
16.997	24.10	-	23.80	-	60.00	50.00	-35.9	-	-36.2	-
22.569	28.50	-	30.00	-	60.00	50.00	-31.5	-	-30.0	-

- Remarks:
1. "*": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 4. The emission levels of other frequencies were very low against the limit.
 5. The above data is of LCD MONITOR.

ADT CO. Shielded Room 5
CISPR 22 CLASS B

25. Jul 98 14:18

EUT: L5MX-TD
Test Spec: LISN : L
Comment: 110V AC / 60Hz

Report No. F87070908


Page 9-1

Tested by J.W. KUO

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	450k	3k	10k	PK	1ms	10dBLN	OFF	60dB
450k	5M	3k	10k	PK	1ms	10dBLN	OFF	60dB
5M	30M	3k	10k	PK	1ms	10dBLN	OFF	60dB

dBuV ◇ Mkr : 210.00 kHz 49.1 dBuV

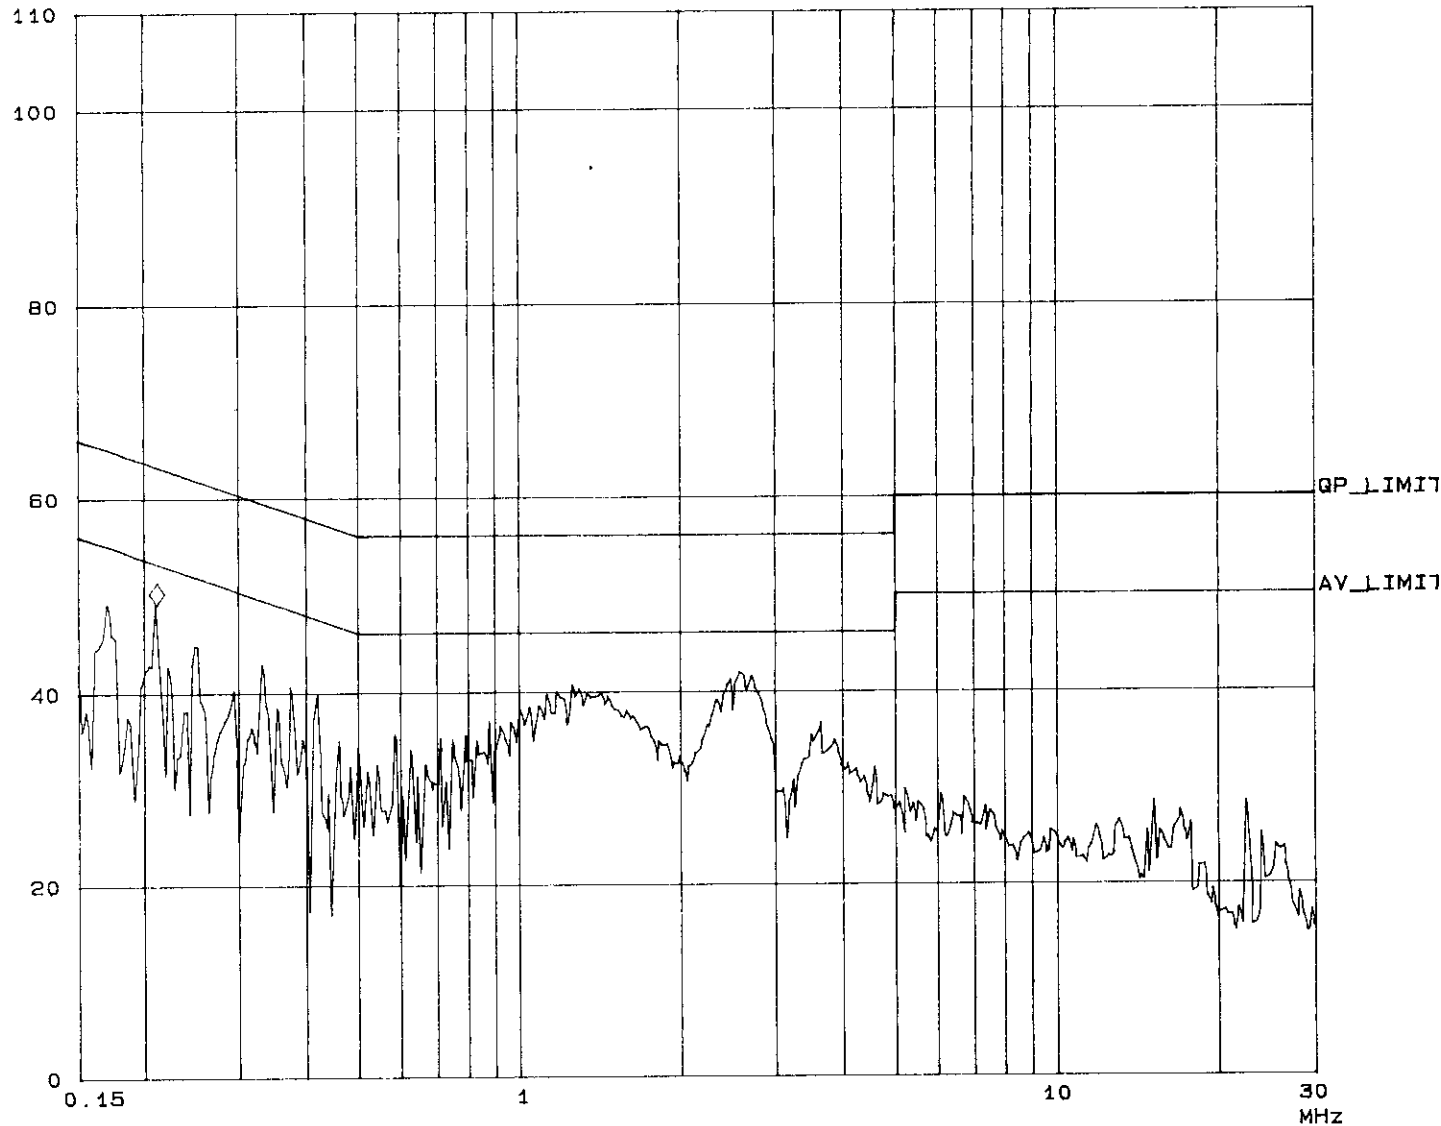

ADT CO. Shielded Room 5
CISPR 22 CLASS B

25. Jul 98 14:33

EUT: L5MX-TD
Test Spec: LISN: N
Comment: 110V AC / 60Hz

Report No. F87070908


Page 9-2

Tested by J.W. Kuo

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preampl	OpAmp
150k	450k	3k	10k	PK	1ms	10dB	BLN OFF	60dB
450k	5M	3k	10k	PK	1ms	10dB	BLN OFF	60dB
5M	30M	3k	10k	PK	1ms	10dB	BLN OFF	60dB

dBuV ◇ Mkr : 168.00 KHz 50.1 dBuV

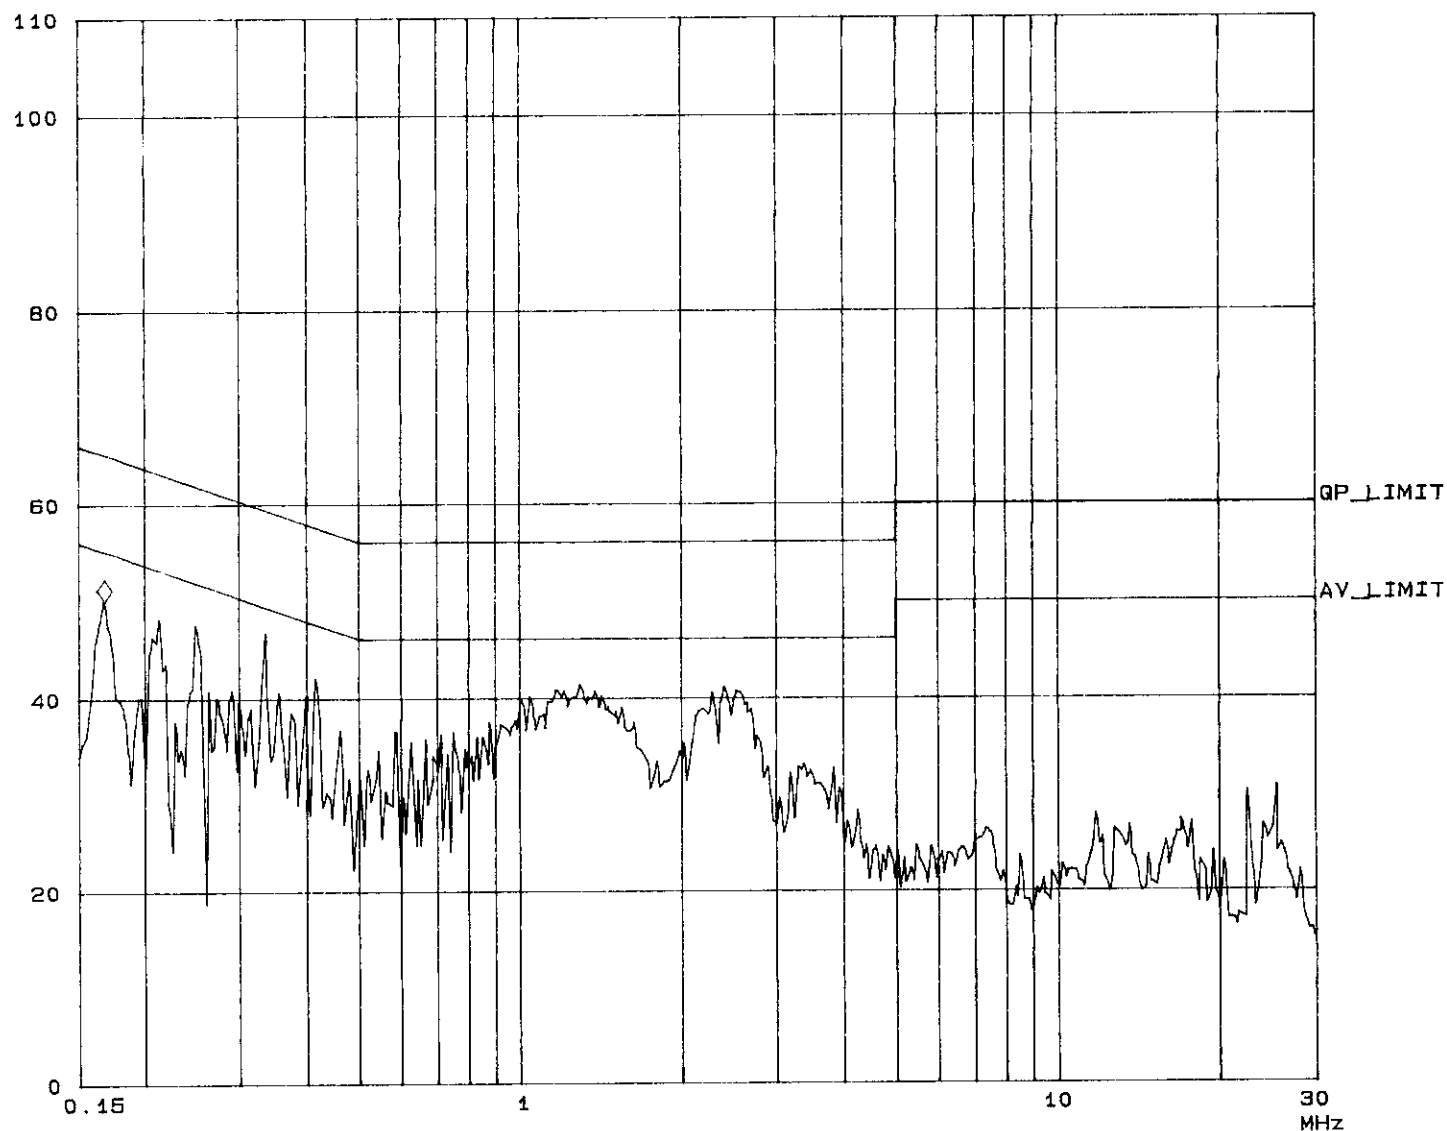



4.4 TEST DATA OF CONDUCTED EMISSION (B)

EUT: LCD MONITORMODEL: L5MX-TDMODE: 1024x768 (48 kHz)

6 dB Band Width: 10 kHz

TEST PERSONNEL: J. W. KUO

Freq.	L Level		N Level		Limit		Margin [dB (μV)]			
[MHz]	[dB (μV)]		[dB (μV)]		[dB (μV)]		L		N	
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV
0.174	40.90	-	44.20	-	64.77	54.77	-23.9	-	-20.6	-
0.230	41.80	-	42.50	-	62.45	52.45	-20.7	-	-20.0	-
0.573	27.00	-	13.40	-	56.00	46.00	-29.0	-	-42.6	-
1.948	28.80	-	24.80	-	56.00	46.00	-27.2	-	-31.2	-
10.315	37.50	-	39.40	-	60.00	50.00	-22.5	-	-20.6	-
15.882	34.50	-	34.60	-	60.00	50.00	-25.5	-	-25.4	-

- Remarks:
1. "": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 4. The emission levels of other frequencies were very low against the limit.
 5. The above data is of VGA CARD powered by the computer.

ADT CO. Shielded Room 5
CISPR 22 CLASS B

25. Jul 98 16:55

EUT: L5MX-TD (VGA CARD)
Test Spec: LISN : L
Comment: 110 AC / 60HZ

Report No. F87070908


Page 10-1

Tested by J.W. KUO

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	450k	3k	10k	PK	1ms	10dB	BLN OFF	60dB
450k	5M	3k	10k	PK	1ms	10dB	BLN OFF	60dB
5M	30M	3k	10k	PK	1ms	10dB	BLN OFF	60dB

dBuV ◇ Mkr : 171.00 KHz 49.5 dBuV

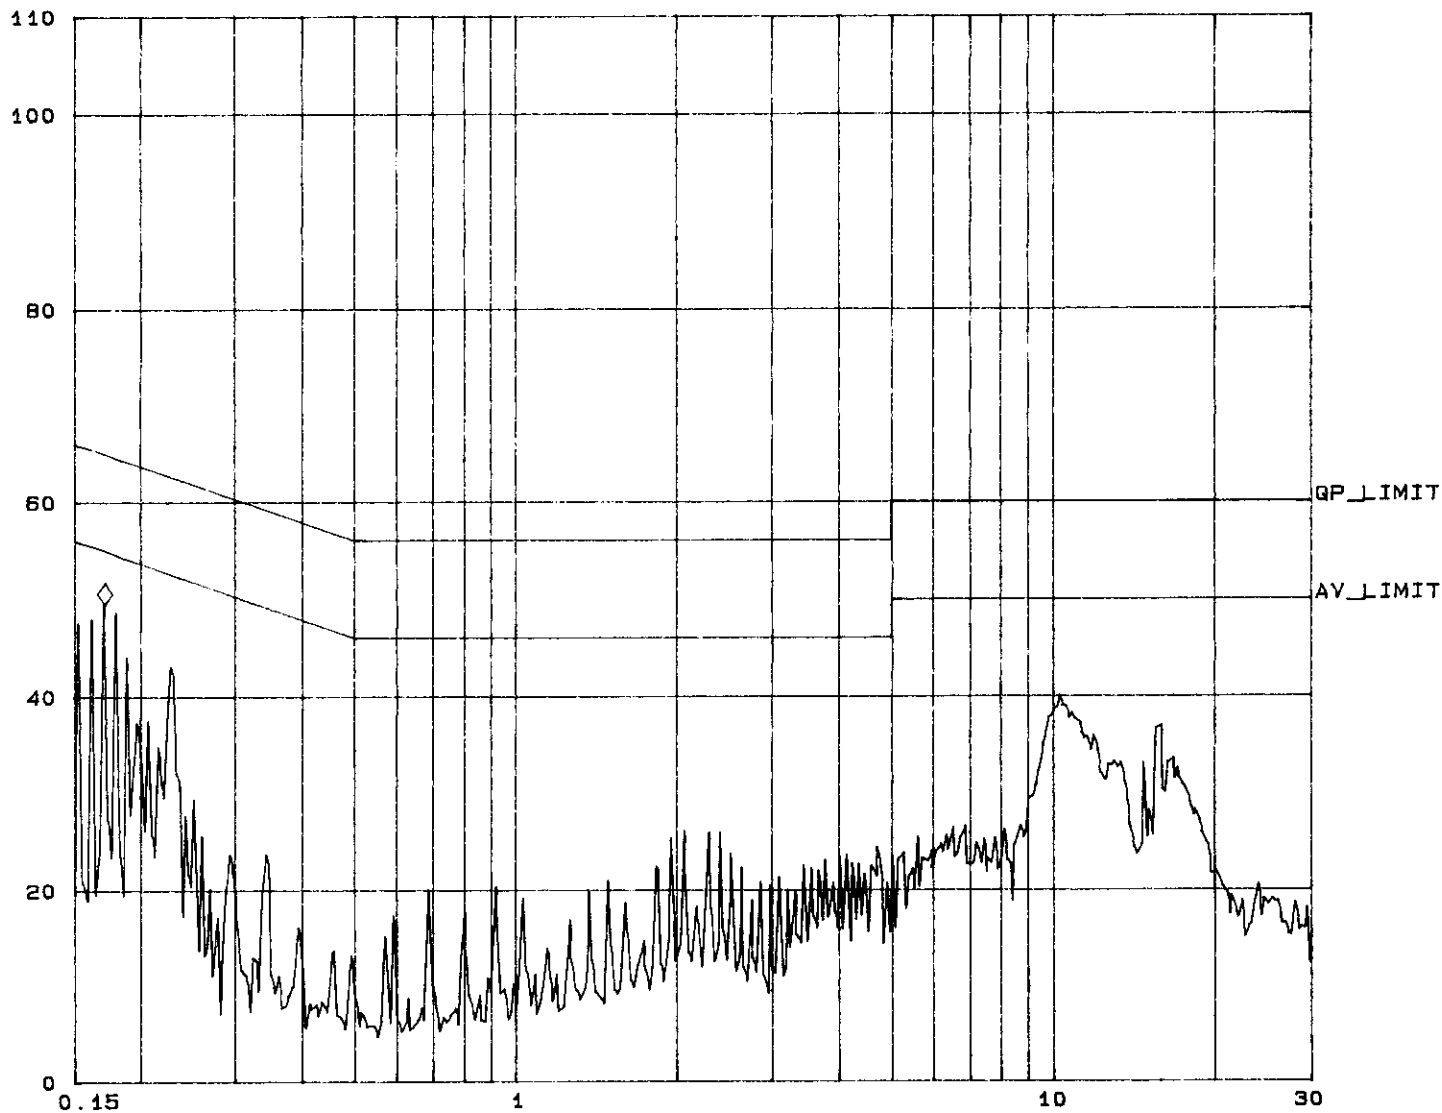

ADT CO. Shielded Room 5
CISPR 22 CLASS B

25. Jul 98 16:46

EUT: LSMX-TD (VGA CARD)
Test Spec: LISN : N
Comment: 110 AC / 60HZ

Report No. F87070908


Page 10-2

Tested by J.W. KUO

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preampl	OpRge
150k	450k	3k	10k	PK	1ms	10dBLN	OFF	60dB
450k	5M	3k	10k	PK	1ms	10dBLN	OFF	60dB
5M	30M	3k	10k	PK	1ms	10dBLN	OFF	60dB

dBuV ◇ Mkr : 165.00 kHz 45.9 dBuV

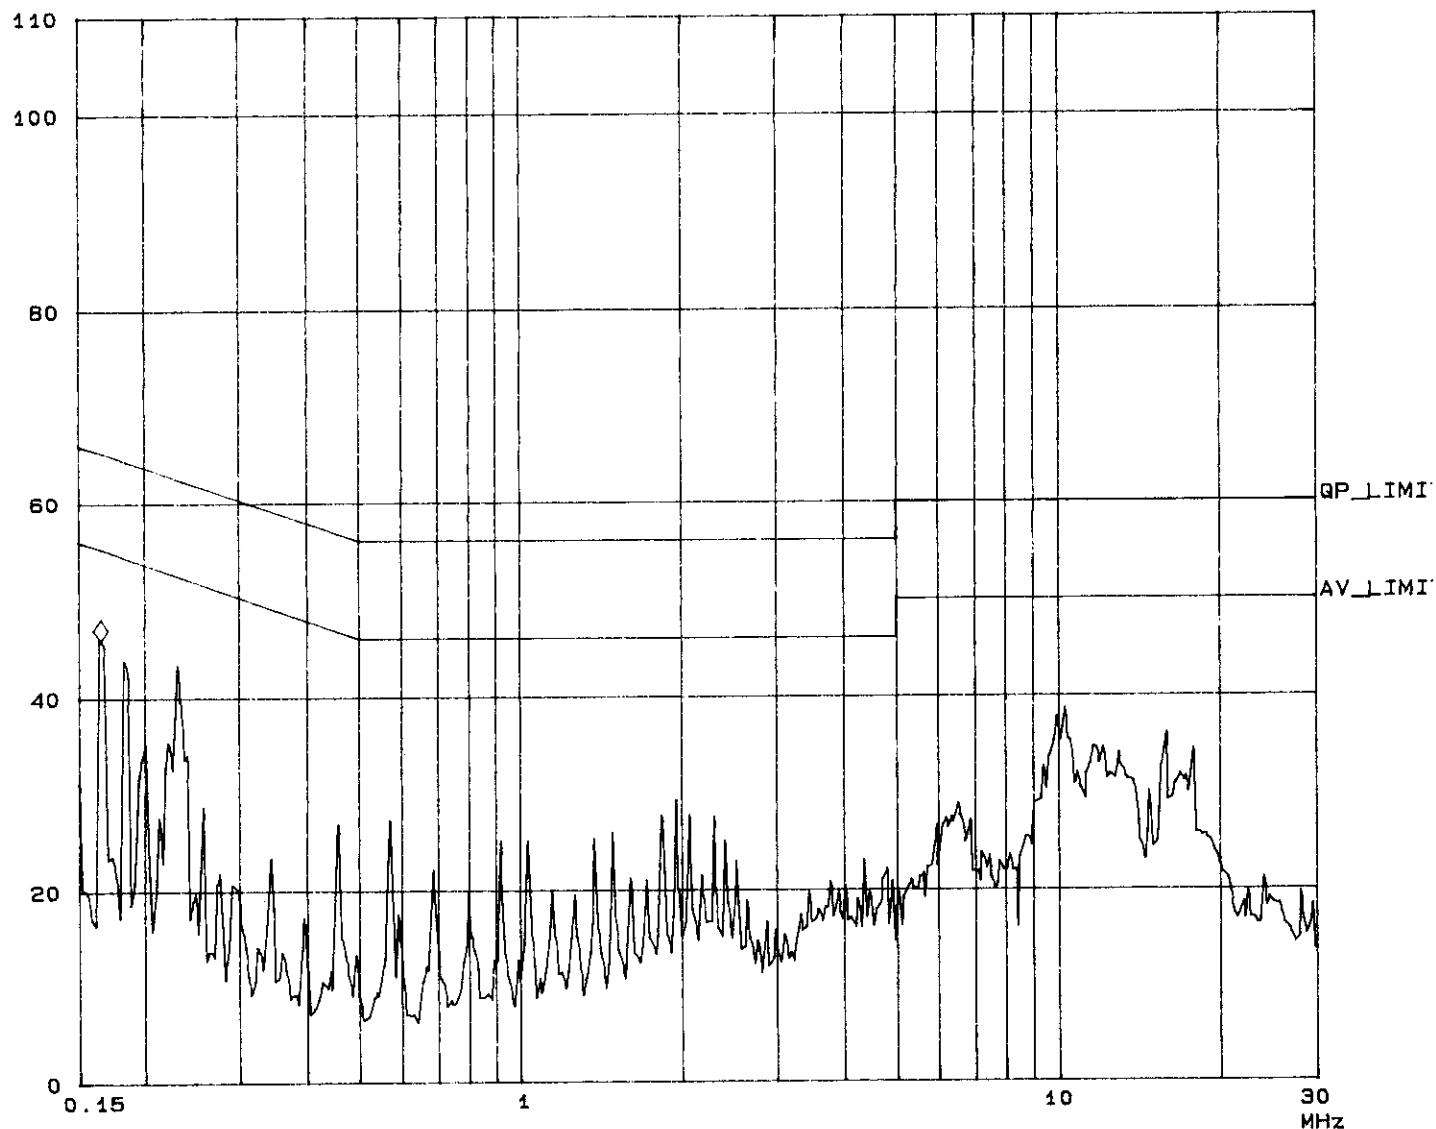



4.5 TEST DATA OF RADIATED EMISSION

EUT: LCD MONITORMODEL: L5MX-TDMODE: 1024x768 (48 kHz)ANTENNA: CHASE BILOG CBL 6112APOLARITY: HorizontalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 MTEST PERSONNEL: J. W. KUO

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
48.00	11.3	15.0	26.3	30.0	-3.7
78.13	8.2	15.9	24.1	30.0	-5.9
117.18	15.4	8.3	23.7	30.0	-6.3
144.00	13.9	11.0	24.9	30.0	-5.1
227.82	14.8	12.9	27.7	30.0	-2.3
372.95	19.2	7.2	26.4	37.0	-10.6
432.10	21.4	10.7	32.1	37.0	-4.9
531.82	23.3	9.5	32.8	37.0	-4.2

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
 2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



TEST DATA OF RADIATED EMISSION

EUT: LCD MONITORMODEL: L5MX-TDMODE: 1024x768 (48 kHz)ANTENNA: CHASE BILOG CBL 6112APOLARITY: VerticalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 MTEST PERSONNEL: J. W. KUO

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
48.00	10.5	16.8	27.3	30.0	-2.7
78.13	7.5	19.3	26.8	30.0	-3.2
117.15	12.8	14.4	27.2	30.0	-2.8
144.00	14.3	10.3	24.6	30.0	-5.4
227.81	15.2	11.7	26.9	30.0	-3.1
372.58	17.7	12.9	30.6	37.0	-6.4
432.08	20.0	14.5	34.5	37.0	-2.5
531.78	23.2	9.9	33.1	37.0	-3.9

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
 2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



6. ATTACHMENT 1 - TECHNICAL DESCRIPTION OF EUT

SPECIFICATIONS:

* Type Configuration	L5MX-TD-SR5	
* LCD Display	15.0" TFT Active Matrix Panel	
* Display Size	304 (H) x 228 (V) mm	
* Pixel Pitch	0.297 (H) x 0.297 (V) mm	
* Max. Resolution	XGA 1024 x 168 N.I.	
* Contrast Ratio	300: 1	
* Brightness	200 Cd/m ² (Typical)	
* Response Time	45 ms	
* Display Color	16M	
* Viewing Angle	+70° ~ -70° (L/R), +60° ~ -60° (U/D)	
* PC interface	C & T 65555 VGA, LVDS Interface	
	2M DRAM EDO On Board, Upgradable to 4M	
	Dual Connector (MDR 26 Pin & D-sub 15 pin)	
* Signal Cable Connector	MDR 26 Pin	
* Front Control	Soft Power Switch, Brightness Adjustment	
* Rear Control	Main Power Switch	
* Rotation	90 degree Clockwise Rotate For Portrait Display	
* Plug & Play	DDC1 / 2B	
* Audio System	Speaker	3W / Per Channel
	Control	Audio Power Switch, Volume, 3D, Bass
	Connector	Earphone plug, Audio-In
* Microphone	Imbedded Omnidirectional Mic.	
* USB	1 Upstream Port, 2 Downstream Ports	
* Power	Imbedded AC Input, Universal 90 ~ 264 V	
* Operating Condition	Temperature	0°C ~ 40°C
	Humidity	10% ~ 80% (No Condensation)
	Altitude	To 10,000 Feet
* Storage Conditions	Temperature	-20°C ~ 60°C
	Humidity	10% ~ 80% (No Condensation)
* Dimensions	408.6 x 385 x 230.7 mm	
	(With Audio System, Width is 426.6 mm)	
* Weight (Net)	5.5 Kg	