



EMC EMISSIONS - TEST REPORT (Full)

Test Report No.	BC400286-1	Issue Date:	June 28, 2004
Model / Serial No.	MN: REMOTE 10.0 / SN: FCC1		
Product Type	9 Channel FSK/OOK remote		
Client	Echostar		
Manufacturer	Echostar		
License holder	Echostar		
Address	9601 S. Meridian Blvd Englewood, CO 80112		
Test Criteria Applied	FCC CFR47 Part 15.231		
Test Result	PASS		
Test Project Number	BC400286-1		
References	39		
Total Pages			
Including			
Appendices:			
<i>Todd J. Kelley</i>	<i>Robert Crosswell</i>		
Reviewed By :	Approved By :		

Title 47 CFR 15.231: RADIO
FREQUENCY DEVICES operating in the
frequency range of 40.66-40.70MHz and
above 70MHz (including 15.205, 15.207,
15.209 where applicable)

INTERNATIONAL APPROVALS LABORATORIES (IAL) reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. IAL have no liability for any deductions, inferences or generalizations drawn by the client or others from IAL issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval of IAL. This report shall not be used by the client to claim product endorsement by NVLAP (No. 200624-0) or any agency of the US government.

International Approval Laboratories and its professional staff hold government
and professional organization certifications and are members of
IEEE, NVLAP, and VCCI.



Lab Code: 200624-0



Accredited

DIRECTORY

Documentation	Page(s)
Test report	<u>1 - 39</u>
Directory	<u>2</u>
Test Regulations	<u>3</u>
General Remarks	<u>5</u>
Test-setup Photographs	<u>7 - 9</u>
Appendix A	
Test Data Sheets and Test Equipment Used	<u>10 - 33</u>
Appendix B	
Test Plan/Constructional Data Form	<u>34 - 34</u>
Appendix C	
Measurement Protocol/Test Procedures	<u>35 - 39</u>

STATEMENT OF MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The measurement uncertainty for Conducted Emissions in the frequency range of 150kHz – 30MHz is calculated to be $\pm 2.30\text{dB}$ and for Radiated Emissions is calculated to be $\pm 3.60\text{dB}$ in the frequency range of 30MHz – 200MHz and $\pm 3.38\text{dB}$ in the frequency range of 200MHz – 1000MHz.

EUT Received Date: 14-June-2004

Testing Start Date: 14-June-2004

Testing End Date: 16-June-2004

Radiated Emissions 15.231(c) - PASS**Test Result**

Remarks: Devices operated within the frequency band of 70 – 900MHz: **-20dBc Bandwidth** maximum of 0.25% of the center frequency

Devices operated within the frequency band of >900MHz: **-20dBc Bandwidth** maximum of 0.50% of the center frequency

Radiated Emissions 15.231(d) - Not Applicable**Test Result**

Remarks: Devices operated within the frequency band of 40.66 – 40.70MHz: **-20dBc Bandwidth** maximum of 0.01% of the center frequency as measured through the temp range of -20 to +50 deg. C, and at 85 - 115% of the nominal supply voltage at 20 deg. C “a new battery would be used in cases where the device is powered from a battery”

Radiated Emissions 15.231(e) - Not Applicable**Test Result**

Minimum limit margin 00.00 dB at 0000.00 MHz

Maximum limit exceeding dB at MHz

Remarks: Measurements were taken utilizing the methods dictated by Part 15.35 for averaging pulsed emissions and for limiting peak emissions

GENERAL REMARKS:

The following remarks are to be considered as “where applicable” and are taken into account while completing any FCC/IC/ETSI radio tests at International Approvals Laboratories, LLC.

Testing was performed in 3 different orthogonal axis to determine the worst case emissions from the device. The worst case emissions measurements are shown in this report.

FCC CFR47 Part 15.31: Measurement Standards: In any case where the device is powered off a battery, a fresh battery was used during test. In cases where the device is powered off an AC supply, voltage was varied per Part 15.31 to find worst case emissions.

FCC CFR47 Part 15.35: Measurement Detector Functions and Bandwidths: FCC Part 15.35 was utilized when performing the measurements within this report.

In any case where the device is powered off a battery, a fresh battery was used during test. In cases where the device is powered off an AC supply, voltage was varied per Part 15.31 to find worst case emissions.

The actual test distance for the FCC Part 15.209 testing was conducted at 10m for the fact that the device was being tested to EN55022 Class B from 30 MHz to 1000 MHz (meets/exceeds the FCC Part 15.209 & 109B limits) The data is automatically extrapolated back to the FCC 3m limits and measurements are corrected to better show the compliance to FCC requirements and reduce confusion. A correction factor of 10.54dB is used in cases of 30MHz and up for a difference between 10m and 3m measurement distances. All measurements that are lesser than 30MHz where applicable are accompanied with the full of measurements and calculations to support the interpolation.

The intentional emissions data shown on pages 15-23 represents the worst case emissions. The fundamental and harmonics data was taken at both antenna polarities but only the worst case is shown on the data sheets.

The EUT will operate at 8 FSK channels and 1 On/Off Key channel. In terms of frequency the On/Off Key channel is between FSK channels 4 and 5. The FSK channels use a different modulation and have a different duty cycle than the On/Off Key channel. For these reasons the On/Off Key and FSK channels were tested individually, not just low, medium and high.

Modifications required to pass: **NONE**

Test Specification Deviations: **NONE**

Required Information In Accordance to FCC CFR 47 Part 2.1033:

Rule Part 11, 15 & 18 Devices	Other Rule Part Devices	Description	Comments
2.1033(b)(1)	2.1033(c)(1)	Manu. Contact	See Page 1 of this report
2.1033(b)(2)	2.1033(c)(2)	FCC Identifier	
2.1033(b)(3)	2.1033(c)(3)	Users Manual to include Operating, installation	Attached as Exhibit
	2.1033(c)(4)	Emissions Designator per 2.	
	2.1033(c)(5)	Frequency Range	Not Applicable to Part 15 Devcies
	2.1033(c)(6)	Power range and controls	Not Applicable to Part 15 Devcies
	2.1033(c)(7)	Maximum power ouput rating	Not Applicable to Part 15 Devcies
	2.1033(c)(8)	DC Voltage and Current suplying final RF stages	Not Applicable to Part 15 Devcies
2.1033(b)(3)	2.1033(c)(9)	Tune –up procedure	Please refer to the users manual for applicability
2.1033(b)(4&5)	2.1033(c)(10)	Complete Circuit Diagrams and circuit operation description	Attached as Exhibit
2.1033(b)(7)	2.1033(c)(11)	Photographs/drawings of the identification label & its location on the device	Attached as Exhibit
2.1033(b)(7)	2.1033(c)(12)	Photographs of the external and internal surfaces, and construction	Attached as Exhibit
	2.1033(c)(13)	Digital Modulation	Not Applicable
2.1033(b)(6)	2.1033(c)(14)	Report of Measurement Data Required by 2.1046 – 2.1057	See Data Below (This report consists of the testing required under Part 15.231)
2.1033(b)(8)		Description of publicly available support equipment used during test	Refer to Exhibit B of this report (Client Test Plan)
2.1033(b)(9)		Statement of Autorization to Part 15.37 of CFR47	The equipment herein is being authorized in accordance to 15.37 of the CFR47 Rules.
2.1033(b)(10)		Direct Sequence Spread Spectrum Devices (DSSS)	Exhibit of compliance to 15.247(e)
2.1033(b)(10)		Frequency Hopping Devices	Exhibit of compliance to 15.247(a)(1)
2.1033(b)(11)		Scanning receiver construction	Exhibit stating compliance to construction in accordance to 15.121.
15.31	15.31	Transmitter Supply Voltage	Testing herein was completed in accordance to FCC CFR47 Part 15.31

Exhibits Including (where applicable):

- | | |
|------------------------------------|---|
| 1. Users Manual | 7. Parts List |
| 2. Operation Description | 8. Tuning Procedure (if applicable) |
| 3. Block Diagram | 9. Test Setup Photograph |
| 4. Report of Measurement | 10. Label Drawings and or Photograpghs |
| 5. External & Internal Photographs | 11. Description of Support Equipment (where Applicable) |
| 6. Schematic | |

Required Information in Accordance to Industry Canada Regulations (In addition to the above):

Information Required	Description	Comments
Modulation Type	(i.e. ASK, NON, FSK, DSSS, FHSS, etc.)	
Emissions Designator	Per TRC-49	
In Country Representative	Contact Information	
99% Bandwidth Measurement	Per RSS-210	

Test-setup photo(s):
Conducted Emissions

N/A

Test-setup photo(s):
Radiated Emissions



Test-setup photo(s):
Radiated Emissions



Appendix A


Test Data Sheets and Test Equipment Used

Part 15.231 (a) (1&2)

Device must cease to function after manual or automatic activation.


Verification of 5 second Deactivation

Deactivation occurred at the center point.

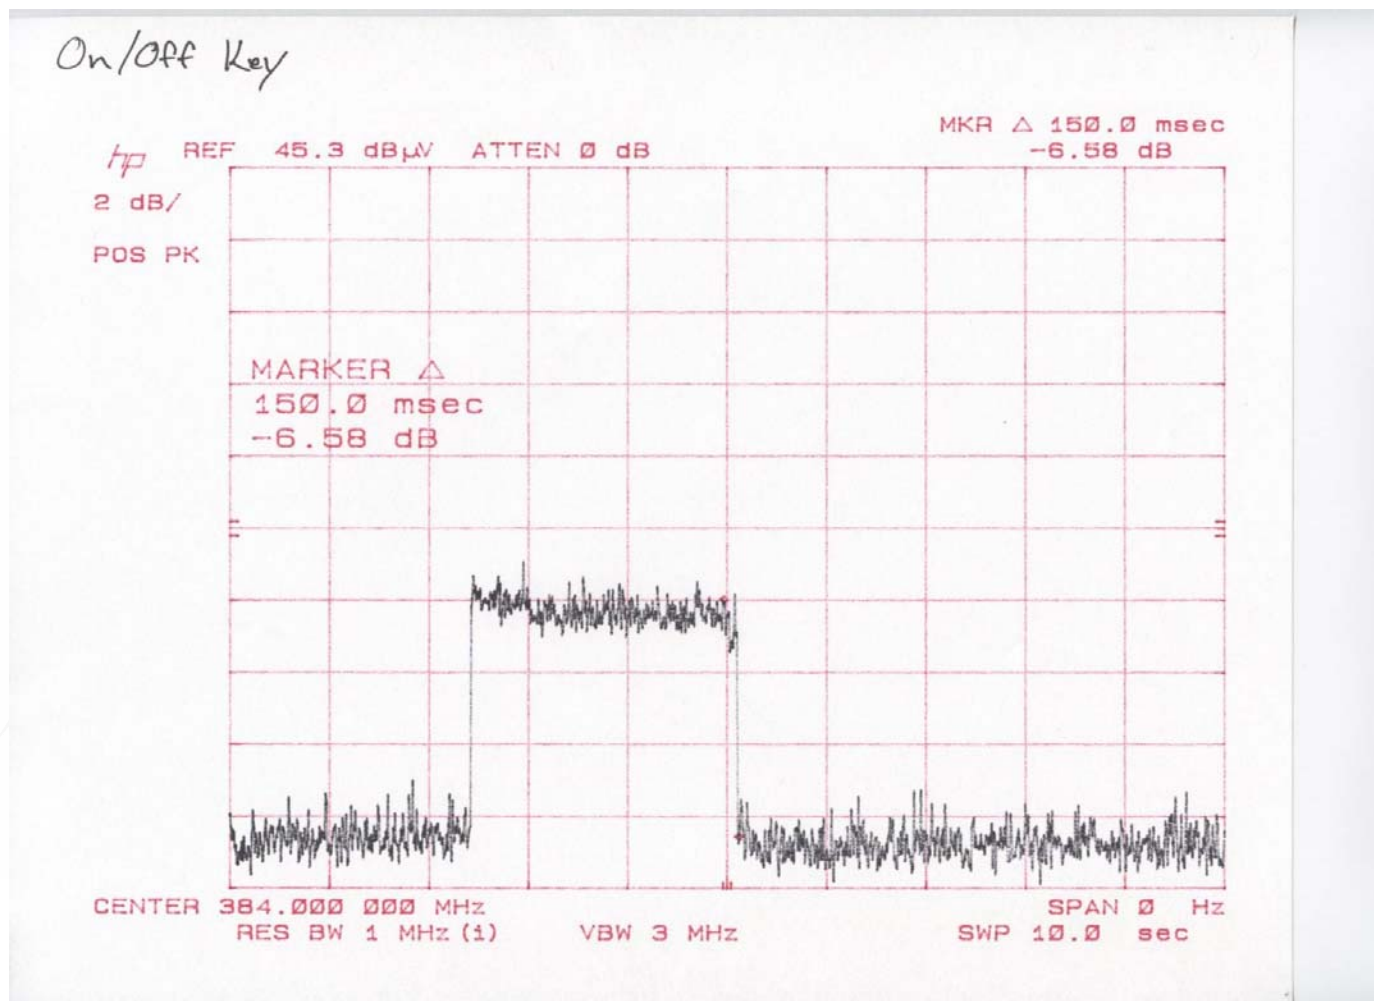

Verification of 5 second Deactivation

Deactivation occurred at the center point.

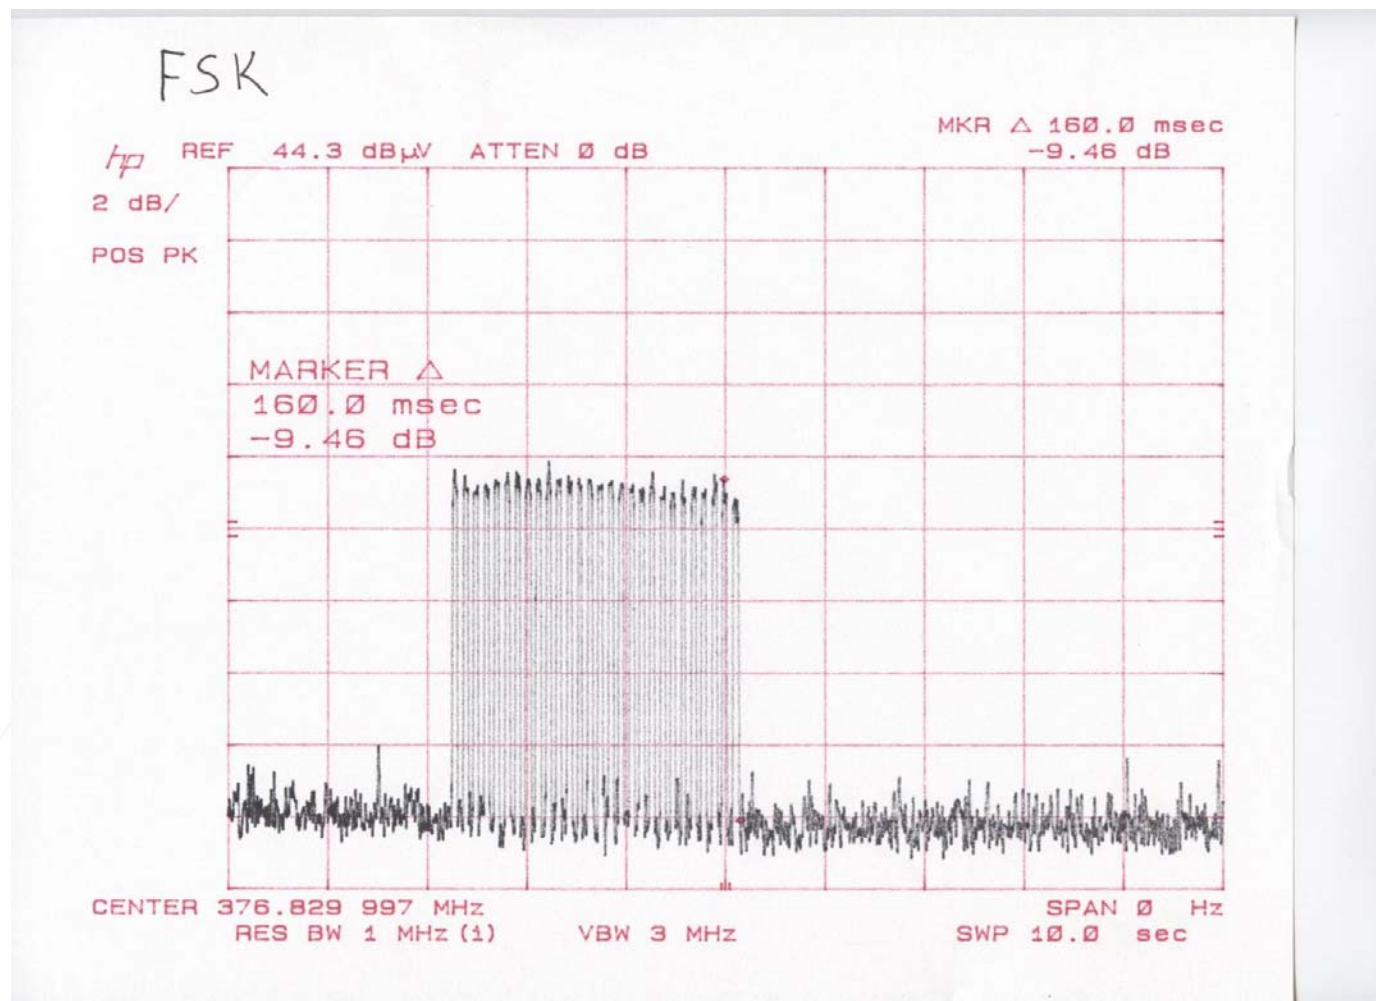

Part 15.231 (b)(1) or (e)
Field Strength Emissions from Intentional Radiators

&

Part 15.231 (b)(2) / 15.205
Restricted Bands of Operation

Field Strength Measurements

Fundamental and Spurious of the Transmitter

Test Report #: BC400286	Test Area: Pinewood Site 1 (3m)	Temperature: 22.4 °C
Test Method: FCC CFR47 Part 15.231/205	Test Date: 14-June-2004	Relative Humidity: 42 %
EUT Model #: Remote 10.0	EUT Power: 14VDC Battery	Air Pressure: 80 kPa
EUT Serial #: FCC1		Page: 15 of 39
Manufacturer: Echostar		
EUT Description: 9 channel FSK/OOK remote		
Notes: FSK Channel 1		
The fundamental and harmonics were maximized at both antenna polarities, the data below represents the worst case at each frequency.		

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	Duty Cycle Correction	Final Corrected	Limit	DELTA
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV)	(m) (DEG)	(dB)	(dBuV/m)	(dBuV/m) 15.231(b)- 15.209	(dB)

The following duty cycle was declared by the manufacturer.

Duty Cycle = active / 100ms. = 39.3%

Averaging method for pulsed signals and calculation in accordance to FCC CFR47 Part 15.35 utilized to calculate field strength emissions.

The testing performed in accordance to FCC CFR47 Part 15.205 (restricted bands of operation) and 15.231 emissions and delta limits were calculated as follows:

Final Corrected Peak Measurement – Duty Cycle Correction Factor* = Final Calculated Emission

The Final Calculated Emission was then compared to the Limits in CFR47 Part 15.209 and 15.231 and the emission/limit delta was calculated.

the DTCF is calculated as follows $20 \cdot \log_{10}(\text{duty cycle in 100ms})$ "not to exceed 20dB"

Part 15.231(b) and 15.205 Respectively

FSK Channel 1

369.39	63.2 Pk	2.1 / 14.5 / 0.0	79.8	H / 1.0 / 96.0	-8.11	71.69	78.39	-6.70
738.85	47.3 Pk	2.3 / 20.3 / 28.0	41.8	H / 1.0 / 110.0	-8.11	33.69	58.39	-24.70
1108.38	53.1 Pk	2.4 / 25.4 / 37.5	43.4	V / 1.0 / 294.0	-8.11	35.29	54	-18.71
1477.88	44.9 Pk	2.9 / 26.8 / 37.0	37.6	V / 1.0 / 294.0	-8.11	29.49	54	-24.51
1847.55	50.8 Pk	3.1 / 28.4 / 37.2	45.1	V / 1.0 / 216.0	-8.11	36.99	58.39	-21.40
2216.84	44.7 Pk	3.5 / 29.8 / 37.9	40.1	V / 1.0 / 216.0	-8.11	31.99	54	-22.01
2586.68	45.0 Pk	4.1 / 30.8 / 37.7	42.2	H / 1.0 / 149.0	-8.11	34.09	58.39	-24.30
2955.66	45.1 Pk	4.5 / 31.6 / 37.5	43.7	V / 1.0 / 263.0	-8.11	35.59	58.39	-22.80
3325.74	43.1 Pk	4.7 / 32.4 / 37.7	42.5	V / 1.0 / 0.0	-8.11	34.39	58.39	-24.00
3695.32	37.3 Pk	5.2 / 33.4 / 37.9	38	V / 1.0 / 168.0	-8.11	29.89	54	-24.11

Field Strength Measurements

Fundamental and Spurious of the Transmitter

Test Report #:	BC400286	Test Area:	Pinewood Site 1 (3m)	Temperature:	22.4	°C
Test Method:	FCC CFR47 Part 15.231/205	Test Date:	14-June-2004	Relative Humidity:	42	%
EUT Model #:	Remote 10.0	EUT Power:	14VDC Battery	Air Pressure:	80	kPa
EUT Serial #:	FCC1			Page:	16	of 1
Manufacturer:	Echostar					
EUT Description:	9 channel FSK/OOK remote					
Notes:	FSK Channel 2					
	The fundamental and harmonics were maximized at both antenna polarities, the data below represents the worst case at each frequency.					

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	Duty Cycle Correction	Final Corrected	Limit	DELTA
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV)	(m) (DEG)	(dB)	(dBuV/m)	(dBuV/m) 15.231(b)- 15.209	(dB)

The following duty cycle was declared by the manufacturer.

Duty Cycle = active / 100ms. = 39.3%

Averaging method for pulsed signals and calculation in accordance to FCC CFR47 Part 15.35 utilized to calculate field strength emissions.

The testing performed in accordance to FCC CFR47 Part 15.205 (restricted bands of operation) and 15.231 emissions and delta limits were calculated as follows:

Final Corrected Peak Measurement – Duty Cycle Correction Factor* = Final Calculated Emission

The Final Calculated Emission was then compared to the Limits in CFR47 Part 15.209 and 15.231 and the emission/limit delta was calculated.

the DTCF is calculated as follows $20 \cdot \log_{10}(\text{duty cycle in 100ms})$ "not to exceed 20dB"

Part **15.231(b)** and **15.205** Respectively

FSK Channel 2

371.02	65.7 Pk	2.1 / 14.7 / 0.0	82.4	H / 1.0 / 81.0	-8.11	74.29	78.46	-4.17
742.25	44.9 Pk	2.3 / 20.3 / 28.2	39.2	H / 2.3 / 236.0	-8.11	31.09	58.46	-27.37
1113.18	52.8 Pk	2.4 / 25.4 / 37.5	43.1	V / 1.0 / 277.0	-8.11	34.99	54	-19.01
1484.45	41.4 Pk	2.9 / 26.8 / 37.0	34.1	H / 1.0 / 173.0	-8.11	25.99	54	-28.01
1855.19	52.1 Pk	3.1 / 28.5 / 37.2	46.5	V / 1.0 / 202.0	-8.11	38.39	58.46	-20.07
2226.34	41.8 Pk	3.6 / 29.8 / 37.9	37.1	V / 1.0 / 133.0	-8.11	28.99	54	-25.01
2597.36	42.5 Pk	4.1 / 30.8 / 37.7	39.7	V / 1.0 / 180.0	-8.11	31.59	58.39	-26.80
2969.03	45.4 Pk	4.6 / 31.6 / 37.5	44.1	V / 1.0 / 157.0	-8.11	35.99	58.39	-22.40
3340.13	43.3 Pk	4.7 / 32.4 / 37.7	42.8	V / 1.0 / 162.0	-8.11	34.69	58.39	-23.70
3711	32.2 Pk	5.2 / 33.5 / 37.9	33	V / 1.0 / 0.0	-8.11	24.89	54	-29.11

Field Strength Measurements

Fundamental and Spurious of the Transmitter

Test Report #:	BC400286	Test Area:	Pinewood Site 1 (3m)	Temperature:	22.4	°C
Test Method:	FCC CFR47 Part 15.231/205	Test Date:	14-June-2004	Relative Humidity:	42	%
EUT Model #:	Remote 10.0	EUT Power:	14VDC Battery	Air Pressure:	80	kPa
EUT Serial #:	FCC1			Page:	17	of 1
Manufacturer:	Echostar					
EUT Description:	9 channel FSK/OOK remote					
Notes:	FSK Channel 3					
	The fundamental and harmonics were maximized at both antenna polarities, the data below represents the worst case at each frequency.					

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	Duty Cycle Correction	Final Corrected	Limit	DELTA
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV)	(m) (DEG)	(dB)	(dBuV/m)	(dBuV/m) 15.231(b)- 15.209	(dB)

The following duty cycle was declared by the manufacturer.

Duty Cycle = active / 100ms. = 39.3%

Averaging method for pulsed signals and calculation in accordance to FCC CFR47 Part 15.35 utilized to calculate field strength emissions.

The testing performed in accordance to FCC CFR47 Part 15.205 (restricted bands of operation) and 15.231 emissions and delta limits were calculated as follows:

Final Corrected Peak Measurement – Duty Cycle Correction Factor* = Final Calculated Emission

The Final Calculated Emission was then compared to the Limits in CFR47 Part 15.209 and 15.231 and the emission/limit delta was calculated.

the DTCF is calculated as follows $20 \cdot \log_{10}(\text{duty cycle in 100ms})$ "not to exceed 20dB"

Part 15.231(b) and 15.205 Respectively

FSK Channel 3

375.17	67.9 Pk	2.1 / 14.7 / 0.0	84.7	H / 1.0 / 88.0	-8.11	76.59	78.64	-2.05
750.44	51.1 Pk	2.3 / 20.3 / 28.4	45.3	H / 1.0 / 98.9	-8.11	37.19	58.64	-21.45
1125.76	51.3 Pk	2.4 / 25.5 / 37.5	41.7	V / 1.0 / 152.0	-8.11	33.59	54	-20.41
1501.02	44.1 Pk	2.9 / 26.9 / 37.0	36.9	H / 1.3 / 236.0	-8.11	28.79	54	-25.21
1876.16	51.8 Pk	3.1 / 28.6 / 37.2	46.3	V / 1.0 / 219.0	-8.11	38.19	58.64	-20.45
2251.9	40.4 Pk	3.6 / 29.9 / 38.0	35.8	H / 1.0 / 203.0	-8.11	27.69	54	-26.31
2627.29	43.8 Pk	4.2 / 30.9 / 37.7	41.2	H / 1.3 / 155.0	-8.11	33.09	58.64	-25.55
3002.05	40.8 Pk	4.6 / 31.7 / 37.5	39.5	V / 1.5 / 296.0	-8.11	31.39	58.64	-27.25
3377.95	40.4 Pk	4.8 / 32.5 / 37.7	40	V / 1.0 / 118.0	-8.11	31.89	58.64	-26.75
3752.63	37.3 Pk	5.3 / 33.6 / 37.9	38.3	V / 1.0 / 0.0	-8.11	30.19	54	-23.81

Field Strength Measurements

Fundamental and Spurious of the Transmitter

Test Report #:	BC400286	Test Area:	Pinewood Site 1 (3m)	Temperature:	22.4	°C
Test Method:	FCC CFR47 Part 15.231/205	Test Date:	14-June-2004	Relative Humidity:	42	%
EUT Model #:	Remote 10.0	EUT Power:	14VDC Battery	Air Pressure:	80	kPa
EUT Serial #:	FCC1			Page:	18	of 1
Manufacturer:	Echostar					
EUT Description:	9 channel FSK/OOK remote					
Notes:	FSK Channel 4					
	The fundamental and harmonics were maximized at both antenna polarities, the data below represents the worst case at each frequency.					
				Level Key Pk – Peak Nb – Narrow Band Qp – QuasiPeak Bb – Broad Band Av - Average		

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	Duty Cycle Correction	Final Corrected	Limit	DELTA
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV)	(m) (DEG)	(dB)	(dBuV/m)	(dBuV/m) 15.231(b)- 15.209	(dB)
The following duty cycle was declared by the manufacturer. Duty Cycle = active / 100ms. = 39.3%								
Averaging method for pulsed signals and calculation in accordance to FCC CFR47 Part 15.35 utilized to calculate field strength emissions. The testing performed in accordance to FCC CFR47 Part 15.205 (restricted bands of operation) and 15.231 emissions and delta limits were calculated as follows: Final Corrected Peak Measurement – Duty Cycle Correction Factor* = Final Calculated Emission The Final Calculated Emission was then compared to the Limits in CFR47 Part 15.209 and 15.231 and the emission/limit delta was calculated. the DTCF is calculated as follows $20 \cdot \log_{10}(\text{duty cycle in 100ms})$ "not to exceed 20dB"								
Part 15.231(b) and 15.205 Respectively								
FSK Channel 4								
376.83	69.5 Pk	2.1 / 14.7 / 0.0	86.3	H / 1.0 / 94.0	-8.11	78.19	78.71	-0.52
753.67	56.0 Pk	2.3 / 20.7 / 28.5	50.4	H / 1.0 / 259.0	-8.11	42.29	58.71	-16.42
1130.72	52.9 Pk	2.4 / 25.5 / 37.5	43.3	V / 1.2 / 209.0	-8.11	35.19	54	-18.81
1507.68	44.2 Pk	2.9 / 26.9 / 37.0	37.1	H / 1.0 / 167.0	-8.11	28.99	54	-25.01
1884.64	53.5 Pk	3.1 / 28.6 / 37.2	48	V / 1.1 / 0.0	-8.11	39.89	58.71	-18.82
2261.07	44.2 Pk	3.6 / 29.9 / 38.0	39.7	H / 1.0 / 188.0	-8.11	31.59	54	-22.41
2638.01	44.0 Pk	4.2 / 30.9 / 37.6	41.4	V / 1.0 / 185.0	-8.11	33.29	58.71	-25.42
3015.46	43.3 Pk	4.6 / 31.7 / 37.5	42.1	H / 1.0 / 188.0	-8.11	33.99	58.71	-24.72
3392.32	39.5 Pk	4.8 / 32.6 / 37.7	39.1	V / 1.0 / 204.0	-8.11	30.99	58.71	-27.72
3769.26	35.4 Pk	5.3 / 33.7 / 37.9	36.4	V / 1.0 / 0.0	-8.11	28.29	54	-25.71

Field Strength Measurements Fundamental and Spurious of the Transmitter

Test Report #: BC400286	Test Area: Pinewood Site 1 (3m)	Temperature: 22.4 °C
Test Method: FCC CFR47 Part 15.231/205	Test Date: 14-June-2004	Relative Humidity: 42 %
EUT Model #: Remote 10.0	EUT Power: 14VDC Battery	Air Pressure: 80 kPa
EUT Serial #: FCC1		Page: 19 of 1
Manufacturer: Echostar		
EUT Description: 9 channel FSK/OOK remote		
Notes: FSK Channel 5		

The fundamental and harmonics were maximized at both antenna polarities, the data below represents the worst case at each frequency.

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	Duty Cycle Correction	Final Corrected	Limit	DELTA
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV)	(m) (DEG)	(dB)	(dBuV/m)	(dBuV/m) 15.231(b)- 15.209	(dB)

The following duty cycle was declared by the manufacturer.

Duty Cycle = active / 100ms. = 39.3%

Averaging method for pulsed signals and calculation in accordance to FCC CFR47 Part 15.35 utilized to calculate field strength emissions.

The testing performed in accordance to FCC CFR47 Part 15.205 (restricted bands of operation) and 15.231 emissions and delta limits were calculated as follows:

Final Corrected Peak Measurement – Duty Cycle Correction Factor* = Final Calculated Emission

The Final Calculated Emission was then compared to the Limits in CFR47 Part 15.209 and 15.231 and the emission/limit delta was calculated.

the DTCF is calculated as follows $20 \cdot \log_{10}(\text{duty cycle in 100ms})$ "not to exceed 20dB"

Part 15.231(b) and 15.205 Respectively

FSK Channel 5

388.17	63.6 Pk	2.1 / 15.1 / 0.0	80.8	H / 1.0 / 85.0	-8.11	72.69	79.17	-6.48
776.45	47.1 Pk	2.3 / 20.8 / 28.3	41.8	H / 1.0 / 119.0	-8.11	33.69	59.17	-25.48
1164.65	54.0 Pk	2.4 / 25.6 / 37.5	44.6	V / 1.0 / 54.0	-8.11	36.49	54	-17.51
1553.24	45.3 Pk	2.9 / 27.1 / 37.0	38.4	V / 1.0 / 0.0	-8.11	30.29	54	-23.71
1941.57	47.6 Pk	3.2 / 28.8 / 37.2	42.4	V / 1.0 / 105.0	-8.11	34.29	59.17	-24.88
2329.87	37.9 Pk	3.7 / 30.1 / 38.0	33.7	V / 1.0 / 0.0	-8.11	25.59	54	-28.41
2717.82	46.1 Pk	4.3 / 31.1 / 37.5	43.9	V / 1.0 / 15.0	-8.11	35.79	54	-18.21
3106.6	45.3 Pk	4.6 / 31.9 / 37.6	44.3	V / 1.0 / 31.0	-8.11	36.19	59.17	-22.98
3494.38	43.4 Pk	4.8 / 32.8 / 37.8	43.1	V / 1.0 / 160.0	-8.11	34.99	59.17	-24.18
3883.37	42.7 Pk	5.5 / 34.0 / 37.7	44.5	V / 1.0 / 244.0	-8.11	36.39	54	-17.61

Field Strength Measurements

Fundamental and Spurious of the Transmitter

Test Report #:	BC400286	Test Area:	Pinewood Site 1 (3m)	Temperature:	22.4	°C								
Test Method:	FCC CFR47 Part 15.231/205	Test Date:	14-June-2004	Relative Humidity:	42	%								
EUT Model #:	Remote 10.0	EUT Power:	14VDC Battery	Air Pressure:	80	kPa								
EUT Serial #:	FCC1			Page:	20	of 1								
Manufacturer:	Echostar													
EUT Description:	9 channel FSK/OOK remote													
Notes:	FSK Channel 6													
	The fundamental and harmonics were maximized at both antenna polarities, the data below represents the worst case at each frequency.													
	<table><tr><th colspan="2">Level Key</th></tr><tr><td>Pk – Peak</td><td>Nb – Narrow Band</td></tr><tr><td>Qp – QuasiPeak</td><td>Bb – Broad Band</td></tr><tr><td>Av - Average</td><td></td></tr></table>						Level Key		Pk – Peak	Nb – Narrow Band	Qp – QuasiPeak	Bb – Broad Band	Av - Average	
Level Key														
Pk – Peak	Nb – Narrow Band													
Qp – QuasiPeak	Bb – Broad Band													
Av - Average														

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	Duty Cycle Correction	Final Corrected	Limit	DELTA
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV)	(m) (DEG)	(dB)	(dBuV/m)	(dBuV/m) 15.231(b)- 15.209	(dB)

The following duty cycle was declared by the manufacturer.

Duty Cycle = active / 100ms. = 39.3%

Averaging method for pulsed signals and calculation in accordance to FCC CFR47 Part 15.35 utilized to calculate field strength emissions.

The testing performed in accordance to FCC CFR47 Part 15.205 (restricted bands of operation) and 15.231 emissions and delta limits were calculated as follows:

Final Corrected Peak Measurement – Duty Cycle Correction Factor* = Final Calculated Emission

The Final Calculated Emission was then compared to the Limits in CFR47 Part 15.209 and 15.231 and the emission/limit delta was calculated.

the DTCF is calculated as follows $20 \cdot \log_{10}(\text{duty cycle in 100ms})$ "not to exceed 20dB"

Part **15.231(b)** and **15.205** Respectively

FSK Channel 6

391.4	62.9 Pk	2.1 / 15.1 / 0.0	80.1	H / 1.0 / 95.0	-8.11	71.99	79.3	-7.31
782.66	49.3 Pk	2.3 / 20.6 / 28.2	44	H / 1.0 / 100.0	-8.11	35.89	59.3	-23.41
1174.41	53.2 Pk	2.4 / 25.7 / 37.5	43.9	V / 1.0 / 232.0	-8.11	35.79	54	-18.21
1565.77	44.4 Pk	2.9 / 27.2 / 37.0	37.5	H / 1.0 / 0.0	-8.11	29.39	54	-24.61
1957.22	44.6 Pk	3.2 / 28.9 / 37.2	39.5	V / 1.0 / 0.0	-8.11	31.39	59.3	-27.91
2348.7	42.6 Pk	3.8 / 30.1 / 38.0	38.5	H / 1.0 / 142.0	-8.11	30.39	54	-23.61
2740.18	43.1 Pk	4.3 / 31.1 / 37.5	41.1	V / 1.0 / 0.0	-8.11	32.99	54	-21.01
3131.64	43.2 Pk	4.7 / 32.0 / 37.6	42.3	H / 1.0 / 184.0	-8.11	34.19	59.3	-25.11
3523.15	42.8 Pk	4.8 / 32.9 / 37.8	42.7	V / 1.0 / 161.0	-8.11	34.59	59.3	-24.71
3914.64	40.1 Pk	5.5 / 34.1 / 37.7	42.1	V / 1.0 / 156.0	-8.11	33.99	54	-20.01

Field Strength Measurements Fundamental and Spurious of the Transmitter

Test Report #: **BC400286** Test Area: Pinewood Site 1 (3m)
 Test Method: FCC CFR47 Part 15.231/205 Test Date: 14-June-2004
 EUT Model #: Remote 10.0 EUT Power: 14VDC Battery
 EUT Serial #: FCC1
 Manufacturer: Echostar
 EUT Description: 9 channel FSK/OOK remote
 Notes: FSK Channel 7

Temperature: 22.4 °C
 Relative Humidity: 42 %
 Air Pressure: 80 kPa
 Page: 21 of 1

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

The fundamental and harmonics were maximized at both antenna polarities, the data below represents the worst case at each frequency.

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	Duty Cycle Correction	Final Corrected	Limit	DELTA
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV)	(m) (DEG)	(dB)	(dBuV/m)	(dBuV/m) 15.231(b)- 15.209	(dB)

The following duty cycle was declared by the manufacturer.
 Duty Cycle = active / 100ms. = 39.3%

Averaging method for pulsed signals and calculation in accordance to FCC CFR47 Part 15.35 utilized to calculate field strength emissions.

The testing performed in accordance to FCC CFR47 Part 15.205 (restricted bands of operation) and 15.231 emissions and delta limits were calculated as follows:

Final Corrected Peak Measurement – Duty Cycle Correction Factor* = Final Calculated Emission

The Final Calculated Emission was then compared to the Limits in CFR47 Part 15.209 and 15.231 and the emission/limit delta was calculated.
 the DTCF is calculated as follows $20 \cdot \log_{10}(\text{duty cycle in 100ms})$ "not to exceed 20dB"

Part 15.231(b) and 15.205 Respectively

FSK Channel 7

394.25	61.1 Pk	2.1 / 15.0 / 0.0	78.2	H / 1.0 / 101.0	-8.11	70.09	79.41	-9.32
788.4	44.6 Pk	2.3 / 20.8 / 28.2	39.5	H / 1.0 / 108.0	-8.11	31.39	59.41	-28.02
1182.77	54.2 Pk	2.5 / 25.7 / 37.5	44.9	V / 1.0 / 197.0	-8.11	36.79	54	-17.21
1577.02	45.1 Pk	2.9 / 27.2 / 37.0	38.3	V / 1.0 / 0.0	-8.11	30.19	54	-23.81
1971.29	38.1 Pk	3.2 / 29.0 / 37.3	33.1	V / 1.0 / 0.0	-8.11	24.99	59.41	-34.42
2365.93	44.4 Pk	3.8 / 30.2 / 38.0	40.4	V / 1.0 / 303.0	-8.11	32.29	54	-21.71
2760.23	36.0 Pk	4.3 / 31.2 / 37.5	34	V / 1.0 / 0.0	-8.11	25.89	54	-28.11
3154.62	44.6 Pk	4.7 / 32.0 / 37.6	43.8	V / 1.0 / 317.0	-8.11	35.69	59.41	-23.72
3548.98	42.7 Pk	4.9 / 33.0 / 37.8	42.7	V / 1.0 / 26.0	-8.11	34.59	59.41	-24.82
3943.29	39.5 Pk	5.6 / 34.2 / 37.7	41.6	V / 1.0 / 0.0	-8.11	33.49	54	-20.51

Field Strength Measurements Fundamental and Spurious of the Transmitter

Test Report #: BC400286	Test Area: Pinewood Site 1 (3m)	Temperature: 22.4 °C
Test Method: FCC CFR47 Part 15.231/205	Test Date: 14-June-2004	Relative Humidity: 42 %
EUT Model #: Remote 10.0	EUT Power: 14VDC Battery	Air Pressure: 80 kPa
EUT Serial #: FCC1		Page: 22 of 1
Manufacturer: Echostar		
EUT Description: 9 channel FSK/OOK remote		
Notes: FSK Channel 8		
The fundamental and harmonics were maximized at both antenna polarities, the data below represents the worst case at each frequency.		

Level Key

Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	Duty Cycle Correction	Final Corrected	Limit	DELTA
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV)	(m) (DEG)	(dB)	(dBuV/m)	(dBuV/m) 15.231(b)- 15.209	(dB)
The following duty cycle was declared by the manufacturer. Duty Cycle = active / 100ms. = 39.3% Averaging method for pulsed signals and calculation in accordance to FCC CFR47 Part 15.35 utilized to calculate field strength emissions. The testing performed in accordance to FCC CFR47 Part 15.205 (restricted bands of operation) and 15.231 emissions and delta limits were calculated as follows: Final Corrected Peak Measurement – Duty Cycle Correction Factor* = Final Calculated Emission The Final Calculated Emission was then compared to the Limits in CFR47 Part 15.209 and 15.231 and the emission/limit delta was calculated. the DTCF is calculated as follows $20 \cdot \log_{10}(\text{duty cycle in 100ms})$ "not to exceed 20dB" Part 15.231(b) and 15.205 Respectively FSK Channel 8								
395.76	61.0 Pk	2.1 / 15.0 / 0.0	78.1	H / 1.0 / 85.9	-8.11	69.99	79.47	-9.48
791.66	40.4 Pk	2.3 / 20.9 / 28.2	35.3	H / 2.0 / 234.0	-8.11	27.19	59.47	-32.28
1187.65	54.4 Pk	2.5 / 25.7 / 37.5	45.1	V / 1.0 / 153.0	-8.11	36.99	54	-17.01
1583.45	46.6 Pk	3.0 / 27.3 / 37.0	39.7	V / 1.0 / 20.0	-8.11	31.59	54	-22.41
1979.22	41.9 Pk	3.2 / 29.0 / 37.3	36.8	H / 1.0 / 162.0	-8.11	28.69	59.47	-30.78
2375.07	39.8 Pk	3.8 / 30.2 / 37.9	35.9	V / 1.0 / 61.5	-8.11	27.79	54	-26.21
2770.96	41.6 Pk	4.3 / 31.2 / 37.5	39.6	V / 1.0 / 158.0	-8.11	31.49	54	-22.51
3166.85	39.9 Pk	4.7 / 32.1 / 37.6	39	H / 1.0 / 208.0	-8.11	30.89	59.47	-28.58
3563.35	40.3 Pk	4.9 / 33.0 / 37.8	40.4	V / 1.0 / 125.0	-8.11	32.29	59.47	-27.18
3959.28	38.0 Pk	5.6 / 34.3 / 37.6	40.2	V / 1.0 / 157.0	-8.11	32.09	54	-21.91

Field Strength Measurements

Fundamental and Spurious of the Transmitter

Test Report #: BC400286	Test Area: Pinewood Site 1 (3m)	Temperature: 22.4 °C
Test Method: FCC CFR47 Part 15.231/205	Test Date: 14-June-2004	Relative Humidity: 42 %
EUT Model #: Remote 10.0	EUT Power: 14VDC Battery	Air Pressure: 80 kPa
EUT Serial #: FCC1		Page: 23 of 1
Manufacturer: Echostar		
EUT Description: 9 channel FSK/OOK remote		
Notes: On/Off Key		
The fundamental and harmonics were maximized at both antenna polarities, the data below represents the worst case at each frequency.		

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	Duty Cycle Correction	Final Corrected	Limit	DELTA
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV)	(m) (DEG)	(dB)	(dBuV/m)	(dBuV/m) 15.231(b)- 15.209	(dB)

The following duty cycle was declared by the manufacturer.

Duty Cycle = active / 100ms. = 13.3%

Averaging method for pulsed signals and calculation in accordance to FCC CFR47 Part 15.35 utilized to calculate field strength emissions.

The testing performed in accordance to FCC CFR47 Part 15.205 (restricted bands of operation) and 15.231 emissions and delta limits were calculated as follows:

Final Corrected Peak Measurement – Duty Cycle Correction Factor* = Final Calculated Emission

The Final Calculated Emission was then compared to the Limits in CFR47 Part 15.209 and 15.231 and the emission/limit delta was calculated.

the DTCF is calculated as follows $20 \cdot \log_{10}(\text{duty cycle in 100ms})$ "not to exceed 20dB"

Part 15.231(b) and 15.205 Respectively


On/Off Key

383.25	76.5 Pk	2.1 / 15.0 / 0.0	93.6	H / 1.0 / 95.0	-17.52	76.08	78.97	-2.89
766.46	68.9 Pk	2.3 / 21.3 / 28.5	64	H / 1.3 / 280.0	-17.52	46.48	58.97	-12.49
1151.89	71.4 Pk	2.4 / 25.6 / 37.5	61.9	V / 1.0 / 215.0	-17.52	44.38	54	-9.62
1535.93	58.7 Pk	2.9 / 27.1 / 37.0	51.7	H / 1.0 / 213.0	-17.52	34.18	54	-19.82
1919.96	61.5 Pk	3.2 / 28.7 / 37.2	56.2	V / 1.0 / 202.0	-17.52	38.68	58.97	-20.29
2304.01	52.7 Pk	3.7 / 30.0 / 38.0	48.4	V / 1.0 / 312.0	-17.52	30.88	54	-23.12
2687.97	54.2 Pk	4.2 / 31.0 / 37.6	51.9	V / 1.0 / 18.0	-17.52	34.38	54	-19.62
3071.97	50.2 Pk	4.6 / 31.9 / 37.5	49.2	H / 1.0 / 186.0	-17.52	31.68	58.97	-27.29
3456.06	56.0 Pk	4.8 / 32.7 / 37.8	55.8	V / 1.0 / 138.0	-17.52	38.28	58.97	-20.69
3839.92	51.5 Pk	5.4 / 33.9 / 37.8	53	V / 1.0 / 150.0	-17.52	35.48	54	-18.52

Duty Cycle Correction Factor Justification

The following plot was taken to verify the actual Duty Cycle as specified in the FCC CFR47 Rules and was utilized to perform the DCCF adjustment for averaging emissions allowed in FCC CFR47 Part 15.35.



FSK

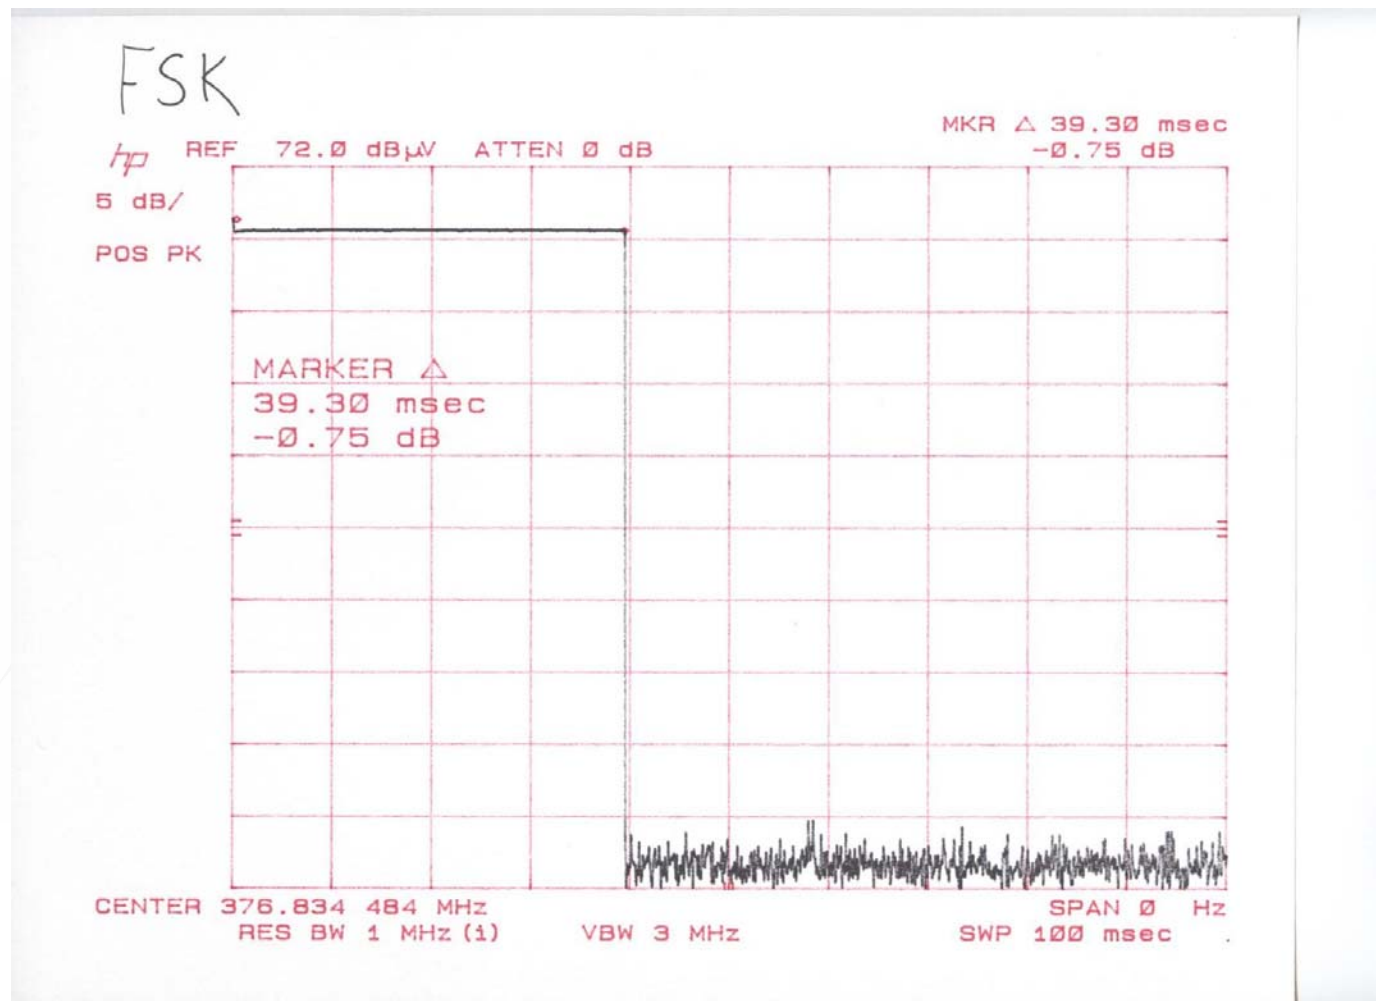

Duty Cycle Correction Factor Justification

The following plot was taken to verify the actual Duty Cycle as specified in the FCC CFR47 Rules and was utilized to perform the DCCF adjustment for averaging emissions allowed in FCC CFR47 Part 15.35.

On/Off Key

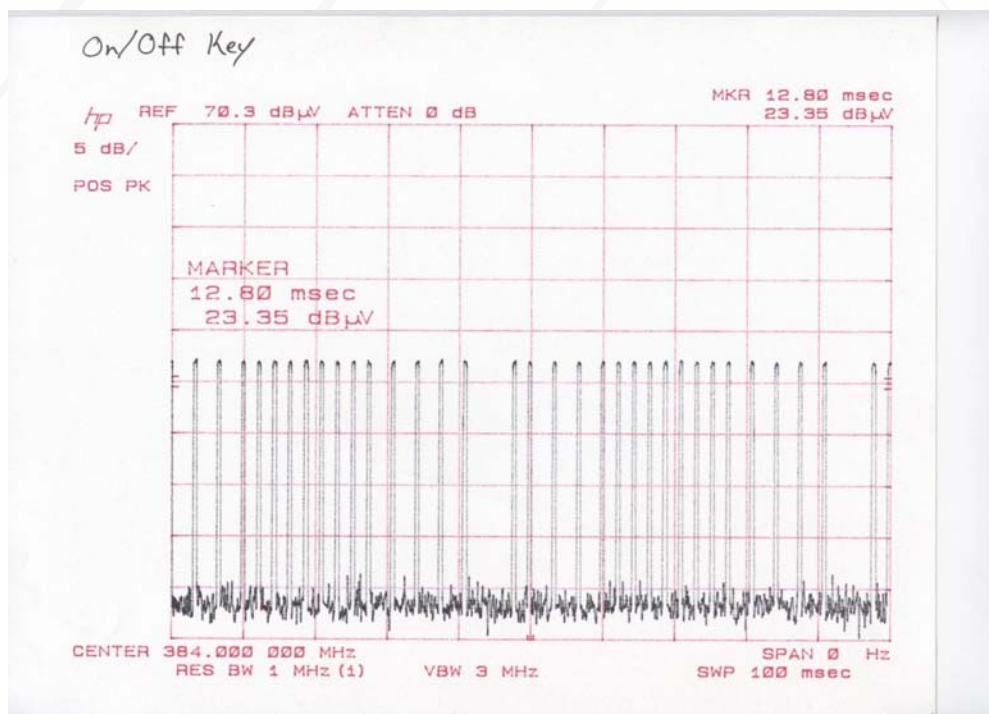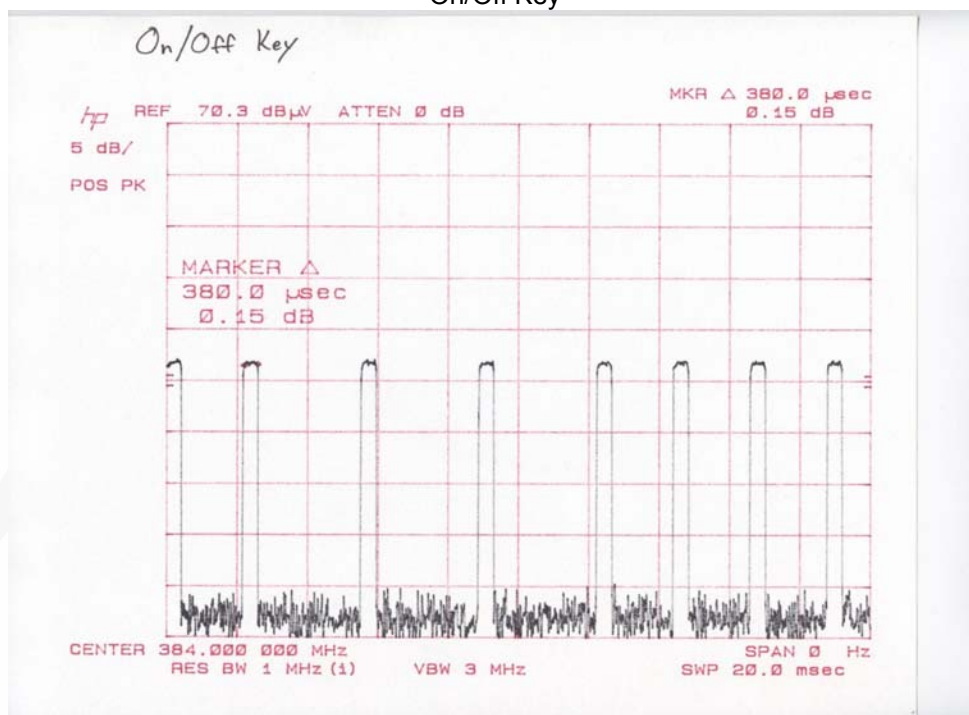

Part 15.231 (b)(3) / 15.209
Spurious and Unintentional Emissions

Radiated Electromagnetic Emissions

Test Report #:	BC400286	Test Area:	Pinewood Site 1 (3m)	Temperature:	22.4	°C								
Test Method:	FCC CFR47 Part 15.209	Test Date:	14-June-2004	Relative Humidity:	42	%								
EUT Model #:	Remote 10.0	EUT Power:	14VDC Battery	Air Pressure:	80	kPa								
EUT Serial #:	FCC1	Page: 27 of 1												
Manufacturer:	Echostar	<table border="1"> <thead> <tr> <th colspan="2">Level Key</th> </tr> </thead> <tbody> <tr> <td>Pk – Peak</td> <td>Nb – Narrow Band</td> </tr> <tr> <td>Qp – QuasiPeak</td> <td>Bb – Broad Band</td> </tr> <tr> <td>Av – Average</td> <td></td> </tr> </tbody> </table>					Level Key		Pk – Peak	Nb – Narrow Band	Qp – QuasiPeak	Bb – Broad Band	Av – Average	
Level Key														
Pk – Peak	Nb – Narrow Band													
Qp – QuasiPeak	Bb – Broad Band													
Av – Average														
EUT Description:	9 channel FSK/OOK remote													
Notes:														

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB) (dBm) (dB)	FINAL (dbuV)	POL / HGT / AZ (m) (DEG)	DELTA1 (dB) 15.209 <30MHz	DELTA2 (dB) 15.209 >30MHz
No emissions found: 1 to 4 GHz Horizontal.						
Noise floor.						
3000.00	31.5 Av	4.6 / 31.7 / 37.5	30.3	H / 1.0 / 270.0	N/A	N/A
No emissions found: 1 to 4 GHz Vertical.						
Noise floor.						
4000.00	31.9 Av	5.7 / 34.4 / 37.6	34.4	V / 1.0 / 0.0	N/A	N/A
No emissions found: 4 to 30 MHz Vertical.						
Noise floor.						
4.00	9.2 Qp	0.3 / 10.0 / 0.0	19.5	V / 1.0 / 180.0	-30.0	N/A
No emissions found: 4 to 30 MHz Horizontal.						
Noise floor.						
20.00	11.1 Qp	0.5 / 10.1 / 0.0	21.7	H / 1.0 / 90.0	-27.8	N/A
No emissions found: 30 to 200 MHz Vertical.						
Noise floor.						
30.00	31.0 Qp	0.6 / 13.5 / 28.6	16.5	V / 1.0 / 270.0	-33.0	-23.5
80.00	25.9 Qp	0.9 / 7.4 / 28.6	5.7	V / 1.0 / 270.0	N/A	-34.3
190.00	22.9 Qp	1.4 / 13.6 / 28.6	9.3	V / 1.0 / 270.0	N/A	-34.2
No emissions found: 30 to 200 MHz Horizontal.						
Noise floor.						
35.00	25.0 Qp	0.7 / 12.9 / 28.6	10.0	H / 1.6 / 90.0	N/A	-30.0
85.00	24.0 Qp	0.9 / 7.7 / 28.5	4.1	H / 1.6 / 90.0	N/A	-35.9
195.00	23.4 Qp	1.4 / 13.8 / 28.6	10.0	H / 1.6 / 90.0	N/A	-33.5

Radiated Electromagnetic Emissions

Test Report #:	BC400286	Test Area:	Pinewood Site 1 (3m)	Temperature:	22.4	°C								
Test Method:	FCC CFR47 Part 15.209	Test Date:	14-June-2004	Relative Humidity:	42	%								
EUT Model #:	Remote 10.0	EUT Power:	14VDC Battery	Air Pressure:	80	kPa								
EUT Serial #:	FCC1	Page: 28 of 1												
Manufacturer:	Echostar	<table border="1"> <thead> <tr> <th colspan="2">Level Key</th> </tr> </thead> <tbody> <tr> <td>Pk – Peak</td> <td>Nb – Narrow Band</td> </tr> <tr> <td>Qp – QuasiPeak</td> <td>Bb – Broad Band</td> </tr> <tr> <td>Av - Average</td> <td></td> </tr> </tbody> </table>					Level Key		Pk – Peak	Nb – Narrow Band	Qp – QuasiPeak	Bb – Broad Band	Av - Average	
Level Key														
Pk – Peak	Nb – Narrow Band													
Qp – QuasiPeak	Bb – Broad Band													
Av - Average														
EUT Description:	9 channel FSK/OOK remote													
Notes:														

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dbuV)	(m) (DEG)	15.209 <30MHz	15.209 >30MHz
No emissions found: 200 to 1000 MHz Vertical.						
Noise floor.						
200.00	37.2 Qp	1.4 / 11.3 / 28.5	21.4	V / 1.0 / 180.0	N/A	-22.1
500.00	22.5 Qp	2.4 / 17.9 / 28.5	14.3	V / 1.0 / 180.0	N/A	-31.7
1000.00	22.8 Qp	2.2 / 23.7 / 28.3	20.4	V / 1.0 / 180.0	N/A	-33.6
No emissions found: 200 to 1000 MHz Horizontal.						
Noise floor.						
250.00	23.0 Qp	1.7 / 11.8 / 28.7	7.8	H / 1.0 / 0.0	N/A	-38.2
550.00	22.2 Qp	2.3 / 18.1 / 28.5	14.2	H / 1.0 / 0.0	N/A	-31.8
950.00	22.7 Qp	2.2 / 22.9 / 28.5	19.3	H / 1.0 / 0.0	N/A	-26.7

Radiated Electromagnetic Emissions

Test Report #:	BC400286	Test Area:	Pinewood Site 1 (3m)	Temperature:	22.4	°C								
Test Method:	FCC CFR47 Part 15.209	Test Date:	14-June-2004	Relative Humidity:	42	%								
EUT Model #:	Remote 10.0	EUT Power:	14VDC Battery	Air Pressure:	80	kPa								
EUT Serial #:	FCC1			Page:	29	of 1								
Manufacturer:	Echostar			<table border="1"> <thead> <tr> <th colspan="2">Level Key</th> </tr> </thead> <tbody> <tr> <td>Pk – Peak</td> <td>Nb – Narrow Band</td> </tr> <tr> <td>Qp – QuasiPeak</td> <td>Bb – Broad Band</td> </tr> <tr> <td>Av - Average</td> <td></td> </tr> </tbody> </table>			Level Key		Pk – Peak	Nb – Narrow Band	Qp – QuasiPeak	Bb – Broad Band	Av - Average	
Level Key														
Pk – Peak	Nb – Narrow Band													
Qp – QuasiPeak	Bb – Broad Band													
Av - Average														
EUT Description:	9 channel FSK/OOK remote													
Notes:														

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB/m) (dB)	(dbuV)	(m) (DEG)	15.209 <30MHz	15.209 >30MHz
***** Measurement Summary *****						
4000.00	31.9 Av	5.7 / 34.4 / 37.6	34.4	V / 1.0 / 0.0	N/A	-19.6
3000.00	31.5 Av	4.6 / 31.7 / 37.5	30.3	H / 1.0 / 270.0	N/A	-27.7
1000.00	22.8 Qp	2.2 / 23.7 / 28.3	20.4	V / 1.0 / 180.0	N/A	-33.6
950.00	22.7 Qp	2.2 / 22.9 / 28.5	19.3	H / 1.0 / 0.0	N/A	-26.7
550.00	22.2 Qp	2.3 / 18.1 / 28.5	14.2	H / 1.0 / 0.0	N/A	-31.8
500.00	22.5 Qp	2.4 / 17.9 / 28.5	14.3	V / 1.0 / 180.0	N/A	-31.7
250.00	23.0 Qp	1.7 / 11.8 / 28.7	7.8	H / 1.0 / 0.0	N/A	-38.2
200.00	37.2 Qp	1.4 / 11.3 / 28.5	21.4	V / 1.0 / 180.0	N/A	-22.1
195.00	23.4 Qp	1.4 / 13.8 / 28.6	10.0	H / 1.6 / 90.0	N/A	-33.5
190.00	22.9 Qp	1.4 / 13.6 / 28.6	9.3	V / 1.0 / 270.0	N/A	-34.2
85.00	24.0 Qp	0.9 / 7.7 / 28.5	4.1	H / 1.6 / 90.0	N/A	-35.9
80.00	25.9 Qp	0.9 / 7.4 / 28.6	5.7	V / 1.0 / 270.0	N/A	-34.3
35.00	25.0 Qp	0.7 / 12.9 / 28.6	10.0	H / 1.6 / 90.0	N/A	-30.0
30.00	31.0 Qp	0.6 / 13.5 / 28.6	16.5	V / 1.0 / 270.0	-33.0	-23.5
20.00	11.1 Qp	0.5 / 10.1 / 0.0	21.7	H / 1.0 / 90.0	-27.8	N/A
4.00	9.2 Qp	0.3 / 10.0 / 0.0	19.5	V / 1.0 / 180.0	-30.0	N/A

Part 15.231 (c) and/or (d)
Stability over Temperature and Voltage
-20dBc Bandwidth

-20dB Bandwidth Measurement

Test Report #:	BC400286	Test Area:	Pinewood Site 1 (3m)	Temperature:	25.5	°C
Test Method:	FCC CFR47 Part 15.231	Test Date:	14-June-2004	Relative Humidity:	31	%
EUT Model #:	Remote 10.0	EUT Power:	14VDC Battery	Air Pressure:	80	kPa
EUT Serial #:	FCC1					
Manufacturer:	Echostar					
EUT Description:	9 channel FSK/OOK remote					
Notes:	Measurements were taken in accordance to FCC CFR47 Part 15.231(c).					

31 of 1

-20dBc Bandwidth Section (c) FSK

Resolution Bandwidth Utilized	Bandwidth Measured -20dBc	Bandwidth Limit 0.25% or 0.50% of The Fundamental Carrier Freq.	DELTA from Bandwidth Limit to Fundamental Carrier Freq.
(kHz)	(HZ)	(Hz)	(Hz)
10	125,000	923,475	798,475

-20dBc Bandwidth Section (c) On/Off Key

Resolution Bandwidth Utilized	Bandwidth Measured -20dBc	Bandwidth Limit 0.25% or 0.50% of The Fundamental Carrier Freq.	DELTA from Bandwidth Limit to Fundamental Carrier Freq.
(kHz)	(HZ)	(Hz)	(Hz)
10	55,000	958,125	903,125

The following Measurements and Tables are only applicable for radio devices operating in the 40.66 – 40.70 Band

Temperature Stability Section (d)

N/A

Voltage Stability Section (d)

N/A



Equipment Utilized During Test

Project Report

Begin Date: 6/14/2004 **End Date:** 6/14/2004

Technician Karen Parker

Project BC400286

Capital Asset ID	Manufacturer	Model #	Serial #	Description	Test Performed	Service Type	Service Date	Service Due
195	EMCO	6502	9205-2738	Magnetic loop	R Radiated Emissions	For Cal	6/2/2004	6/2/2005
6	Hewlett-Packard	8594E	3223A00145	Spectrum Analyzer	R Radiated Emissions	For Cal	1/16/2004	1/16/2005
138	EMC TEST SYSTEMS	3109	3142	Biconical Antenna 30-300MHz	R Radiated Emissions	For Cal	10/3/2003	10/3/2004
171	Hewlett-Packard	85662A	1928A01169	Spectrum Analyzer - Display Section	R Radiated Emissions	For Cal	1/21/2004	1/21/2005
172	Hewlett-Packard	8566B	2430A00759	Spectrum Analyzer	R Radiated Emissions	For Cal	1/21/2004	1/21/2005
187	EMCO	3115	9205-3886	Horn Antenna 1-18GHz	R Radiated Emissions	For Cal	10/6/2003	10/6/2004
212	MITEQ	AM-2A-000110-N	848495	Amplifier	R Radiated Emissions	For Ver	5/27/2004	5/27/2005
213	Mini-Circuits Lab	ZHL-42	N052792-2	Amplifier	R Radiated Emissions	For Ver	6/5/2004	6/5/2005
217	EMCO	3146	9203-3376	Log Periodic Antenna	R Radiated Emissions	For Cal	10/3/2003	10/3/2004

Appendix B

Test Plan and Constructional Data Form

Appendix C

Measurement Protocol And Test Procedures

MEASUREMENT PROTOCOL

GENERAL INFORMATION

Test Methodology

Conducted and radiated emission testing is performed according to the procedures in ANSI C63.4 & CNS13438.

Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

CONDUCTED EMISSIONS

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the applicable limit.

To convert between dB μ V and μ V, the following conversions apply:

- $\text{dB}\mu\text{V} = 20(\log \mu\text{V})$
- $\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$

RADIATED EMISSIONS

The final level, expressed in dB μ V/m, is arrived at by taking the reading from the spectrum analyzer (Level dB μ V) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has the applicable limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets in Attachment B. The amplifier gain is automatically accounted for by using an analyzer offset.

Example: At a Test Frequency of 30 MHz, with a peak reading on the spectrum analyzer or measuring receiver of 14 dB μ V:

Measured Level	+	Transducer & Cable Loss factor	=	Corrected Reading	Specification Limit	-	Corrected Reading	=	Delta Specification
(dB μ V)		(dB)		(dB μ V/m)	(dB μ V/m)		(dB μ V/m)		
14.0		14.9		28.9	40.0		28.9		-11.1

DETAILS OF TEST PROCEDURES

General Standard Information

The test methods used comply with ANSI C63.4-1992 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."


Conducted Emissions

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 Ω /50 μ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeters above the floor and is positioned 40 centimeters from the vertical ground plane (wall) of the screen room. In some cases, a pre-scan using a spectrum analyzer is initially performed on the units comprising the system under test to locate the highest emissions. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver or spectrum analyzer with quasi-peak and average detection and recorded on the data sheets.

Radiated Emissions

Radiated emissions from the EUT are measured in the frequency range of 30 to 22GHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection and measurements above 1000 MHz are made with a 1 MHz/6 dB bandwidth and peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3, 10 or 30 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees.

Conducted Emissions Diagram:

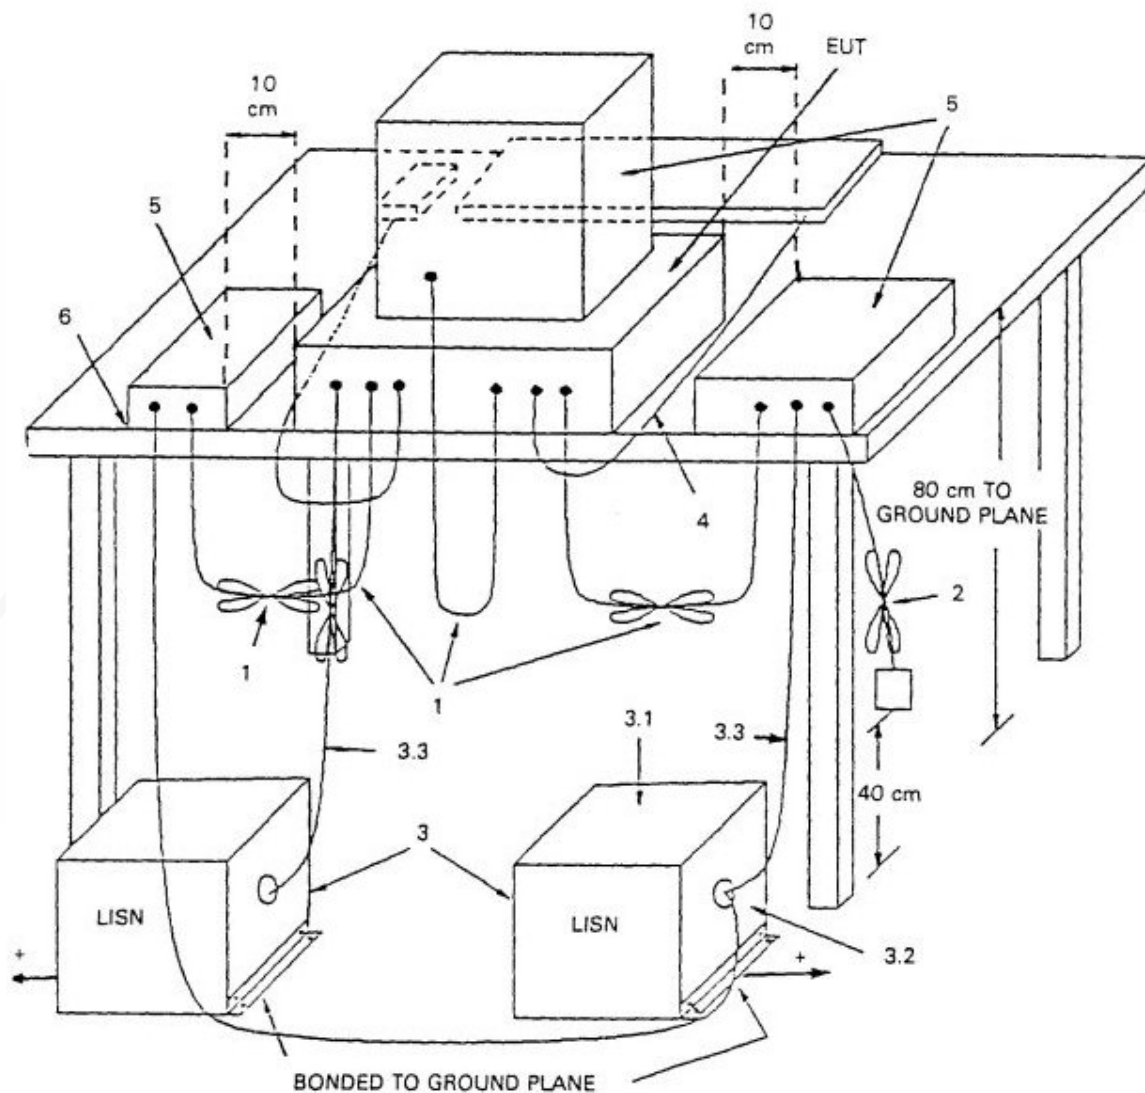

Radiated Emissions Diagram:

