Report on the Radio Testing

For

Vicon Motion Systems Ltd

on

Vicon Pulsar Master (Beacon) Synchronization Unit

Report no. TRA-040048-45-06B

11 October 2018

RF915 6.0

Report Number: TRA-040048-45-06B
Issue: B

REPORT ON THE RADIO TESTING OF A
Vicon Motion Systems Ltd
Vicon Pulsar Master (Beacon) Synchronization Unit
WITH RESPECT TO LIMITED PARTS OF SPECIFICATION
FCC 47CFR 15.247 & IC RSS-247

TEST DATE: 3rd July to 8th August 2018

Written by: Ian Broadwell
Radio Test Engineer

Approved by: John Charters
Department Manager (Radio)

Digitally signed by John Charters
DN: cn=John Charters, o, ou=Element Materials Technology Ltd., email=john.charters@element.com, c=GB
Reason: I am the author of this document
Date: 2018.10.11 10:37:36 +01'00'

Date: 11 October 2018

Disclaimers:

[1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
[2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

# 1 Revision Record

| *Issue Number* | *Issue Date* | *Revision History* |
|---|---|---|
| A | 30th August 2018 | Original |
| B | 11 October 2018 | Model number corrected |

## 2 Summary

| | |
|---|---|
| TEST REPORT NUMBER: | TRA-040048-45-06B |
| WORKS ORDER NUMBER | TRA-040048-00 |
| PURPOSE OF TEST: | USA: Testing of radio frequency equipment per the relevant authorization procedure of chapter 47 of CFR (code of federal regulations) Part 2, subpart J.<br><br>Canada: Testing of radio apparatus for TAC (technical acceptance certificate) per subsections 4(2) of the Radiocommunication Act and 21(1) of the Radiocommunication Regulations. |
| TEST SPECIFICATION(S): | 47CFR15.247 & RSS-247 |
| EQUIPMENT UNDER TEST (EUT): | Vicon Pulsar Master (Beacon) |
| Synchronization Unit | |
| FCC IDENTIFIER: | DMR- VICMSU1 |
| ISED IDENTIFIER: | 11323A-VICMSU1 |
| EUT SERIAL NUMBER: | BE-A-0002 |
| MANUFACTURER/AGENT: | Vicon Motion Systems Ltd |
| ADDRESS: | Unit 6 Oxford Industrial Park<br>Mead Road<br>Yarnton<br>OXFORD<br>OX5 1QU<br>United Kingdom |
| CLIENT CONTACT: | Tom Shannon<br>☎ TPS01865 781398<br>✉ thomas.shannon@omg3d.com |
| ORDER NUMBER: | PO: POR011981 |
| TEST DATE: | 3rd July to 8th August 2018 |
| TESTED BY: | Ian Broadwell<br>Element |

## *2.1 Test Summary*

| ***Test Method and Description*** | | ***Requirement Clause*** | | ***Applicable to this equipment*** | ***Result / Note*** |
|---|---|---|---|---|---|
| | | ***RSS*** | ***47CFR15*** | | |
| Radiated spurious emissions (restricted bands of operation and cabinet radiation) | | Gen, 8.10 | 15.205 | ☒ | *PASS* |
| AC power line conducted emissions | | Gen, 8.8 | 15.207 | ☒ | *PASS* |
| Occupied bandwidth | | 247, 5.2 (1) | 15.247(a)(2) | ☒ | *PASS* |
| Conducted carrier power | Peak | 247, 5.4 (4) | 15.247(b)(3) | ☒ | *PASS* |
| | Max. | | | ☐ | |
| Conducted / radiated RF power out-of-band | | 247, 5.5 | 15.247(d) | ☒ | *PASS* |
| Power spectral density, conducted | | 247, 5.2 (2) | 15.247(e) | ☒ | *PASS* |
| Calculation of duty correction | | - | 15.35(c) | ☐ | *N/A* |

**Notes:**

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

# 3 Contents


1 Revision Record ..... 3
2 Summary ..... 4
2.1 Test Summary ..... 5
3 Contents ..... 6
4 Introduction ..... 8
5 Test Specifications ..... 9
5.1 Normative References ..... 9
5.2 Deviations from Test Standards ..... 9
6 Glossary of Terms ..... 10
7 Equipment Under Test ..... 11
7.1 EUT Identification ..... 11
7.2 System Equipment ..... 11
7.2.1 Transmission ..... 11
7.2.2 Reception ..... 11
7.3 EUT Radio Parameters ..... 12
7.3.1 General ..... 12
7.3.2 Antennas ..... 12
7.4 EUT Description ..... 13
8 Modifications ..... 14
9 EUT Test Setup ..... 15
9.1 Block Diagram ..... 15
9.2 General Set-up Photograph ..... 16
10 General Technical Parameters ..... 17
10.1 Normal Conditions ..... 17
10.2 Varying Test Conditions ..... 17
11 Radiated emissions ..... 18
11.1 Definitions ..... 18
11.2 Test Parameters ..... 18
11.3 Test Limit ..... 18
11.4 Test Method ..... 20
11.5 Test Set-up Photograph ..... 21
11.6 Test Equipment ..... 22
11.7 Test Results ..... 23
12 AC power-line conducted emissions ..... 32
12.1 Definition ..... 32
12.2 Test Parameters ..... 32
12.3 Test Limit ..... 32
12.4 Test Method ..... 32
12.5 Test Set-up Photograph ..... 33
12.6 Test Equipment ..... 33
12.7 Test Results ..... 35
13 Occupied Bandwidth ..... 36
13.1 Definition ..... 36
13.2 Test Parameters ..... 36
13.3 Test Limit ..... 36
13.4 Test Method ..... 36
13.5 Test Equipment ..... 37
13.6 Test Results ..... 37
14 Maximum peak conducted output power ..... 41
14.1 Definition ..... 41
14.2 Test Parameters ..... 41
14.3 Test Limit ..... 41
14.4 Test Method ..... 41
14.5 Test Equipment ..... 42
14.6 Test Results ..... 42
15 Out-of-band and conducted spurious emissions ..... 44
15.1 Definition ..... 44
15.2 Test Parameters ..... 44
15.3 Test Limit ..... 44
15.4 Test Method ..... 45
15.5 Test Equipment ..... 45
15.6 Test Results ..... 46
16 Power spectral density ..... 48

16.1 Definition ..... 48
16.2 Test Parameters ..... 48
16.3 Test Limit ..... 48
16.4 Test Method ..... 48
16.5 Test Equipment ..... 48
16.6 Test Results ..... 49
17 Measurement Uncertainty ..... 51
18 RF Exposure ..... 52

# 4 Introduction

This report TRA-040048-45-06B presents the results of the Radio testing on a Vicon Motion Systems Ltd, Vicon Pulsar Master (Beacon) Synchronization Unit to specification 47CFR15 Radio Frequency Devices and RSS-247 Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment.

The testing was carried out for Vicon Motion Systems Ltd by Element, at the address detailed below.

| | | | |
|---|---|---|---|
| ☒ | Element Hull<br>Unit E<br>South Orbital Trading Park<br>Hedon Road<br>Hull<br>HU9 1NJ<br>UK | ☐ | Element Skelmersdale<br>Unit 1<br>Pendle Place<br>Skemersdale<br>West Lancashire<br>WN8 9PN<br>UK |

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

Throughout this report EUT denotes equipment under test.

FCC Site Listing:
Element is accredited for the above sites under the US-EU MRA, Designation number UK0009.

IC Registration Number(s):

| | |
|---|---|
| Element Hull | 3483A |
| Element North West | 3930B |

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

# 5 Test Specifications

## *5.1 Normative References*

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- Industry Canada RSS-247, Issue 2, February 2017 – Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
- Industry Canada RSS-Gen, Issue 4, November 2014 – General Requirements for Compliance of Radio Apparatus

## *5.2 Deviations from Test Standards*

There were no deviations from the test standard.

# 6 Glossary of Terms

| | |
|---|---|
| **§** | denotes a section reference from the standard, not this document |
| **AC** | Alternating Current |
| **ANSI** | American National Standards Institute |
| **BW** | bandwidth |
| **C** | Celsius |
| **CFR** | Code of Federal Regulations |
| **CW** | Continuous Wave |
| **dB** | decibel |
| **dBm** | dB relative to 1 milliwatt |
| **DC** | Direct Current |
| **DSSS** | Direct Sequence Spread Spectrum |
| **EIRP** | Equivalent Isotropically Radiated Power |
| **ERP** | Effective Radiated Power |
| **EUT** | Equipment Under Test |
| **FCC** | Federal Communications Commission |
| **FHSS** | Frequency Hopping Spread Spectrum |
| **Hz** | hertz |
| **IC** | Industry Canada |
| **ITU** | International Telecommunication Union |
| **LBT** | Listen Before Talk |
| **m** | metre |
| **max** | maximum |
| **MIMO** | Multiple Input and Multiple Output |
| **min** | minimum |
| **MRA** | Mutual Recognition Agreement |
| **N/A** | Not Applicable |
| **PCB** | Printed Circuit Board |
| **PDF** | Portable Document Format |
| **Pt-mpt** | Point-to-multipoint |
| **Pt-pt** | Point-to-point |
| **RF** | Radio Frequency |
| **RH** | Relative Humidity |
| **RMS** | Root Mean Square |
| **Rx** | receiver |
| **s** | second |
| **SVSWR** | Site Voltage Standing Wave Ratio |
| **Tx** | transmitter |
| **UKAS** | United Kingdom Accreditation Service |
| **V** | volt |
| **W** | watt |
| **Ω** | ohm |

# 7 Equipment Under Test

## *7.1 EUT Identification*

- Name: Vicon Pulsar Master (Beacon) Synchronization Unit
- Serial Number: BE-A-0002
- Model Number: MUS1
- Software Revision: V1.0
- Build Level / Revision Number: Pre-production prototypes

## *7.2 System Equipment*

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

- *Power supply* LEVEL ONE GEP-1622, 16 Port POE Network Hub*: TRA-040048-S20*
- *Laptop computer* DELL Latitude 7204*: TRA-040048-S9*

.EUT Mode of Operation

### *7.2.1 Transmission*

The mode of operation for transmit tests was as follows…

The EUT was put in transmit mode using the same procedure outlined in the receive section below.

### *7.2.2 Reception*

Receive mode Part 15 b testing is covered by test report TRA-040048-36-00A.

## 7.3 EUT Radio Parameters

### 7.3.1 General

| | |
|---|---|
| ***Frequency of operation:*** | 2405 MHz – 2480 MHz |
| ***Modulation type(s):*** | O-QPSK |
| ***Occupied channel bandwidth(s):*** | 1 MHz |
| ***Channel spacing:*** | 2 MHz |
| ***Declared output power(s):*** | 3.16 mW |
| ***Nominal Supply Voltage:*** | 44-57 Vdc via PoE |
| ***Location of notice for license exempt use:*** | Label / user manual / both. |
| ***Duty cycle:*** | 25% |

### 7.3.2 Antennas

| | |
|---|---|
| ***Type:*** | External |
| ***Frequency range:*** | 2405 MHz – 2480 MHz |
| ***Impedance:*** | 50 Ohm |
| ***Part No*** | Pulse Electronics W1030 |
| ***Gain:*** | 2.0 dBi |
| ***Connector type:*** | SMA |

### *7.4 EUT Description*

The device is designed to synchronise LED Clusters via 802.15.4. A cluster is a small body-worn active LED cluster designed to provide a unique three dimensional estimate of the location in space of a body segment when viewed by multiple video cameras.

# 8 Modifications

No modification we included during the testing.

# 9 EUT Test Setup

## *9.1 Block Diagram*

The following diagram shows basic EUT interconnections with cable type and cable lengths identified:

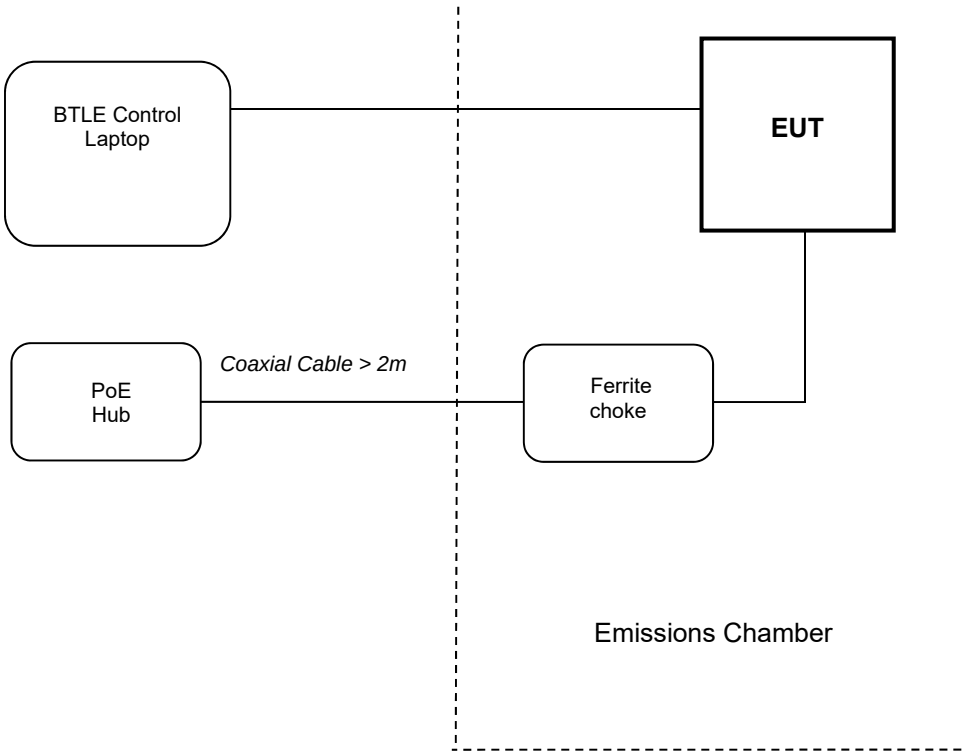

### *9.2 General Set-up Photograph*

The following photograph shows basic EUT set-up:

# 10 General Technical Parameters

## *10.1 Normal Conditions*

The E U T was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was approx. 48 V fromt eh power over either net hub

## *10.2 Varying Test Conditions*

There are no specific frequency stability requirements for the type of device. The results contained in this report demonstrate that the occupied bandwidth is contained within the authorised band and the manufacturer has declared sufficient frequency stability (refer to section 7.4).

Variation of supply voltage is required to ensure stability of the declared output power. During carrier power testing the following variations were made:

| | ***Category*** | ***Nominal*** | ***Variation*** |
|---|---|---|---|
| ☐ | Mains | 110 V ac +/-2 % | 85 % and 115 % |
| ☐ | Battery | New battery | N/A |
| ☐ | PoE | 48V | N/A |

# 11 Radiated emissions

## *11.1 Definitions*

*Out-of-band emissions*
Emissions on a frequency or frequencies immediately outside the necessary bandwidth which result from the modulation process, but exclude spurious emissions.

*Spurious emissions*
Emissions on a frequency or frequencies which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

*Restricted bands*
A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

## *11.2 Test Parameters*

| | |
|---|---|
| Test Location: | Element Hull |
| Test Chamber: | Wireless Lab 2 |
| Test Standard and Clause: | ANSI C63.10-2013, Clause 6.5 and 6.6 |
| EUT Channels / Frequencies Measured: | Low / Mid / High – 2405, 2440, 2480 MHz |
| EUT Channel Bandwidths: | 2 MHz |
| Deviations From Standard: | None |
| Measurement BW: | 30 MHz to 1 GHz: 120 kHz<br>Above 1 GHz: 1 MHz |
| Measurement Detector: | Up to 1 GHz: quasi-peak<br>Above 1 GHz: RMS average and Peak |

**Environmental Conditions (Normal Environment)**

| | |
|---|---|
| Temperature: 22 °C | +15 ºC to +35 ºC (as declared) |
| Humidity: 50 % RH | 20 % RH to 75 % RH (as declared) |
| Supply: PoE | PoE |

## *11.3 Test Limit*

Except for harmonics, out-of-band emissions shall be attenuated by at least 50 dB below the level of the fundamental or to the general field strength limits listed in FCC 47CFR15.209 / RSS-Gen {see table below}, whichever is less stringent.

Harmonics shall be limited to a maximum level of 0.5 mV/m measured at 3 metres.

**General Field Strength Limits for License-Exempt Transmitters at Frequencies above 30 MHz**

| ***Frequency (MHz)*** | ***Field Strength (µV/m at 3 m)*** |
|---|---|
| 30 to 88 | 100 |
| 88 to 216 | 150 |
| 216 to 960 | 200 |
| Above 960 | 500 |

n.b. per FCC 47CFR15.35(b) / RSS-Gen 8.1, peak limit is 20 dB above average.

### *11.4 Test Method*

With the EUT setup as per section 9 of this report and connected as per Figure i, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dBµV/m at the regulatory distance, using:

$$FS = PR + CL + AF - PA + DC - CF$$

Where,

PR is the power recorded on the receiver / spectrum analyzer in dBµV;
CL is the cable loss in dB;
AF is the test antenna factor in dB/m;
PA is the pre-amplifier gain in dB (where used);
DC is the duty correction factor in dB (where used, e.g. harmonics of pulsed fundamental);
CF is the distance factor in dB (where measurement distance different to limit distance);

This field strength value is then compared with the regulatory limit.

**Figure i Test Setup**

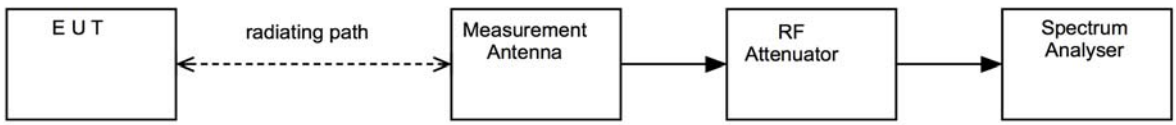

### *11.5 Test Set-up Photograph*

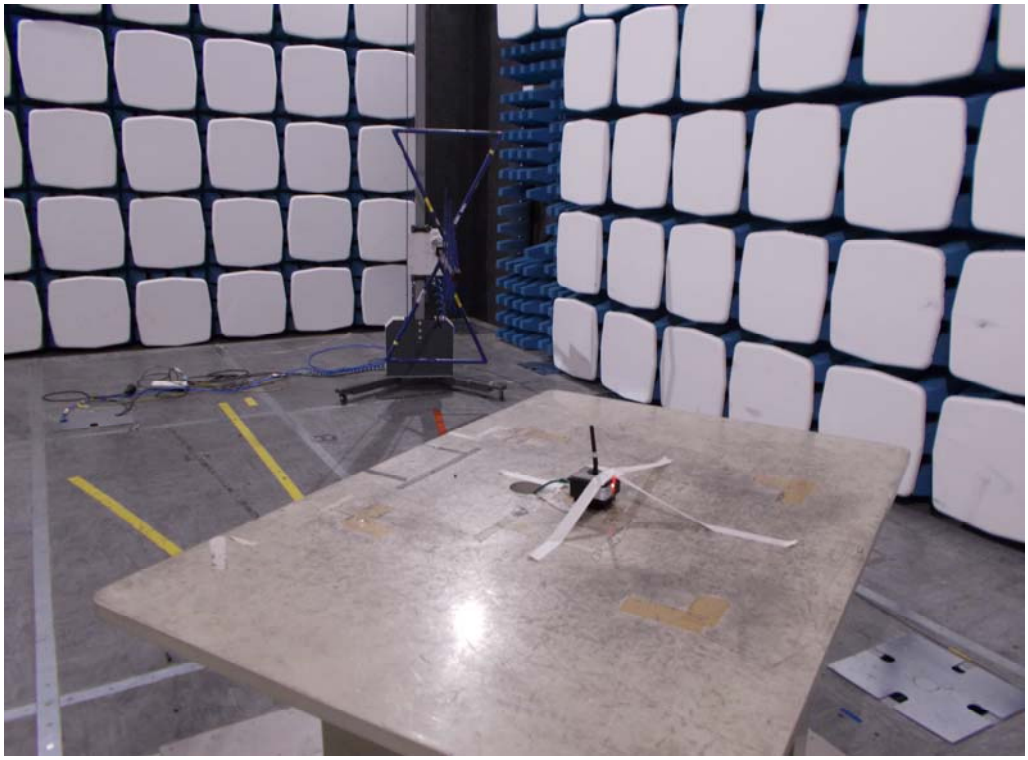

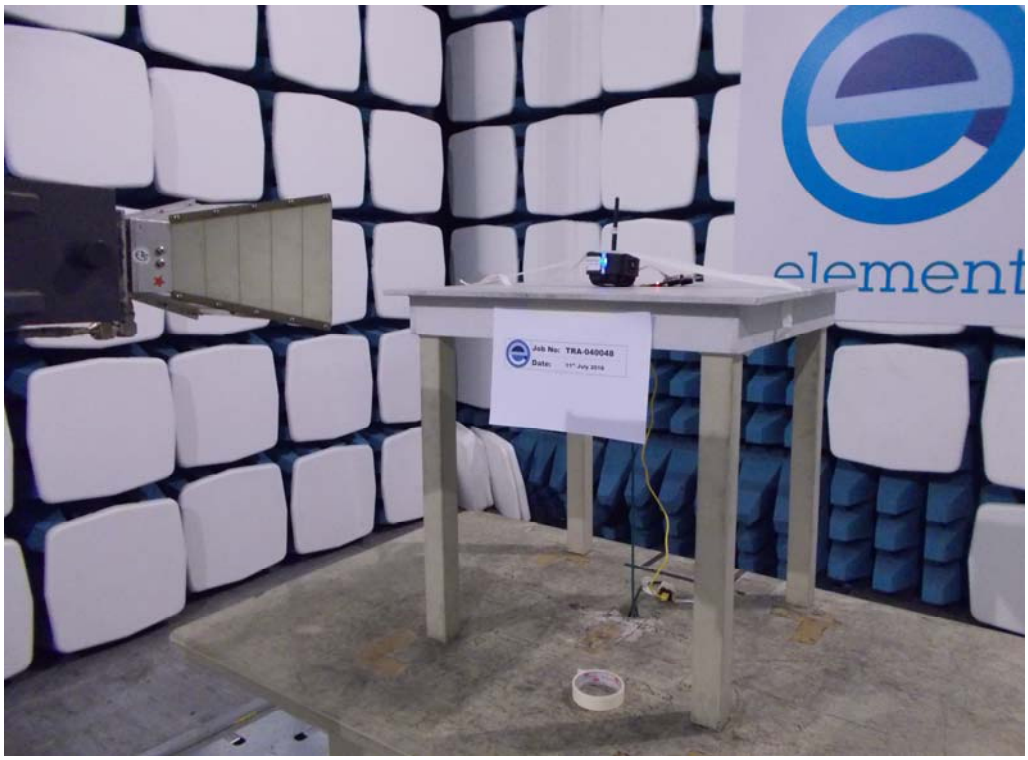

### *11.6 Test Equipment*

| ***Equipment*** | | Equipment | ***Element*** | ***Due*** For |
|---|---|---|---|---|
| Type | Manufacturer | Description | No | Calibration |
| Pre-Amp (9kHz – 1GHz) | Sonoma | 310 | REF927 | 2019-05-22 |
| Spectrum Analyser | R&S | FSU46 | U281 | 2018-07-19 |
| Bilog Antenna | Chase | CBL6111B | REF2218 | 2019-11-06 |
| Ferrite Lined Chamber | Rainford | ATS | REF886 | 2019-07-24 |
| Pre-Amp (1 – 26.5GHz) | Agilent | 8449B | REF913 | 2019-02-07 |
| Horn Antenna | EMCO | 3115 | RFG129 | 2020-02-12 |
| Horn Antenna | Q-par | QSH20S20S | RFG629 | 2019-09-26 |

### *11.7 Test Results*

| *High Power; Channel: 11, 2405 MHz* | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| ***Detector*** | ***Freq. (MHz)*** | ***Meas'd Emission (dBµV)*** | ***Cable Loss (dB)*** | ***Antenna Factor (dB/m)*** | ***Pre-amp Gain (dB)*** | ***Duty Cycle Corr'n (dB)*** | ***Distance Extrap'n Factor (dB)*** | ***Field Strength (dBµV/m)*** | ***Field Strength (µV/m)*** | ***Limit (µV/m)*** |
| There were no emissions within 10 dB of the restricted band QP limit as specified in 15.205. | | | | | | | | | | |

30 MHz – 1 GHz pre-scan plot with fundamental at 2405 MHz and 5dBm output power

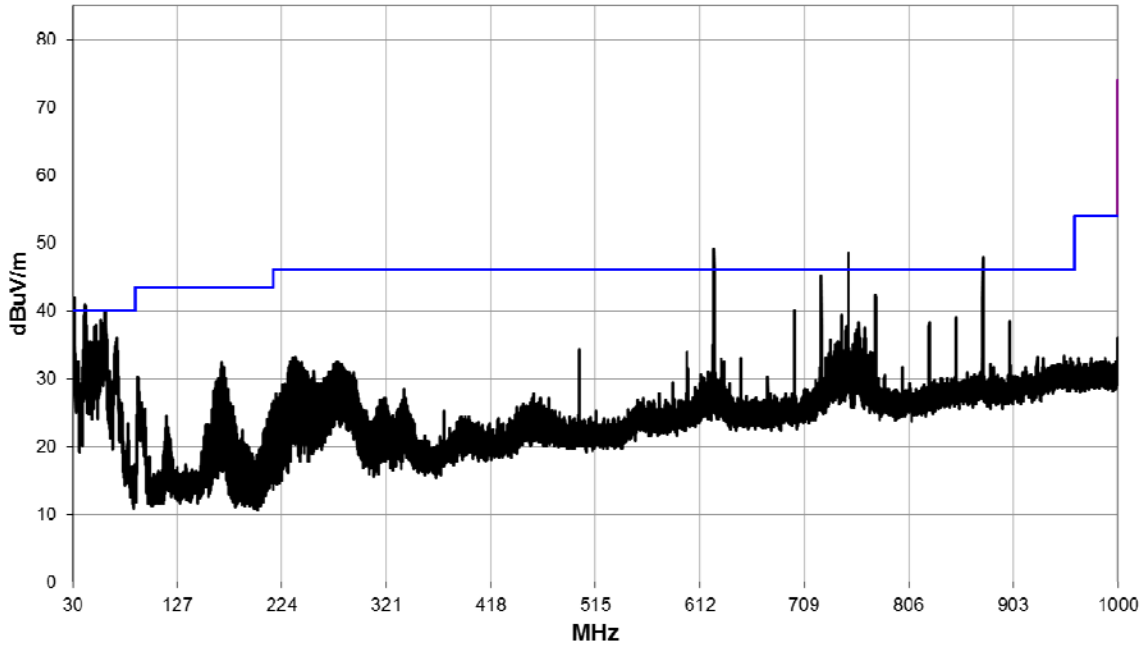


1 – 8.2 GHz pre-scan plot with fundamental at 2405 MHz and 5dBm output power

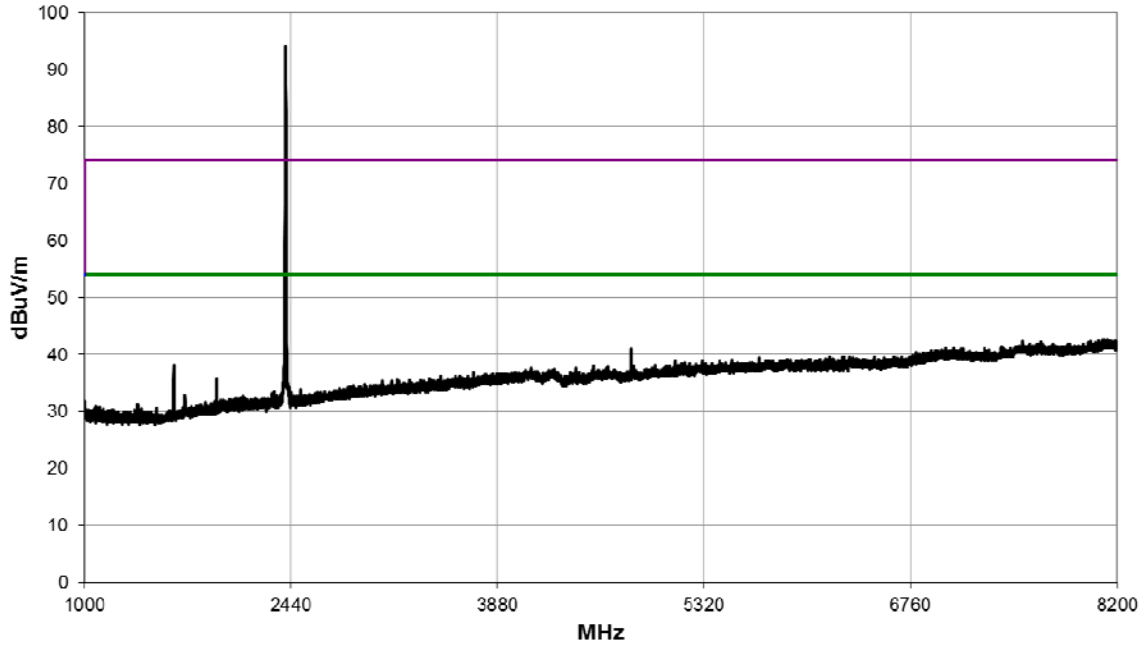

8.2 – 12.4 GHz pre-scan plot with fundamental at 2405 MHz and 5dBm output power

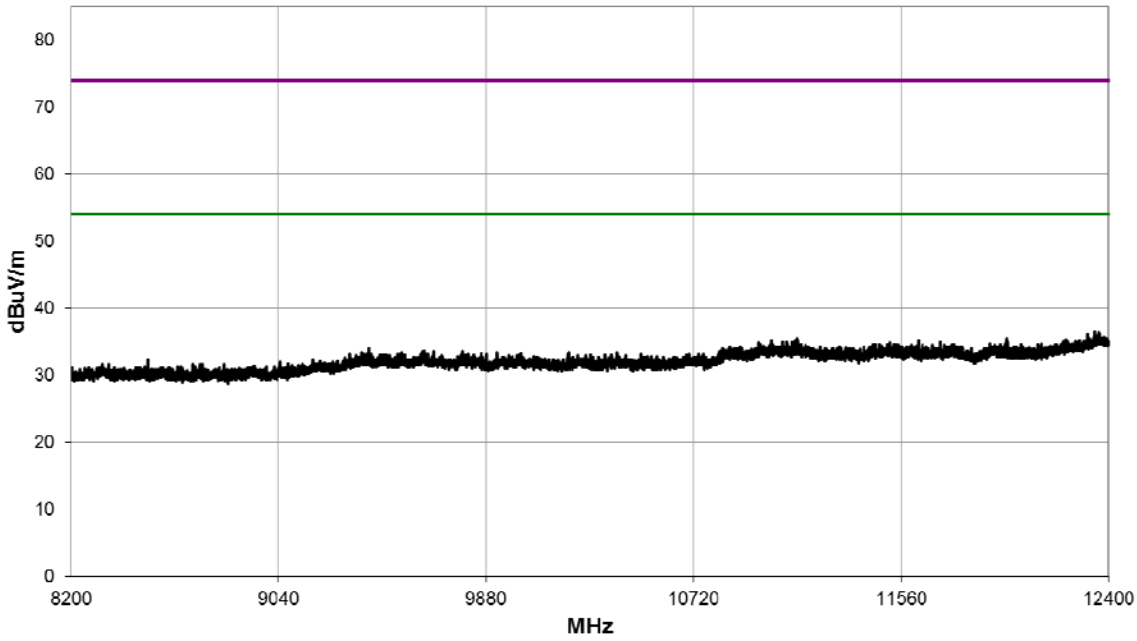


12.4 – 18 GHz pre-scan plot with fundamental at 2405 MHz and 5dBm output power

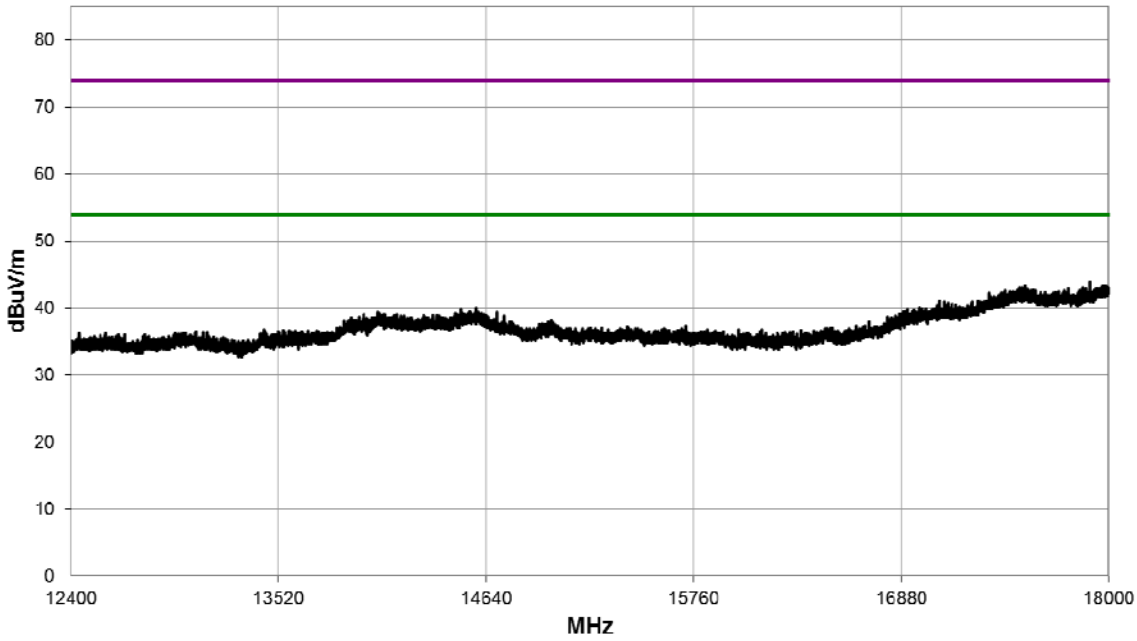

18 – 25 GHz pre-scan plot with fundamental at 2405 MHz and 5dBm output power

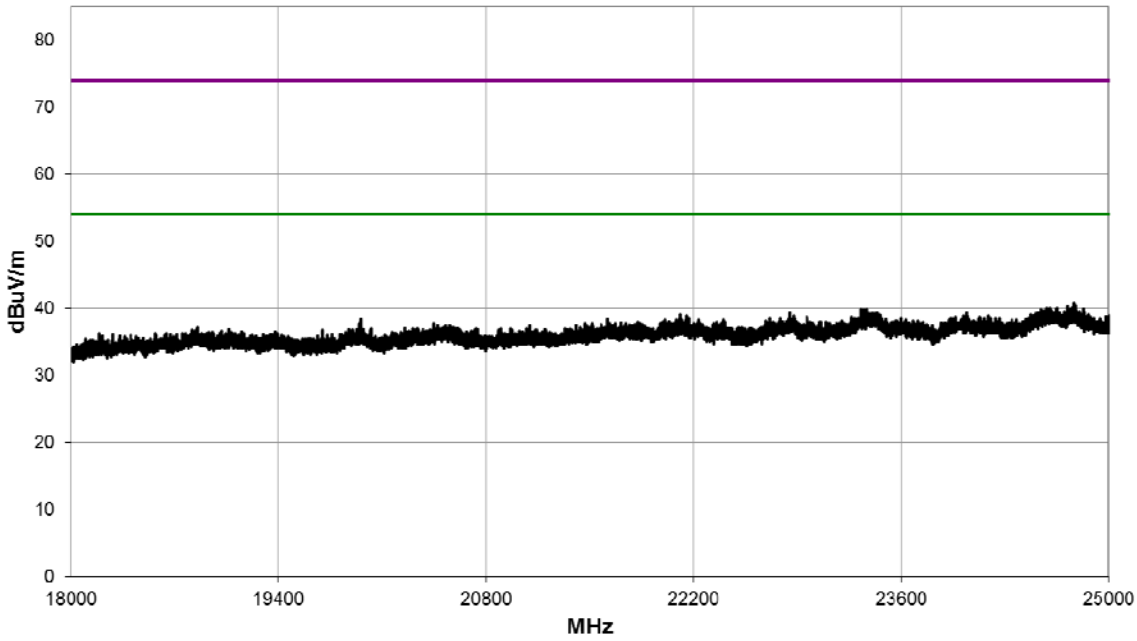


Lower band edge plot

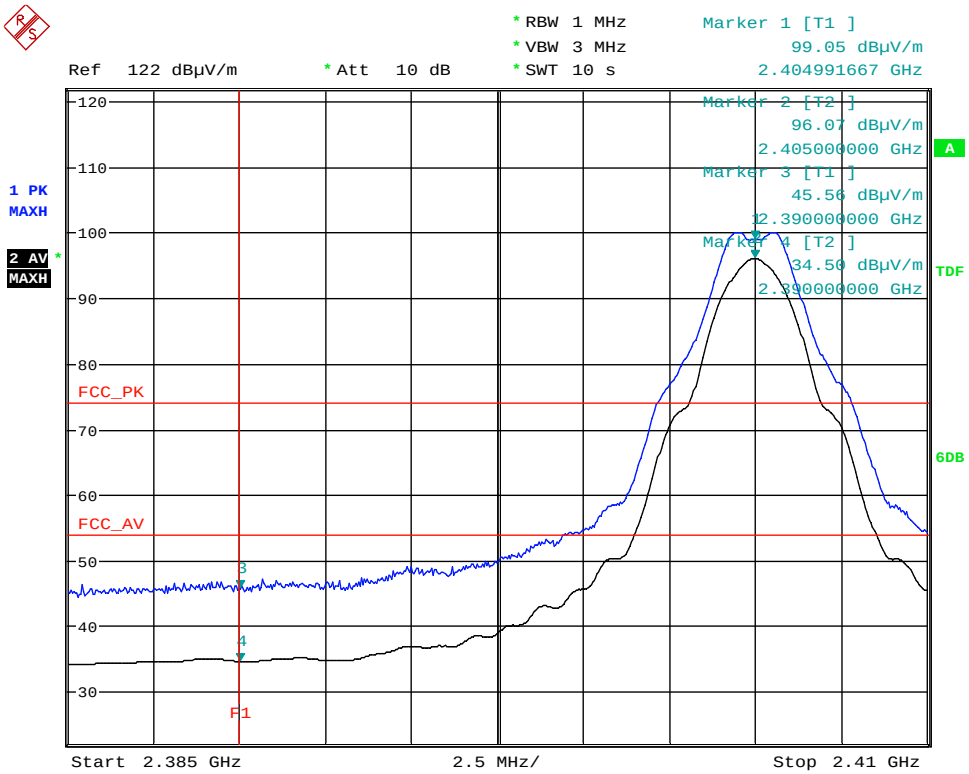


Date: 11.JUL.2018 12:55:06

| High Power; Channel: 18, 2440 MHz | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| ***Detector*** | ***Freq. (MHz)*** | ***Meas'd Emission (dBµV)*** | ***Cable Loss (dB)*** | ***Antenna Factor (dB/m)*** | ***Pre-amp Gain (dB)*** | ***Duty Cycle Corr'n (dB)*** | ***Distance Extrap'n Factor (dB)*** | ***Field Strength (dBµV/m)*** | ***Field Strength (µV/m)*** | ***Limit (µV/m)*** |
| There were no emissions within 10 dB of the restricted band QP limit as specified in 15.205. | | | | | | | | | | |

30 MHz – 1 GHz pre-scan plot with fundamental at 2440 MHz and 5dBm output power

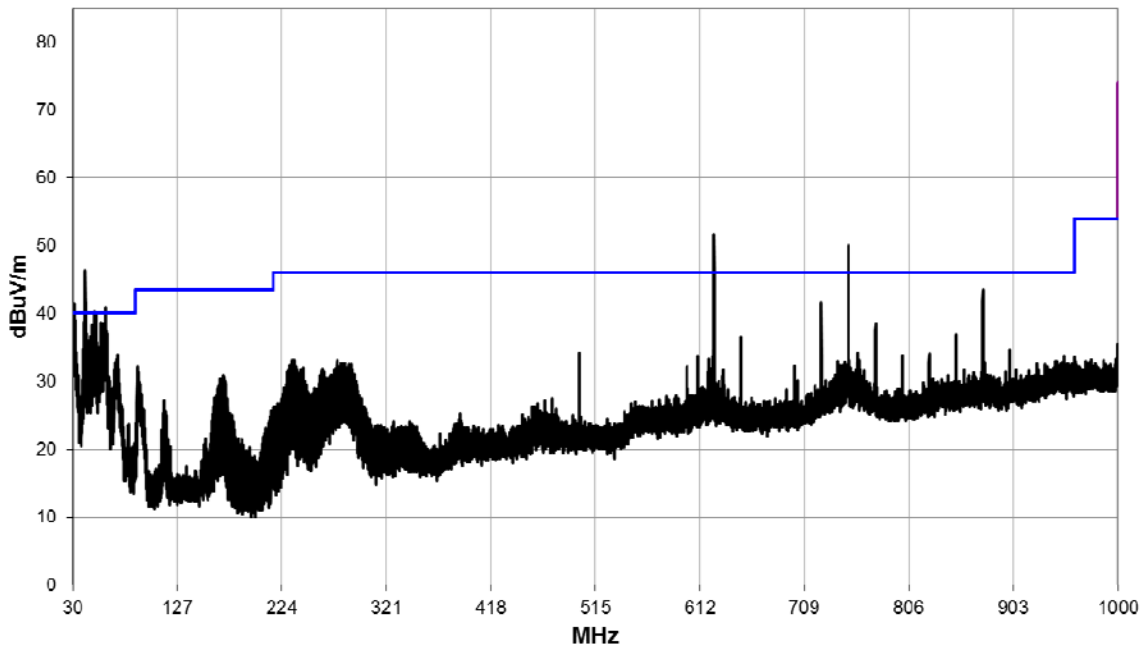


1 – 8.2 GHz pre-scan plot with fundamental at 2440 MHz and 5dBm output power

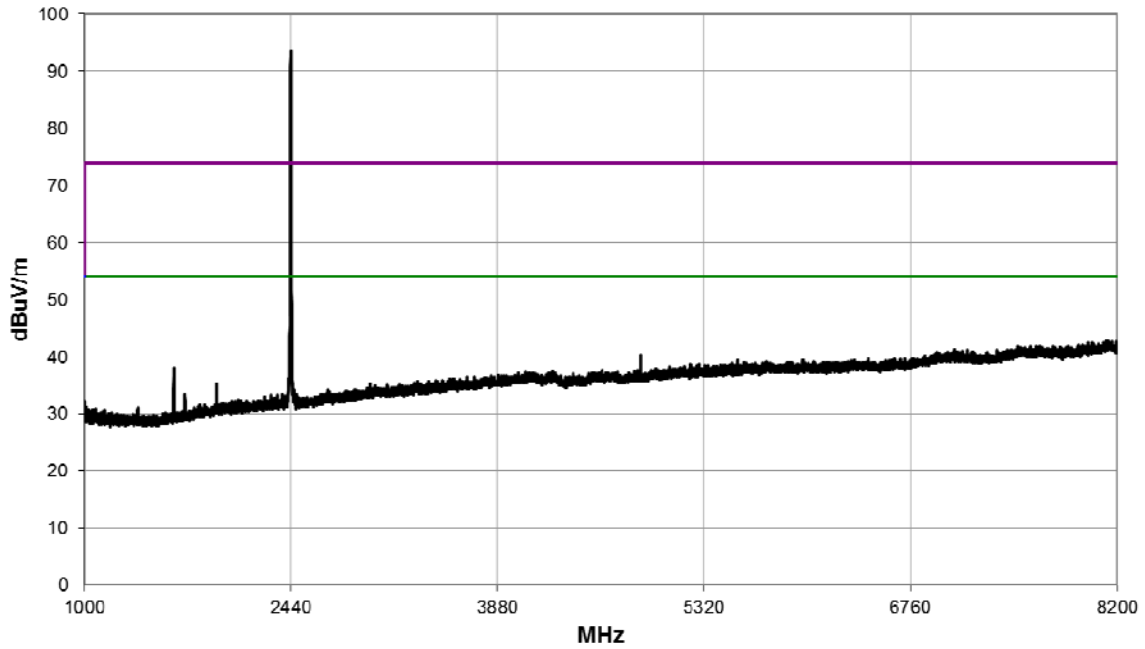

8.2 – 12.4 GHz pre-scan plot with fundamental at 2440 MHz and 5dBm output power

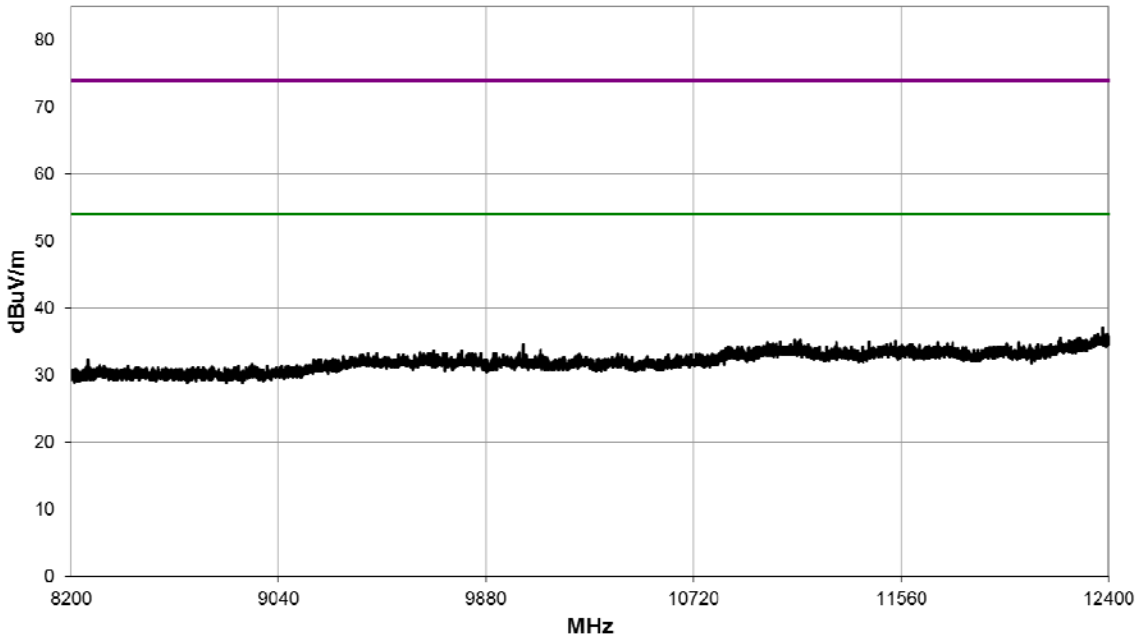


12.4 – 18 GHz pre-scan plot with fundamental at 2440 MHz and 5dBm output power

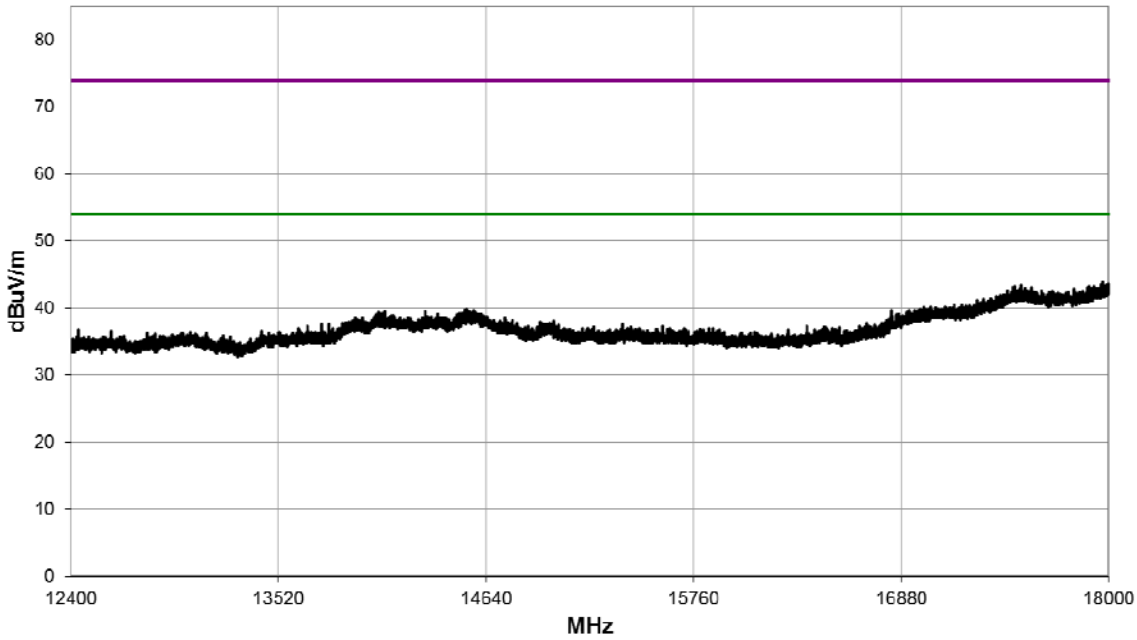

18 – 25 GHz pre-scan plot with fundamental at 2440 MHz and 5dBm output power

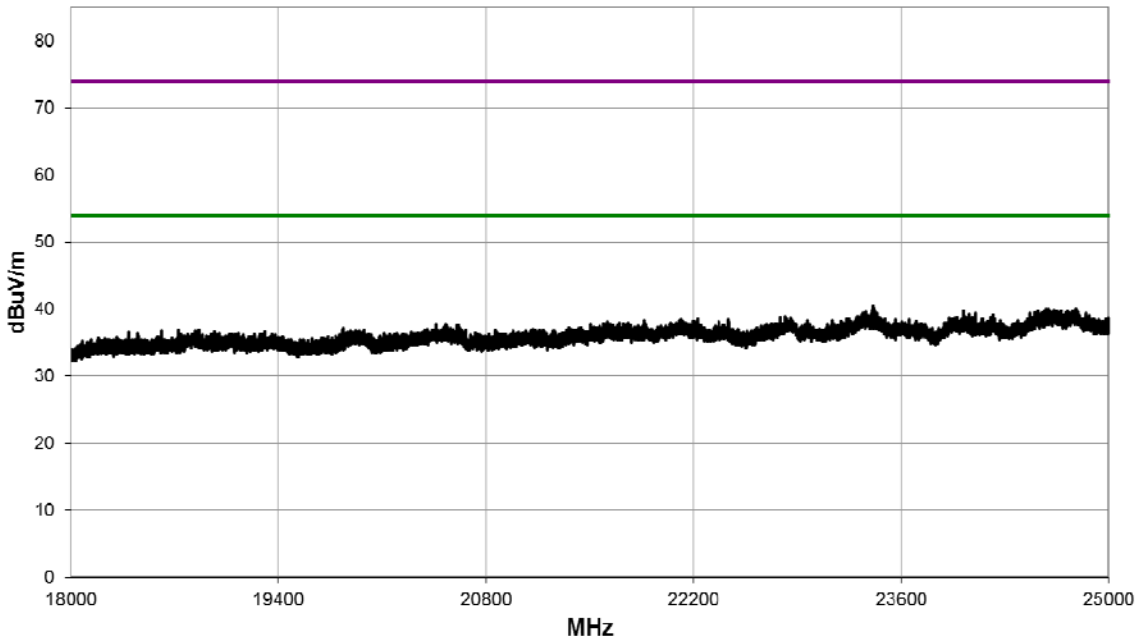

| High Power; Channel: 26, 2480 MHz | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| ***Detector*** | ***Freq. (MHz)*** | ***Meas'd Emission (dBµV)*** | ***Cable Loss (dB)*** | ***Antenna Factor (dB/m)*** | ***Pre-amp Gain (dB)*** | ***Duty Cycle Corr'n (dB)*** | ***Distance Extrap'n Factor (dB)*** | ***Field Strength (dBµV/m)*** | ***Field Strength (µV/m)*** | ***Limit (µV/m)*** |
| There were no emissions within 10 dB of the restricted band QP limit as specified in 15.205. | | | | | | | | | | |

30 MHz – 1 GHz pre-scan plot with fundamental at 2480 MHz and 5dBm output power

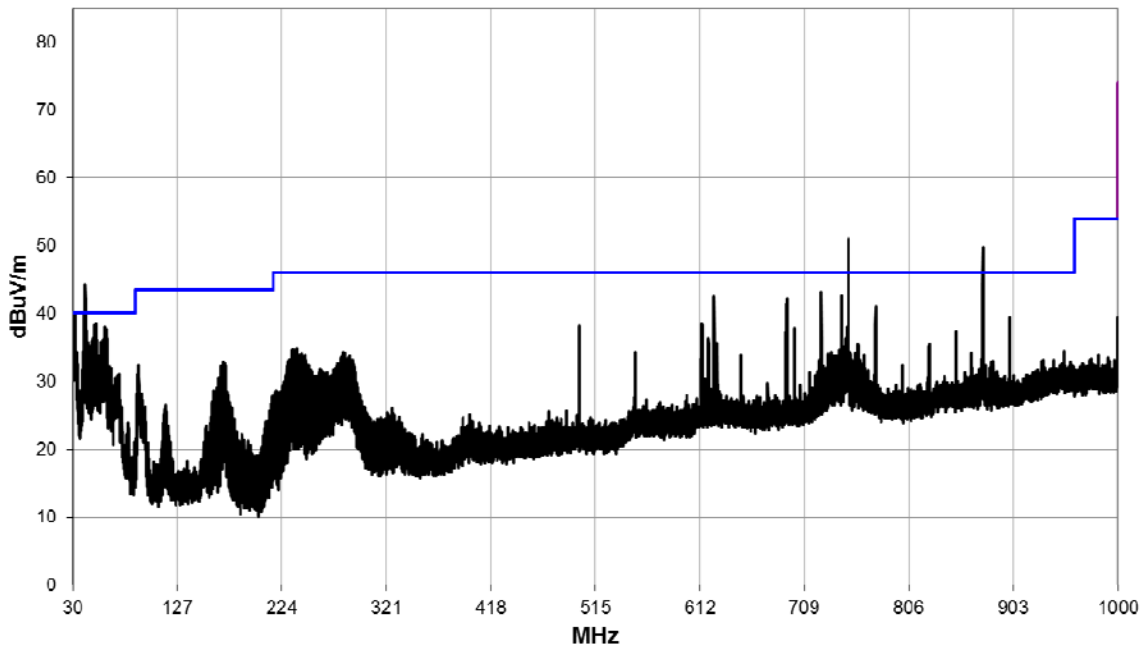


1 – 8.2 GHz pre-scan plot with fundamental at 2480 MHz and 5dBm output power

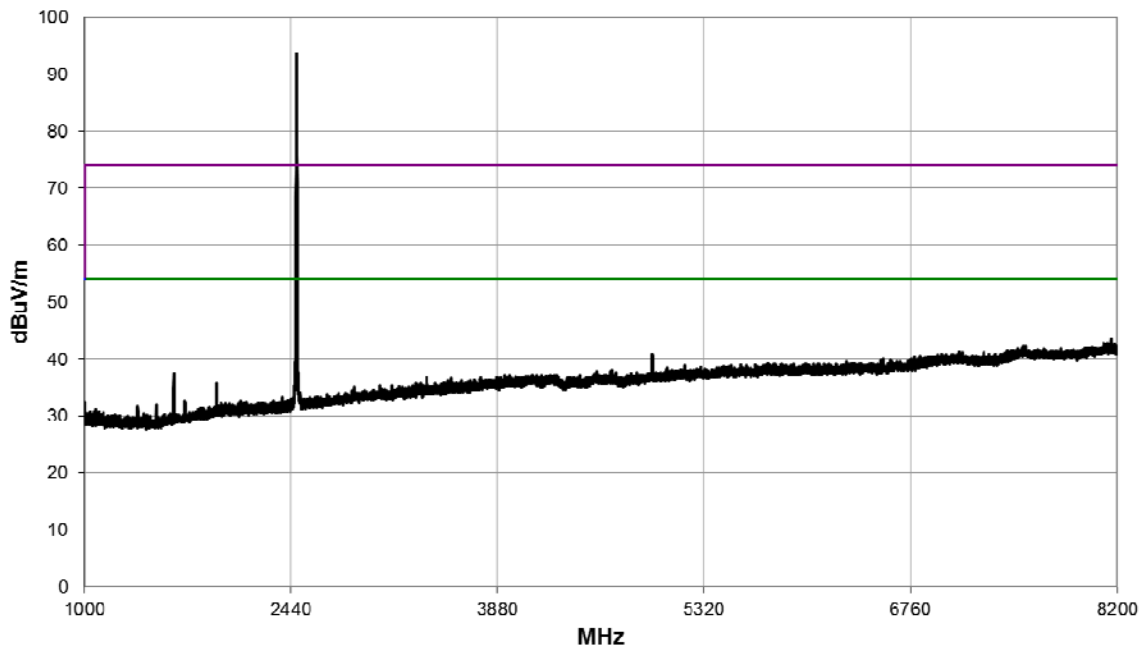

8.2 – 12.4 GHz pre-scan plot with fundamental at 2480 MHz and 5dBm output power

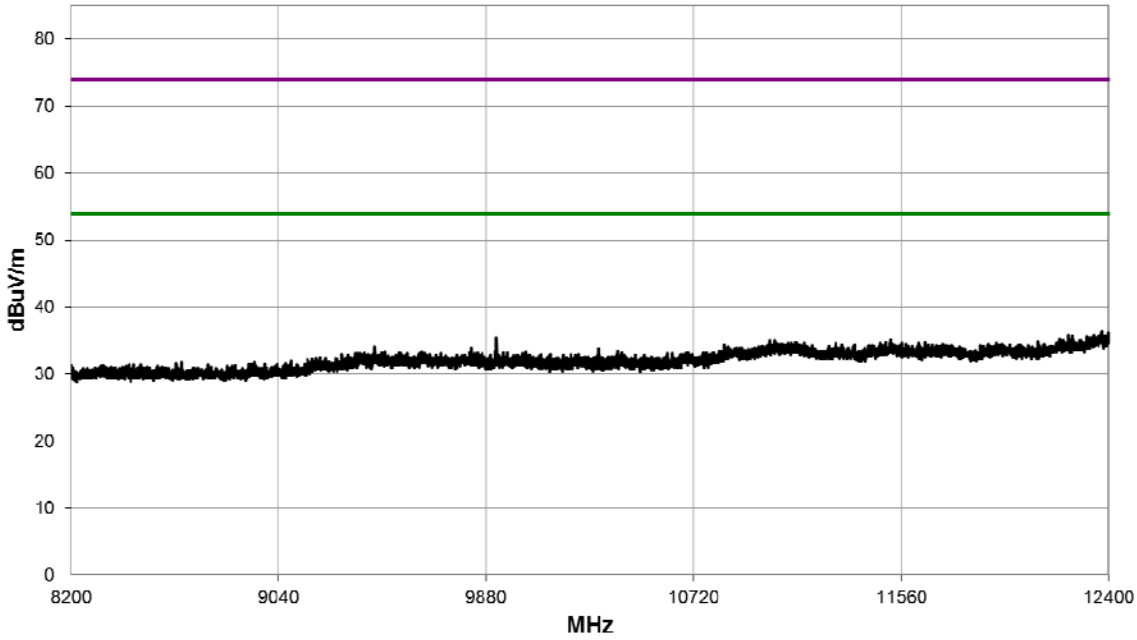


12.4 – 18 GHz pre-scan plot with fundamental at 2480 MHz and 5dBm output power

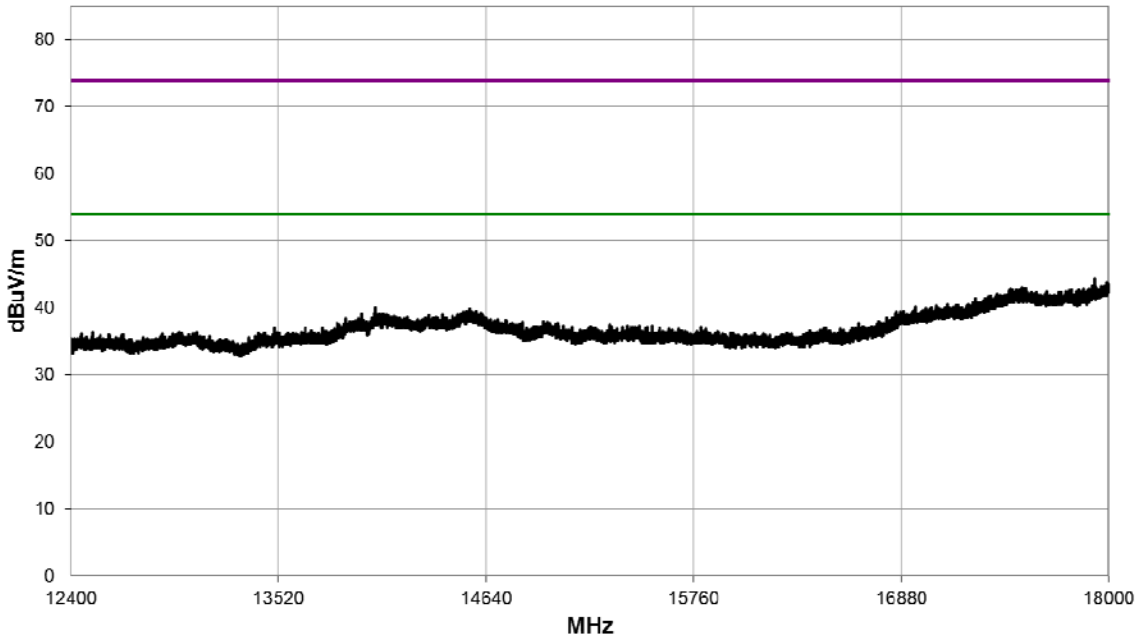

18 – 25 GHz pre-scan plot with fundamental at 2480 MHz and 5dBm output power

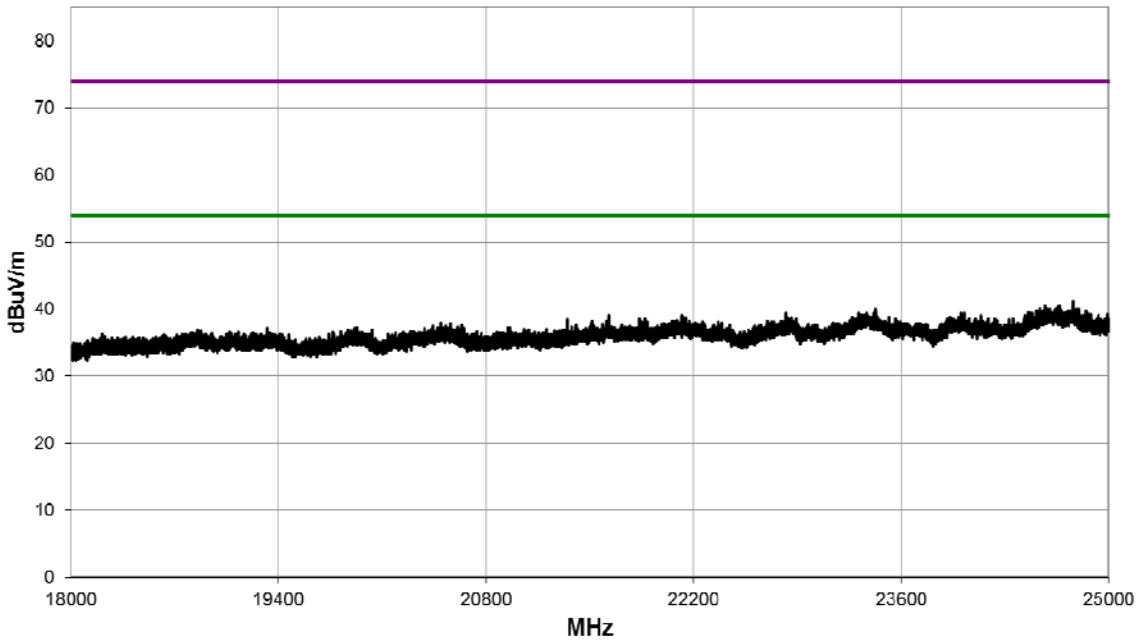


Plot for the upper band edge

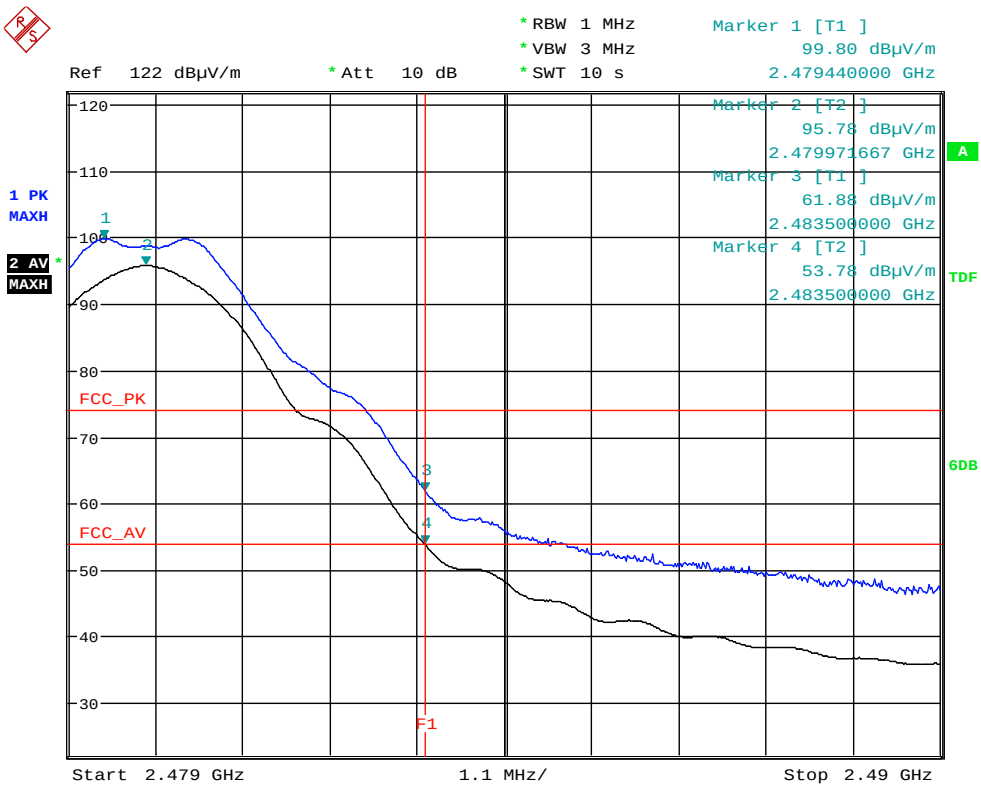


Date: 11.JUL.2018 13:17:00

# 12 AC power-line conducted emissions

## *12.1 Definition*

Line-to-ground radio-noise voltage that is conducted from all of the EUT current-carrying power input terminals that are directly (or indirectly via separate transformers or power supplies) connected to a public power network.

## *12.2 Test Parameters*

| | |
|---|---|
| Test Location: | Element Hull |
| Test Chamber: | Screen Room 2 |
| Test Standard and Clause: | ANSI C63.10-2013, Clause 6.2 |
| EUT Frequency Measured: | 2480 MHz |
| Deviations From Standard: | None |
| Measurement Detectors: | Quasi-Peak and Average |

**Environmental Conditions (Normal Environment)**

| | |
|---|---|
| Temperature: 22 °C | +15 ºC to +35 ºC (as declared) |
| Humidity: 43 % RH | 20 % RH to 75 % RH (as declared) |
| Supply: 120 Vac | 120 V ac ±10 % (as declared) |

## *12.3 Test Limit*

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz, shall not exceed the limits in Table 3.

**Table 3 – AC Power Line Conducted Emission Limits**

| ***Frequency (MHz)*** | ***Conducted limit (dBµV)*** | |
|---|---|---|
| | ***Quasi-Peak*** | ***Average*** ** |
| 0.15 to 0.5 | 66 to 56* | 56 to 46* |
| 0.5 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

*The level decreases linearly with the logarithm of the frequency.
**A linear average detector is required.

## *12.4 Test Method*

With the EUT setup in a screened room, and connected as per Figure ii, the power line emissions were measured on a spectrum analyzer / EMI receiver.

AC power line conducted emissions from the EUT are checked first by preview scans with peak and average detectors covering both live and neutral lines. A spectrum analyzer is used to determine if any periodic emissions are present.

Formal measurements using the correct detectors and bandwidth are made on frequencies identified from the preview scans. Final measurements were performed with EUT set at its maximum duty in transmit and receive modes.

**Figure ii Test Setup**

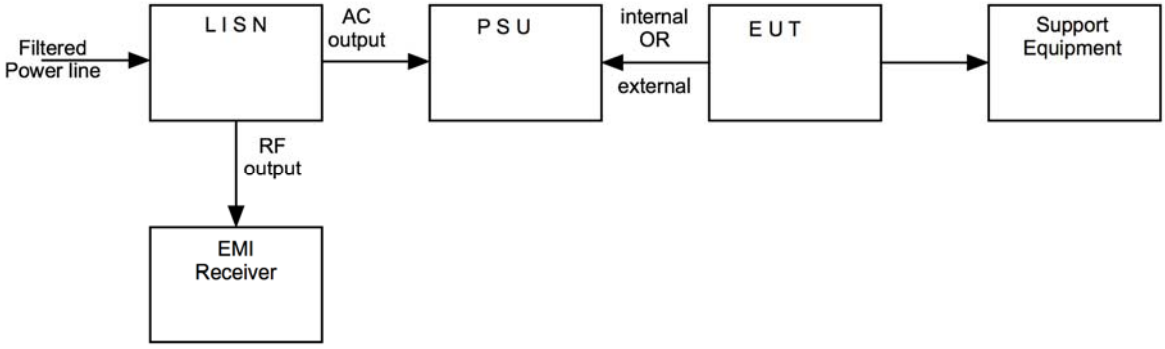


### *12.5 Test Set-up Photograph*

### *12.6 Test Equipment*

| ***Equipment Description*** | ***Manufacturer*** | ***Equipment Type*** | ***Element No*** | ***Due For Calibration*** |
|---|---|---|---|---|
| ESCI7 | R&S | Measuring Receiver | RFG715 | 2018-11-03 |
| ESH3-Z5 | R&S | LISN | RFG732 | 2019-05-22 |

## 12.7 Test Results

| Frequency (MHz) | Quasi-Peak (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | PE | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|---|---|---|---|---|---|---|---|---|
| 0.151750 | 27.2 | 15000.0 | 9.000 | GND | N | 10.1 | 38.7 | 65.9 |
| 0.289725 | 34.7 | 15000.0 | 9.000 | GND | L1 | 10.1 | 25.9 | 60.5 |
| 0.342250 | 38.0 | 15000.0 | 9.000 | GND | N | 10.1 | 21.2 | 59.1 |
| 0.350350 | 45.2 | 15000.0 | 9.000 | GND | N | 10.1 | 13.8 | 59.0 |
| 0.355450 | 36.1 | 15000.0 | 9.000 | GND | N | 10.1 | 22.8 | 58.8 |
| 0.580725 | 35.1 | 15000.0 | 9.000 | GND | N | 10.1 | 20.9 | 56.0 |
| 0.668025 | 39.4 | 15000.0 | 9.000 | GND | N | 10.1 | 16.6 | 56.0 |
| 1.131200 | 30.3 | 15000.0 | 9.000 | GND | N | 10.2 | 25.7 | 56.0 |
| 4.310375 | 17.6 | 15000.0 | 9.000 | GND | N | 10.4 | 38.4 | 56.0 |
| 26.539000 | 25.8 | 15000.0 | 9.000 | GND | L1 | 11.7 | 34.2 | 60.0 |

| Frequency (MHz) | Average (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | PE | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|---|---|---|---|---|---|---|---|---|
| 0.151750 | 23.3 | 15000.0 | 9.000 | GND | N | 10.1 | 32.6 | 55.9 |
| 0.289725 | 34.3 | 15000.0 | 9.000 | GND | L1 | 10.1 | 16.2 | 50.5 |
| 0.342250 | 33.6 | 15000.0 | 9.000 | GND | N | 10.1 | 15.5 | 49.1 |
| 0.350350 | 44.8 | 15000.0 | 9.000 | GND | N | 10.1 | 4.2 | 49.0 |
| 0.355450 | 32.7 | 15000.0 | 9.000 | GND | N | 10.1 | 16.2 | 48.8 |
| 0.580725 | 35.0 | 15000.0 | 9.000 | GND | N | 10.1 | 11.0 | 46.0 |
| 0.668025 | 39.3 | 15000.0 | 9.000 | GND | N | 10.1 | 6.7 | 46.0 |
| 1.131200 | 28.6 | 15000.0 | 9.000 | GND | N | 10.2 | 17.4 | 46.0 |
| 4.310375 | 9.2 | 15000.0 | 9.000 | GND | N | 10.4 | 36.8 | 46.0 |
| 26.539000 | 19.2 | 15000.0 | 9.000 | GND | L1 | 11.7 | 30.8 | 50.0 |

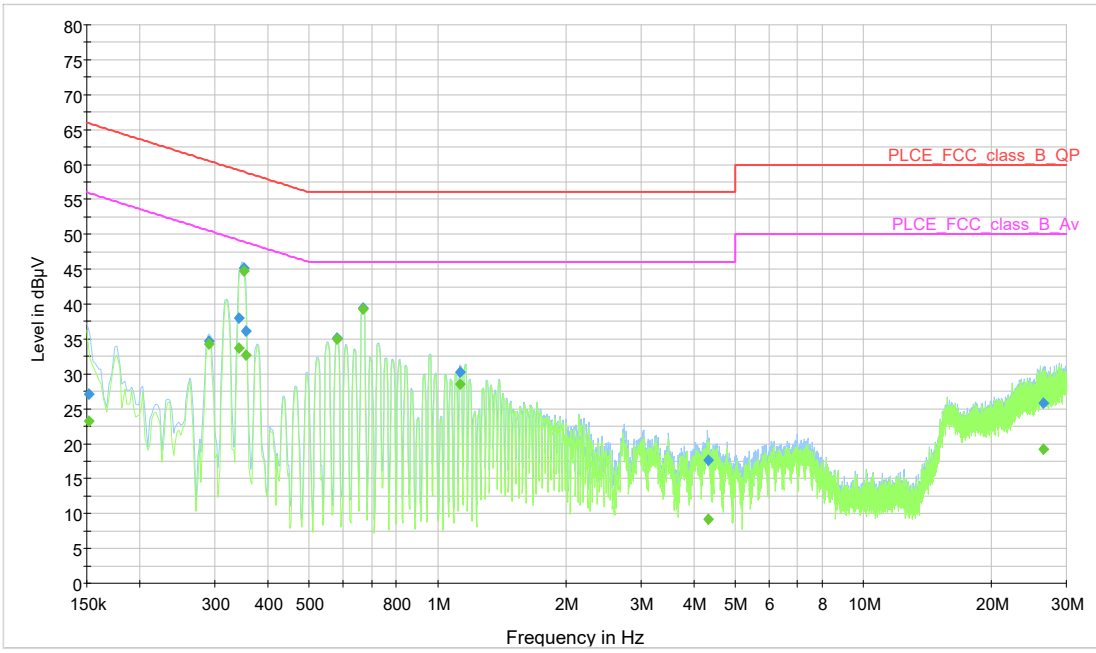

# 13 Occupied Bandwidth

## *13.1 Definition*

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

The 99% emission bandwidth is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained.

## *13.2 Test Parameters*

| | |
|---|---|
| Test Location: | Element Hull |
| Test Chamber: | Wireless Lab 1 |
| Test Standard and Clauses: | 6 dB Bandwidth: ANSI C63.10-2013, Clause 11.8<br>99% Bandwidth: ANSI C63.10-2013, Clause 6.9 |
| EUT Frequencies Measured: | 2405 MHz, 2440 MHz & 2480 MHz |
| Deviations From Standard: | None |
| Measurement Detector: | Peak |

**Environmental Conditions (Normal Environment)**

| | |
|---|---|
| Temperature: 23 °C | +15 ºC to +35 ºC (as declared) |
| Humidity: 45 % RH | 20 % RH to 75 % RH (as declared) |

## *13.3 Test Limit*

The minimum -6 dB bandwidth shall be at least 500 kHz.

## *13.4 Test Method*

With the EUT connected as per Figure iii, the bandwidth of the EUT was measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

**Figure iii Test Setup**



## 13.5 Test Equipment

| Equipment Description | Manufacturer | Equipment Type | Element No | Due For Calibration |
|---|---|---|---|---|
| Spectrum Analyser | R&S | FSU26 | REF909 | 2019-06-15 |

## 13.6 Test Results

| Test: 6 dB Bandwidth; Power Setting: 5 dBm | | | | |
|---|---|---|---|---|
| Channel Frequency (MHz) | $F_L$ (MHz) | $F_H$ (MHz) | 6dB Bandwidth (kHz) | Result |
| 2405 | 2404.183 | 2405.801 | 1618.6 | PASS |
| 2440 | 2439.183 | 2440.801 | 1618.6 | PASS |
| 2480 | 2479.183 | 2480.801 | 1618.6 | PASS |

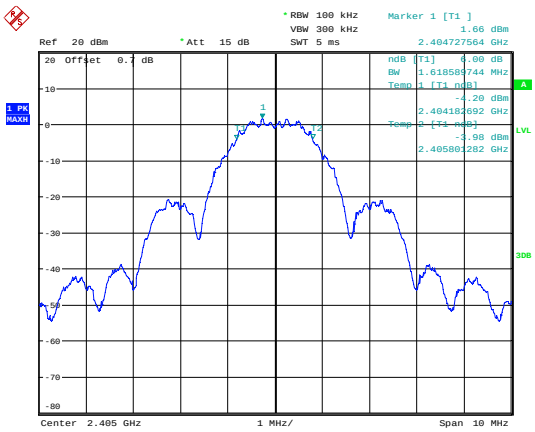


Date: 19.JUL.2018 15:31:11

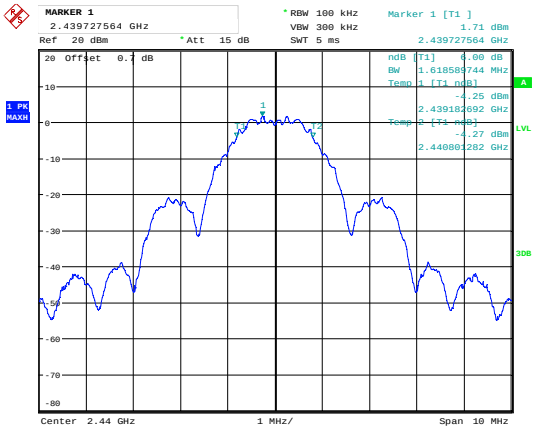


Date: 19.JUL.2018 15:14:17

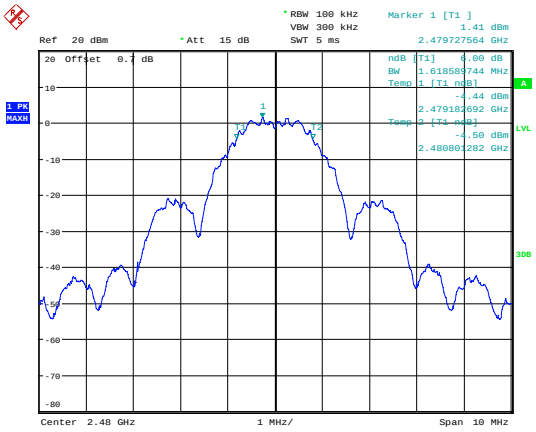


Date: 19.JUL.2018 15:20:47

| Test: 99% Bandwidth; Power Setting: 5 dBm | | | | |
|---|---|---|---|---|
| **Channel Frequency (MHz)** | **$F_L$ (MHz)** | **$F_H$ (MHz)** | **99% Bandwidth (kHz)** | **Result** |
| 2405 | 2403.702 | 2406.282 | 2580.1 | PASS |
| 2440 | 2438.702 | 2441.282 | 2580.1 | PASS |
| 2480 | 2478.702 | 2481.282 | 2580.1 | PASS |

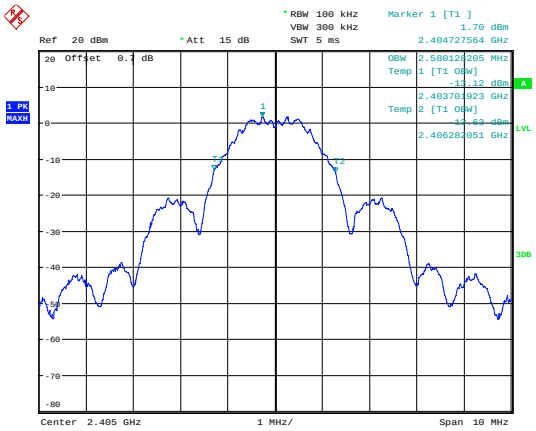


Date: 19.JUL.2018 15:23:46

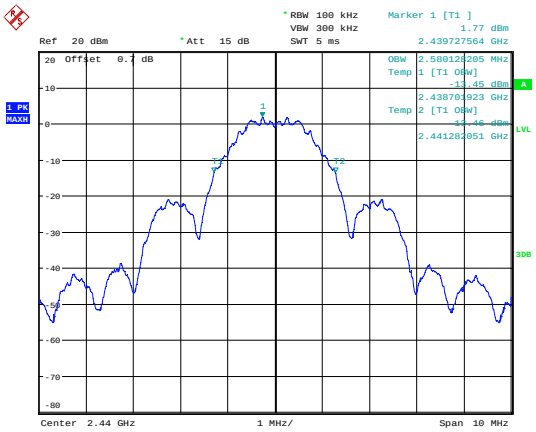


Date: 19.JUL.2018 15:12:28

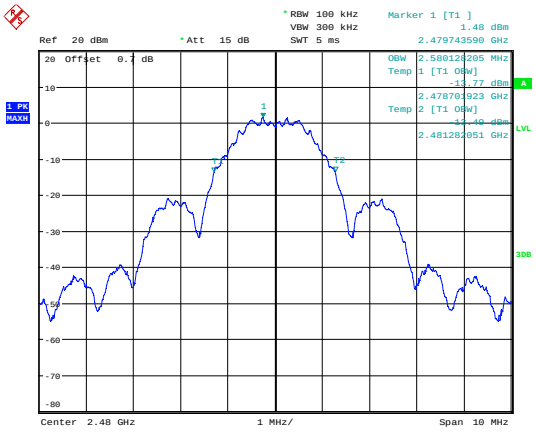


Date: 19.JUL.2018 15:16:51

# 14 Maximum peak conducted output power

## *14.1 Definition*

The maximum peak conducted output power is defined as the maximum power level measured with a peak detector using a filter with width and shape of which is sufficient to accept the signal bandwidth.

The maximum conducted output power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level.

## *14.2 Test Parameters*

| | |
|---|---|
| Test Location: | Element Hull |
| Test Chamber: | Wireless Lab 1 |
| Test Standard and Clause: | ANSI C63.10-2013, Clause 11.9.1 |
| EUT Frequencies Measured: | 2405 MHz, 2440 MHz & 2480 MHz |
| Deviations From Standard: | None |
| Measurement Detector: | Peak |

**Environmental Conditions (Normal Environment)**

| | |
|---|---|
| Temperature: 23 °C | +15 ºC to +35 ºC (as declared) |
| Humidity: 45 % RH | 20 % RH to 75 % RH (as declared) |

## *14.3 Test Limit*

For systems employing digital modulation techniques operating in the bands 902 to 928 MHz, 2400 to 2483.5 MHz and 5725 to 5850 MHz, the maximum peak conducted output power shall not exceed 1 W.

## *14.4 Test Method*

With the EUT connected as per Figure iv, the resolution bandwidth of the spectrum analyser was increased above the EUT occupied bandwidth and the peak emission data noted.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

**Figure iv Test Setup**




## *14.5 Test Equipment*

| *Equipment Description* | *Manufacturer* | *Equipment Type* | *Element No* | *Due For Calibration* |
|---|---|---|---|---|
| Spectrum Analyser | R&S | FSU26 | REF909 | 2019-06-15 |

## *14.6 Test Results*

| *Power Setting: 5 dBm* | | | | | | |
|---|---|---|---|---|---|---|
| *Channel Frequency (MHz)* | *Maximum peak conducted output power* | | *Antenna gain (dBi)* | *E.I.R.P.* | | *Result* |
| | *(dBm)* | *(W)* | | *(dBm)* | *(W)* | |
| 2405 | 4.99 | 0.0032 | 2.0 | 6.99 | 0.0050 | PASS |
| 2440 | 4.91 | 0.0031 | 2.0 | 6.91 | 0.0049 | PASS |
| 2480 | 4.72 | 0.0030 | 2.0 | 6.72 | 0.0047 | PASS |

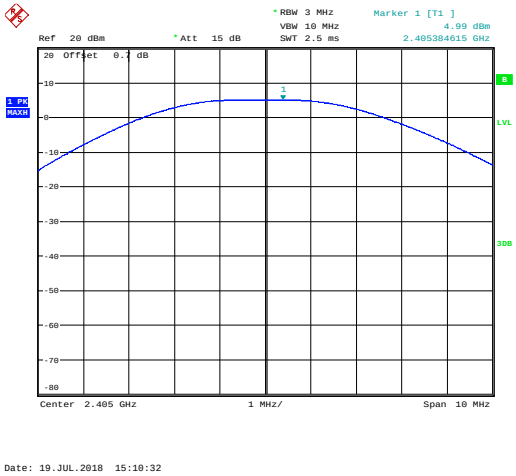

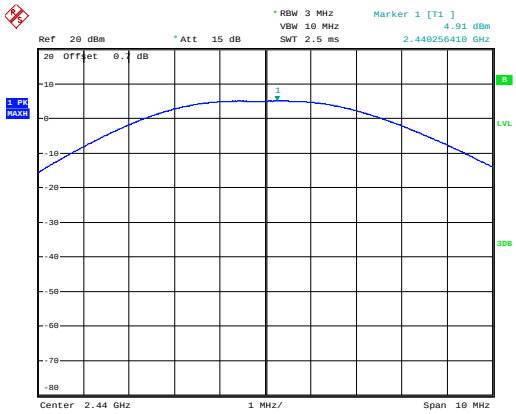


Date: 19.JUL.2018 15:15:00

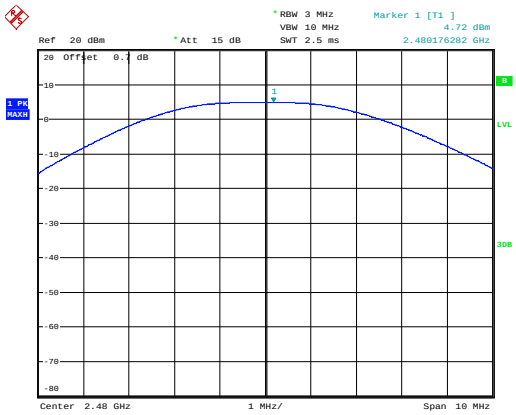


Date: 19.JUL.2018 15:21:14

# 15 Out-of-band and conducted spurious emissions

## *15.1 Definition*

*Out-of-band emission*
Emission on a frequency or frequencies immediately outside the necessary bandwidth that results from the modulation process but excluding spurious emissions.

*Spurious emission*
Emission on a frequency or frequencies that are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products, and frequency conversion products, but exclude out-of-band emissions.

## *15.2 Test Parameters*

| | |
|---|---|
| Test Location: | Element Hull |
| Test Chamber: | Wireless Lab 1 |
| Test Standard and Clause: | ANSI C63.10-2013, Clause 11.11 |
| EUT Frequencies Measured: | 2405 MHz, 2440 MHz & 2480 MHz |
| Deviations From Standard: | None |
| Measurement BW: | 100 kHz |
| Spectrum Analyzer Video BW: | 300 kHz |
| Measurement Detector: | Peak |
| Measurement Range: | 9 kHz to 25 GHz |

**Environmental Conditions (Normal Environment)**

| | |
|---|---|
| Temperature: 23 °C | +15 ºC to +35 ºC (as declared) |
| Humidity: 45 % RH | 20 % RH to 75 % RH (as declared) |

## *15.3 Test Limit*

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

Attenuation below the general field strength limits specified in FCC 47CFR15.209 (a) / RSS-Gen is not required.

### *15.4 Test Method*

With the EUT connected as per Figure v, the emissions from the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

**Figure v Test Setup**




### *15.5 Test Equipment*

| *Equipment Description* | *Manufacturer* | *Equipment Type* | *Element No* | *Due For Calibration* |
|---|---|---|---|---|
| Spectrum Analyser | R&S | FSU26 | REF909 | 2019-06-15 |

## 15.6 Test Results

**Frequency: 2405 MHz; Power setting: 5 dBm**

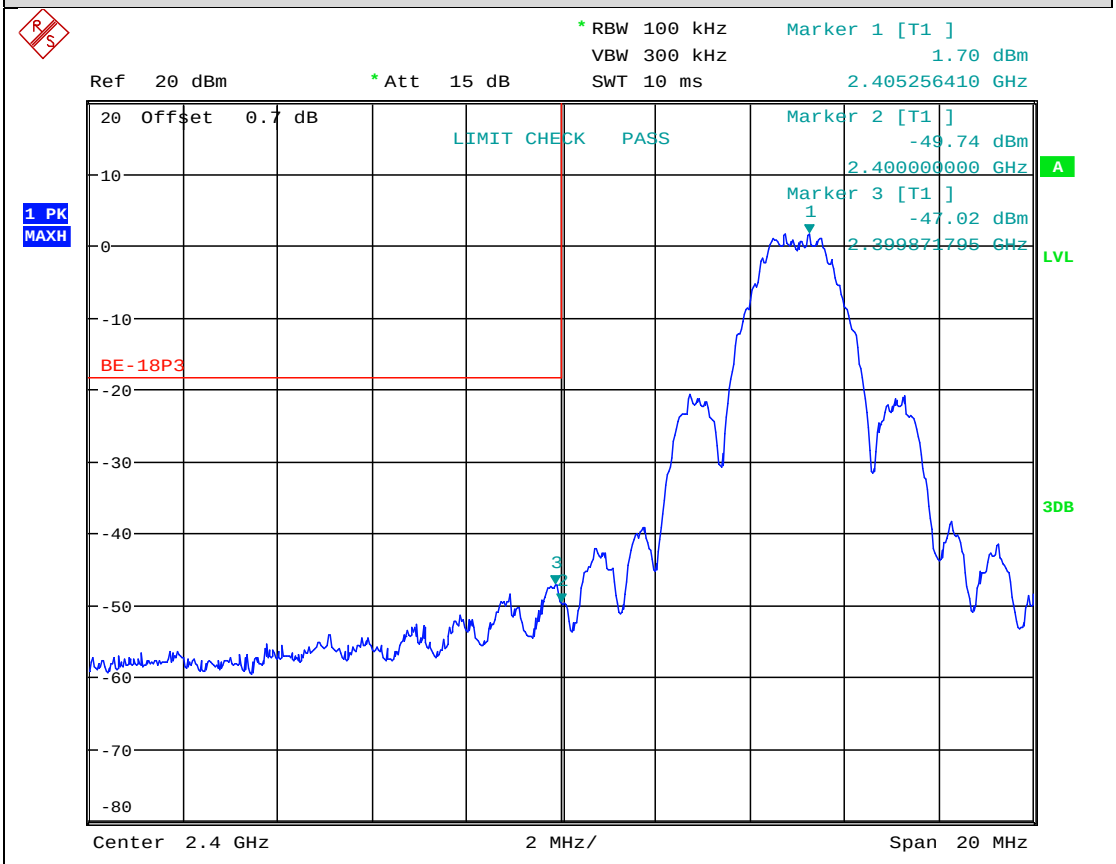


Date: 19.JUL.2018 15:58:38

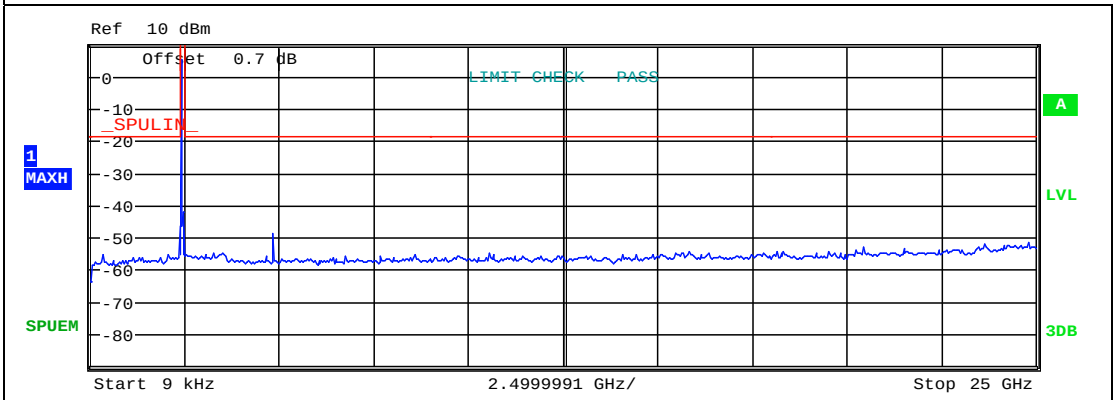


| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PwrAbs [dBm] | Δ Limit [dB] |
|---|---|---|---|---|---|
| 9.000 k | 150.000 k | 1.00 k | 25.043269 k | -68.22 | -49.92 |
| 150.000 k | 30.000 M | 10.00 k | 152.985000 k | -63.72 | -45.42 |
| 30.000 M | 1.000 G | 100.00 k | 300.630000 M | -55.52 | -37.22 |
| 1.000 G | 2.400 G | 100.00 k | 2.399767 G | -46.62 | -28.32 |
| 2.400 G | 2.483 G | 3.00 M | 2.404338 G | 4.92 | -25.08 |
| 2.483 G | 9.000 G | 100.00 k | 4.808848 G | -49.01 | -30.71 |
| 9.000 G | 18.000 G | 100.00 k | 15.839100 G | -54.69 | -36.39 |
| 18.000 G | 25.000 G | 100.00 k | 24.798400 G | -51.93 | -33.63 |

## Frequency: 2440 MHz; Power setting: 5 dBm

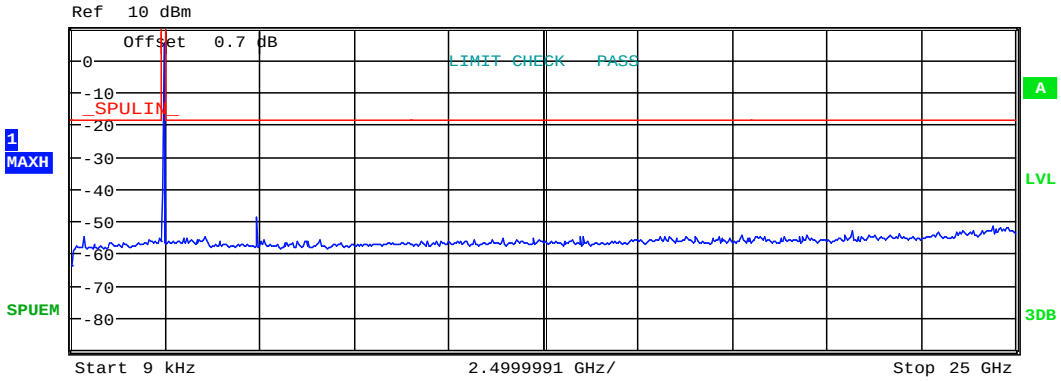


| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PwrAbs [dBm] | Δ Limit [dB] |
|---|---|---|---|---|---|
| 9.000 k | 150.000 k | 1.00 k | 9.451923 k | -68.84 | -50.54 |
| 150.000 k | 30.000 M | 10.00 k | 176.865000 k | -63.99 | -45.69 |
| 30.000 M | 1.000 G | 100.00 k | 305.027333 M | -55.01 | -36.71 |
| 1.000 G | 2.400 G | 100.00 k | 2.338587 G | -55.64 | -37.34 |
| 2.400 G | 2.483 G | 3.00 M | 2.439581 G | 4.91 | -25.09 |
| 2.483 G | 9.000 G | 100.00 k | 4.878965 G | -49.07 | -30.77 |
| 9.000 G | 18.000 G | 100.00 k | 17.741100 G | -54.69 | -36.39 |
| 18.000 G | 25.000 G | 100.00 k | 24.395200 G | -51.89 | -33.59 |

## Frequency: 2480 MHz; Power setting: 5 dBm

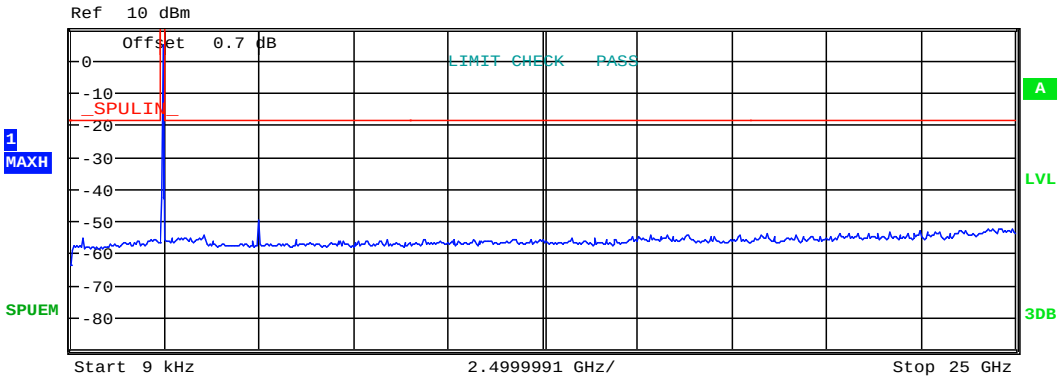


| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PwrAbs [dBm] | Δ Limit [dB] |
|---|---|---|---|---|---|
| 9.000 k | 150.000 k | 1.00 k | 41.312500 k | -69.09 | -50.79 |
| 150.000 k | 30.000 M | 10.00 k | 152.985000 k | -64.13 | -45.83 |
| 30.000 M | 1.000 G | 100.00 k | 310.006667 M | -55.44 | -37.14 |
| 1.000 G | 2.400 G | 100.00 k | 2.224720 G | -56.05 | -37.75 |
| 2.400 G | 2.483 G | 3.00 M | 2.479705 G | 4.66 | -25.34 |
| 2.483 G | 9.000 G | 100.00 k | 2.484021 G | -43.63 | -25.33 |
| 9.000 G | 18.000 G | 100.00 k | 16.286100 G | -54.57 | -36.27 |
| 18.000 G | 25.000 G | 100.00 k | 24.906900 G | -52.52 | -34.22 |

# 16 Power spectral density

## *16.1 Definition*

The power per unit bandwidth.

## *16.2 Test Parameters*

| | |
|---|---|
| Test Location: | Element Hull |
| Test Chamber: | Wireless Lab 1 |
| Test Standard and Clause: | ANSI C63.10-2013, Clause 11.10 |
| EUT Frequencies Measured: | 2405 MHz, 2440 MHz & 2480 MHz |
| Deviations From Standard: | None |
| Measurement Detector: | Peak |

**Environmental Conditions (Normal Environment)**

| | |
|---|---|
| Temperature: 23 °C | +15 ºC to +35 ºC (as declared) |
| Humidity: 45 % RH | 20 % RH to 75 % RH (as declared) |

## *16.3 Test Limit*

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

## *16.4 Test Method*

With the EUT connected as per Figure vi, the peak emission of the EUT was measured on a spectrum analyser, with path losses taken into account.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

**Figure vi Test Setup**

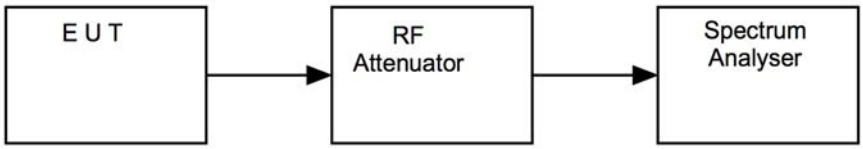


## *16.5 Test Equipment*

| *Equipment Description* | *Manufacturer* | *Equipment Type* | *Element No* | *Due For Calibration* |
|---|---|---|---|---|
| Spectrum Analyser | R&S | FSU26 | REF909 | 2019-06-15 |

## 16.6 Test Results

| Power Setting: 5 dBm | | | | |
|---|---|---|---|---|
| **Channel Frequency (MHz)** | **Analyzer Level (dBm)** | **Cable loss (dB)** | **Power (dBm)** | **Result** |
| 2405 | 1.70 | 0.0 | 1.70 | PASS |
| 2440 | 1.64 | 0.0 | 1.64 | PASS |
| 2480 | 1.49 | 0.0 | 1.49 | PASS |

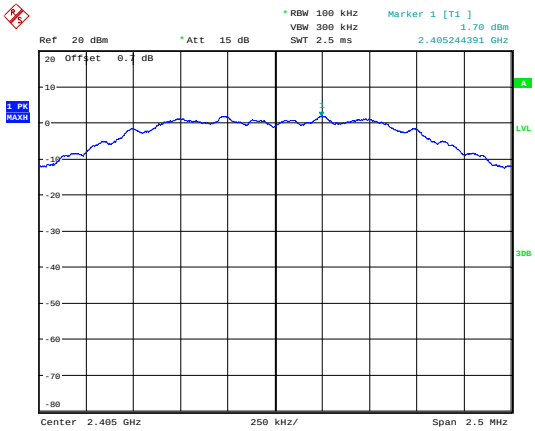


Date: 19.JUL.2018 15:38:18

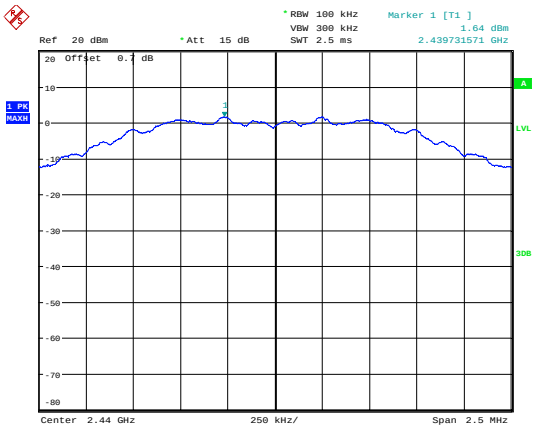


Date: 19.JUL.2018 15:40:31

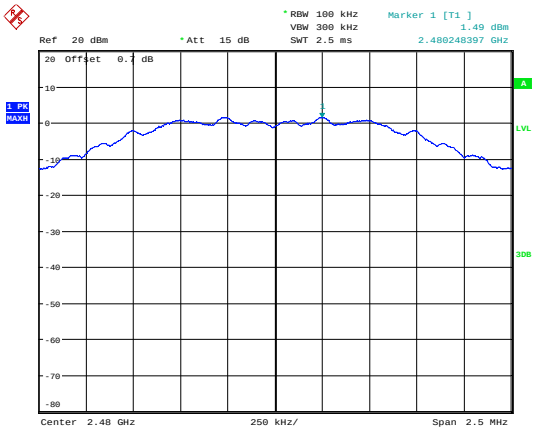


Date: 19.JUL.2018 15:45:05

# 17 Measurement Uncertainty

## Calculated Measurement Uncertainties

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence:

**[1] Radiated spurious emissions**

Uncertainty in test result (30 MHz to 1 GHz) = **4.75 dB**
Uncertainty in test result (1 GHz to 18 GHz) = **4.46 dB**

**[2] AC power line conducted emissions**

Uncertainty in test result = **3.2 dB**

**[3] Occupied bandwidth**

Uncertainty in test result = **15.58 %**

**[4] Conducted carrier power**

Uncertainty in test result (Power Meter) = **0.93 dB**

**[5] Conducted RF power out-of-band**

Uncertainty in test result – up to 8.1 GHz = **3.31 dB**
Uncertainty in test result – 8.1 GHz to 15.3 GHz = **4.43 dB**

**[6] Radiated RF power out-of-band**

Uncertainty in test result (30 MHz to 1 GHz) = **4.75 dB**
Uncertainty in test result (1 GHz to 18 GHz) = **4.46 dB**

**[7] Power spectral density**

Uncertainty in test result (Spectrum Analyser) = **3.11 dB**

**[8] ERP / EIRP**

Uncertainty in test result (Laboratory) = **4.71 dB**
Uncertainty in test result (Pershore OATS) = **4.26 dB**

# 18 RF Exposure

**As per KDB 447498**

47 CFR §§1.1307 and 2.1091

2.1091 Radio frequency radiation exposure evaluation: Portable devices.

For purposes of these requirements mobile devices are defined by the FCC as transmitters designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimetres is normally maintained between radiating structures and the body of the user or nearby persons. These devices are normally evaluated for exposure potential with relation to the MPE limits. As the 20cm separation specified under FCC rules may not be achievable under normal operation of the EUT, an RF exposure calculation is needed to show the minimum distance required to be less than 0.6mW/cm$^2$ power density limit, as required under FCC rules

**Prediction of MPE limit at a given distance**

Equation from KDB 447498 D01

$$S = \frac{1.64\ ERP}{4\pi R^2} \quad \text{re - arranged} \quad R = \sqrt{\frac{1.64\ ERP}{S\ 4\pi}}$$

where:

S = power density
R = distance to the centre of radiation of the antenna
ERP = EUT Maximum power

Result:

| Prediction Frequency (MHz) | Maximum ERP (mW) | Power density limit (S) (mW/cm$^2$) | Distance (R) cm required to be less than 0.6mW/cm$^2$ (cm) |
|---|---|---|---|
| 2405 | 5 | 0.6 | 1.04 |