



FCC TEST REPORT

REPORT NO.: RF930507L12

MODEL NO.: TR-8200 (refer to page 5 for other models)

RECEIVED: June 10, 2004

TESTED: July 01 ~ July 14, 2004

APPLICANT: JEBSEE ELECTRONICS CO., LTD.

ADDRESS: 24-3, Sin-Lo Road, P.O.Box 57, Tainan,
Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 19, Hwa Ya 2nd rd., Kueishan, Taoyuan,
Taiwan, R.O.C.

This test report consists of 32 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA

Table of Contents

1	CERTIFICATION	3
2	SUMMARY OF TEST RESULTS	4
3.	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF TEST MODES	6
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
3.4	DESCRIPTION OF SUPPORT UNITS	7
3.5	CONFIGURATION OF SYSTEM UNDER TEST	8
4.	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST PROCEDURES	10
4.1.4	DEVIATION FROM TEST STANDARD	10
4.1.5	TEST SETUP	11
4.1.6	EUT OPERATING CONDITIONS	11
4.1.7	TEST RESULTS	12
4.2	RADIATED EMISSION MEASUREMENT	14
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2	TEST INSTRUMENTS	16
4.2.3	TEST PROCEDURES	17
4.2.4	DEVIATION FROM TEST STANDARD	17
4.2.5	TEST SETUP	18
4.2.6	EUT OPERATING CONDITIONS	18
4.2.7	TEST RESULTS	19
4.3	OCCUPIED BANDWIDTH MEASUREMENT	26
4.3.1	LIMITS OF BAND EDGES MEASUREMENT	26
4.3.2	TEST INSTRUMENTS	26
4.3.3	TEST PROCEDURES	26
4.3.4	DEVIATION FROM TEST STANDARD	27
4.3.5	TEST SETUP	27
4.3.6	TEST RESULTS	27
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	30
6.	INFORMATION ON THE TESTING LABORATORIES	32



1 CERTIFICATION

PRODUCT : PC REMOTE CONTROLLER
MODEL NO.: TR-8200 (refer to page 5 for other models)
BRAND: JEBSEE
APPLICANT : JEBSEE ELECTRONICS CO., LTD.
TESTED: July 01 ~ July 14, 2004
TEST ITEM: ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.231),
ANSI C63.4-2001

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY: Wendy Liao, **DATE:** July 14, 2004
Wendy Liao
APPROVED BY: Cody Chang, **DATE:** July 14, 2004
Cody Chang /Supervisor

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	PASS	Minimum passing margin is -27.44dB at 0.201MHz
15.209	Radiated Emission Test	PASS	Minimum passing margin is -2.46dB at 384.10MHz
15.231	20dB Occupied Bandwidth Measurement	PASS	Meet the requirement of limit

NOTE: The information of measurement uncertainty is available upon the customer's request.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	PC REMOTE CONTROLLER
MODEL NO.	TR-8200 (refer to following table for other models)
POWER SUPPLY	18Vdc from power adapter
MODULATION TYPE	ASK
CARRIER FREQUENCY OF EACH CHANNEL	433.92MHz
NUMBER OF CHANNEL	1
ANTENNA TYPE	Rods antenna
DATA CABLE	1.76m nonshielded cable
I/O PORTS	IrDA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT include Transmitter part and Receiver part. The model no.: TR-8200 includes Tx of 433MHz application used for control signal transmitting.
2. The following model was provided to this EUT, due to marketing requirement.

BRAND	MODEL NO.	REMARK
JEBSEE	TR-8200	Wireless function (433.92MHz)
JEBSEE	T-8200	IR RX Function/ Without wireless function (IrDA)

3. The EUT was operated with following power adapter:

Brand :	Sino-American
Model:	A21810
Input:	120Vac, 60Hz, 5W
Output:	18Vdc, 100mA,

4. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

One channel is provided in the EUT :

Channel	Frequency
1	433.92 MHz

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a PC REMOTE CONTROLLER. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.231)
ANSI C63.4 : 2001

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	12130898320	E2K24CLNS
2	MODEM	ACEEX	1414V/3	0401008248	IFAXDM1414
3	PRINTER	EPSON	LQ-300+	DCGY047265	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m shielded cable without core
3	1.2m shielded cable without core

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

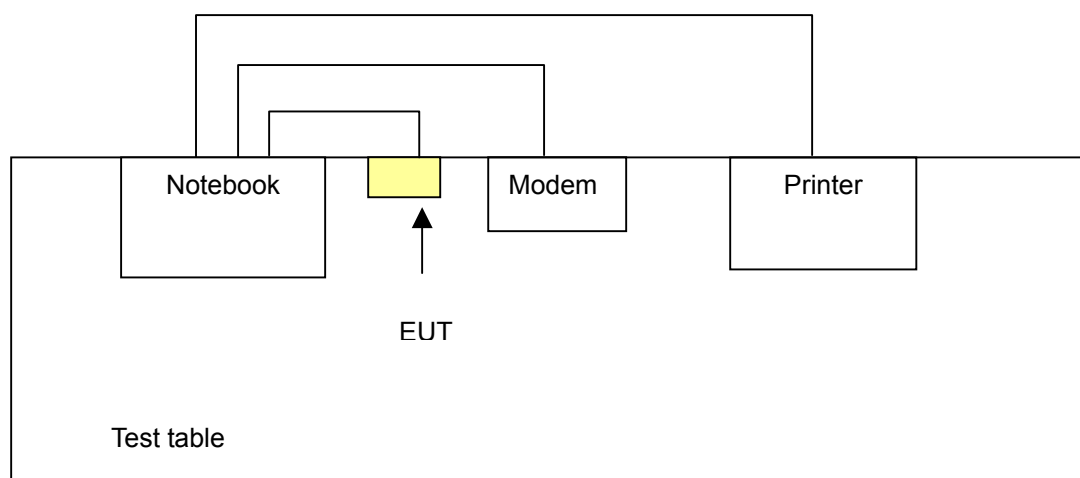

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Dec. 11, 2004
RF signal cable Woken	5D-FB	Cable-HyC02-01	Mar. 07, 2005
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Mar. 10, 2005
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Mar. 04, 2005
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels (Limit -20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

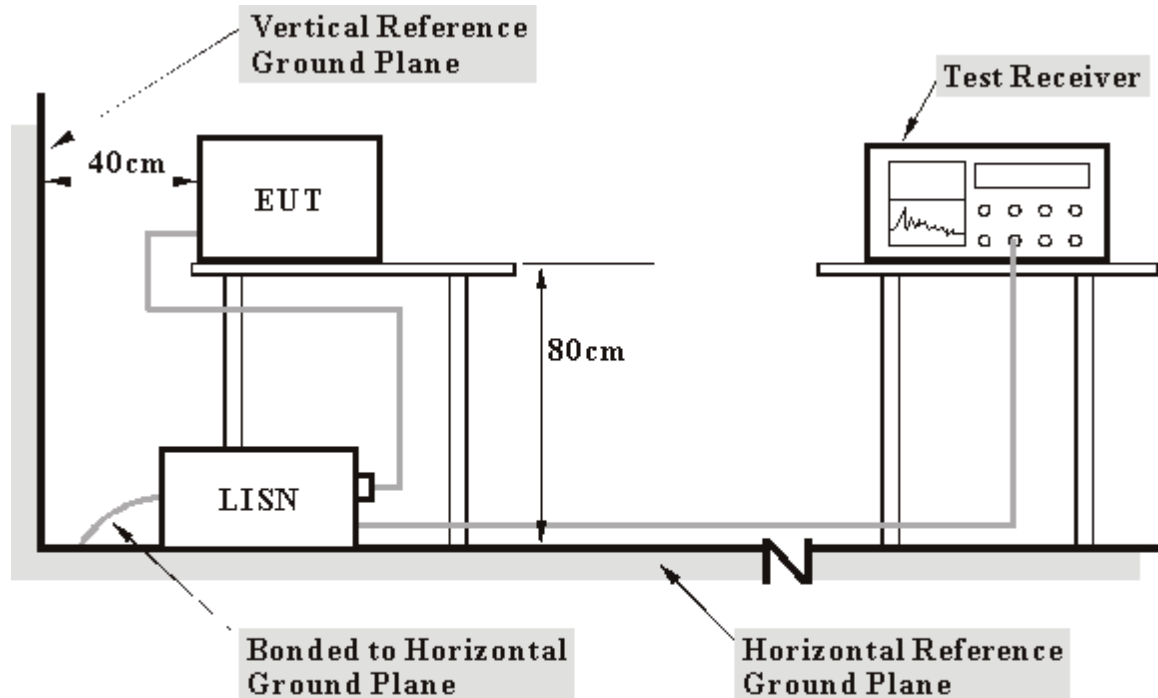

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


- a. Connected the EUT to a notebook system by USB cable and placed on a testing table.
- b. The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The notebook system sent "H" messages to its screen.
- d. The notebook system sent "H" messages to modem.
- e. The notebook system sent "H" messages to printer, and the printer printed them on paper.
- f. Steps c ~ e were repeated.

4.1.7 TEST RESULTS

EUT	PC REMOTE CONTROLLER	MODEL	TR-8200
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TESTED BY	Leo Hung

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.10	34.63	-	34.73	-	64.25	54.25	-29.52	-
2	0.213	0.10	34.45	-	34.55	-	63.11	53.11	-28.56	-
3	0.588	0.16	8.59	-	8.75	-	56.00	46.00	-47.25	-
4	2.789	0.28	4.40	-	4.68	-	56.00	46.00	-51.32	-
5	16.230	0.75	20.62	-	21.37	-	60.00	50.00	-38.63	-
6	21.211	0.98	14.91	-	15.89	-	60.00	50.00	-44.11	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

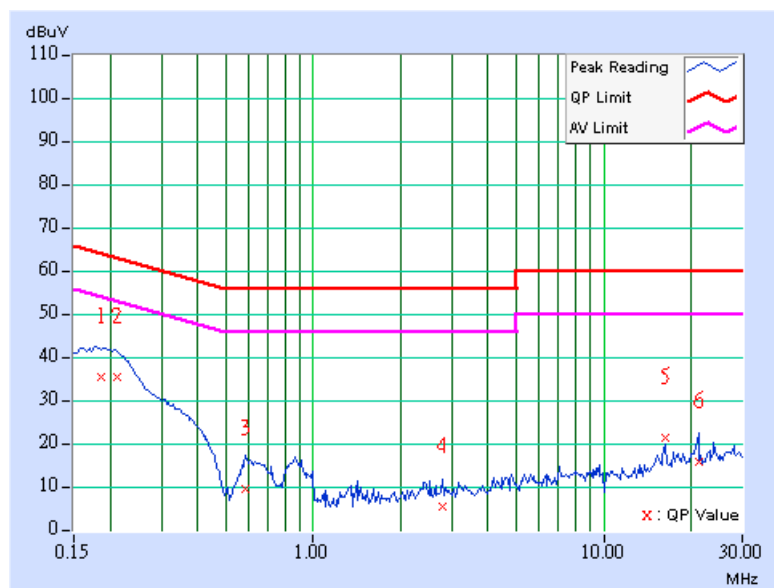

EUT	PC REMOTE CONTROLLER	MODEL	TR-8200
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TESTED BY	Leo Hung

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.10	36.04	-	36.14	-	63.58	53.58	-27.44	-
2	0.338	0.11	24.02	-	24.13	-	59.26	49.26	-35.14	-
3	0.619	0.16	15.18	-	15.34	-	56.00	46.00	-40.66	-
4	1.266	0.24	8.04	-	8.28	-	56.00	46.00	-47.72	-
5	7.211	0.42	9.96	-	10.38	-	60.00	50.00	-49.62	-
6	16.227	0.58	22.94	-	23.52	-	60.00	50.00	-36.48	-

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

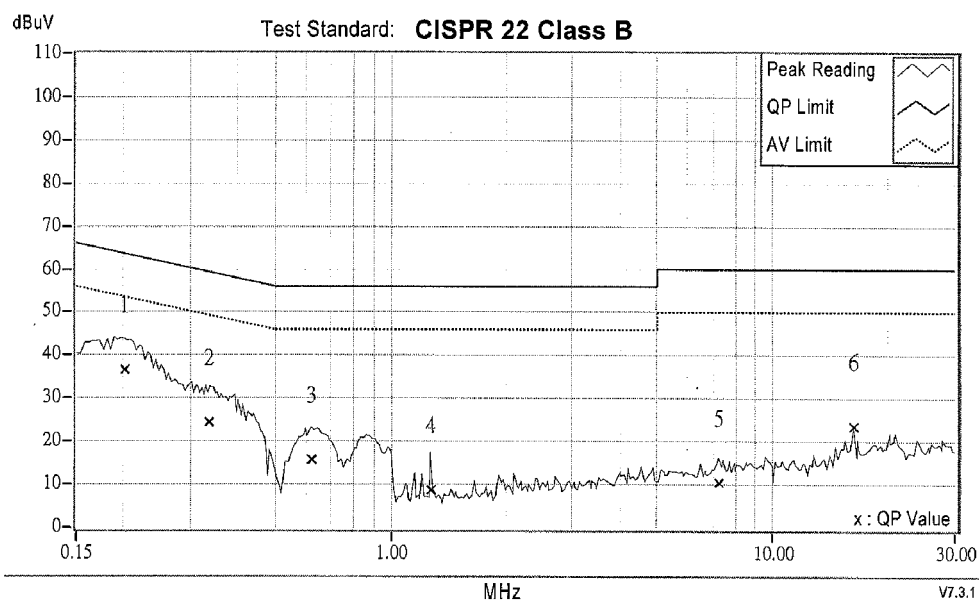

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.231 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental		Field Strength of Spurious	
	uV/meter	dBuV/meter	uV/meter	dBuV/meter
40.66 – 40.70	2250	67.04	225	48.04
70 – 130	1250	61.94	125	41.94
130 – 174	1250 to 3750	61.94 to 71.48	125 to 375	41.94 to 51.48
174 – 260	3750	71.48	75	37.50
260 – 470	3750 to 12500	71.48 to 81.94	375 to 1250	51.48 to 61.94
Above 470	12500	81.94	1250	61.94

NOTE:

- (1) Where F is the frequency in MHz, the formula for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = $56.81818(F) - 6136.3636$; for the band 260-470 MHz, uV/m at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.
- (2) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	Jun, 08, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Dec. 15, 2004
BILOG Antenna SCHWARZBECK	VULB9168	9168-153	Feb. 03, 2005
HORN Antenna SCHWARZBECK	9120D	9120D-408	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170243	Feb. 23, 2005
Preamplifier Agilent	8447D	2944A10633	Jan. 15, 2005
Preamplifier Agilent	8449B	3008A01964	Jan. 27, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218183/4	Mar. 05, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218195/4	Mar. 05, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 2.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The IC Site Registration No. is IC4924-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

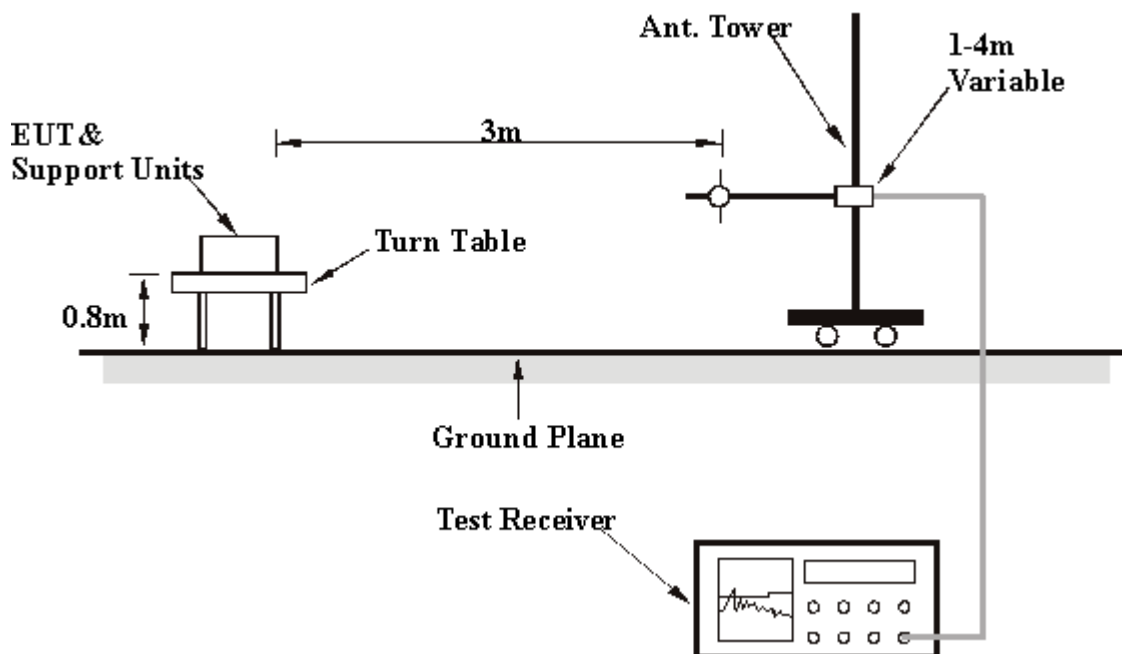

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6

4.2.7 TEST RESULTS

EUT	PC REMOTE CONTROLLER	MODEL	TR-8200
FREQUENCY RANGE	Below 1000MHz	DETECTOR FUNCTION	Quasi-Peak / PK/ AV
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa
TESTED BY	Long Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	311.86	33.49 QP	46.00	-12.51	1.00 H	127	18.43	15.06
2	384.10	43.54 QP	46.00	-2.46	1.00 H	114	26.93	16.61
3	*433.75	73.37 PK	100.80	-27.43	1.00 H	139	55.63	17.74
4	*433.75	62.18 AV	80.80	-18.62	1.00 H	139	44.44	17.74
5	515.97	35.71 QP	46.00	-10.29	1.00 H	163	16.65	19.06
6	576.23	35.54 QP	46.00	-10.46	1.00 H	175	14.97	20.57
7	867.44	50.14 QP	53.37	-3.23	1.00 H	114	25.54	24.60
8	867.44	38.95 QP	42.18	-3.23	1.00 H	114	14.35	24.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	288.54	29.14 QP	46.00	-16.86	1.50 V	151	14.52	14.62
2	383.79	39.00 QP	46.00	-7.00	1.50 V	160	22.40	16.60
3	*433.75	74.55 PK	100.80	-26.25	1.00 V	337	56.81	17.74
4	*433.75	63.36 AV	80.80	-17.44	1.00 V	337	45.62	17.74
5	515.97	34.10 QP	46.00	-11.90	1.00 V	232	15.03	19.06
6	576.23	36.59 QP	46.00	-9.41	1.00 V	136	16.03	20.57
7	648.16	32.77 QP	46.00	-13.23	1.50 V	172	10.85	21.91
8	698.70	38.08 QP	46.00	-7.92	2.00 V	202	15.58	22.50
9	867.53	50.29 QP	54.55	-4.26	1.40 V	134	25.69	24.60
10	867.53	39.10 QP	43.36	-4.26	1.40 V	134	14.50	24.60

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB) = Antenna Factor (dB) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*” = Fundamental frequency
 6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle)
Where the duty factor is calculated from following formula:

$$20\log(\text{Duty cycle}) = 20\log \frac{2.56\text{ms} + (0.721\text{ms} \times 10) + (1.36\text{ms} \times 2)}{45.33\text{ms}} = -11.19\text{dB}$$

please see page 21~25 for plotted duty

EUT	PC REMOTE CONTROLLER	MODEL	TR-8200
FREQUENCY RANGE	1-25GHz	DETECTOR FUNCTION	Peak (PK) Average (AV)
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TESTED BY	Long Chen		


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1301.00	48.47 PK	74.00	-25.53	1.02 H	353	19.36	29.11
2	1735.00	40.58 PK	74.00	-33.42	1.00 H	0	11.90	28.68


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1301.00	51.88 PK	74.00	-22.12	1.40 V	189	22.77	29.11
1	1301.00	40.69 AV	54.00	-13.31	1.40 V	189	11.58	29.11
2	1735.00	43.16 PK	74.00	-30.84	1.00 V	190	14.48	28.68


- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

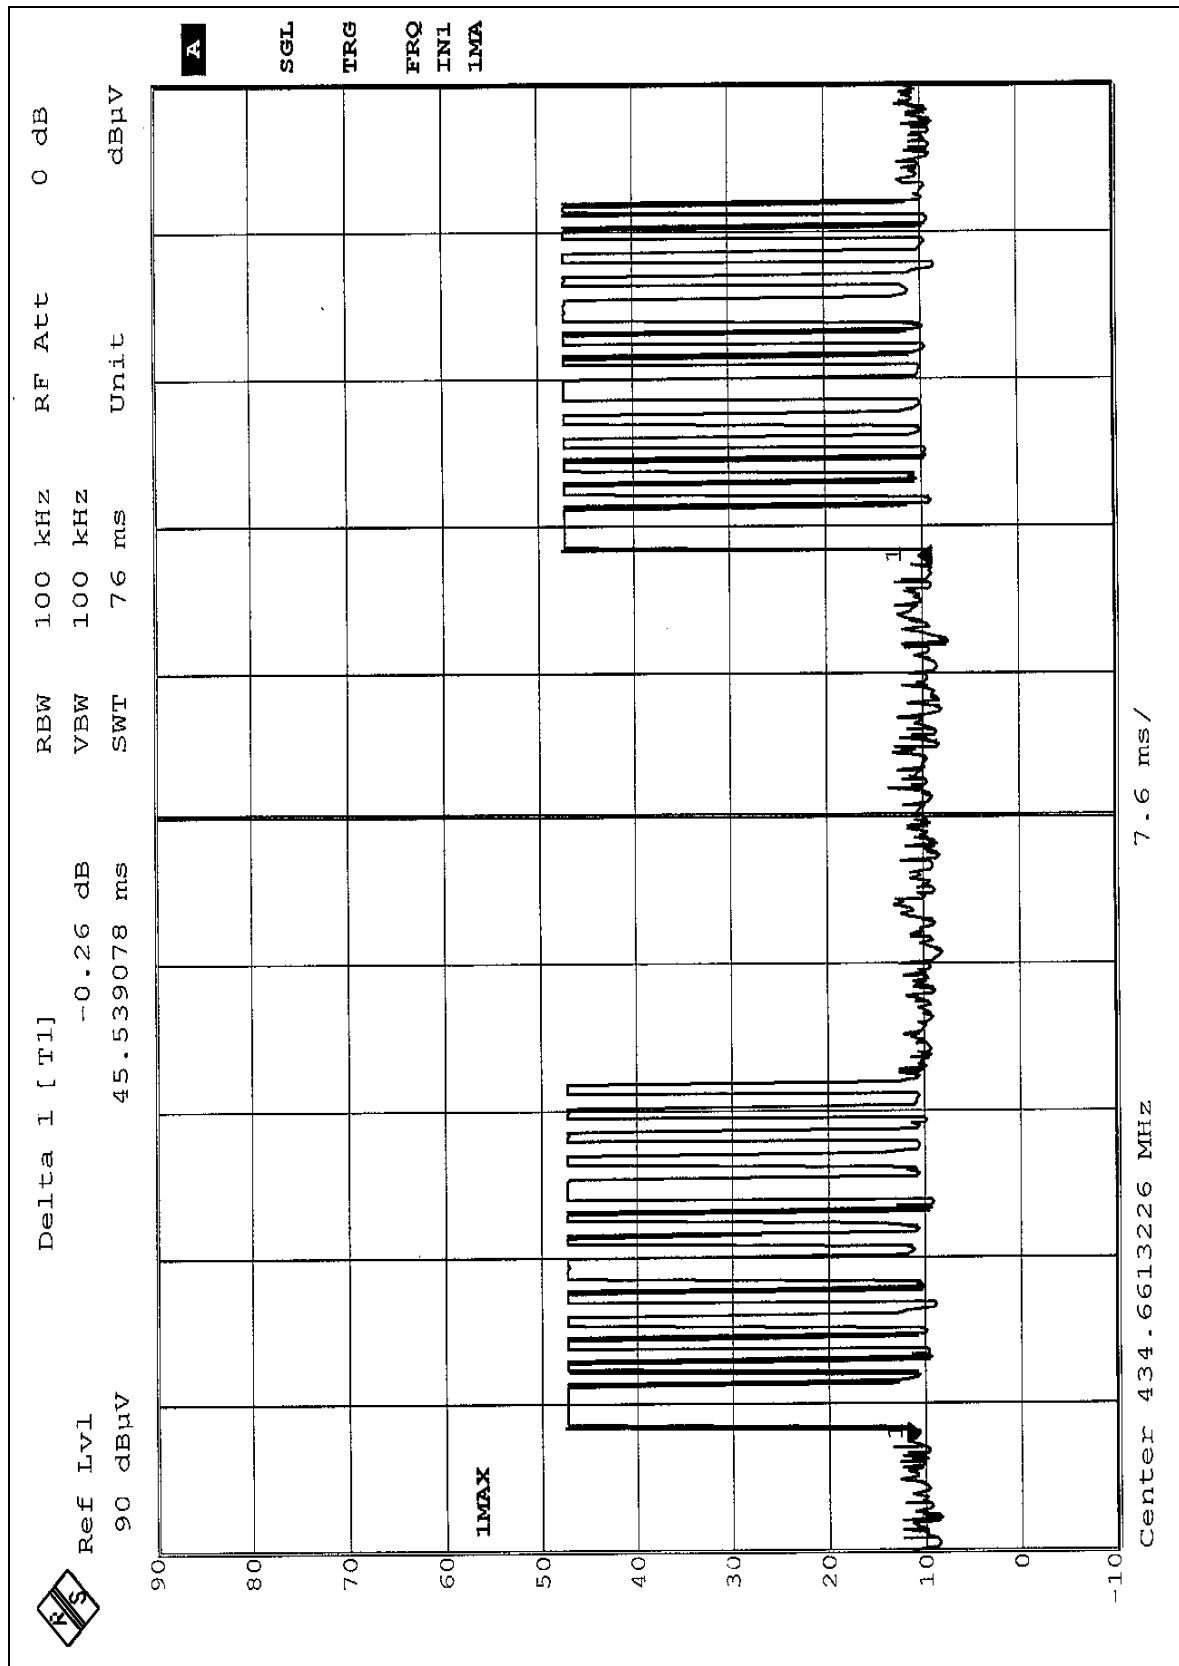

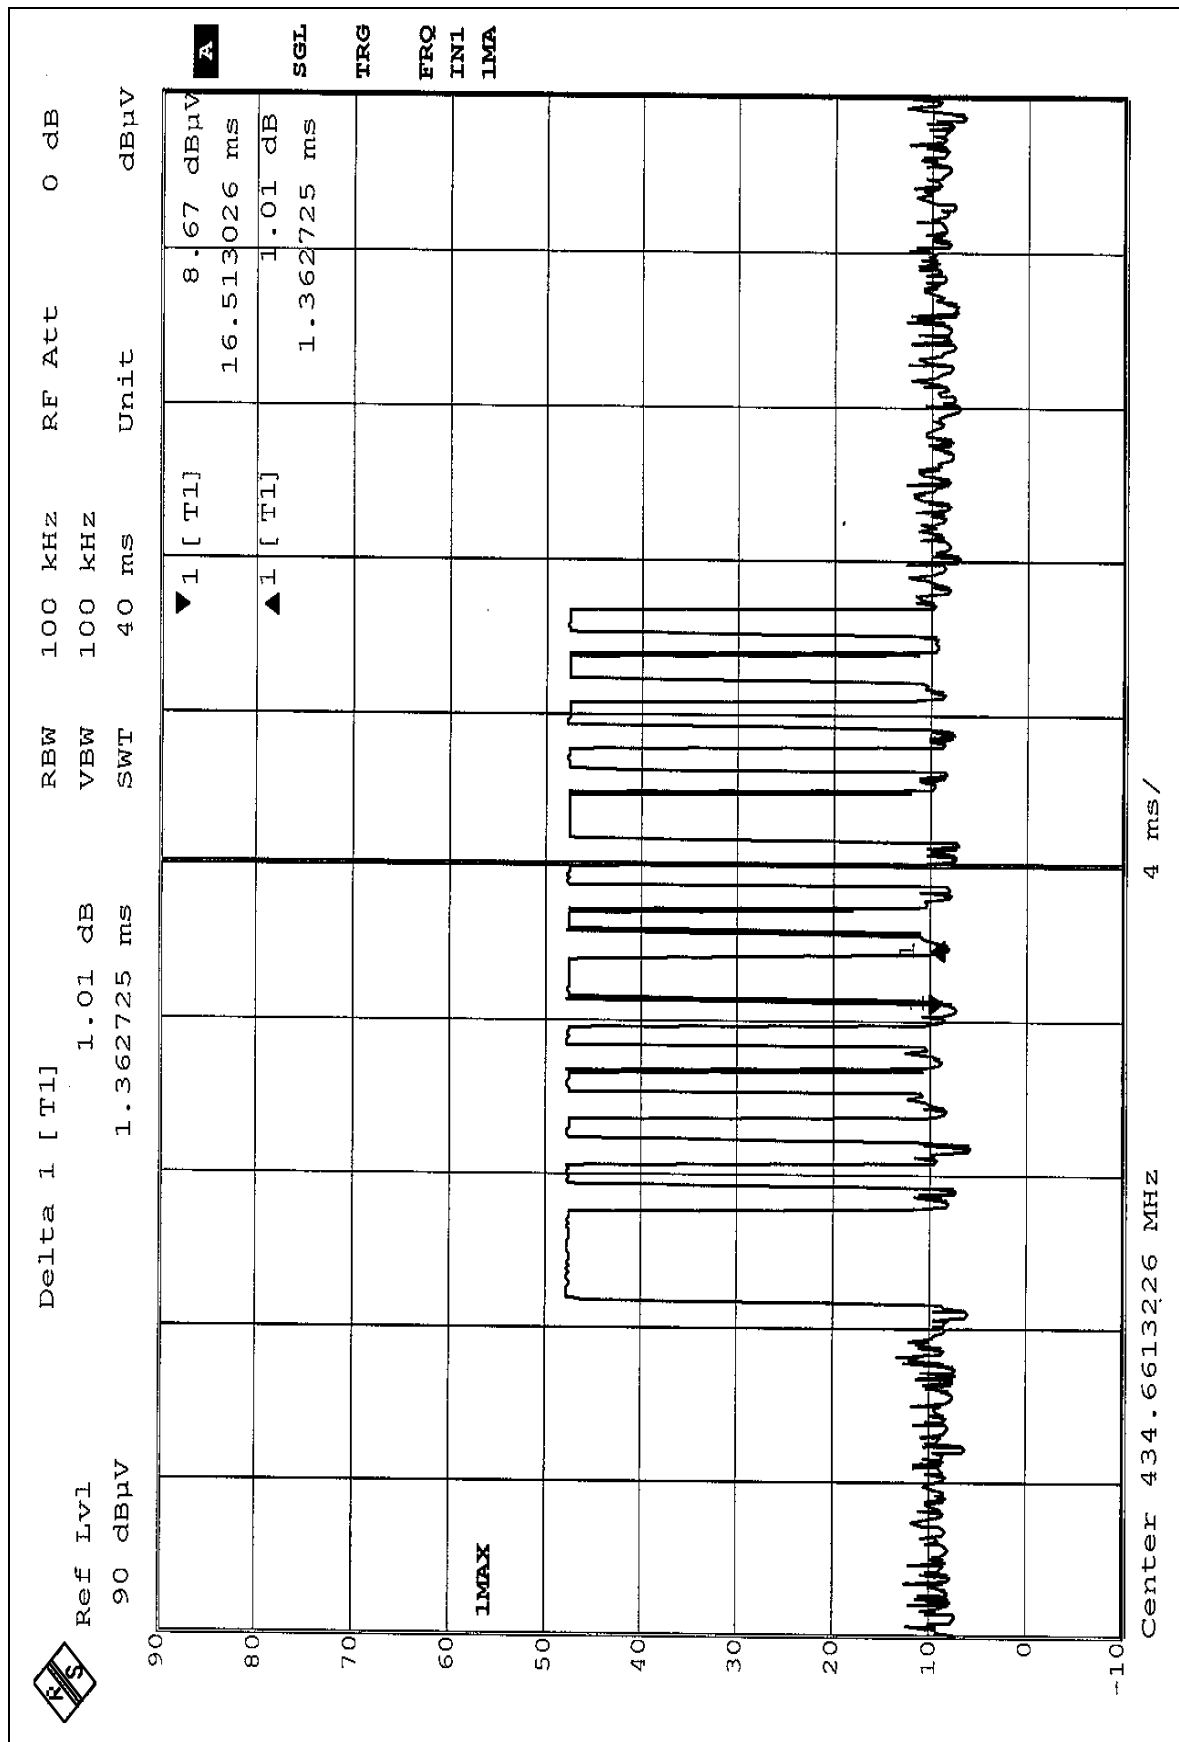

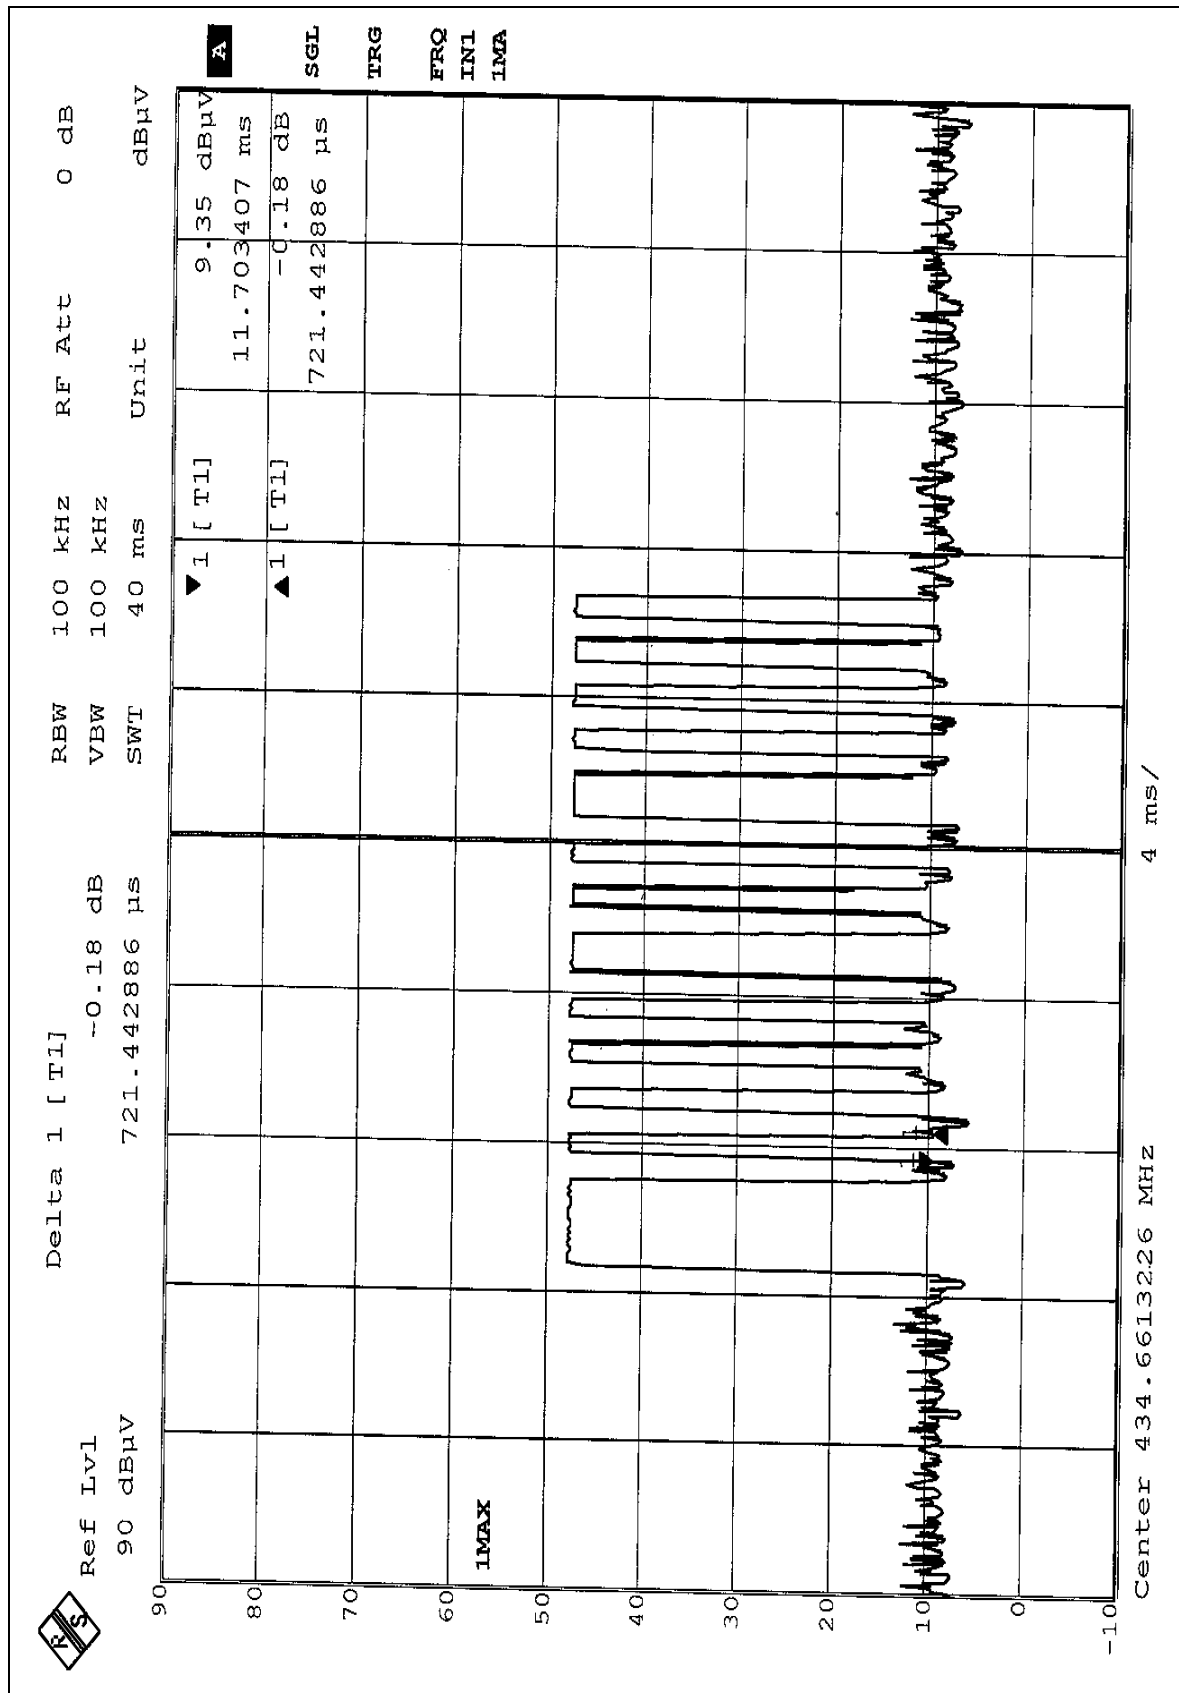

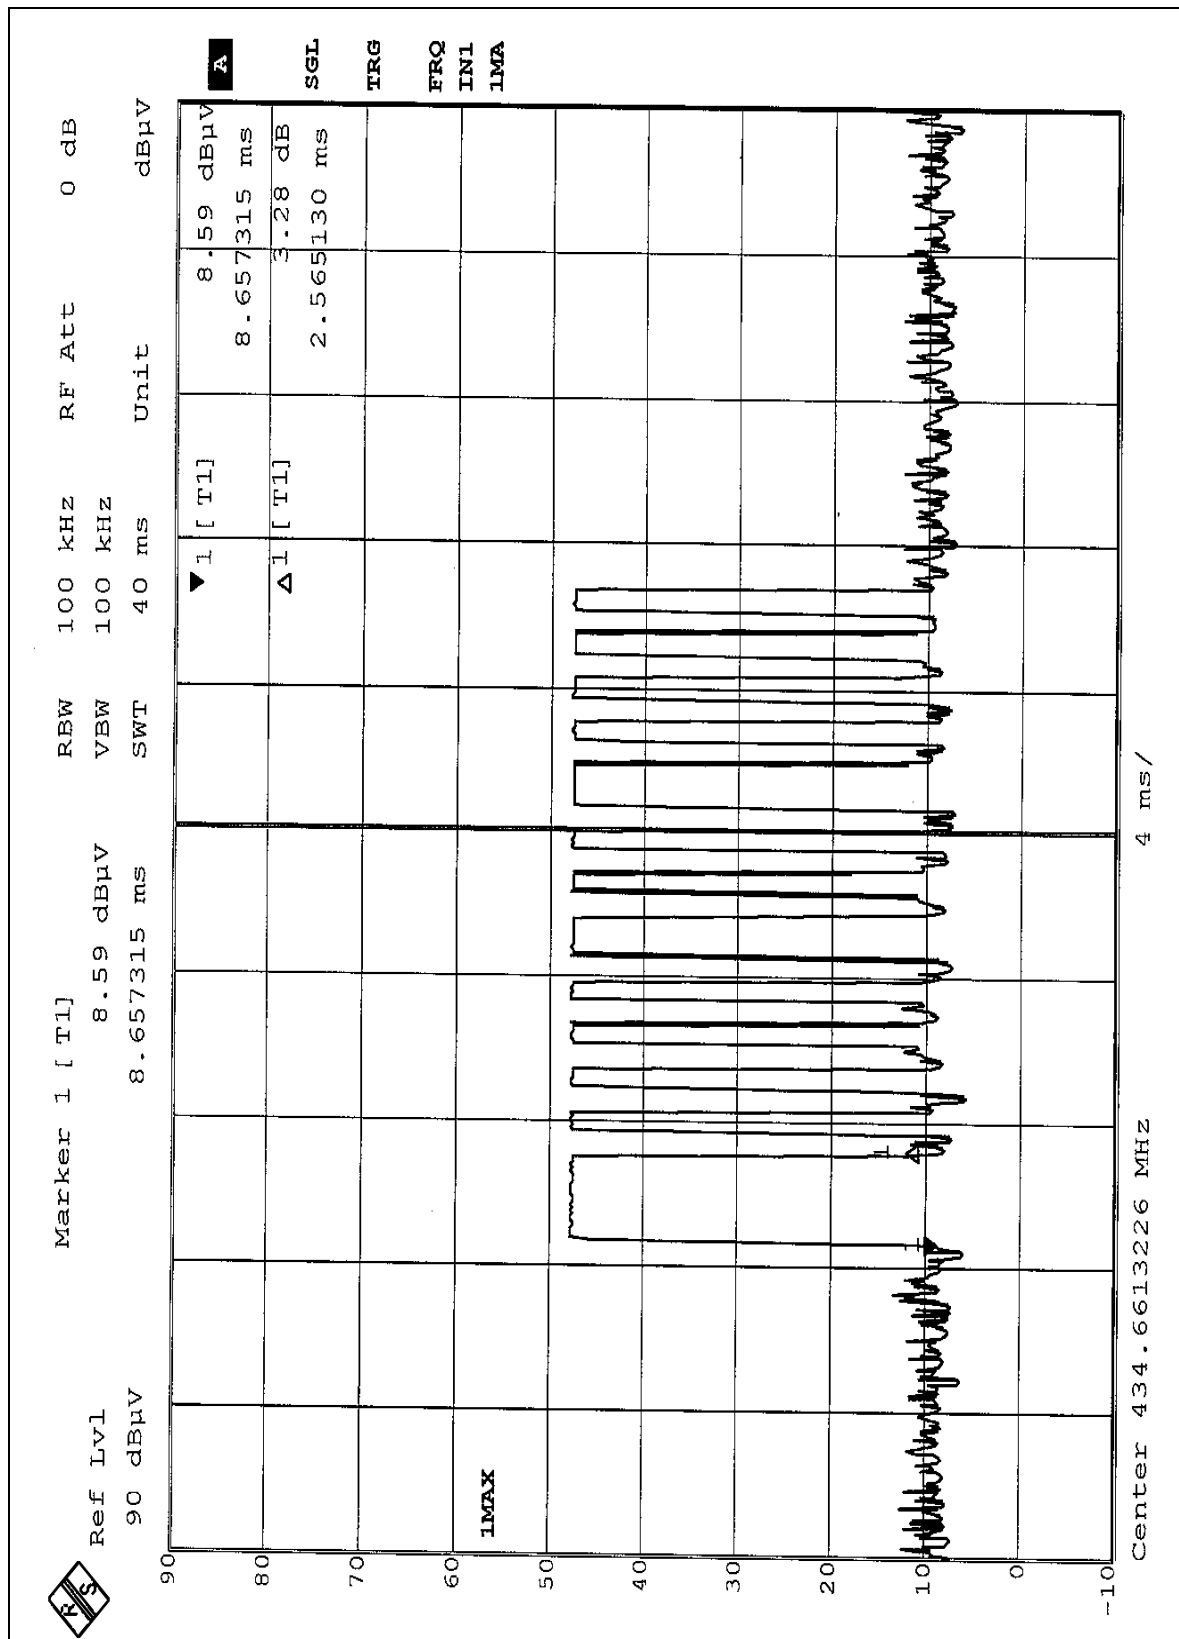

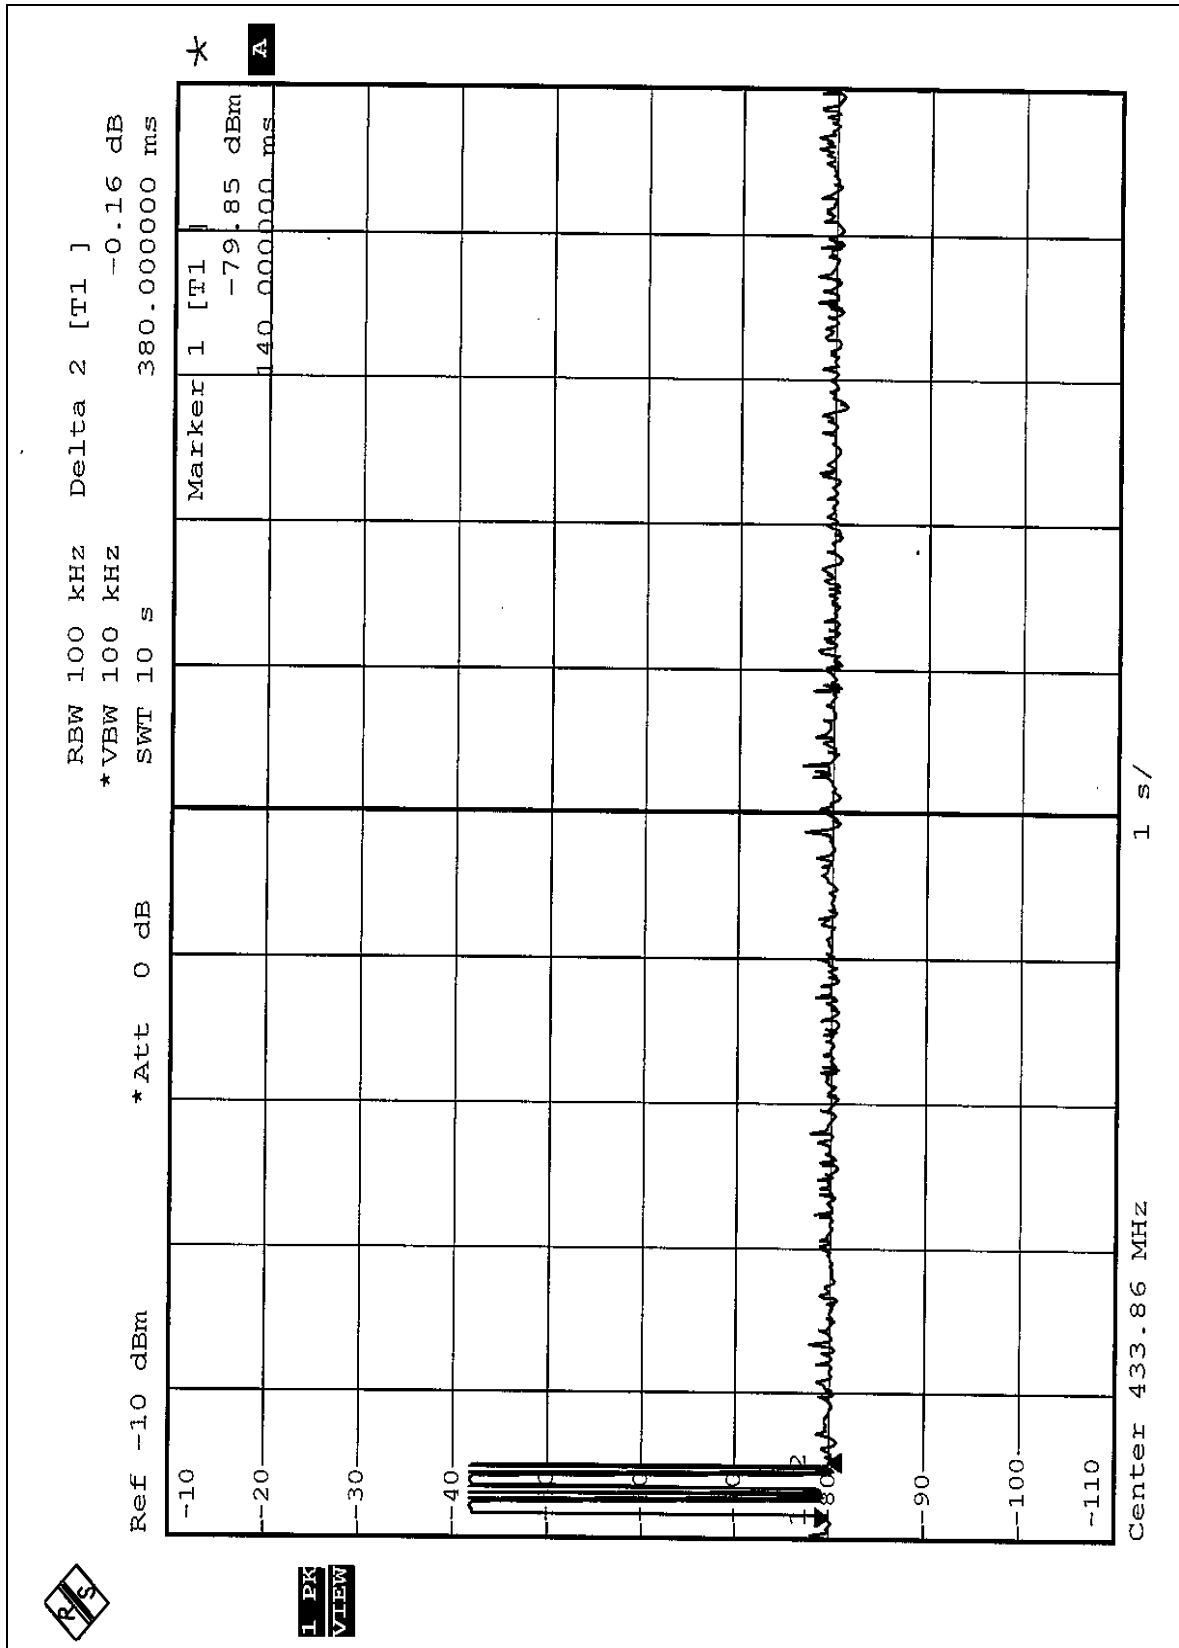

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF BAND EDGES MEASUREMENT

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for device operating above 70 MHz and below 900 MHz.

Fundamental Frequency (MHz)	Limit of 20 dB Bandwidth(kHz)
433.92	1084.8

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURES

- 1 The EUT was placed on the turn table .
- 2 The signal was coupled to the spectrum analyzer through an antenna.
- 3 Set the resolution bandwidth to 100kHz and video bandwidth to 100kHz then select Peak function to scan the channel frequency.
- 4 The 20dB bandwidth was measured and recorded.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation


4.3.5 TEST SETUP

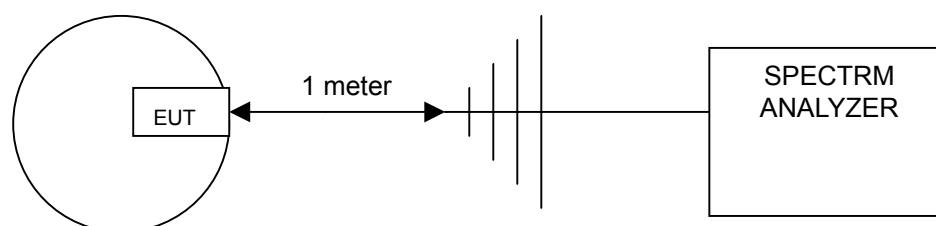


4.3.6 TEST RESULTS

Frequency (MHz)	20 dB bandwidth (kHz)	Maximum limit (kHz)	PASS/FAIL
433.92	910.00	1084.80	PASS

The plot of test result is attached as below.

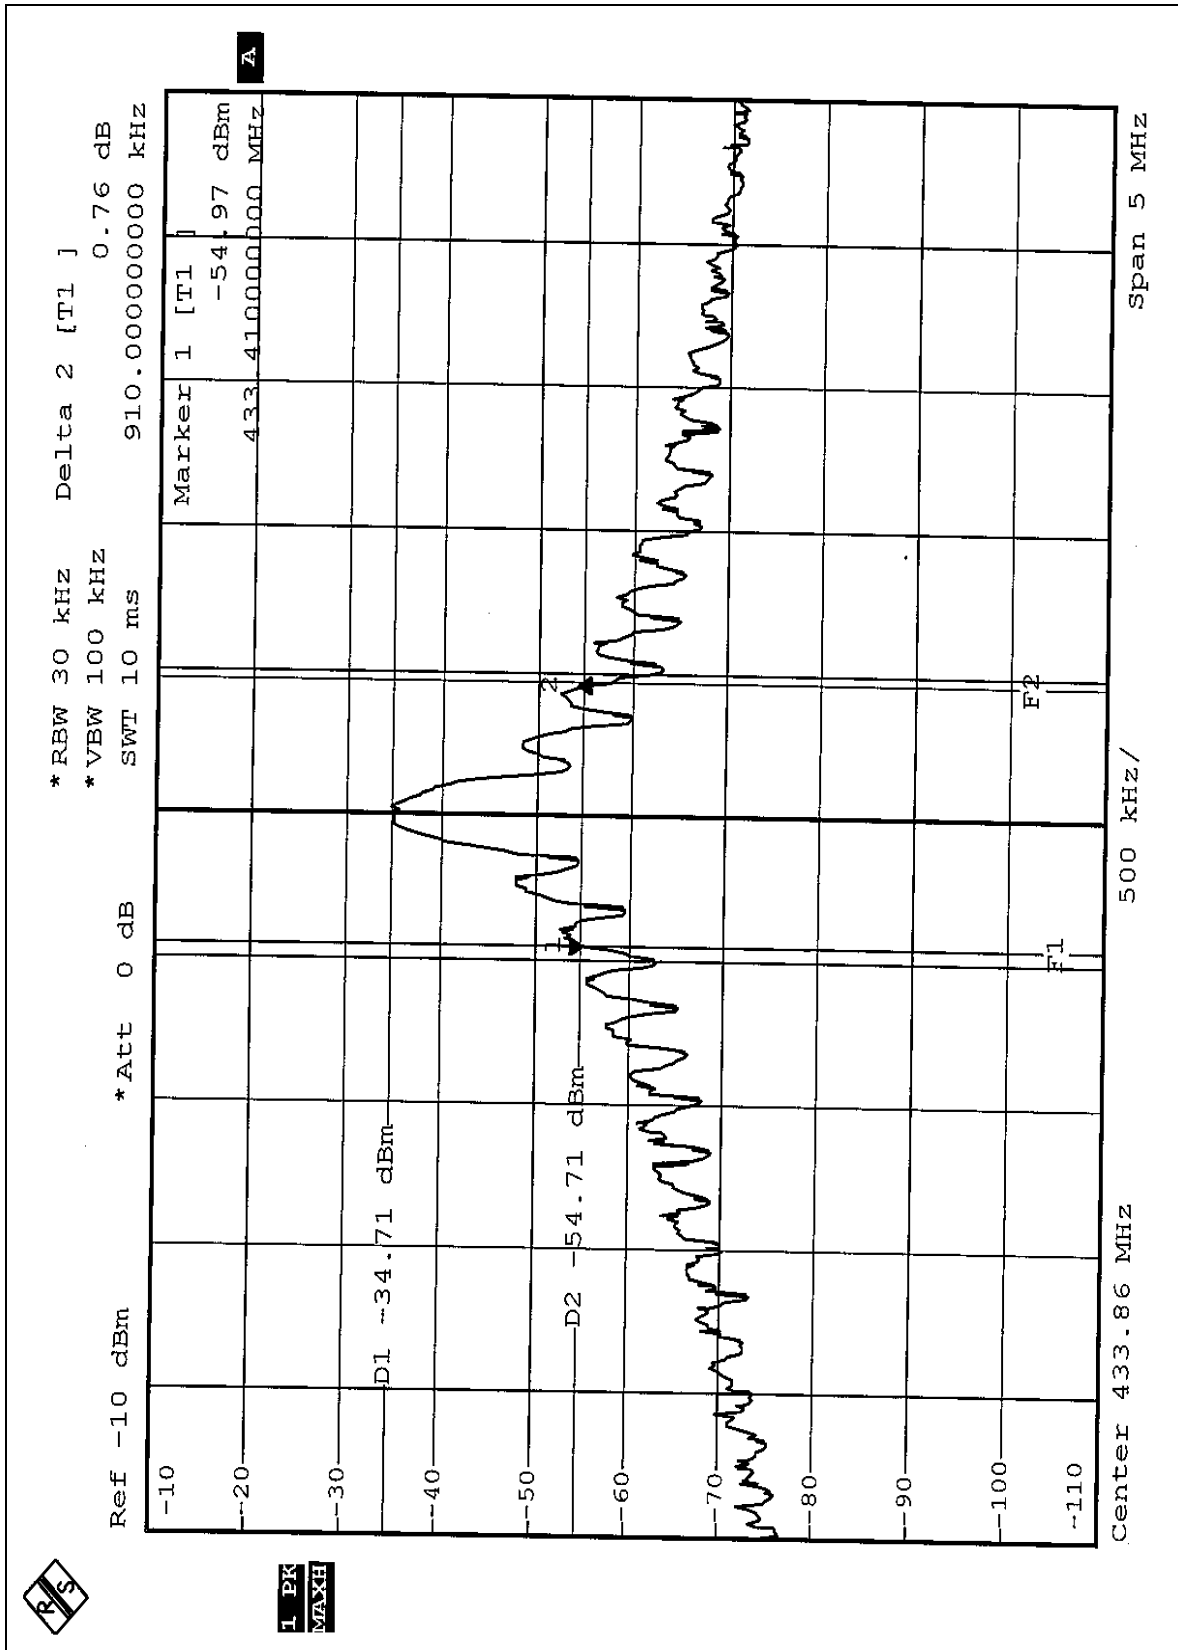


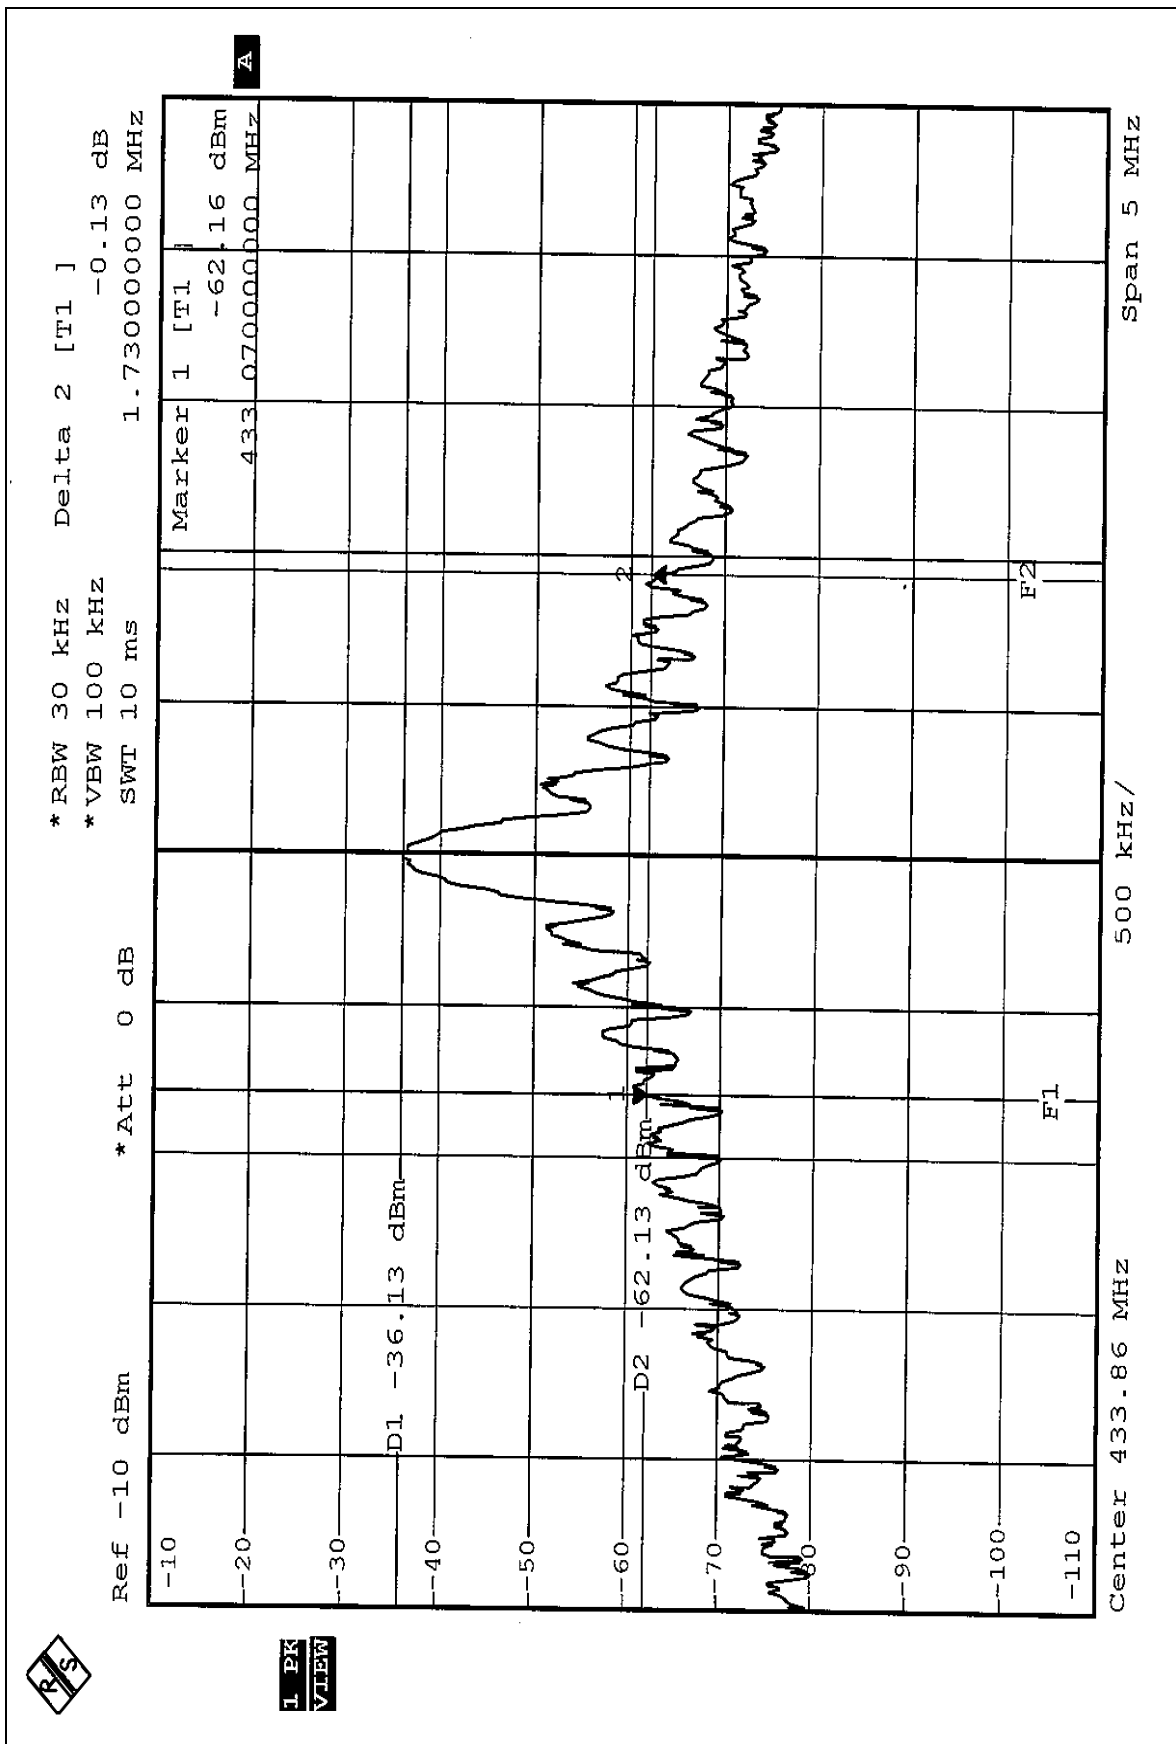


5. PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

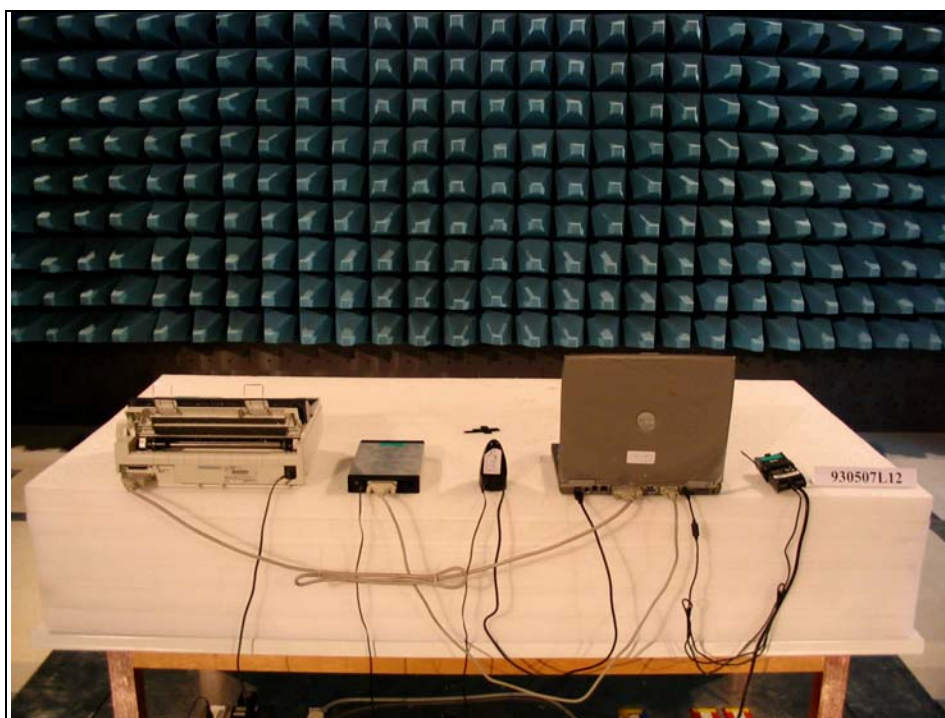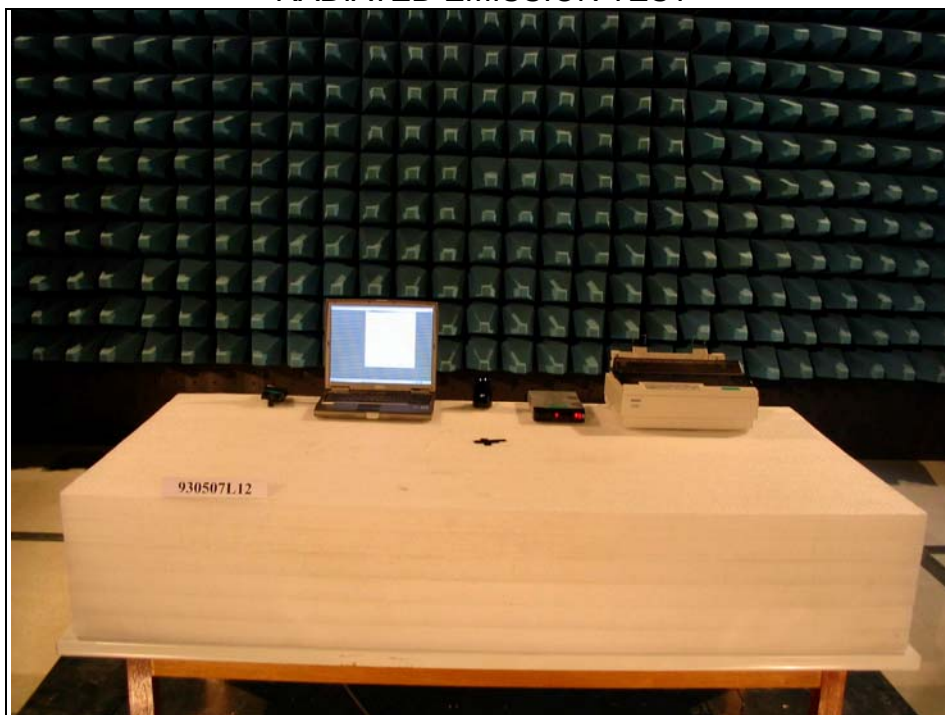

6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:
www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Linko RF Lab.
Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

Report Format Version 1.0