

Winterm™ 3000 Series Windows®-based Terminal Users Guide

Issue: 070601



WYSE
| | | |

This page intentionally blank.

Winterm™ 3000 Series Windows®-based Terminal Users Guide

Issue: 070601

883630-05 Rev. A
July 2001

Wyse Technology Inc.
3471 North First Street
San Jose, CA 95134-1803

This page intentionally blank.

Copyright Notice

© 2001, Wyse Technology Inc. All rights reserved.

This manual and the software and firmware described in it are copyrighted. You may not reproduce, transmit, transcribe, store in a retrieval system, or translate into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, any part of this publication without express written permission.

Trademarks

WYSE is a registered trademark and Winterm is a trademark of Wyse Technology Inc.

ICA is a registered trademark and MetaFrame is a trademark of Citrix Systems Inc.

Microsoft, Windows, Windows CE, Windows NT, and Windows Terminal Server are registered trademarks of Microsoft Corporation.

All other products are trademarks and/or registered trademarks of their respective companies.

The Energy Star emblem does not represent endorsement of any product or service.

Specifications subject to change without notice.

Patents

The Wyse product(s) described herein is(are) covered by U.S. Patent No. 5,918,039 and other patents pending.

Restricted Rights Legend

Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 or subparagraphs (c)(1) and (2) of the Commercial Computer Software - Restricted Rights at 48 CFR 52.227-19, as applicable. Manufacturer is Wyse Technology Inc.

Ordering Information

For availability, pricing, and ordering information in the United States and Canada, call 1-800-GET-WYSE (1-800-438-9973). In all other countries, contact your sales representative.

Wyse Technology Inc.
3471 North First Street
San Jose, CA 95134-1803 U.S.A.

License Agreement

THIS LICENSE SETS FORTH THE TERMS UNDER WHICH WYSE TECHNOLOGY INC. AND/OR ITS LICENSORS (collectively referred to as “Licensor”) IS WILLING TO LICENSE THE SOFTWARE WHICH IS OWNED BY WYSE TECHNOLOGY INC. OR ITS LICENSORS TO YOU. LICENSOR IS WILLING TO LICENSE THE ENCLOSED SOFTWARE TO YOU ONLY IF YOU ACCEPT ALL OF THE TERMS CONTAINED IN THIS LICENSE. PLEASE READ THIS AGREEMENT CAREFULLY BEFORE UNPACKING AND USING THE TERMINAL. BY UNPACKING AND USING THE TERMINAL, YOU AGREE TO BE BOUND BY THE TERMS OF THIS LICENSE. IF YOU DO NOT AGREE TO THESE TERMS, LICENSOR IS UNWILLING TO LICENSE THE SOFTWARE TO YOU, AND YOU SHOULD NOT UNPACK AND USE THE TERMINAL. IN SUCH CASE, PROMPTLY RETURN THE PRODUCT AND ALL ACCOMPANYING MATERIALS AND YOU WILL RECEIVE A REFUND OF YOUR MONEY.

License Grant

Licensor grants to You, the Licensee, a non-exclusive right, during the term of this License, to install and use the Firmware program (“Firmware”) or Application program (“Application”) solely in conjunction with your Wyse-manufactured hardware (“Terminal”) in object code only. You have the right to use this Firmware by loading it onto a computer(s) containing the capability of transferring the Firmware (in whole or in part) to the Wyse-manufactured Terminal. You also have the right to load the Application onto a computer(s) containing the capability of communicating to the Wyse-manufactured Terminal. “Firmware” and “Application” shall collectively be known as “Software” as used in this License. You may use the Software in this fashion as many times as is permitted by your paid-up license fees, so long as such use is always in conjunction with your Terminal. The Software may contain programs or codes (“Licensed Components”) which have been licensed or sublicensed to Licensor by third parties (“Third-Party Producers”). Such Licensed Components shall be included within the term “Software”) as used in this License. Subject to the express terms of this License, all right, title, and ownership interest in and to the Software and all related materials, and in any and all related patents, trademarks, copyrights, or proprietary or trade secret rights therein shall remain the sole property of the Licensors, each of whom shall retain all rights not expressly granted in this License. You shall not have the right to inspect, possess, use, or copy the source code (or any portion thereof) used to create the Software.

Patent and Copyright

The Software and all related documentation are protected by patent, copyright and other intellectual property laws. You may copy and use the Software and related documentation only as expressly permitted in this License. You must reproduce and maintain all proprietary marks, legends, and copyright notices that appear in or on the Software and related materials, or any portion thereof, on any copies of the Software that you make or use. Third-Party Producers named in such copyright notices shall each have the right to enforce provisions of this License.

Restrictions on Transfer

You may not sublicense, assign or transfer the Software or ownership of the Terminal and equipment, including the right to use the Software, this License, or any rights or obligations hereunder, either in whole or in part, to any third party unless such third party agrees in writing to the terms of this License.

Term

This License becomes effective when you unpack and use the terminal. This License will terminate automatically if you fail to comply with any of its terms or conditions, including any attempt to modify the Software. Upon termination for any reason, you agree that you will destroy all copies of the Software and related material or return all such copies to Licensor.

No Warranties

The software and licensed components are provided to you, "AS IS," with no warranties whatsoever. Licensor and all Third-Party Producers specifically disclaim all warranties, representations, or conditions, express or implied, including but not limited to, any implied warranty or condition of merchantability or fitness for a particular purpose. SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OF IMPLIED WARRANTIES, SO THE ABOVE EXCLUSION MAY NOT APPLY TO YOU.

Limitation of Liability

In no event shall licensor, any Third-Party Producer, or any other party that has been involved in the creation, production, or delivery of the software be liable for any direct, consequential, incidental, indirect, or special damages, including without limitation lost profits or losses resulting from business interruption or loss of data, regardless of the form of action or legal theory under which the liability may be asserted, even if advised of the possibility or likelihood of such damages. Licensor does not warrant that the functions contained in the product will meet your requirements or that the operation will be uninterrupted or error free. SOME JURISDICTIONS DO NOT ALLOW THE LIMITATION OR EXCLUSION OF LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

Use Restrictions

You may not modify, decompile, disassemble, reverse engineer, or otherwise manipulate the Software so as to derive the source code, or for any other purpose, or create a derivative work of the Software. You acknowledge that a breach of this paragraph shall cause irreparable harm to Licensor and the Third-Party Producers and that Licensor and the Third-Party Producers shall be entitled to injunctive relief to prevent or remedy such breach.

Export

You agree that you will not knowingly export or transmit the Software, directly or indirectly, to any restricted countries or in any manner that would violate United States laws and regulations as shall, from time to time, govern the License and delivery of technology abroad by persons subject to the jurisdiction of the United States, including the Export Administration Act of 1979, as amended, and any export administration regulations issued thereafter.

Severability

If any provision of this License is held to be invalid or unenforceable under any circumstances, its application in any other circumstances and the remaining provisions of the License shall not be affected.

Governing Law

This License shall be governed by and interpreted in accordance with the laws of the State of California of the United States of America.

No Third-Party Beneficiary Rights

No provisions in any agreement between Wyse Technology and a Third-Party Producer shall be deemed to provide or create any third-party beneficiary rights or any other rights of any kind to Licensee.

Entire Agreement

Opening this package is an acknowledgement that you have read and understood this agreement and that you agree to be bound by its terms and restrictions. You further agree that this license is the complete and exclusive statement of the agreement between you and Licensors, and that it supersedes any prior proposal or agreement, oral or written, and any other communication relating to the subject matter hereof. No vendor, provider, OEM, sales representative, or other person is authorized to modify this License or to make any warranty, representation or promise that is different from those set forth in this License.

Note on Java Support

The Software may contain support for programs written in Java. Java technology is not fault tolerant and is not designed, manufactured, or intended for use or resale as online control equipment in hazardous environments requiring fail-safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, direct life support machines, or weapons systems, in which the failure of Java technology could lead directly to death, personal injury, or severe physical or environmental damage.

U.S. Government Restricted Rights

If you are licensing the Software on behalf of the U.S. Government (the "Government"), the following provisions apply to you. If the Software is supplied to the Department of Defense ("DoD"), it is classified as "Commercial Computer Software" under paragraph 252.227-7014 of the DoD Supplement to the Federal Acquisition Regulations ("DFARS") (or any successor regulations) and the Government is acquiring only the license rights granted herein (the license rights customarily provided to non-Government users). If the Software is supplied to any unit or agency of the Government other than DoD, it is classified as "Restricted Computer Software" and the Government's rights in the Software are defined in paragraph 52.227-19 of the Federal Acquisition Regulations ("FAR") (or any successor regulations) or, in the case of NASA, in paragraph 18.52.227-86 of the NASA Supplement to the FAR (or any successor regulations).

EULA for Microsoft® Windows NT® Embedded Operating System, Microsoft Windows CE® Operating System for Embedded Systems, Microsoft Windows CE® Operating System for Windows®-based Terminals, and Desktop Applications for Windows® CE Operating System for Embedded Systems

IMPORTANT—READ CAREFULLY:

This End User License Agreement (EULA) is a legal agreement between you (either an individual or a single entity) and the manufacturer (MANUFACTURER) of the special purpose computing device (SYSTEM) you acquired which includes certain Microsoft software product(s) installed on the SYSTEM and/or included in the SYSTEM package (SOFTWARE). The SOFTWARE includes computer software, the associated media, any printed materials, and any online or electronic documentation. By installing, copying or otherwise using the SOFTWARE, you agree to be bound by the terms of this EULA. If you do not agree to the terms of this EULA, MANUFACTURER and Microsoft Licensing, Inc. (MS) are unwilling to license the SOFTWARE to you. In such event, you may not use or copy the SOFTWARE, and you should promptly contact MANUFACTURER for instructions on return of the unused product(s) for a refund.

Software License

The SOFTWARE is protected by copyright laws and international copyright treaties, as well as other intellectual property laws and treaties. The SOFTWARE is licensed, not sold.

1. Grant of License

SOFTWARE includes software already installed on the SYSTEM (SYSTEM SOFTWARE) and, if included in the SYSTEM package, software contained on the CD-ROM disc and/or floppy disk(s). This EULA grants you the following rights to the SOFTWARE:

- **Refund.** If you do not agree to the terms of this EULA, MANUFACTURER and MS are unwilling to license the SOFTWARE to you. In such event, you may not use or copy the Licensed Product, and you should promptly contact MANUFACTURER for instructions on return of the unused product(s) for a refund.
- **Client Access Licenses.** If you use the Embedded System to access or utilize the services or functionality of Microsoft Windows NT Server (all editions) or Microsoft Windows 2000 Server (all editions), or use the Embedded System to permit workstation or computing devices to access or utilize the services or functionality of Microsoft Windows NT Server, you may be required to obtain a Client Access License for the Embedded System and/or each such workstation or computing device. Please refer to the end user license agreement for Microsoft Windows NT Server or Microsoft Windows 2000 Server for additional information.
- **No Warranties.** EXCEPT AS EXPRESSLY PROVIDED IN THE LIMITED WARRANTY SECTION BELOW, THE SOFTWARE IS PROVIDED TO YOU “AS IS” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND OR FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK OF THE QUALITY AND PERFORMANCE OF THE SOFTWARE IS WITH YOU.

- **No Liability for Consequential Damages.** *[MANUFACTURER AND/OR]* MANUFACTURER'S SUPPLIERS SHALL NOT BE HELD TO ANY LIABILITY FOR ANY DAMAGES SUFFERED OR INCURRED BY YOU (INCLUDING, BUT NOT LIMITED TO, GENERAL, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES INCLUDING DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION AND THE LIKE), ARISING FROM OR IN CONNECTION WITH THE DELIVERY, USE OR PERFORMANCE OF THE SOFTWARE.
- **Customer Remedies.** *[MANUFACTURER's and]* MANUFACTURER's supplier's entire liability and your exclusive remedy shall be, at MANUFACTURER's option, either (a) return of the price paid, or (b) repair or replacement of the defective SOFTWARE that does not meet the Limited Warranty and which is returned to the manufacturer with a copy of your receipt. This Limited Warranty is void if failure of the SOFTWARE has resulted from accident, abuse, or misapplication. Any replacement SOFTWARE will be warranted for the remainder of the original warranty period or thirty (30) days, whichever is longer.
- **Limitations on Reverse Engineering, Decompilation, and Disassembly.** You may not reverse engineer, decompile, or disassemble the SOFTWARE, except and only to the extent that such activity is expressly permitted by applicable law notwithstanding this limitation.
- **Separation of Components.** The SOFTWARE is licensed as a single product. Its component parts may not be separated for use on more than one Embedded System.
- **Single Embedded System.** The SOFTWARE is licensed with the Embedded System as a single integrated product. The SOFTWARE may only be used with the Embedded System as set forth in these licensing terms.
- **Rental.** You may not rent, lease, or lend the SOFTWARE.
- **SOFTWARE Transfer.** You may permanently transfer all of your rights set forth in these licensing terms only as part of a permanent sale or transfer of the Embedded System, provided you retain no copies, you transfer all of the SOFTWARE (including all component parts, the media and printed materials, any upgrades, these licensing terms, and, if applicable, the Certificate(s) of Authenticity), and the recipient agrees to these licensing terms. If the SOFTWARE is an upgrade, any transfer must also include all prior versions of the SOFTWARE.
- **Back-up Copy.** If MANUFACTURER has not included a back-up copy of the SOFTWARE with the Embedded System, you may make a single back-up copy of the SOFTWARE. You may use the back-up copy solely for archival purposes. Except as expressly provided in these licensing terms, you may not otherwise make copies of the SOFTWARE, including the printed materials accompanying the SOFTWARE.
- **NOT FAULT TOLERANT.** THE SOFTWARE MAY CONTAIN TECHNOLOGY THAT IS NOT FAULT TOLERANT AND IS NOT DESIGNED, MANUFACTURED, OR INTENDED FOR USE IN ENVIRONMENTS OR APPLICATIONS IN WHICH THE FAILURE OF LICENSED SOFTWARE COULD LEAD TO DEATH, PERSONAL INJURY, OR SEVERE PHYSICAL OR ENVIRONMENTAL DAMAGE OR FINANCIAL LOSS.
- **Termination.** Without prejudice to any other rights, MANUFACTURER may terminate this license if you fail to comply with the licensing terms. In such event, you must destroy all copies of the SOFTWARE and all of its component parts.

- **Desktop Software (for CE Full products only).** Your Embedded System package may include software contained on a CD-ROM disc labeled "Desktop Software for Microsoft® Windows® CE" ("Desktop Software"). If Desktop Software is included with your Embedded System, you may install and use the component(s) of the Desktop Software in accordance with the terms of the end user license agreement provided with such component(s). If no separate end user license agreement is provided, you may install and use only one (1) copy of such component(s) on a single computer with which you use the Embedded System.
- **Note on Compatibility of Desktop Software (for CE Full products only).** These licensing terms are for a special purpose computing device. The only warranties are those provided by MANUFACTURER in the Limited Warranty section set forth below. Notwithstanding any online "help" files or other online information displayed by the Desktop Software, neither Microsoft Licensing Inc. nor its suppliers (including Microsoft Corporation) represents or makes any warranty that the Desktop Software will operate in a specific manner or operate with any computer or computing device, whether or not such computer(s) or computing device(s) contain Microsoft Windows Operating System software or Microsoft Windows CE Operating System software. MANUFACTURER's warranties are expressly limited to those set forth in the Limited Warranty section below.

2. Copyright

All title and copyrights in and to the SOFTWARE (including but not limited to any images, photographs, animations, video, audio, music, text and "applets," incorporated into the SOFTWARE), the accompanying printed materials, and any copies of the SOFTWARE, are owned by MS or its suppliers (including Microsoft Corporation). You may not copy the printed materials accompanying the SOFTWARE. All rights not specifically granted under this EULA are reserved by MS and its suppliers (including Microsoft Corporation).

3. Limited Warranty

MANUFACTURER warrants that the SOFTWARE will perform substantially in accordance with the accompanying written materials for a period of ninety (90) days from the date of receipt. Any implied warranties on the SOFTWARE are limited to ninety (90) days. Some states/jurisdictions do not allow limitations on duration of an implied warranty, so the above limitation may not apply to you.

4. Product Support

Product support for the SOFTWARE is not provided by MS, its parent corporation, Microsoft Corporation, or their affiliates or subsidiaries. For product support, please refer to MANUFACTURER's support number provided in the documentation for the SYSTEM. Should you have any questions concerning this EULA, or if you desire to contact MANUFACTURER for any other reason, please refer to the address provided in the documentation for the SYSTEM.

- **Note on Java Support.** The SOFTWARE may contain support for programs written in Java. Java technology is not fault tolerant and is not designed, manufactured, or intended for use or resale as online control equipment in hazardous environments requiring fail-safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, direct life support machines, or weapons systems, in which the failure of Java technology could lead directly to death, personal injury, or severe physical or environmental damage. Sun Microsystems, Inc. has contractually obligated Microsoft Corporation to make this disclaimer.

EXPORT RESTRICTIONS

You acknowledge that SOFTWARE is of US-origin. You agree to comply with all applicable international and national laws that apply to the SOFTWARE, including the U.S. Export Administration Regulations, as well as end-user, end-use and country destination restrictions issued by U.S. and other governments. For additional information on exporting the SOFTWARE, see <http://www.microsoft.com/exporting/>.

U.S. GOVERNMENT RESTRICTED RIGHTS

The SOFTWARE and documentation are provided with RESTRICTED RIGHTS. Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 or subparagraphs (c)(1) and (2) of the Commercial Computer Software—Restricted Rights at 48 CFR 52.227-19, as applicable.

05/01 883647-05 Rev. A

FCC Statement

This equipment has been tested and found to comply with the limits for either Class A or Class B digital devices (refer to “Terminal Requirements Compliance”), pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Caution

Changes or modifications not covered in this manual must be approved in writing by the manufacturer’s Regulatory Engineering department. Changes or modifications made without written approval may void the user’s authority to operate the equipment.

Terminal Requirements Compliance

FCC Compliance

Models 3200LE, 3230LE, 3320SE, 3350SE, 3360SE, 3630LE, 3730LE, and 3720SE terminals meet Class B requirements.

IEC/EN Compliance

Models 3200LE, 3230LE, 3320SE, 3350SE, 3360SE, 3630LE, 3730LE, and 3720SE terminals meet Class B requirements.

Canadian DOC Notices

Refer to the previous section, “Terminal Requirements Compliance,” to find out to which model terminal each of the statements below refers.

Class A

This digital apparatus does not exceed the Class A limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.

Le présent appareil numérique n’émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la classe A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le Ministère des Communications du Canada.

Class B

This digital apparatus does not exceed the Class B limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la classe B prescrites dans le Règlement sur le brouillage radioélectrique édicté par le Ministère des Communications du Canada.

IEC/EN Notice

These products conform to the requirements of IEC950 and EN60950.

These products conform to requirements of EN55022 for Class A equipment or EN55022 for Class B equipment (refer to "Terminal Requirements Compliance").

Models 3320SE, 3350SE, and 3360SE Terminals

For use with External Power Supply DVE Model DSA-0301-05 or certified equivalent model supplied by the manufacturer, rated minimum 5V/4A.

Models 3200LE and 3230LE Terminals

For use with External Power Supply DVE Model DSA-0151D-12 or certified equivalent model supplied by the manufacturer, rated minimum 12V/1.5A.

Model 3630LE Terminals

For use with External Power Supply Ilan Model F1650K or certified equivalent model supplied by the manufacturer, rated minimum 12 V/3.5A.

Noise Suppressor

A noise suppressor (ferrite bead) must be installed on the network cable of your terminal. This installation is necessary to maintain compliance with U.S. FCC B limits and European CISPR B EN55022 Class B limits. The noise suppressor is supplied by the manufacturer and is packed in your terminal's shipping carton.

Cable Notice

The use of shielded I/O cables is required when connecting this equipment to any and all optional peripheral or host devices. Failure to do so may cause interference and violate FCC and international regulations for electromagnetic interference.



Contents

About the Users Guide

Guide Overview	1
Guide Conventions	2
Text Format	2
User Interface Menu Control	3

1 Introducing the 3000 Series Windows-based Terminals

Models Summary	5
Model 3200LE Terminal	6
Model 3230LE Terminal	7
Model 3320SE Terminal	8
Model 3350SE Terminal	9
Model 3360SE Terminal	10
Model 3630LE Terminal	11
Model 3720SE Terminal	12
Model 3730LE Terminal	13
3000 Series Terminal Features	14

2 General Terminal Information

Logging On	17
Access Levels	18
Version and Copyright Information	21
System Information	23

3 Display Configuration

Display Screen Resolution	26
Energy Savers	29

4 Integrated Terminal Monitor Adjustments

Model 3630LE	31
Model 3720SE	32
Model 3730LE	35
Operation	35
OSD	35
Select	35
Adjust	35
Volume	36
Auto Registration	36
Recall factory default settings	36
Auto Degauss	36

5 Keyboard and Mouse Configuration

Keyboard 40

Mouse 42

6 Managing Connections

Configuring a Connection 43

Making a Connection 43

Ending a Connection 44

Shutting Down the Terminal 45

7 Browser Configuration

Adding a Browser Connection 48

8 Multiple Sessions

Setting Up Multiple Sessions 51

Managing Multiple Sessions 51

Manipulating Multiple Sessions 51

9 Getting Help

Troubleshooting Your Terminal 53

Glossary

Index

List of Figures

1-1	Model 3200LE Terminal and Connectors	6
1-2	Model 3230LE Terminal and Connectors	7
1-3	Model 3320SE Terminal and Connectors	8
1-4	Model 3350SE Terminal and Connectors	9
1-5	Model 3360SE Terminal and Connectors	10
1-6	Model 3630LE Terminal and Connectors	11
1-7	Model 3720SE Terminal and Connectors	12
1-8	Model 3730LE Terminal and Connectors	13
2-1	Terminal Login Dialog Box	17
2-2	Administrator-Level Terminal Properties Screen	18
2-3	User-Level Terminal Properties Screen	19
2-4	Guest-Level Terminal Properties Screen	20
2-5	Winterm Connection Manager	21
2-6	General Properties Sheet	22
2-7	SysInfo Properties Sheet	23
3-1	Display Properties Sheet	26
3-2	Terminal Settings Change Dialog Box	30
4-1	Model 3630LE User Controls	31
4-2	Model 3720SE Display Controls	32
4-3	Model 3720SE OSD (On-Screen Display) Menu	33
4-4	Model 3720SE Recall Mode	34
4-5	Model 3730LE Display Controls	35
5-1	Input Properties Sheet	39
6-1	Shutdown Window Dialog Box	45
7-1	Internet Explorer Browser Window	47
7-2	Winterm Connection Manager	48
7-3	Configure Tab Buttons	48
7-4	New Connection Dialog	49
7-5	Internet Explorer Setup Dialog Box	49
7-6	Connection Startup Dialog Box	49

List of Tables

1	Text Format	2
2	User Interface Menu Control	3
1-1	Terminal Features	14
3-1	Display Screen Resolution	27
3-2	Energy Savers	29
4-1	Model 3630 User Controls	31
4-2	Model 3720SE Terminal Front Panel	33
4-3	Model 3720SE OSD Menu	34
4-4	Screen Control Definitions	36
5-1	Keyboard	40
5-2	Mouse	42
6-1	Connections Properties Sheet	44
6-2	Shutdown Window Dialog Box	45
9-1	Troubleshooting the Terminal	53

This page intentionally blank.



About the Users Guide

The *Winterm 3000 Series Windows-based Terminal Users Guide* contains the information you will need to use and troubleshoot a WBT (Windows-based Terminal). This guide is written primarily for desktop users and covers the Models 3200LE, 3230LE, 3320SE, 3350SE, 3360SE, 3630LE, 3720SE, and 3730LE.

Guide Overview

The users guide consists of the following chapters:

- Introducing the 3000 Series Windows-based Terminals
- General Terminal Information
- Display Configuration
- Integrated Terminal Monitor Adjustments
- Keyboard and Mouse Configuration
- Managing Connections
- Browser Configuration
- Multiple Sessions
- Getting Help

This guide contains information about:

- WBT features and management
- The user interface



Note

The on-line version of this guide features a link to the Wyse home page at www.wyse.com.

Guide Conventions

Text Format

Table 1 lists the text format conventions used in this document.

Table 1 Text Format

Convention	Where Used
<i>Italic</i>	New term, book title, or emphasis.
Bold	Screen display, keycaps, and user input.
 Note	Indicates a note. A note adds information.
 Caution	Indicates a caution. A caution indicates actions that may cause damage to equipment, erase files, or destroy data.
+	Keystroke sequences such as: Ctrl+Alt+Del
	Instructions about invoking a menu such as: Network SNMP Network Location

User Interface Menu Control

Table 2 describes the command buttons used for user interface menu control on a 3000 Series WBT.

Table 2 User Interface Menu Control

Command Button	Function
X	Found in the upper right corner of a dialog box. Click on this command button to quit a dialog box or properties sheet without saving changes.
OK	Found in dialog boxes and on properties sheets. Click on this command button to save your changes and quit a dialog box or properties sheet.
Cancel	Found in dialog boxes and on properties sheets. Click on this command button at any time to quit a dialog box or properties sheet without saving changes.
Apply	Found in dialog boxes and on properties sheets. Click on this command button to save changes without quitting a dialog box or properties sheet. This command button is sometimes not activated.
Next or Accept	Found in wizards. Click on these command buttons to display the next dialog box in the sequence.
Back	Found in wizards. Click on this command button to return to the previous dialog box.
Finish	Found in wizards. Click on this command button to finish the wizard.

This page intentionally blank.

1

Introducing the 3000 Series Windows-based Terminals

Winterm 3000 Series WBTs (Windows-based Terminals) are graphical display terminals that are designed to connect to Windows 2000 or Windows NT TSE (Terminal Server Edition) servers via either the Microsoft RDP (Remote Desktop Protocol) or the Citrix ICA (Independent Computing Architecture) protocol. Winterm 3000 Series WBTs are also capable of connecting to legacy servers using “text-based terminal” emulation software that resides on the WBT. Please consult the *Terminal Emulation User’s Guide*, provided with your terminal for information on configuring emulations, and “Managing Connections” for information on managing the sessions.

RDP is a Microsoft-developed protocol based on, and is an extension of, the ITU (International Telecommunications Union) T.120 protocol standards and is provided with the Windows 2000 and Windows NT TSE operating systems. ICA is a protocol developed by Citrix Systems and is part of the MetaFrame software package, which is available in versions for either Windows 2000 or Windows NT TSE. Both protocols are multi-channel capable and allow for separate virtual channels that carry highly encrypted presentation data, serial device communications, licensing information, and other data (including keyboard and mouse activity, etc.). In addition, ICA has other extended capabilities such as sound and printer support.

Both protocols allow an application’s user interface to execute on a Windows-based terminal while the application’s logic executes on the server.

Models Summary

All Winterm 3000 Series terminals with at least 8 MB of RAM are supported by version 3.5.1 of the terminal software.

Currently available Wyse Winterm 3000 Series terminals are:

- Modular type, Models 3200LE, 3230LE, 3320SE, 3350SE, and 3360SE
- Integrated-display type, Models 3630LE, 3720SE, and 3730LE




Note

Monitors are not provided with modular-type Wyse Winterms. Monitors are integral to Models 3630LE, 3720SE and 3730LE. For modular-type terminals, your system administrator must provide a monitor and a video interface cable.

Model 3200LE Terminal

The Model 3200LE terminal is the entry-level, modular-type 3000 Series terminal. The connectors for power input, the network, a monitor, a USB keyboard (with mouse), USB peripherals, headphones, and a microphone are on the back of the terminal. The power push-button switch is on the top of the unit. The following figure shows a Model 3200LE terminal and its connectors.

Figure 1-1 Model 3200LE Terminal and Connectors

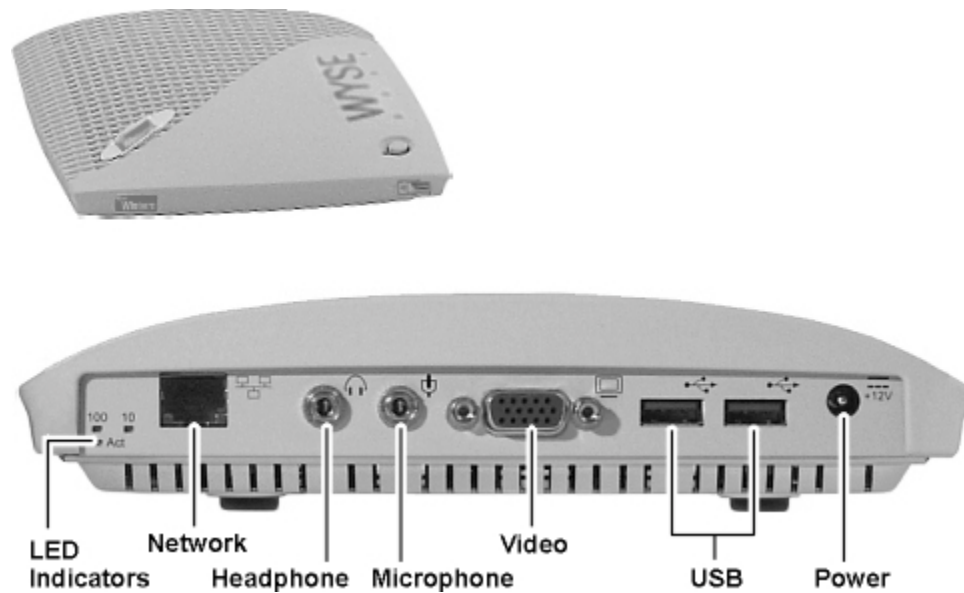

The following items are provided with Model 3200LE terminals:

- Power supply
- Power cord (with domestic versions only)
- Keyboard (with domestic versions only)
- Mouse
- Installation and user information (also available at www.wyse.com)




Note

An optional mounting kit is also available. For more information call 1-800-800-WYSE (9973).

Model 3230LE Terminal

The Model 3230LE terminal is the lower mid-level, modular-type 3000 Series terminal. The connectors for power input, the network, a monitor, a USB keyboard (with mouse), USB peripherals, headphones, and a microphone are on the back of the terminal. The power push-button switch is on the top of the unit. The following figure shows a Model 3230LE terminal and its connectors.

Figure 1-2 Model 3230LE Terminal and Connectors

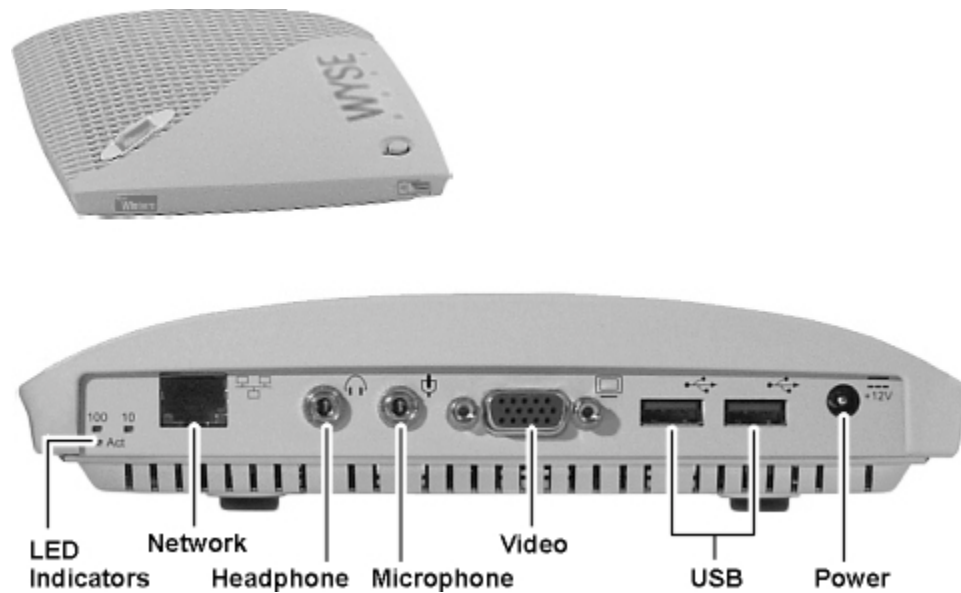

The following items are provided with Model 3230LE terminals:

- Power supply
- Power cord (with domestic versions only)
- Keyboard (with domestic versions only)
- Mouse
- Installation and user information (also available at www.wyse.com)




Note

An optional mounting kit is also available. For more information call 1-800-800-WYSE (9973).

Model 3320SE Terminal

The Model 3320SE terminal is a standard modular-type 3000 Series terminal. The connectors for power input, a monitor, a keyboard, a mouse, the network, serial/parallel peripherals, headphones, and a microphone are on the back of the unit. The power push-button switch is on the top of the unit. An option slot provides a method of connecting supported peripheral devices. The following figure shows a Model 3320SE terminal and its connectors.

Figure 1-3 Model 3320SE Terminal and Connectors

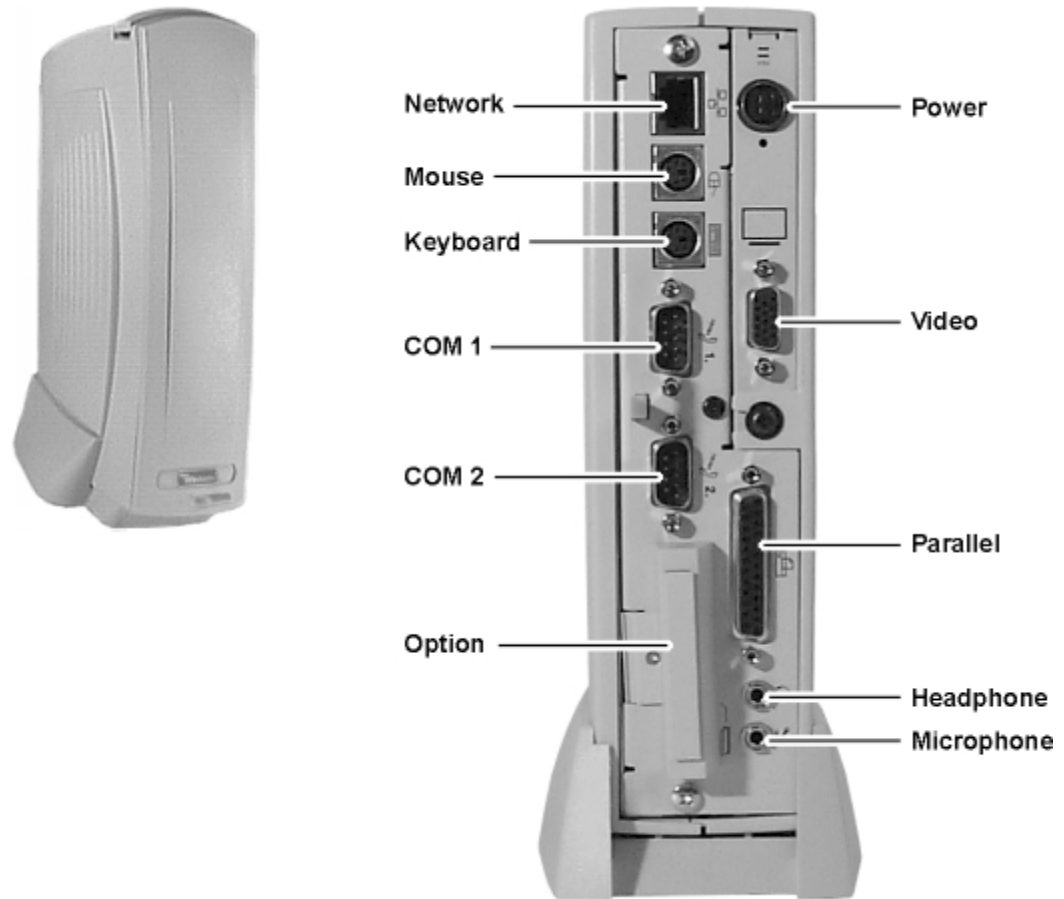

The following items are provided with Model 3320SE terminals:

- Power supply
- Power cord (with domestic versions only)
- Desktop mounting stand
- Keyboard (with domestic versions only) and mouse
- Installation and user information (also available at www.wyse.com)




Note

Optional wall-mount and cable shroud kits (P/N 920190-01 and P/N 920198-01) are available. For more information call 1-800-800-WYSE (9973).

Model 3350SE Terminal

The Model 3350SE terminal is a medium-performance, standard modular-type 3000 Series terminal. The connectors for power input, a monitor, a keyboard, a mouse, the network, serial/parallel and USB peripherals, headphones, and a microphone are on the back of the unit. An option slot provides a method of connecting supported peripheral devices. The power push-button switch is on the front of the unit. The following figure shows a Model 3350SE terminal and its connectors.

Figure 1-4 Model 3350SE Terminal and Connectors

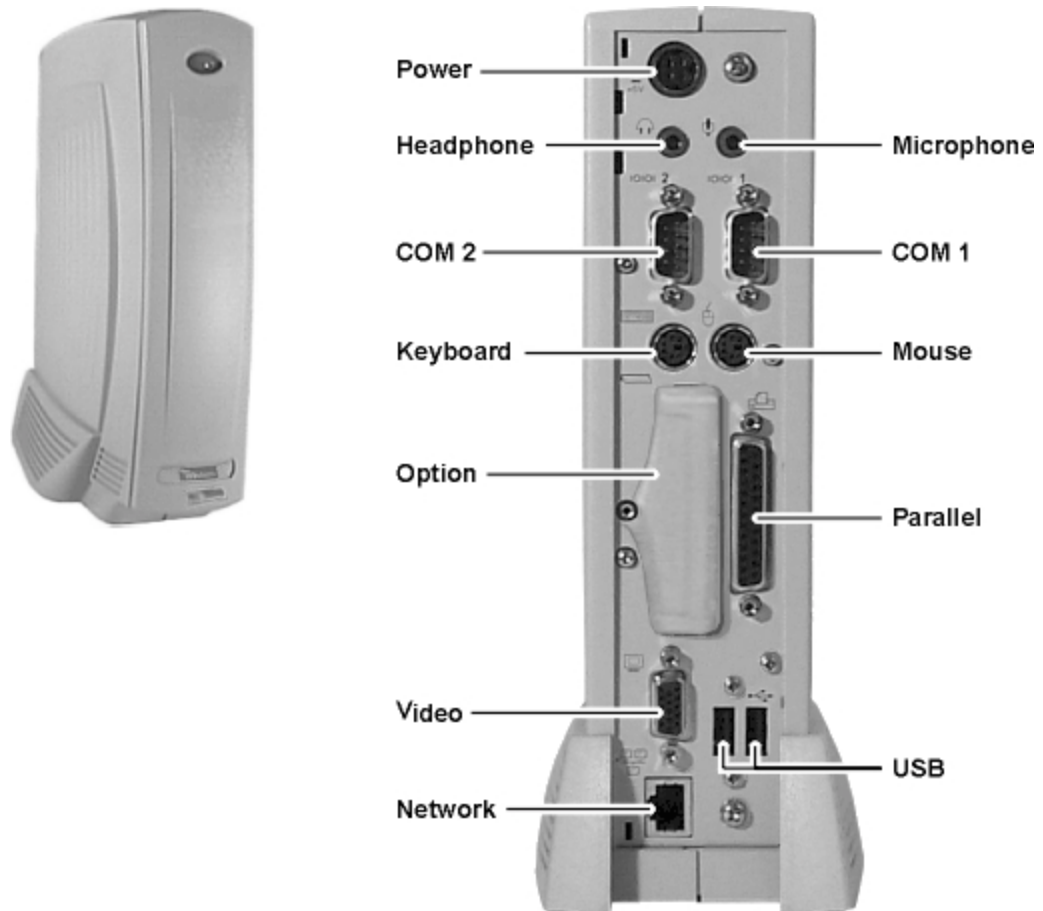

The following items are provided with Model 3350SE terminals:

- Power supply
- Power cord (with domestic versions only)
- Desktop mounting stand (integral)
- Keyboard (with domestic versions only) and mouse
- Installation and user information (also available at www.wyse.com)


**Note**

An optional wall-mount kit (P/N 920189-01) is available. For more information call 1-800-800-WYSE (9973).

Model 3360SE Terminal

The Model 3360SE terminal is a high-performance, standard modular-type 3000 Series terminal. The connectors for power input, a monitor, a keyboard, a mouse, the network, serial/parallel and USB peripherals, headphones, and a microphone are on the back of the unit. An option slot provides a method of connecting supported peripheral devices. The power push-button switch is on the top of the unit. The following figure shows a Model 3360SE terminal and its connectors.

Figure 1-5 Model 3360SE Terminal and Connectors

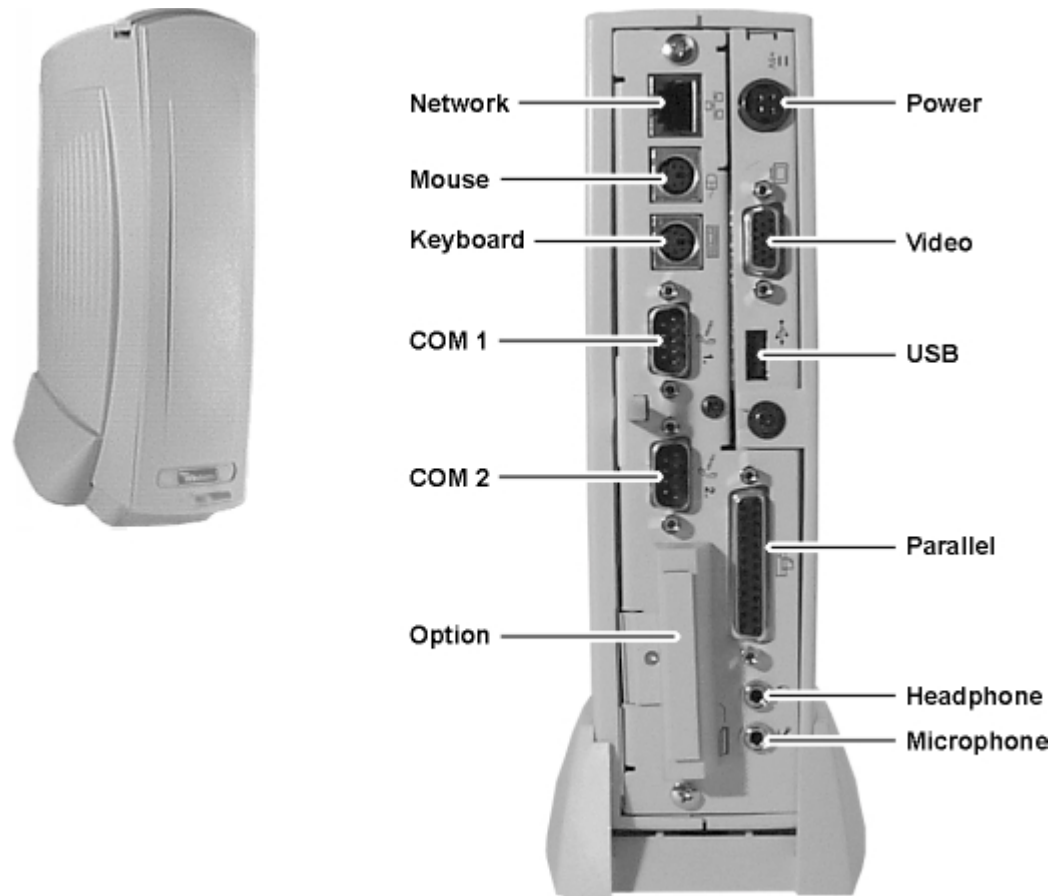

The following items are provided with Model 3360SE terminals:

- Power supply
- Power cord (with domestic versions only)
- Desktop mounting stand
- Keyboard (with domestic versions only) and mouse
- Installation and user information (also available at www.wyse.com)




Note

Optional wall-mount and cable shroud kits (P/N 920190-01 and P/N 920198-01) are available. For more information call 1-800-800-WYSE (9973).

Model 3630LE Terminal

The Model 3630LE terminal is a medium-performance, integrated-type 3000 Series terminal with a 15" color flat-panel display. The connectors for power, a USB keyboard (with mouse), the network, and USB peripherals are on the back of the unit. The power push-button switch, the monitor controls, and connectors for a microphone and headphones are on the front of the unit. The following figure shows a Model 3630LE terminal and its connectors.

Figure 1-6 Model 3630LE Terminal and Connectors

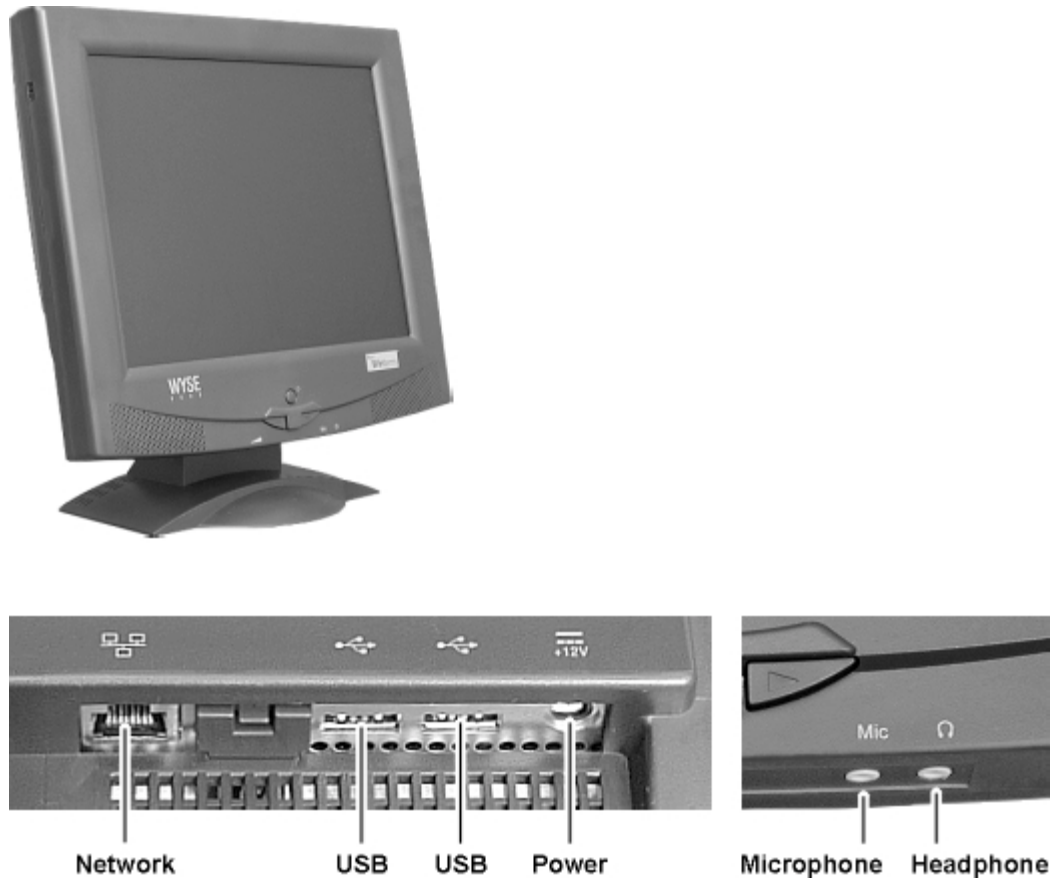

The following items are provided with Model 3630LE terminals:

- Power supply
- Power cord (with domestic versions only)
- Keyboard (with domestic versions only) and mouse
- Installation and user information (also available at www.wyse.com)

Model 3720SE Terminal

Model 3720SE is an integrated type 3000 Series terminal with a 15" color CRT display. The connectors for AC power input, the keyboard, a mouse, the network, serial/parallel peripherals, headphones, and a microphone are on the back of the unit. An option slot provides a method of connecting supported peripheral devices. The power push-button switch and the monitor controls are on the front of the unit. The following figure shows a Model 3720SE terminal and its connectors.

Figure 1-7 Model 3720SE Terminal and Connectors




The following items are provided with Model 3720SE terminals:

- Power cord
- Keyboard (with domestic versions only) and mouse
- Installation and user information (also available at www.wyse.com)

Model 3730LE Terminal

The Model 3730LE is an integrated type 3000 Series terminal with a 17" color CRT display. The connectors for a USB keyboard (with mouse), USB peripherals, the network, and connectors for the base and monitor subunit power, monitor video, and audio cables are on the back of the terminal. The audio jacks and the monitor controls are on the front of the monitor panel and the power push-button switch is on the base. The following figure shows a Model 3730LE integrated terminal and its connectors.

Figure 1-8 Model 3730LE Terminal and Connectors

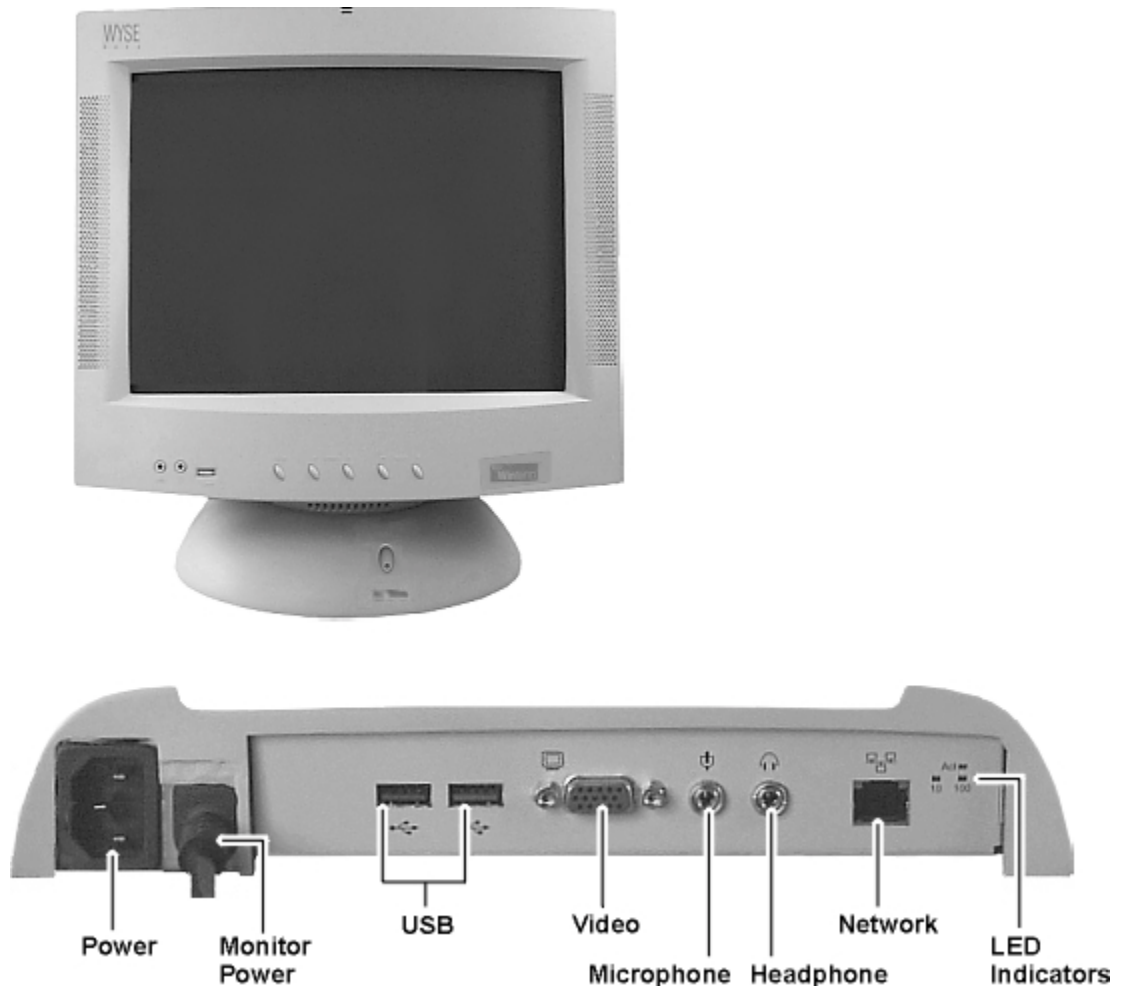

The following items are provided with Model 3730LE terminals:

- Power cord (with domestic versions only)
- Keyboard (with domestic versions only)
- Mouse
- Installation and user information (also available at www.wyse.com)

3000 Series Terminal Features

The following table lists the features of each WBT model.

Table 1-1 Terminal Features

Feature	3200LE	3230LE	3320SE	3350SE	3360SE	3630LE	3720SE	3730LE
Windows 3.1, Windows 95, Windows 98, and Windows NT applications via Windows 2000	✓	✓	✓	✓	✓	✓	✓	✓
RDP and ICA 3.x application compliant	✓	✓	✓	✓	✓	✓	✓	✓
ICA server connections via serial cable			✓	✓	✓			
10Base-T network communications	✓	✓	✓	✓	✓	✓	✓	✓
100Base-T network communications	✓	✓	✓	✓	✓	✓	✓	✓
Dual high-speed serial ports			✓	✓	✓			
Parallel printer port			✓	✓	✓			
Single USB port					✓			
Dual USB ports	✓	✓		✓		✓	✓	✓
Optional touch screen support		✓			✓			✓
Support for monochrome or color monitor		✓			✓			
Desktop (standard) or wall-mount (optional kit)		✓			✓			
Support for PCMCIA modem					✓			
Print Spooling		✓			✓	✓		✓
Secure RDP & ICA		✓			✓	✓		✓
Media Player		✓			✓	✓		✓
16-bit color support		✓			✓	✓		✓

Table 1-1 Terminal Features, Continued

Feature	3200LE	3230LE	3320SE	3350SE	3360SE	3630LE	3720SE	3730LE
PCMCIA support for CISCO Aironet™ Wireless Ethernet Card					✓			
Network Time Services		✓			✓	✓		✓
Microsoft Internet Explorer 4 support		✓			✓	✓		✓

This page intentionally blank.


2

General Terminal Information

Logging On

If security is enabled (an administrative function), when you turn on your WBT the Terminal Login dialog box shown below (see Figure 2-1) displays (unless your system administrator has configured your terminal for automatic login with your User Name and Password). Type in your user name and password, then click the OK button.

Figure 2-1 Terminal Login Dialog Box

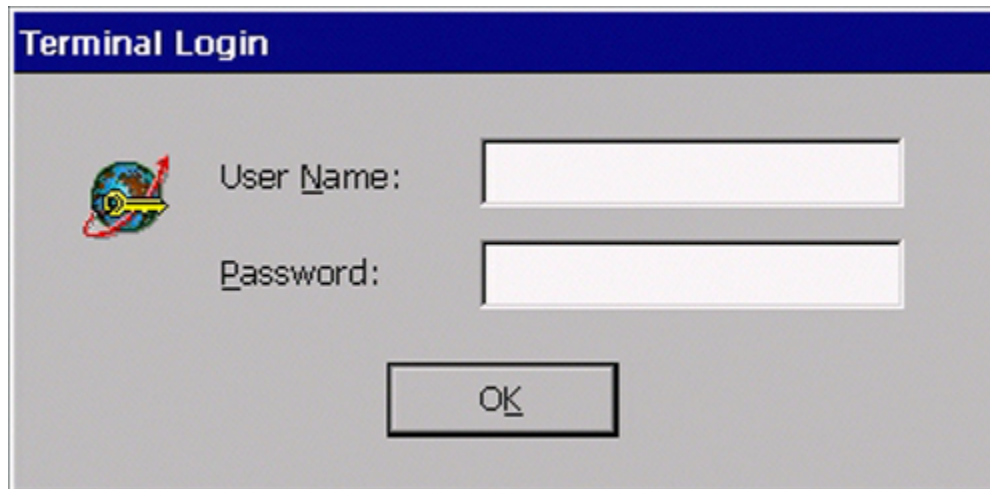The image shows a 'Terminal Login' dialog box with a blue title bar. Inside, there is a small icon of a globe with a key. To the right of the icon, there are two text labels: 'User Name:' and 'Password:'. Each label is followed by a white rectangular input field. Below these fields is a single button labeled 'OK'.

If security has not been enabled or your terminal has been configured for automatic login, the **Winterm Connection Manager** (Figure 2-5) is the first screen you will see after your terminal boots. From the connection manager press **F2** to display the **Terminal Properties** dialog box.

Two of the properties sheets in this dialog box provide general information about your WBT. They are the **General** properties sheet and the **SysInfo** properties sheet. The following paragraphs discuss these properties sheets.

Access Levels

The terminal allows three different levels of access: Administrator, User, and Guest. These levels are assigned to specific User Names by your System Administrator.


Each access level grants certain rights to the user according to the level specified, Administrator having total access and control over all functions of the terminal, User having control over all except the Security functions, and Guest having minimal rights.

The following figures show the Terminal Properties available to each kind of user.

Figure 2-2 Administrator-Level Terminal Properties Screen



Figure 2-3 User-Level Terminal Properties Screen

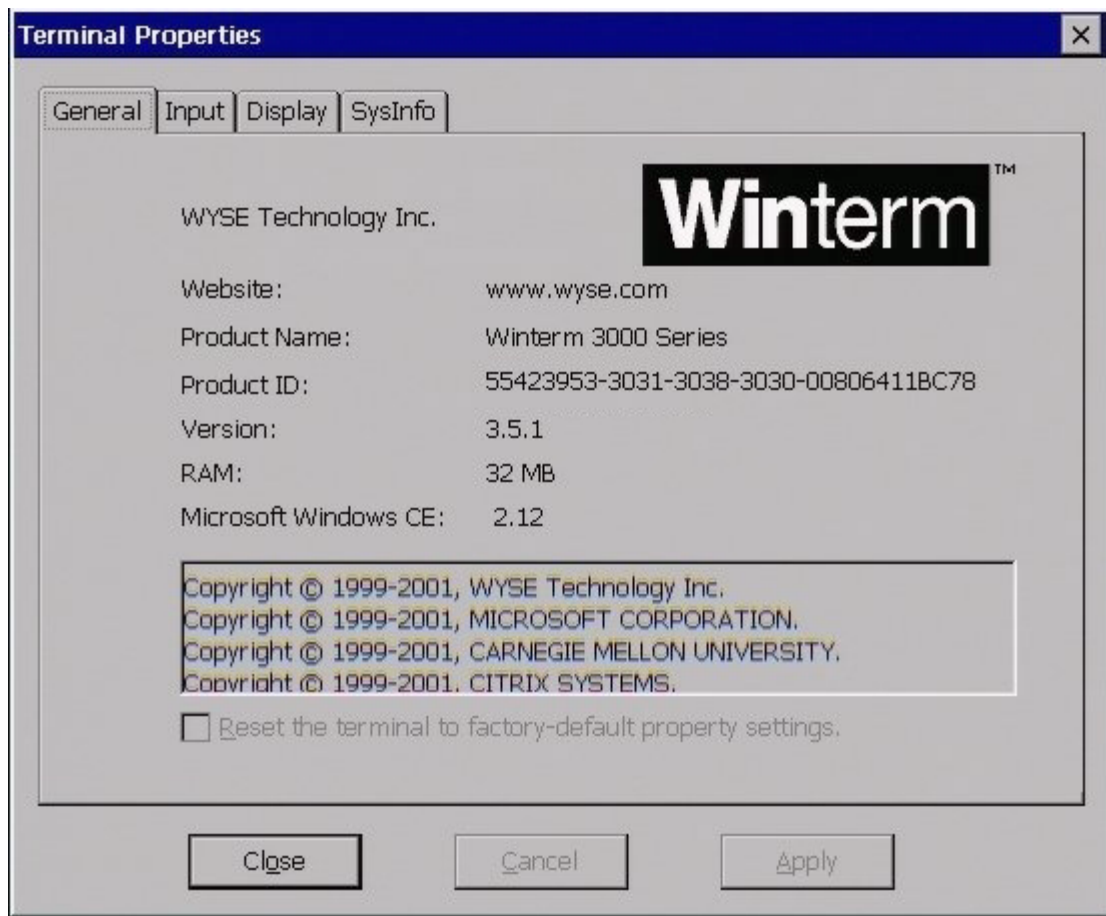Figure 2-4 Guest-Level Terminal Properties Screen

Additionally, the **Configure** tab in the **Winterm Connection Manager** window is only available to Administrator-level users. Information regarding the use of Administrator-level functions is available in the *Winterm 3000 Series Windows-based Terminal Administrators Guide*.

**Note**

If you turn on your WBT and the **Setup Wizard** displays, contact your system administrator. If you are a system administrator, see the administrators guide.

**Note**


See "Managing Connections" in this guide for more information about the **Winterm Connection Manager**.

**Note**

For more information about the **Terminal Properties** dialog box, see your system administrator. If you are a system administrator, see the administrators guide.

The connection manager allows you to connect to one or more servers. See Chapters 6 and 8 for more information about connections and sessions.

Figure 2-5 Winterm Connection Manager

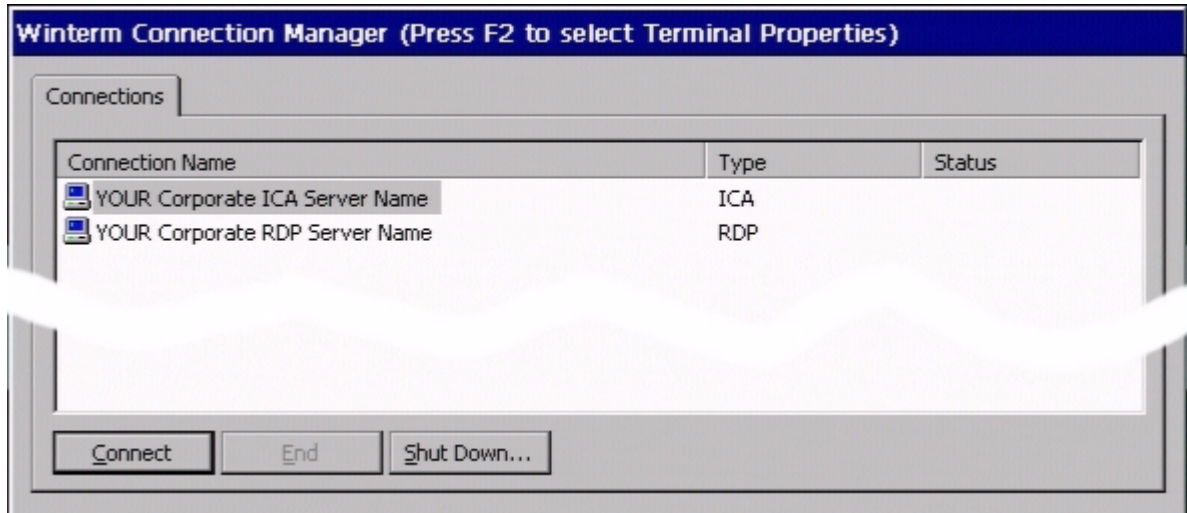

Version and Copyright Information

The **General** properties sheet includes information about the current software on your terminal and copyright statements. See Figure 2-6. The **General** properties sheet is the default for the dialog box.

Figure 2-6 General Properties Sheet

Read the information on this sheet. Click on **Close** to return to the **Winterm Connection Manager**. By default **Cancel** and **Apply** are deactivated.

**Note**

The amount of RAM shown on this properties sheet depends on the model of terminal in use.

**Caution**

There is one function on the **General** properties sheet, **Reset the Terminal to Factory Default Property Settings**. Contact your system administrator before using this function.

System Information

The **SysInfo** properties sheet contains terminal and network information. See Figure 2-7.

Click on the **SysInfo** tab to invoke this properties sheet. Read the information on this sheet. Click on **Cancel** or **Apply** to return to the **Winterm Connection Manager**.

Figure 2-7 SysInfo Properties Sheet

The screenshot shows a Windows-style dialog box titled "Terminal Properties" with a close button (X) in the top right corner. Below the title bar is a tabbed interface with tabs for "General", "Input", "Display", "Network", "Printers", "Apps", "Devices", and "SysInfo". The "SysInfo" tab is currently selected. The main area of the dialog is divided into several sections by thin lines. The "Network Card" section contains a "MAC Address" field with the value "00:80:64:11:BC:78". The "Hardware Number" section contains "Serial Number" (59BU10800038) and "Revision" (N/A). The "TCP/IP Settings" section contains fields for "IP Address" (132.237.6.187), "Subnet Mask" (255.255.255.0), "Gateway" (132.237.6.1), "DNS" (Enable), "Default Domain", "DNS Servers" (132.237.2.26, 132.237.2.174), "WINS" (Enable), and "WINS Servers" (132.237.1.251). The "DHCP Settings" section contains "DHCP" (132.237.1.251), "Lease" (12h), and "Elapsed" (31 min). The "Flash Memory" section contains "Device 1" (16 MB). At the bottom of the dialog are three buttons: "Close", "Cancel", and "Apply".

Network Card	
MAC Address:	00:80:64:11:BC:78

Hardware Number	
Serial Number:	59BU10800038
Revision:	N/A

TCP/IP Settings	
IP Address:	132.237.6.187
Subnet Mask:	255.255.255.0
Gateway:	132.237.6.1
DNS:	Enable
Default Domain:	
DNS Servers:	132.237.2.26, 132.237.2.174
WINS:	Enable
WINS Servers:	132.237.1.251

DHCP Settings	
DHCP:	132.237.1.251
Lease:	12h
Elapsed:	31 min

Flash Memory	
Device 1:	16 MB

Close Cancel Apply

This page intentionally blank.



3

Display Configuration

From the **Winterm Connection Manager** (Figure 2-5) press **F2** on your keyboard. The **Terminal Properties** dialog box displays (see Figure 3-1). The **Display** properties sheet available in this dialog box allows you to configure display screen resolution and turn on the energy savers functions.

To invoke this properties sheet click on the **Display** tab in the **Terminal Properties** dialog box.

Display Screen Resolution

This paragraph discusses display screen resolution referring to Figure 3-1 and using Table 3-1.

Figure 3-1 Display Properties Sheet


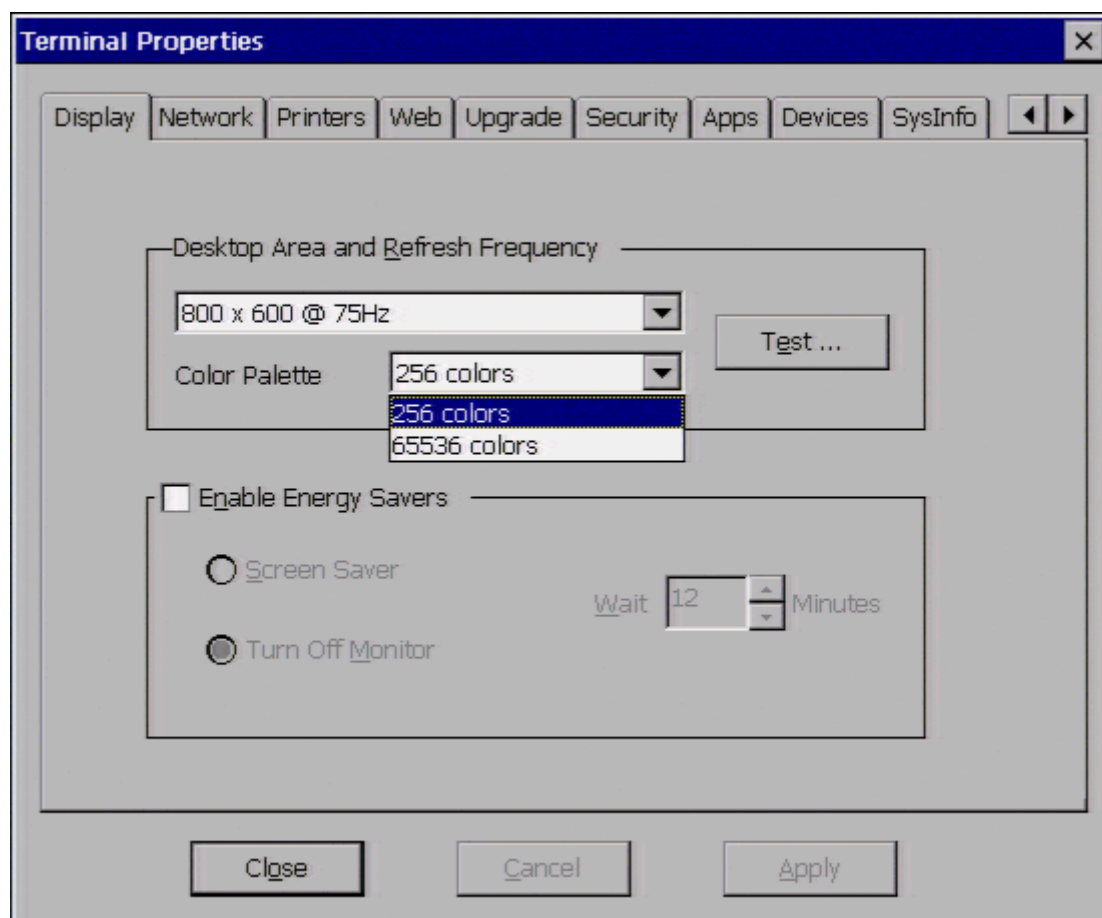


Table 3-1 Display Screen Resolution

Display Properties Sheet Area Called...	To Use...
Desktop Area and Refresh Frequency	The scrolling list box displays the current terminal display screen resolution. Scroll and click on a selection to change the resolution. The default is 640 x 480 @ 60 Hz. Test Click on this command button to test the setting selected in the above scrolling list box. The following dialog box displays:

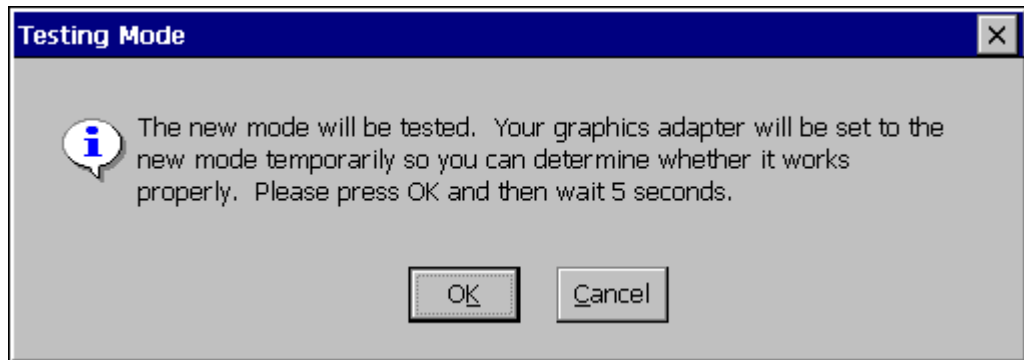

Follow the instructions in the dialog box. If you click on **OK**, a test pattern will display. If you click on **Cancel**, the test is cancelled.

Table 3-1 Display Screen Resolution, Continued

Display Properties Sheet Area Called...	To Use...
	After several seconds the following dialog box displays: 
	Follow the instructions in the dialog box. If you click on Yes , you will return to the Display properties sheet. If you click on No , the following dialog box will display: 
	Follow the instructions in the dialog box.

Energy Savers

This paragraph discusses energy saving features, referring to Figure 3-1 and using Table 3-2.

Table 3-2 Energy Savers

Display Properties Sheet Area Called...	To Use...
Enable Energy Savers	Click on this check box to activate the energy saver functions. When you check this box, all three functions in the group box are activated: Screen Saver Click on this radio button to enable the screen saver. By default this function is not activated. Turn Off Monitor Click on this radio button to use this function as an energy saver. The function works by shutting off the terminal's display rather than displaying a screen saver. By default this function is not activated. When Enable Energy Savers is activated, this function is enabled. Wait Adjust the amount of time (in minutes) that elapses before the energy saver function you have selected starts. You can enter a number or use the scrolling list. By default the function is not activated. When it is activated, the default is 12 .

To finish, click on **Apply**, then **Close**. The following dialog box displays:

Figure 3-2 Terminal Settings Change Dialog Box



You can also click on **Cancel** to cancel any changes and return to the **Winterm Connection Manager**.

4

Integrated Terminal Monitor Adjustments

Model 3630LE

Figure 4-1 shows the user controls available on the Model 3630LE flat-panel terminal. They are described in Table 4-1.

Figure 4-1 Model 3630LE User Controls

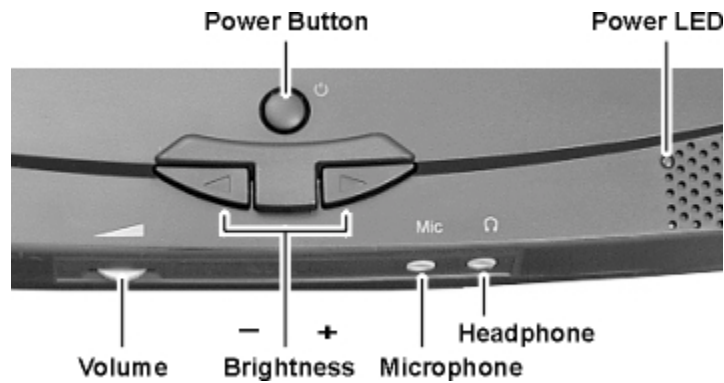


Table 4-1 Model 3630 User Controls

Control	Definition
Power Button and Power LED	Press the double-action push button to turn power on and off. The power LED indicates power status (green - full on, amber - standby or shutting down). Be sure to close all connections and shut down the operating system before turning power off.  Caution Do not remove power to the terminal while the Power LED is lit (green or amber). This could damage the contents of flash memory.

Table 4-1 Model 3630 User Controls, Continued


Control	Definition
Brightness	Increases or decreases the strength (lightness or dimness) of the display image.
Volume	Controls the audio volume from the speakers, or if the headphones are plugged in the speakers will be disabled and the headphone volume is controlled.
Note The microphone (Mic) input is not yet supported by software on the Model 3630LE.	

Model 3720SE

This section explains the various user adjustments available on the Model 3720SE terminal monitor.

The terminal uses an OSD (on-screen display) adjustment feature. The OSD is invoked with the buttons on the front panel (see **Display Controls** below).

Figure 4-2 Model 3720SE Display Controls

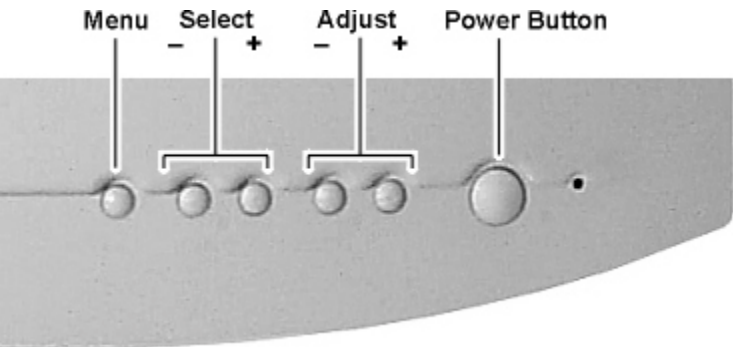

Instructions for using the terminal’s front panel are listed in the following table.

Table 4-2 Model 3720SE Terminal Front Panel

Button	Function
MENU (OSD)	To use: Press the MENU button to invoke the OSD (refer to the following figure). Press the plus [+] or minus [-] SELECT buttons to select the adjustment you want to make (see Table 4-3 for settings). Press the ADJUST plus [+] or minus [-] buttons to make your adjustment. Press MENU to save your adjustments and close the OSD.  Note The OSD can be invoked at any time the terminal is on, even while running an application. It automatically closes after a period of inactivity (2 minutes). If this happens before you complete your adjustments, press the MENU button to invoke the OSD again.
SELECT (Brightness)	Press the plus [+] and minus [-] buttons on the terminal’s front panel to increase or decrease the display’s brightness.
ADJUST (Contrast)	Press the plus [+] and minus [-] buttons on the terminal’s front panel to increase or decrease the display’s contrast.

Figure 4-3 Model 3720SE OSD (On-Screen Display) Menu


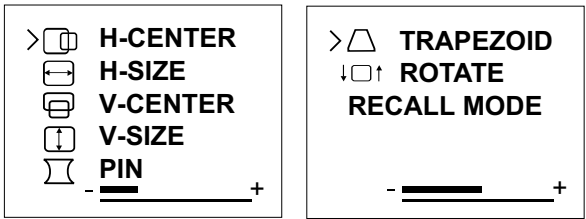


Table 4-3 (following) describes the functions of the OSD menu.

Table 4-3 Model 3720SE OSD Menu

Function	Description
H-CENTER	H-CENTER adjusts the screen's horizontal center from left to right.
H-SIZE	H-SIZE adjusts the screen's width.
V-CENTER	V-CENTER adjusts the screen's vertical center, top to bottom.
V-SIZE	V-SIZE adjusts the screen's height.
PIN	PIN (Pincushion) adjusts screen distortion, where both sides of the display sag inward toward the center or bow outward from it.
TRAPEZOID	TRAPEZOID adjusts the screen's right- and left-hand sides so they are parallel.
ROTATE	ROTATE corrects the screen's rotation. Use this function if the display tilts left or right.
RECALL MODE	Select this item to reset the display to the factory preset color temperatures (also see the following figure): RECALL MODE Preset 1 is 9300°K Preset 2 is 6550°K Preset 3 is 5500°K The color adjustments are: R This adjusts the display's red hues. G This adjusts the display's green hues. B This adjusts the display's blue hues.


Figure 4-4 Model 3720SE Recall Mode

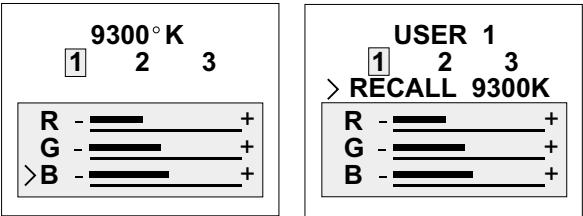

Model 3730LE

This section explains the various user adjustments provided on the Model 3730LE terminal monitor.

Figure 4-5 Model 3730LE Display Controls

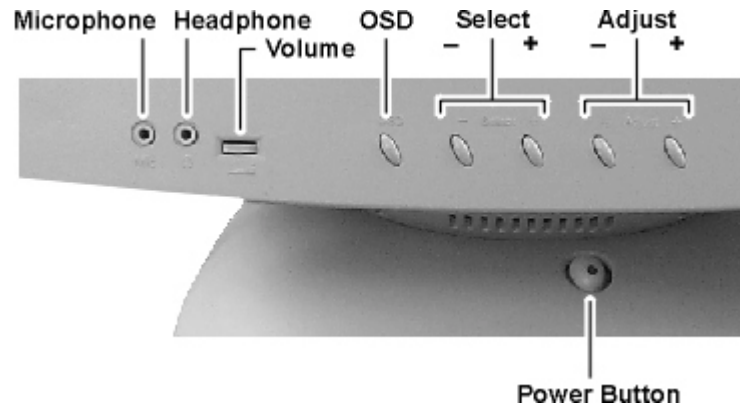

Operation

OSD

Press the **OSD** button to access the OSD master picture, which includes a resolution and frequency indicator as well as the **Adjustment Window**. Press the button again to manually close the window (the window will automatically close after 10 seconds of inactivity).

Select

After activating the On-Screen Display window by pressing the **OSD** button (see above), the **Select** button allows you to choose the desired adjustment. Pressing the **Select +** or **Select -** button will step through all available adjustment icons (controls). The selected item will be highlighted red.

Adjust

After activating the item to be adjusted with the **Select** button, press the **Adjust** button. A window containing an adjustment bar will appear. Pressing the **Adjust +** button will cause the bar to increase; pressing the **Adjust -** button will cause the bar to decrease.

To continue selecting monitor adjustments, press the **Select** key once again to choose the item to be changed, then press the **Adjust** key to adjust the display. Continue in this manner until all adjustments have been made.

After completing all adjustments, press the **OSD** button again to close the Adjustment Window.

Volume

Used to adjust audio volume.



Note

The microphone (Mic) input is not yet supported by software on the Model 3730LE.

Auto Registration

Adjustments are automatically registered after the **Adjust** switch is pressed, or by letting the display automatically close the windows after 15 seconds of inactivity.

Recall factory default settings

To cancel adjustments and recall presets (revert to factory settings), press the **Select** - and **Adjust** - buttons simultaneously to activate the recall function. This resets the display mode to the factory-preset value.

Auto Degauss

This model is equipped with an automatic degaussing function. Degaussing is automatically activated when the display is cold (**i.e., after having been powered off for at least 20 minutes**) and power is applied. If the monitor is repositioned while warm and discoloration is observed, turn off the monitor and allow it to cool or select the degauss option in the OSD display. Upon power-up, the monitor is automatically degaussed and the discoloration will disappear.

Table 4-4 Screen Control Definitions

Control	Definition
Brightness	Increases or decreases the intensity (illumination) of the image.
Contrast	Increases or decreases the strength (lightness or dimness) of the image.
Horizontal Position	Moves the image horizontally on-screen left (-) or right (+).
Horizontal Sizing	Increases (+) or decreases (-) the size of the image horizontally.
Vertical Position	Moves the image vertically on screen up (+) or down (-).
Vertical Sizing	Increases (+) or decreases (-) the size of the image vertically.
Pincushion	Adjusts the side pincushion (or barreling).
Pinbalance	Adjusts the curvature of the left and right sides of the image.
Trapezoid	Corrects the image shape to a rectangle.

Table 4-4 Screen Control Definitions, Continued

Control	Definition
Parallel	Corrects the image shape to a rectangle.
Color temperature	Adjusts the color temperature. When you select 9300K or 6500K mode, you can restore 9300K or 6500K settings to the factory preset values. When you select User mode, you can change Red or Blue video output gain as desired.
OSD	Moves the OSD position.
Recall	Resets the display settings to their original factory values.
Degauss	Improves image clarity by demagnetizing the metal frame of the CRT. For best results, turn the terminal off, wait 20 minutes, then turn it on again. Allow a minimum of 20 minutes to elapse before using the Auto Degauss function, or select the Degauss function from the OSD screen.
Rotation	Corrects the screen tilt by adjusting the screen image to be horizontally level (adjust VR at back cover near the signal cable).

This page intentionally blank.


5

Keyboard and Mouse Configuration

From the **Winterm Connection Manager** you can configure your terminal's keyboard and mouse. Press **F2** on your keyboard. The **Terminal Properties** dialog box displays. In this dialog box is a properties sheet you can use for setting up your keyboard and mouse. It is the **Input** properties sheet. Figure 5-1 shows this properties sheet.

To invoke this properties sheet click on the **Input** tab.

Figure 5-1 Input Properties Sheet

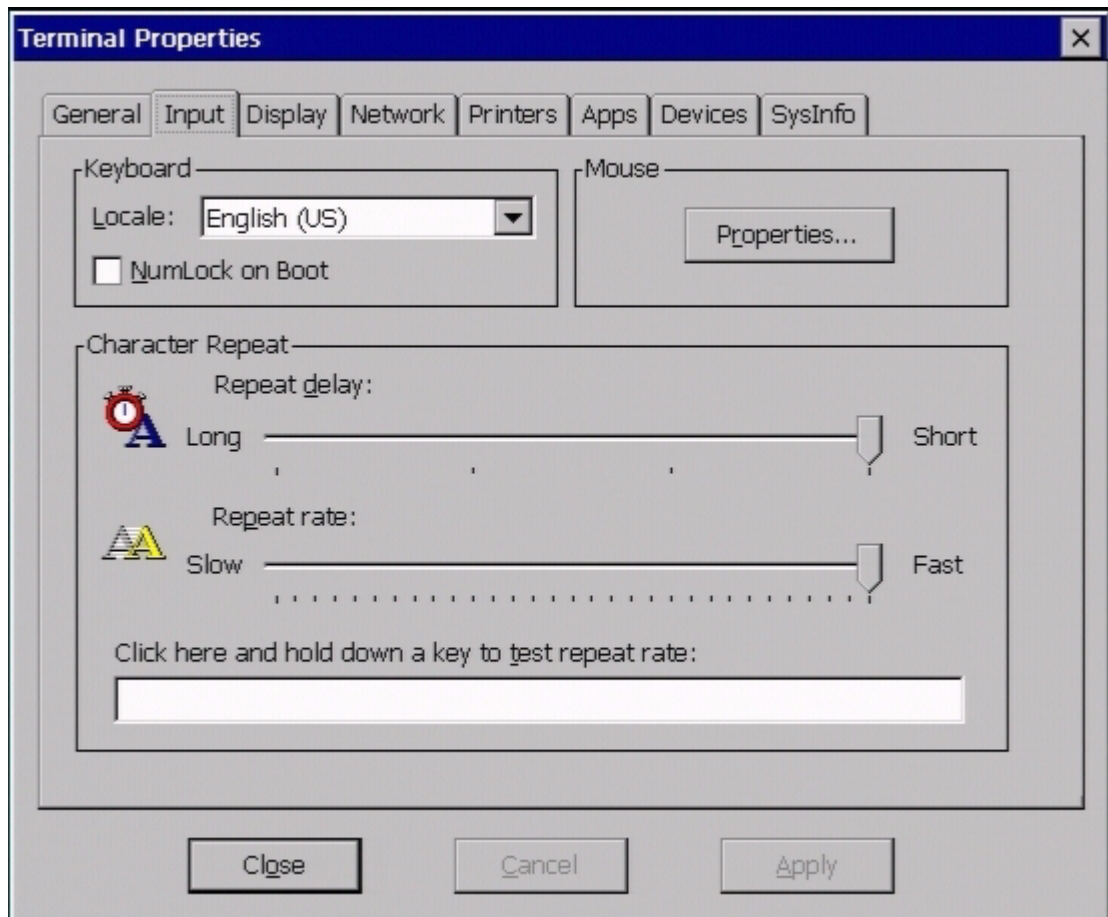

Keyboard

This paragraph discusses configuring your keyboard, referring to Figure 5-1 and using Table 5-1.

Table 5-1 Keyboard

Input Properties Sheet Area Called...	To Use...
Keyboard	Use this group box to configure your keyboard: Locale Use this scroll list to select a language for the keyboard: Belgian Dutch Belgian French Brazilian (ABNT) Canadian Eng (Multi) Canadian FR (Multi) Canadian French Croatian Czech Danish Dutch English (UK) English (US) Finnish French German Greek Hungarian Italian Italian (142) Japanese Latin American Norwegian Polish (214) Polish (programmer) Portuguese Romanian Russian Slovak Slovenian Spanish Spanish Variation Swedish Swiss French Swiss German Turkish-F Turkish-Q US International Click on a selection to highlight it. The default is English (US). Note An IEPC keyboard is required for any language other than English (US). The keyboard layouts are different for each of the languages listed above. NumLock On Boot Click on this check box to enable the Num Lock function on your keyboard. When checked, the keyboard will boot up with the Num Lock function enabled.

Table 5-1 Keyboard, Continued

Input Properties Sheet Area Called...	To Use...
Character Repeat	The group box used to set the keyboard character repeat parameters: Repeat Delay Use this slider control to adjust the repeat delay of keyboard characters. Repeat Delay determines how quickly the same character will appear on screen when typed more than once. Repeat Rate Use this slider control to adjust the repeat rate of a keyboard character. Repeat Rate determines how quickly the same character will appear on screen when the associated key is held down.


To finish, click on **Apply** then **Close** to apply the changes you made and return to the **Winterm Connection Manager**.

Mouse

This section discusses configuring your mouse referring to Figure 5-1 and using Table 5-2.

Table 5-2 Mouse

Input Properties Sheet Area Called...	To Use...
Mouse	Use the following dialog box to configure mouse attributes.
Properties...	Click on this command button to invoke the Mouse Properties dialog box. Use it to set your mouse properties.

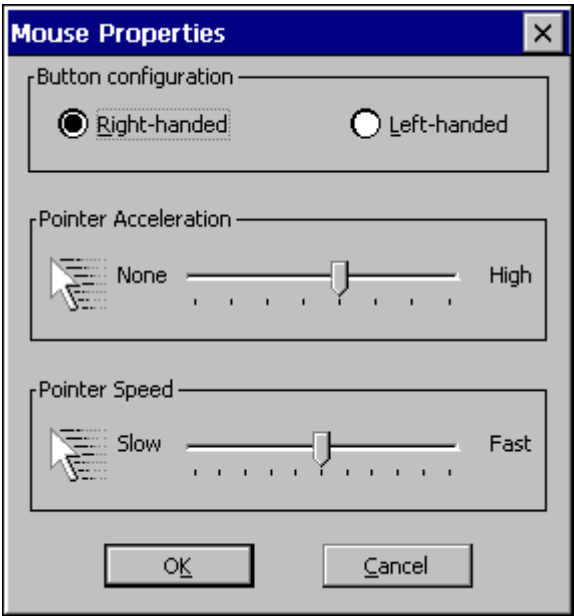

Button Configuration

Select from:

Right-handed

Left-handed

to choose which button you will use on your mouse. The default is **Right-handed**.

Pointer Acceleration

Use this slider control to adjust the acceleration of the mouse.

Pointer Speed

Use this slider control to adjust the speed of the mouse.

To finish, click on **Apply** then **Close** to apply the changes and return to the **Winterm Connection Manager**.



6

Managing Connections

The **Winterm Connection Manager** is designed to help you manage your network connections. The manager consists of the **Connections** properties sheet and the **Configure** properties sheet. With it you can configure, make, and end connections, and gracefully shut down the terminal. Figure 2-5 shows the **Winterm Connection Manager**.

The **Winterm Connection Manager** is automatically invoked when the terminal is turned on.



Note

If you turn on your WBT and the **Setup Wizard** displays, contact your system administrator. If you are a system administrator, see the administrators guide.

Configuring a Connection

The functions of the **Configure** properties sheet are used to add, modify, and delete connections. See your system administrator or the administrators guide for more information about configuring connections.

Making a Connection

The functions of the **Connections** properties sheet (see Figure 2-5) are used to:

- Make terminal connections
- Display the status of a connection
- End a connection
- Shut down the terminal gracefully



Note

The **Connections** properties sheet is the default sheet displayed by the **Winterm Connection Manager**.

Table 6-1 identifies and describes each of functions of the properties sheet.

Table 6-1 Connections Properties Sheet

Function	Description
Connection Name	This application window lists the connections that you can use. Default RDP Connection and Default ICA Connection are the default connections for the window.  Note See the administrators guide for information about creating connections.
Type	This list shows the type of connection. The defaults are RDP and ICA.
Status	This list shows the status of the connection. If a connection is live, the status for that connection will be Active. If a connection is not live, the list will show a blank.
Connect	Click on a connection in the Connection Name list box to highlight it. Click on the Connect command button to make the highlighted connection. You can also double-click on a selection to make a connection.
End	See Ending a Connection.
Shutdown	See Shutting Down the Terminal.


Ending a Connection

Click on the **End** command button to end the connection process. When you press the **End** button and the connection is active, the **End Task** dialog displays. The **End** command button is enabled when one or more sessions become active.

Shutting Down the Terminal

Use the **Shutdown Window** dialog box to log off, shut down, or shut down and restart the terminal. Figure 6-1 shows the **Shutdown Window** dialog box.

Figure 6-1 Shutdown Window Dialog Box

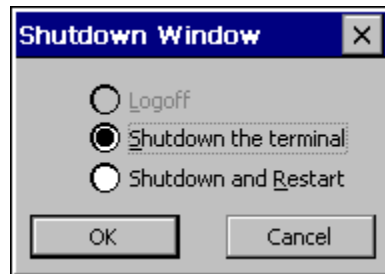

Click on the **Shutdown** command button in the **Winterm Connection Manager** to invoke this dialog box. The following table describes the functions of this dialog box.

Table 6-2 Shutdown Window Dialog Box

Function	Description
Logout	Click on this radio button to invoke the Terminal Login dialog box. By default this command button is not activated. The terminal's security function must be enabled to activate this radio button.  Note See the administrators guide or contact your system administrator for more information about logging out.
Shutdown the Terminal	Click on this radio button to shut down the terminal without restarting it. A dialog box displays after you initiate this action. It prompts you about whether you want to continue. By default this radio button is activated and enabled.
Shutdown and Restart	Click on this radio button to shut down then restart the terminal. By default this function is enabled but not activated.


This page intentionally blank.

7

Browser Configuration

The Microsoft Internet Explorer Web browser is resident on 3000 Series terminals that are factory-configured with at least 16 MB of flash memory (see the note below). This chapter describes how to set the client-based browser as a connection using the **Winterm Connection Manager**.

Figure 7-1 Internet Explorer Browser Window

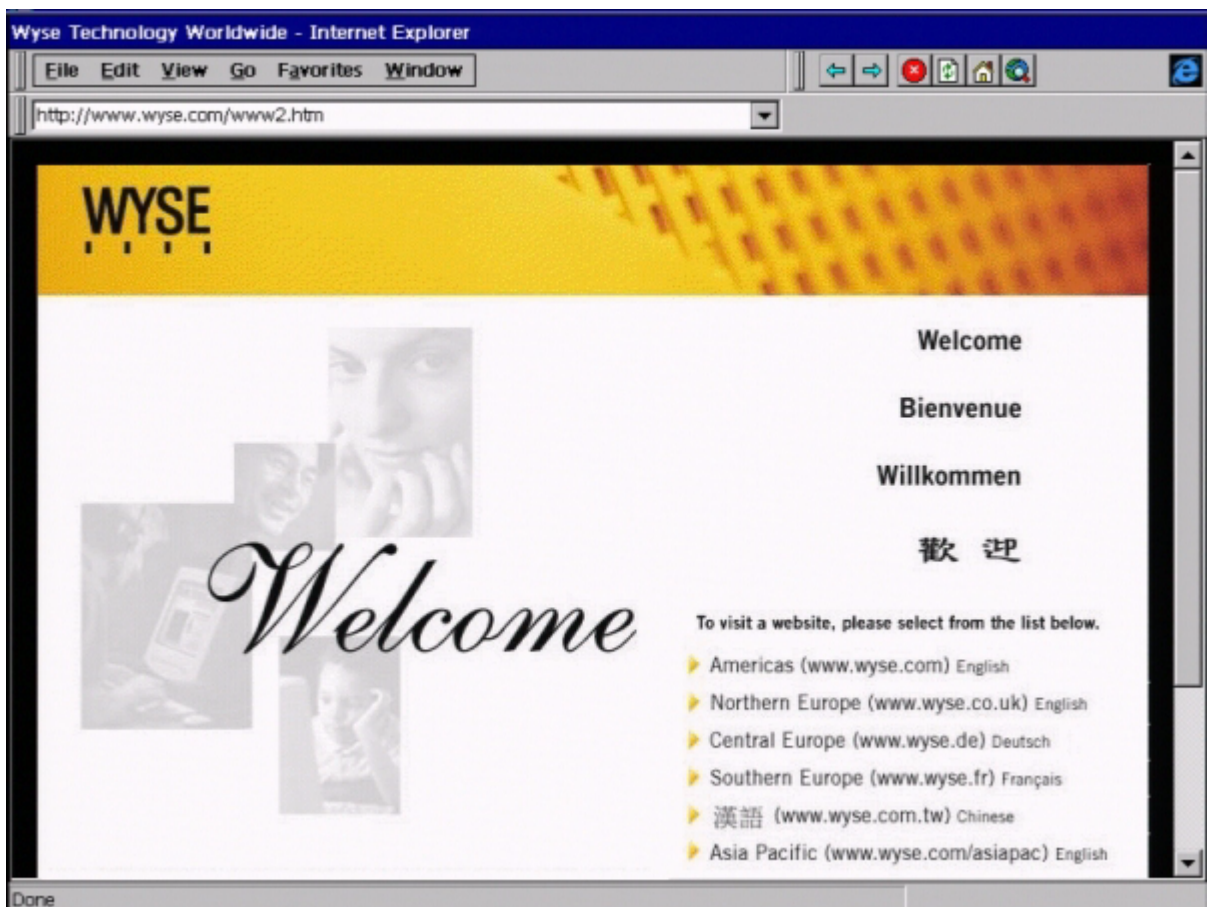


Note

To display the amount of flash memory installed in your terminal, refer to the Sysinfo properties sheet, described in "System Information." Terminals with less than 16 MB of flash memory may be upgraded with additional memory to support the factory image that includes Internet Explorer. For more information call 1-800-GET-WYSE (1-800-438-9973).

Adding a Browser Connection

When you first power-up your Winterm you will see the **Winterm Connection Manager**.

Figure 7-2 Winterm Connection Manager

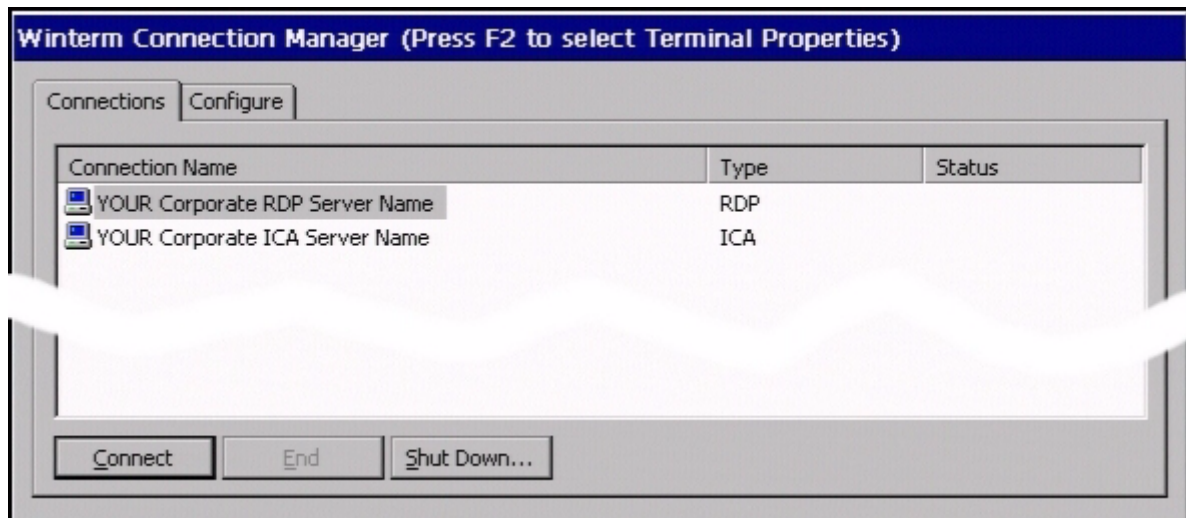

The **Winterm Connection Manager** allows you to configure your local browser. Click on the **Configure** tab to begin setting up your browser.




Note

The operating system installed on the terminal supports 40-bit encryption. Some secure Web sites may require a higher level of encryption to allow a connection.


A new set of buttons will appear at the bottom of the **Winterm Connection Manager** window.

Figure 7-3 Configure Tab Buttons

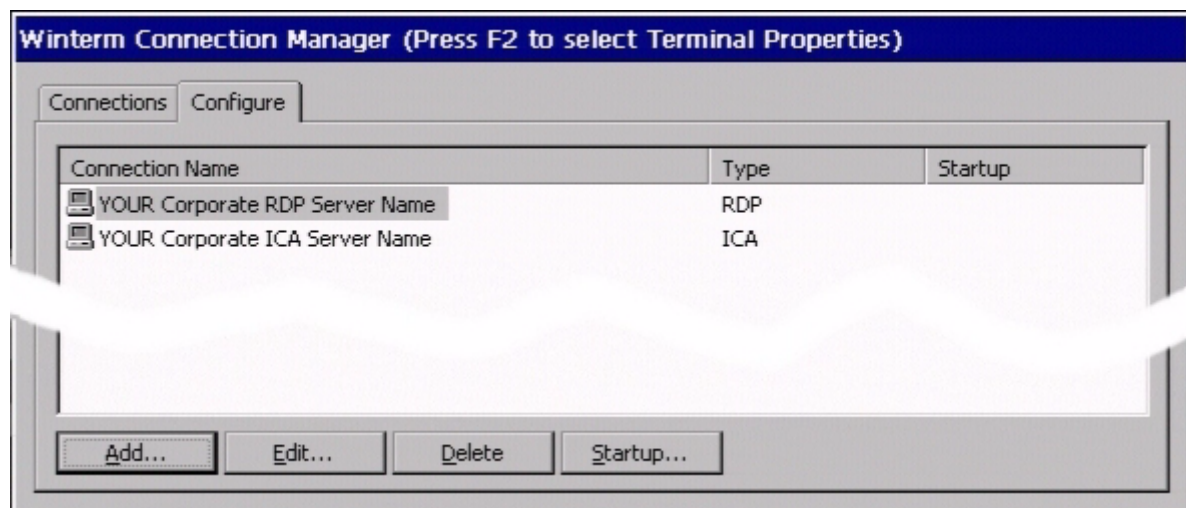


Click the **Add** button and choose Internet Explorer from the drop-down box and click on the **OK** button.

Figure 7-4 New Connection Dialog

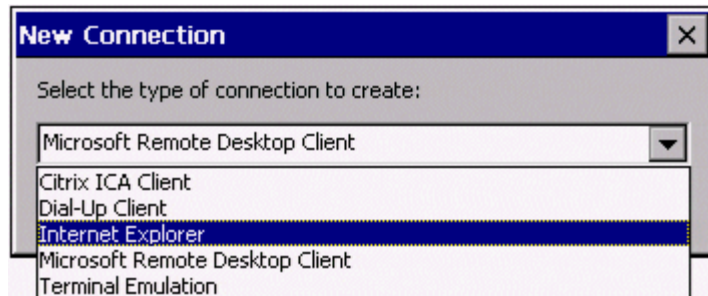

Type a name for your browser connection in the title box of the Internet Explorer Setup dialog box and click **OK**.


Figure 7-5 Internet Explorer Setup Dialog Box

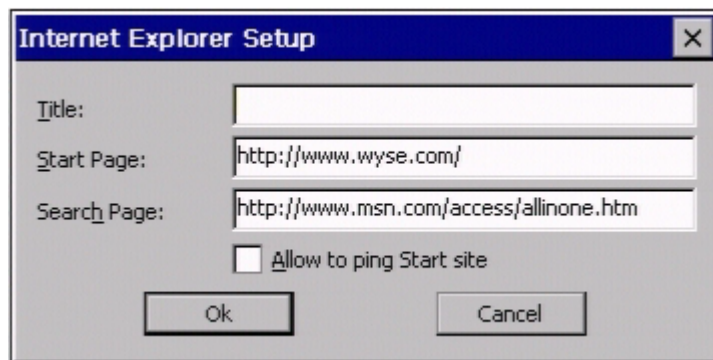

Click the **Connections** tab at the top of the **Winterm Connection Manager** window.

If you want to have the browser automatically open when you start your terminal, click the **Automatically start the selected connection at startup** radio button in the **Connection Startup** dialog box, Figure 7-6.

Figure 7-6 Connection Startup Dialog Box

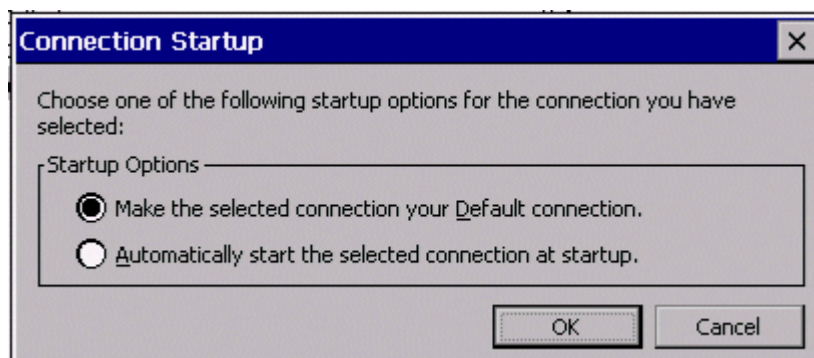

This page intentionally blank.



8

Multiple Sessions

Setting Up Multiple Sessions

To start multiple sessions:

1. Click on a connection in the **Connection Name** list in the **Winterm Connection Manager** to launch your first session. (See “Managing Connections” for more information about configuring connection parameters).
2. Press **Ctrl+Alt+End** while the connection is active to return to the **Winterm Connection Manager**.
3. Click on another connection in the **Connection Name** list to launch another session.

Managing Multiple Sessions

Your terminal is designed to handle multiple sessions. The number of active sessions you can have with your terminal is dependent on the following factors:

- Amount of RAM
- The types of connections open
- Number of sessions configured



Note

The terminal emulation software provided with your terminal limits the number of simultaneous terminal emulation connections to eight.

See your system administrator for detailed information about your terminal's ability to conduct multiple sessions.

Manipulating Multiple Sessions

With multiple sessions active, you can toggle between sessions. To toggle between sessions:

- Press **Ctrl+Alt+↑** to proceed to the previous session.
- Press **Ctrl+Alt+↓** to proceed to the next session.

You can also return to the **Winterm Connection Manager** by pressing **Ctrl+Alt+End**.

This page intentionally blank.

9

Getting Help

Getting Help provides solutions to problems that may occur while you are using your terminal.

Troubleshooting Your Terminal

Troubleshooting the Terminal, Table 9-1, lists some common problems and the solutions to those problems.

Table 9-1 Troubleshooting the Terminal

Problem	Solution
When you turn on the terminal nothing happens.	1. Ensure that the VGA connector is securely connected (modular terminals only). 2. Ensure that the power cord is connected to the power connector on the terminal's back panel or power supply (as appropriate for the terminal in use). 3. Ensure that the power cord is plugged into an AC outlet that works.
When you turn on the terminal the screen remains blank and the power indicator light remains orange.	For Model 3350SE: Turn the terminal off, then on again. All other models: Depress the power push button for at least 5 seconds to execute a power reset.
During power up the following message displays: Keyboard testing failed	Ensure that the keyboard cord is connected to the keyboard (PS/2 or USB) connector on the terminal's back panel.
When you turn on the terminal, the Winterm Connection Manager or the WBT Setup Wizard appears, but the mouse does not function.	Ensure that the mouse cord is properly connected.

Table 9-1 Troubleshooting the Terminal, Continued

Problem	Solution
You are not able to make a network connection using the Winterm Connection Manager .	1. Verify that the network cable is properly attached to the terminal. 2. Verify that the network cable is connected to a hub or other network outlet. 3. Check with your network system administrator to ensure that the WBT is set up properly and that the server you are trying to connect to is operating correctly.
While connected to a server the keyboard and the mouse freeze.	The connection to the server may be broken. 1. Turn the terminal off, then on again. 2. Attempt to make another connection. If you can not make the connection again: 1. Verify that the network cable is properly connected. 2. Check with your network system administrator to ensure that you are using the correct network cable.
You are not able to print using the parallel port.	1. Make sure that the printer is plugged into the AC outlet and turned on. 2. Check the cable connection between the printer and the terminal. 3. Ensure that the printer is on line. 4. Ensure that the printer is properly configured in the print manager. 5. Ensure that the printer has not been paused.
You are not able to print using the serial port.	1. Make sure that the printer is plugged into the AC outlet and turned on. 2. Check the cable connection between the printer and the terminal. 3. Ensure that the printer is on line. 4. Ensure that the printer is properly configured in the print manager. 5. Ensure that the printer has not been paused.

**Note**

If any other error messages are displayed, you have any other problems, or you can not find a solution in this table, contact your network system administrator.

Glossary

The following glossary is a list of commonly used terms in this guide.

Term	Definition
10Base-T	One of several adaptations of the Ethernet (IEEE 802.3) standard for Local Area Networks (LANs). The 10Base-T standard (also called Twisted Pair Ethernet) uses a twisted-pair cable with a maximum length of 100 meters. The cable is thinner and more flexible than the coaxial cable used for the 10Base-2 or 10Base-5 standards.
100Base-T	A networking standard that supports data transfer rates up to 100 Mbps (100 megabits per second). 100Base-T is based on the older Ethernet standard. Because it is 10 times faster than Ethernet, it is often referred to as Fast Ethernet. Officially, the 100Base-T standard is IEEE 802.3u. Like Ethernet, 100Base-T is based on the CSMA/CD LAN access method. There are several different cabling schemes that can be used with 100Base-T, including: • 100Base-TX: two pairs of high-quality twisted-pair wires • 100Base-T4: four pairs of normal-quality twisted-pair wires • 100Base-FX: fiber optic cables
Bootstrap	A technique designed to cause a circuit, stage, or operation to bring itself into a desired state by means of its own action. Used as a machine routine, the bootstrap technique involves loading the first few instructions into storage; these instructions are then used to bring in the rest of the routine--usually by entering a few manual instructions or by using a special keystroke combination.
CHAP	Challenge-Handshake Authentication Protocol. An authentication scheme used by PPP servers to validate the identity of the originator of the connection upon connection or any time later.
CRT	Cathode-Ray Tube. A large vacuum tube with a viewing face in which an electron beam is focused and controlled to form characters and other images.
CTS	Clear to Send. Control signal sent from the DCE. Indicates that the DTE may send data.
DCE	Data Communications Equipment. Devices that provide the functions required to establish, maintain, and terminate a data transmission connection, e.g., a modem.
DHCP	Dynamic Host Configuration Protocol. A protocol for assigning dynamic IP addresses to devices on a network.
DNS	Domain Name Service. A general-purpose distributed, replicated, data query service chiefly used on the Internet for translating host names into Internet addresses.

Glossary 2

Download	To transfer data from a processing unit to an attached device. For example, from a host to the terminal.
DSR	Data Set Ready. A hardware signal sent by a communications device to indicate readiness to send and receive data.
DTE	Data Terminal Equipment. A device that acts as the source and/or destination of data and which controls the communication channel. DTE includes terminals, computers, protocol converters, and multiplexors. DTE is usually connected via an RS-232 serial line to Data Communication Equipment (DCE), typically a modem. It is necessary to distinguish these two types of devices because their connectors must be wired differently if a straight-through cable (pin 1 to pin 1, pin 2 to pin 2 etc.) is to be used. DTE should have a male connector and should transmit on pin three and receive on pin two. It is a curious fact that many modems are actually DTE according to the original standard.
DTR	Data Terminal Ready. A hardware signal sent by a terminal to indicate readiness to send and receive data.
Ethernet	A baseband local area network specification developed jointly by Digital Equipment Corp., Xerox, and Intel to interconnect computer equipment using coaxial cable and transceivers. An Ethernet LAN provides ten million bits per second of capacity for high-speed terminal-to-computer communication or computer-to-computer file transfer.
FCC	Federal Communications Commission. The Government body that regulates all telecommunications originating in the U.S., including transmission over telephone lines.
Firmware	A computer program or software stored permanently in a PROM or ROM or semi-permanently in an EPROM.
Flow control	The procedure for regulating the flow of data between two devices, flow control prevents the loss of data when one device's receiving buffer has reached its capacity.
FTP	File Transfer Protocol. FTP is a program for transferring files in TCP/IP environments such as the Internet in which a user, acting as a client, downloads files from a remote server. FTP is a core component in every TCP/IP system and is implemented at the Applications layer with respect to the OSI protocol model. Its operation is based on the Telnet program and TCP. FTP is available on a wide variety of computer systems and serves as a common protocol for transferring files between systems.
GUI	Graphical User Interface (pronounced "gooey"). The use of pictures rather than just words to represent the input and output of a program. A program with a GUI runs under some windowing system (e.g. Microsoft Windows®). The program displays certain icons, buttons, and dialog boxes in its windows on the screen. The user mainly controls these objects by moving a pointer on the screen (typically controlled by a mouse) and selecting certain objects by pressing buttons on the mouse while the pointer is pointing at them.
Hz	Hertz. A unit of frequency equal to 1 cycle per second.
ICA	Independent Computing Architecture. A three-part server-based computing technology that separates an application's logic from its user interface and allows 100% application execution on the server.

Integrated CRT terminal	A terminal with a monitor and connections on the back for a keyboard and mouse.
Interface	A shared boundary defined by common physical interconnection characteristics, signal characteristics, and meaning of interchanged signals.
Internet	The Internet is a global web of interconnected computers and computer networks that are interconnected under a common set of network protocols that allows them to function as a single large network (see TCP/IP).
IP address	Internet Protocol Address. The 32-bit, 4-byte address assigned to machines using the Internet with TCP/IP. It is usually represented in dotted decimal notation. Provides interconnectivity among a variety of independent host systems.
ISDN	Integrated Services Digital Network. Evolving switched network standard that provides end-to-end digital voice and data communication services.
kb or kilobit	1,024 bits. Commonly referred to as 1 thousand bits.
kB or kilobyte	1,024 bytes. Commonly referred to as 1 thousand bytes.
kbps or kb/s	Kilobits per second. An abbreviation meaning thousands of bits per second.
Load Balancing Services	A management add-on to Citrix WinFrame and MetaFrame servers that allows administrators to group multiple WinFrame and/or MetaFrame servers into scalable “server farms” to deliver the best application performance and server resource utilization.
Mb or megabit	1,048,576 bits. Commonly referred to as 1 million bits.
Mbps or Mb/s	Megabits per second.
MetaFrame	The world’s first Server-based Computing software for Microsoft Windows NT 4.0 Server, Terminal Server Edition multi-user software (co-developed by Citrix).
MIB	Management Information Base. A database of managed objects accessed by network management protocols.
Modem	(Mo)dulator/(dem)odulator. Data communication equipment (DCE) devices that provide connections for computers into the public switched telephone network (PSTN). They convert (modulate) the digital signals of computers into analog signals that can be transmitted over telephone lines. A modem at the other end of the link then demodulates the signals back to digital bits.
Modular terminal	Desktop client that works with existing standard monitors.
Network	An interconnected group of nodes; a series of points, nodes, or stations connected by communications channels; the assembly of equipment through which connections are made between data stations.
Null modem	A cable, especially an RS-232 cable, for connecting serial ports on two computers directly, rather than via modems. Since, according to the specification, both computers should transmit on pin three of their RS-232 connectors and receive on pin two, a null modem cable needs to connect one computer’s pin two to the other’s pin three and vice versa. It also needs to have male connectors at both ends (again, according to the specification).
OSD	On Screen Display.

Glossary 4

Packet	A group of bits (including data and call control signals) transmitted as an identifiable unit on a packet-switched network (PSN).
PAP	Password Authentication Protocol. An authentication scheme used by PPP servers to validate the identity of the originator of the connection. PAP applies a two-way handshaking procedure. After the link is established the originator sends an id-password pair to the server. If authentication succeeds the server sends back an acknowledgment; otherwise it either terminates the connection or gives the originator another chance.
Parallel port	An input/output port that allows the entire bit pattern for a single character to be sent at one time, usually used to connect a printer to a computer.
Parity check	The addition of non-information bits (specifically, parity bits) to make up a transmission block (a number of bits transmitted as unit) that ensures the total number of ones is always either even (even parity) or odd (odd parity). The parity check is used to detect transmission errors.
PCMCIA	Personal Computer Miniature Connector Interface Adapter. Hardware and software standards for credit-card-sized integrated circuit cards.
Ping	Packet InterNet Groper. A protocol used in the Transmission Control Protocol (TCP) environment to test whether a node or remote device is communicating on a local area network (LAN) or wide area network (WAN). The protocol provides for transporting an echo response from a host system, a client, or a gateway. It is a useful tool for locating problems on the network related to failed connections and software problems. One datagram is sent every second over the network and any response is displayed.
PPP	Point-to-Point Protocol. A serial communication protocol that operates over dialup or leased (dedicated) lines to provide connections into IP networks. It sets up and monitors router sessions and frames the data transmitted over the line.
Protocol	A set of formal rules describing how to transmit data, especially across a network. Low-level protocols define the electrical and physical standards to be observed, bit- and byte-ordering, and the transmission and error detection and correction of the bit stream. High level protocols deal with the data formatting, including the syntax of messages, the terminal to computer dialogue, character sets, sequencing of messages, etc.
RAM	Random-Access Memory. A mass store that provides fast access to any storage location by means of vertical and horizontal coordinates. Information is written in or read out using the same procedure. The memory cycle time is the same for any location addressed because there is no waiting or sorting time required, as there is when data items are stored sequentially.
RAS	Remote Access Services. A service provided by Windows NT that allows most of the services which would be available on a network to be accessed over a modem link. The service includes support for dialup and logon, and then presents the same network interface as the normal network drivers (albeit slightly slower). It is not necessary to run Windows NT on the client - there are client versions for other Windows operating systems.
RDP	Remote Desktop Protocol. A computing technology that separates an application's logic from its user interface and allows 100% application execution on the server.

RS-232 cable	A cable for serial interfaces between the terminal and communications devices, such as a modem. The cable connects to the 25-pin serial port at the back of the terminal. Maximum cable length is 50 feet; maximum signaling rate is 20 Kbits/sec.
RTS/CTS flow control	Request to Send/Clear to Send flow control. Enables flow control on the local serial line. RTS is pin 4 of the 25-pin RS232/423 connector. CTS is pin 5 of the connector. RTS is an output of the terminal; CTS is an input to the terminal.
Serial port	A connector on a computer to which you can attach a serial line connected to peripherals that communicate using a serial (bit-stream) protocol. The most common type of serial port is a 25-pin D-type connector carrying RS-232 signals. Smaller connectors (e.g. 9-pin D-type) carrying a subset of RS-232 are often used on personal computers.
Server	The control computer on a local area network that controls software access to workstations, printers, and other parts of the network. Under Citrix's server-based computing model, the server performs all application execution functions.
SNMP	Simple Network Management Protocol. The industry standard protocol for managing TCP/IP networks. This protocol queries agents in managed devices and passes information to the management console.
Start bit	In asynchronous transmission, the first bit of any given character used to alert the receiving system to recognize the related incoming data.
Stop bit	In asynchronous transmission, the last bit of any given character, used to alert the receiving system that transmission of the character is complete.
SVGA	Super Video Graphics Adapter. A DRAM-based VGA adapter that supports both monochrome and color high-resolution graphics and provides extended resolutions of usually 1024 x 768.
TCP/IP	Transmission Control Protocol/Internet Protocol. The de facto standard Ethernet protocols incorporated into 4.2BSD UNIX. TCP/IP was developed by DARPA for Internet working and encompasses both network layer and transport layer protocols (in the OSI model). While TCP and IP specify two protocols at specific protocol layers, TCP/IP is often used to refer to the entire DOD protocol suite based upon these, including Telnet, FTP, UDP and RDP.
Telnet	Telnet is the login and terminal emulation program for Transmission Control Protocol/Internet Protocol (TCP/IP) networks such as the Internet. Its primary function is to allow users to log into remote host systems.
Terminal	A data terminal equipment DTE device. An input/output device made up minimally of a video display, keyboard, and sometimes a central processing unit, connected to a modem, for data communications.
Terminal emulator	A program that allows a computer to act like a particular brand or type of terminal. The computer thus appears as a terminal to the host computer and accepts the same escape sequences for functions such as cursor positioning and clearing the screen.

Glossary 6

Thin-client	A low-cost computing device that works in a server-centric computing model. Thin clients typically do not require state-of-the-art, powerful processors and large amounts of RAM and ROM because they access applications from a central server or network. Thin clients can operate in a Server-based Computing environment.
Timeout	A time interval within which certain operations must occur; for example, the time allotment for the terminal to connect to a login host. After the timeout, the process can either be repeated or discontinued.
Total Cost of Ownership (TCO)	A model that helps IT professionals understand and manage the budgeted (direct) and unbudgeted (indirect) costs incurred for acquiring, maintaining and using an application or a computing system. TCO normally includes training, upgrades, and administration as well as the purchase price. Lowering TCO through single-point control is a key benefit of Server-based Computing.
Touch screen	A type of display screen that has a touch-sensitive transparent panel that can sense when someone is touching it, and is able to furnish a computer with precise information as to exactly where on the screen the touch occurred. Touch screens are used with software that uses the information provided by the screen touch to respond to user requests.
USB	Universal Serial Bus. An external peripheral interface standard for communication between computer and external peripherals over an inexpensive cable using biserial transmission. USB is standard on current (1999) Macintosh computers and is promoted by Intel as an option for the IBM PC where it is supported by later versions of Windows 95. USB works at 12 Mbps with specific consideration for low-cost peripherals. It supports up to 127 devices and both isochronous and asynchronous data transfers. USB cables can be up to 5 meters long and include built-in power distribution for low-power devices. It supports daisy chaining through a tiered star multidrop topology.
Virtual Port	Incoming Telnet and rlogin connections are not associated with a physical port. Instead, they are associated with a virtual port, port 0, which serves for the duration of the connection. Each virtual port is created with a default set of characteristics. The Define Port commands can be used to customize a virtual port during the Telnet/Rlogin session; however, these customizations can not be saved. The port reverts to the default set of characteristics when the session is closed.
WAN	Wide Area Network. A data-communications system covering a large geographic area, usually digital circuits having moderate to high data rates (e.g., 56 to 64 kbps up to 1.5 to 2 Mbps).
Windows Terminal Server	A network device that is attached to non-network serial devices, such as terminals, printers and modems, or to an Ethernet network.
Windows-based Terminal	A fixed-function thin-client device that connects to a Citrix WinFrame or MetaFrame server and Terminal Server to provide application access. The key differentiator of a WBT from other thin devices is that all application execution occurs on the server; there is no downloading or local processing of applications at the client.
WinFrame	A multi-user Windows application server, based on Windows NT, developed under license from Microsoft.

WINS	Windows Internet Naming Service. WINS allows machines to dynamically register their name-to-address mappings. WINS is also a flat name space without the concept of hierarchy and requires each WINS server to maintain a complete database of entries through replication.
Winterm	Trademarked logo for Windows-based terminals manufactured by Wyse Technology Inc.
X-ON/X-OFF	Transmitter On/Transmitter Off. Control characters used for flow control, instructing serial devices to start transmission (X-ON) and stop transmission (X-OFF).

This page intentionally blank.

Index

Numerics

100Base-T 14
10Base-T 14

A

Access Levels 18
ADJUST 33
Adjust 35
Administrator-level access 18
Auto Degauss 36
Auto Registration 36

B

Browser 47

C

Configure 43
Configure tab 20
Connection Name 44
Connections 43
Control keys
 Ctrl+Alt+Down Arrow 51
 Ctrl+Alt+End 51
 Ctrl+Alt+Up Arrow 51
 F2 17, 25, 39

D

Dialog boxes
 Mouse Properties 42
 Shutdown Window 45
 Terminal Login 45
 Terminal Properties 17, 25, 39
 Winterm Connection Manager 17, 20, 22, 23, 25, 30, 39, 41, 42, 43, 47
Display Configuration 25
Display screen resolution 25, 26

E

Emulation 5
End 44
End Task 44
Energy Savers 29
Energy savers 25

F

Functions
 Character Repeat 41
 Connect 44
 Desktop Area and Refresh Frequency 27
 Enable Energy Savers 29
 End 44
 Keyboard 40
 Logoff 45
 Repeat Delay 41
 Repeat Rate 41
 Reset the Terminal to Factory Default Property Settings 22
 Screen Saver 29
 Shutdown and Restart 45
 Shutdown the Terminal 45
 Test 27
 Turn Off Monitor 29
 Wait 29

G

Guest-level access 18

H

H-CENTER 34
H-SIZE 34

I

ICA protocol 5

L

Languages 40
Logging off 45
Logging on 17

M

MENU 33
MetaFrame 5
Mic 32, 36
Monitors (not provided with modular models) 5
Mouse 42
Multiple sessions 51

O

OSD 32, 35

Index 2

P

- Parallel port 14
- PCMCIA 14
- PIN 34
- Properties sheets
 - Configure 43
 - Connections 43
 - Display 25
 - General 17
 - Input 39
 - SysInfo 17

R

- RAM 22
- RDP protocol 5
- Recall 36
- RECALL MODE 34
- ROTATE 34

S

- Security 18
- Select 33, 35
- Serial port 14
- Shutting down and restarting the terminal 44, 45
- Status 44

T

- Terminal adjustment
 - Model 3630LE 31
 - Model 3720SE 32
 - Model 3730LE 35
- Terminal features 14

Terminal models

- integrated-display
 - 3630LE 1, 5, 11
 - 3720SE 1, 5, 12
 - 3730LE 1, 5, 13
- modular
 - 3200LE 1, 5, 6
 - 3230LE 1, 5, 7
 - 3320SE 1, 5, 8
 - 3350SE 1, 5, 9
 - 3360SE 1, 5, 10

- Terminal Properties 18

- Touch screen 14

- TRAPEZOID 34

- Troubleshooting 53

- Type 44

U

- USB port 14
- User-level access 18

V

- V-CENTER 34
- Volume 36
- V-SIZE 34

W

- Wall mount 14
- WBT 1, 5
- Windows 2000 5, 14
- Windows 3.1 14
- Windows 95 14
- Windows 98 14
- Windows NT TSE 5
- Windows-based terminal 5
- Wizards
 - Setup 20, 43
 - WBT Setup 53

This page intentionally blank.

Winterm 3000 Series Windows®-based Terminal Users Guide
Issue: 070601

Written and published by:
Wyse Technology Inc., July 2001

Created using FrameMaker®, Acrobat®, and Magellan™

The on-line book is provided in both PDF and HTML versions, presented on both CD-ROM and the Wyse Web site.