



Report No.: 06146851
Charging & Headset
Online Mode
PC's AC Port


Tested By:Hong, Report No.:06146851

Scan Settings (1 Range)

Frequencies				Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0699
12	9k	30M	EW0192

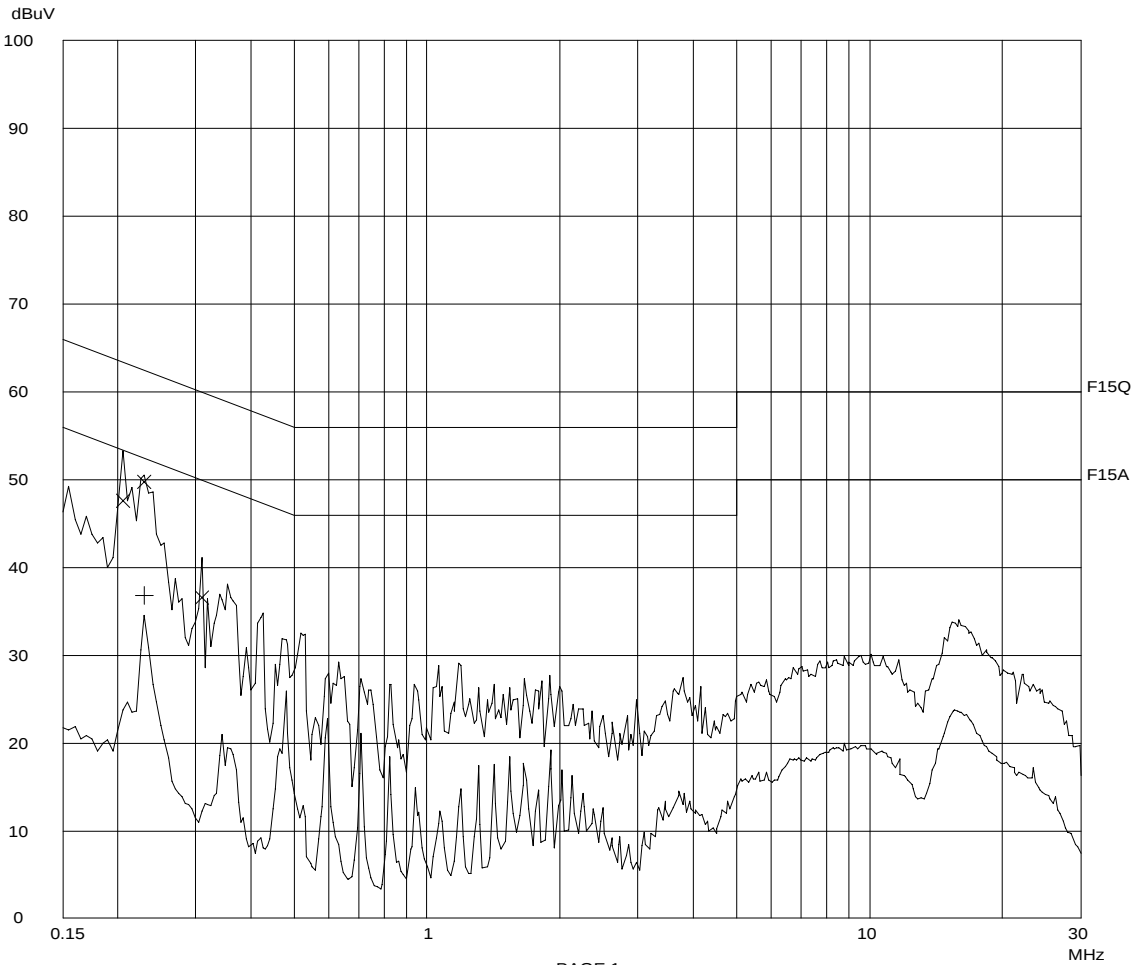

Report No.: 06146851
Charging & Headset
Online Mode
PC's AC Port

Tested By: Hong, Report No.: 06146851

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV
0.20500	47.5	63.4
0.23000	49.7	62.4
0.31000	36.5	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV
0.23000	36.8	52.4

* limit



Report No.: 06146851
Charging & Headset
Online Mode
Adaptor's AC Port


Tested By:Hong, Report No.:06146851

Scan Settings (1 Range)

Frequencies				Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0699
12	9k	30M	EW0192

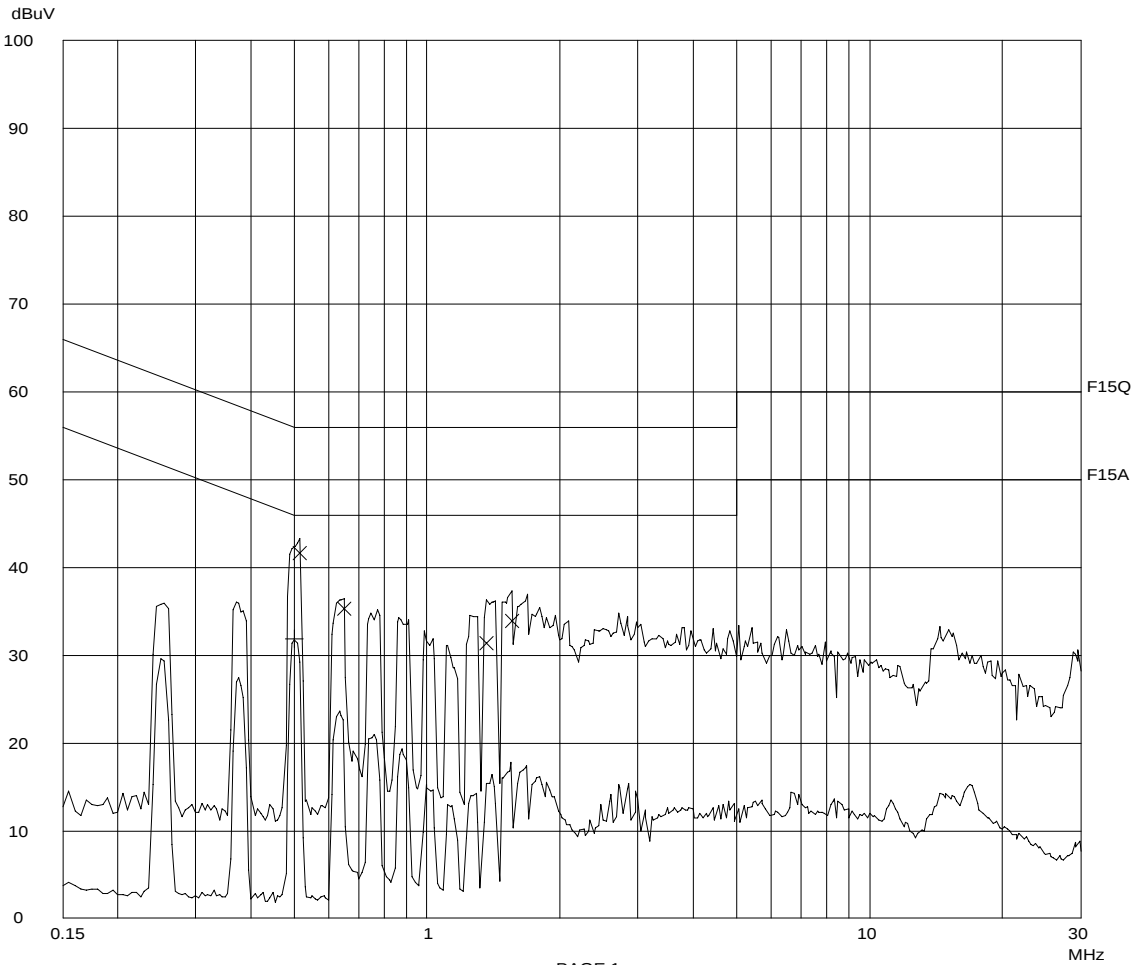

Report No.: 06146851
Charging & Headset
Online Mode
Adaptor's AC Port

Tested By: Hong, Report No.: 06146851

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.51500	41.6	56.0
0.65000	35.2	56.0
1.36500	31.3	56.0
1.56000	33.9	56.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

0.50000	31.8	46.0
---------	------	------

* limit