

# Logitech, Inc.

**MN: A-0363C Cordless Headset**  
**MN: F-0444A Mobile Pro Headset**

**September 18, 2005**

**Report No. LABT0149**

Report Prepared By



[www.nwemc.com](http://www.nwemc.com)  
1-888-EMI-CERT

© 2005 Northwest EMC, Inc

**EMC Test Report**



22975 NW Evergreen Parkway  
Suite 400  
Hillsboro, Oregon 97124

**Certificate of Test**  
**Issue Date: September 18, 2005**  
**Logitech, Inc.**  
**MN: A-0363C Cordless Headset**  
**MN: F-0444A Mobile Pro Headset**

| Emissions                                                        |                 |                                     |                          |
|------------------------------------------------------------------|-----------------|-------------------------------------|--------------------------|
| Specification                                                    | Test Method     | Pass                                | Fail                     |
| FCC 15.247(a) Occupied Bandwidth:2005-04                         | ANSI C63.4:2003 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| FCC 15.247(b) Output Power:2005-04                               | ANSI C63.4:2003 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| FCC 15.247(d) Band Edge Compliance:2005-04                       | ANSI C63.4:2003 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| FCC 15.247(d) Spurious Conducted Emissions:2005-04               | ANSI C63.4:2003 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| FCC 15.247(d) Spurious Radiated Emissions:2005-04                | ANSI C63.4:2003 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| FCC 15.247(e) Power Spectral Density:2005-04                     | ANSI C63.4:2003 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| FCC 15.207 AC Powerline Conducted Emissions:2005-04              | ANSI C63.4:2003 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| FCC 15.107 Class B:2005-04 AC Powerline Conducted Emissions      | ANSI C63.4:2003 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| FCC 15.109(g) (CISPR 22:1997) Class B:2005-04 Radiated Emissions | ANSI C63.4:2003 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |

**Modifications made to the product**

**See the Modifications section of this report**

**Test Facility**

The measurement facility used to collect the data is located at:

Northwest EMC, Inc.  
22975 NW Evergreen Parkway, Suite 400; Hillsboro, OR 97124  
Phone: (503) 844-4066  
Fax: 844-3826

This site has been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada.

**Approved By:**

**Greg Kiemel, Director of Engineering**

*This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.*


*Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested, the specific description is noted in each of the individual sections of the test report supporting this certificate of test.*

| Revision Number | Description | Date | Page Number |
|-----------------|-------------|------|-------------|
| 00              | None        |      |             |

**FCC:** Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



**NVLAP:** Northwest EMC, Inc. is recognized under the United States Department of Commerce, National Institute of Standards and Technology, and National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 89/336/EEC, ANSI C63.4, MIL-STD 461E, DO-160D and SAE J1113. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada.



**Industry Canada:** Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS 212, Issue 1 (Provisional) and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements.



**CAB:** Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement.



**TÜV Product Service:** Included in TÜV Product Service Group's Listing of Recognized Laboratories. It qualifies in connection with the TÜV Certification after Recognition of Agent's Testing Program for the product categories and/or standards shown in TÜV's current Listing of CARAT Laboratories, available from TÜV. A certificate was issued to represent that this laboratory continues to meet TÜV's CARAT Program requirements. Certificate No. USA0401C.



**TÜV Rheinland:** Authorized to carryout EMC tests by order and under supervision of TÜV Rheinland. This authorization is based on "Conditions for EMC-Subcontractors" of November 1992.



**NEMKO:** Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).



**Technology International:** Assessed in accordance with ISO Guide 25 defining the general international requirements for the competence of calibration and testing laboratories and with ITI assessment criteria LACO196. Based upon that assessment, Interference Technology International, Ltd., has granted approval for specifications implementing the EU Directive on EMC (89/336/EEC and amendments). The scope of the approval was provided on a Schedule of Assessment supplied with the certificate and is available upon request.



**Australia/New Zealand:** The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body (NVLAP).



**VCCI:** Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (*Registration Numbers. - Hillsboro: C-1071 and R-1025, Irvine: C-2094 and R-1943, Newberg: C-1877 and R-1760, Sultan: R-871, C-1784 and R-1761*).



**BSMI:** Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement. License No.SL2-IN-E-1017.



**GOST:** Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



## SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/scope.asp>

### What is measurement uncertainty?


When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. The following statement of measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" value. In the case of transient tests (ESD, EFT, Surge, Voltage Dips and Interruptions), the test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements.

The following documents were the basis for determining the uncertainty levels of our measurements:

- "ISO Guide to the Expression of Uncertainty in Measurements", October 1993
- "NIS81: The Treatment of Uncertainty in EMC Measurements", May 1994
- "IEC CISPR 16-3 A1 f1 Ed.1: Radio-interference measurements and statistical techniques", December 2000

### How might measurement uncertainty be applied to test results?

If the diamond marks the measured value for the test and the vertical bars bracket the range of + and – measurement uncertainty, then test results can be interpreted from the diagram below.

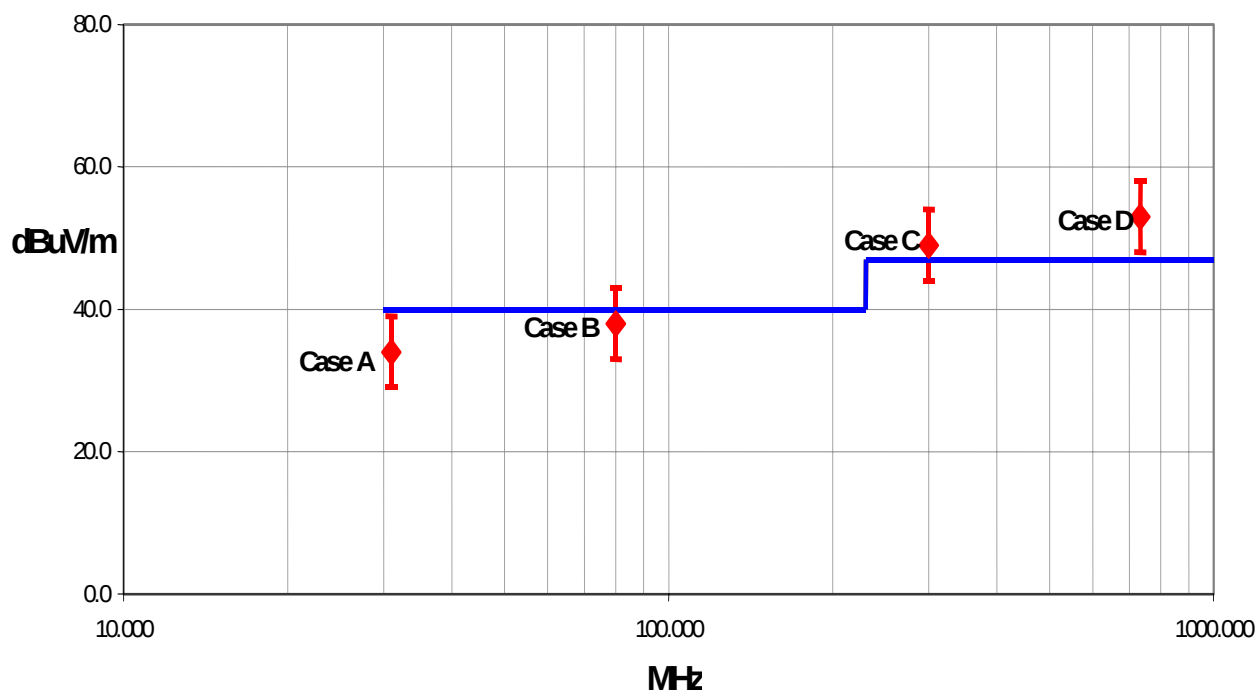

#### Test Result Scenarios:

**Case A:** Product complies.

**Case B:** Product conditionally complies. It is not possible to say with 95% confidence that the product complies.

**Case C:** Product conditionally does not comply. It is not possible to say with 95% confidence that the product does not comply.

**Case D:** Product does not comply.

**Radiated Emissions  $\leq 1$  GHz**

Value (dB)

| Test Distance                                                     | Probability Distribution | Biconical Antenna |                  | Log Periodic Antenna |                  | Dipole Antenna   |                  |
|-------------------------------------------------------------------|--------------------------|-------------------|------------------|----------------------|------------------|------------------|------------------|
|                                                                   |                          | 3m                | 10m              | 3m                   | 10m              | 3m               | 10m              |
| Combined standard uncertainty $u_c(y)$                            | normal                   | + 1.86<br>- 1.88  | + 1.82<br>- 1.87 | + 2.23<br>- 1.41     | + 1.29<br>- 1.26 | + 1.31<br>- 1.27 | + 1.25<br>- 1.25 |
| Expanded uncertainty $U$<br>(level of confidence $\approx 95\%$ ) | normal (k=2)             | + 3.72<br>- 3.77  | + 3.64<br>- 3.73 | + 4.46<br>- 2.81     | + 2.59<br>- 2.52 | + 2.61<br>- 2.55 | + 2.49<br>- 2.49 |

**Radiated Emissions  $> 1$  GHz**

Value (dB)

| Test Distance                                                     | Probability Distribution | Without High Pass Filter |                  | With High Pass Filter |                  |
|-------------------------------------------------------------------|--------------------------|--------------------------|------------------|-----------------------|------------------|
|                                                                   |                          | 3m                       | 10m              | 3m                    | 10m              |
| Combined standard uncertainty $u_c(y)$                            | normal                   | + 1.29<br>- 1.25         | + 1.29<br>- 1.25 | + 1.38<br>- 1.35      | + 1.38<br>- 1.35 |
| Expanded uncertainty $U$<br>(level of confidence $\approx 95\%$ ) | normal (k=2)             | + 2.57<br>- 2.51         | + 2.57<br>- 2.51 | + 2.76<br>- 2.70      | + 2.76<br>- 2.70 |

**Conducted Emissions**

| Test Distance                                                     | Probability Distribution | Value (+/- dB) |
|-------------------------------------------------------------------|--------------------------|----------------|
| Combined standard uncertainty $u_c(y)$                            | normal                   | 1.48           |
| Expanded uncertainty $U$<br>(level of confidence $\approx 95\%$ ) | normal (k = 2)           | 2.97           |

**Radiated Immunity**

| Test Distance                                                     | Probability Distribution | Value (+/- dB) |
|-------------------------------------------------------------------|--------------------------|----------------|
| Combined standard uncertainty $u_c(y)$                            | normal                   | 1.05           |
| Expanded uncertainty $U$<br>(level of confidence $\approx 95\%$ ) | normal (k = 2)           | 2.11           |

**Conducted Immunity**

| Test Distance                                                     | Probability Distribution | Value (+/- dB) |
|-------------------------------------------------------------------|--------------------------|----------------|
| Combined standard uncertainty $u_c(y)$                            | normal                   | 1.05           |
| Expanded uncertainty $U$<br>(level of confidence $\approx 95\%$ ) | normal (k = 2)           | 2.10           |

**Legend**

$u_c(y)$  = square root of the sum of squares of the individual standard uncertainties

$U$  = combined standard uncertainty multiplied by the coverage factor:  $k$ . This defines an interval about the measured result that will encompass the true value with a confidence level of approximately 95%. If a higher level of confidence is required, then  $k=3$  (CL of 99.7%) can be used. Please note that with a coverage factor of one,  $u_c(y)$  yields a confidence level of only 68%.

**California****Orange County Facility****Labs OC01 – OC13**

41 Tesla Ave.  
Irvine, CA 92618  
(888) 364-2378  
FAX (503) 844-3826

**Oregon****Evergreen Facility****Labs EV01 – EV10**

22975 NW Evergreen Pkwy.  
Suite 400  
Hillsboro, OR 97124  
(503) 844-4066  
FAX (503) 844-3826

**Oregon****Trails End Facility****Labs TE01 – TE03**

30475 NE Trails End Lane  
Newberg, OR 97132  
(503) 844-4066  
FAX (503) 537-0735

**Washington****Sultan Facility****Labs SU01 – SU07**

14128 339<sup>th</sup> Ave. SE  
Sultan, WA 98294  
(888) 364-2378  
FAX (360) 793-2536

**Party Requesting the Test**

|                                 |                                                                |
|---------------------------------|----------------------------------------------------------------|
| <b>Company Name:</b>            | Logitech, Inc.                                                 |
| <b>Address:</b>                 | 1499 SE Tech Center Place Suite 350                            |
| <b>City, State, Zip:</b>        | Vancouver, WA 98683                                            |
| <b>Test Requested By:</b>       | Mitchell Phillipi                                              |
| <b>Model:</b>                   | MN: A-0363C Cordless Headset<br>MN: F-0444A Mobile Pro Headset |
| <b>First Date of Test:</b>      | August 11, 2005                                                |
| <b>Last Date of Test:</b>       | September 8, 2005                                              |
| <b>Receipt Date of Samples:</b> | August 11, 2005                                                |
| <b>Equipment Design Stage:</b>  | Pre-Production                                                 |
| <b>Equipment Condition:</b>     | No visual damage.                                              |

**Information Provided by the Party Requesting the Test**

|                            |                                |
|----------------------------|--------------------------------|
| <b>Clocks/Oscillators:</b> | Not provided.                  |
| <b>I/O Ports:</b>          | Combination power and I/O port |

**Functional Description of the EUT (Equipment Under Test):**

The Logitech A-0363C Bluetooth® Headset is a low power, cordless transceiver which is designed to have two-way transmission with the Logitech A-0363D Bluetooth dongle. The A-0363C and the F-0444A are identical to each other, but they have different firmware. The headset is designed to work off of a battery, and it can be charged using an AC Adapter. It will not transmit while recharging.

**Client Justification for EUT Selection:**

The product is an engineering sample, representative of the final product.

**Client Justification for Test Selection:**

These tests satisfy the requirements of FCC 15.247.

We are also using this same headset as a refresh to our older Bluetooth headset. Only difference is firmware, hardware is identical. Thus, we have added this model number to the report: MN: F-0444A Mobile Pro Headset.

**EUT Photo**

| <b>Equipment modifications</b> |                                  |             |                                                                     |                                                          |                                |
|--------------------------------|----------------------------------|-------------|---------------------------------------------------------------------|----------------------------------------------------------|--------------------------------|
| <b>Item</b>                    | <b>Test</b>                      | <b>Date</b> | <b>Modification</b>                                                 | <b>Note</b>                                              | <b>Disposition of EUT</b>      |
| 1                              | Band Edge Compliance             | 08/11/2005  | No EMI suppression devices were added or modified during this test. | Same configuration as delivered.                         | EUT remained at Northwest EMC. |
| 2                              | Occupied Bandwidth               | 08/11/2005  | No EMI suppression devices were added or modified during this test. | Same configuration as in previous test.                  | EUT remained at Northwest EMC. |
| 3                              | Spurious Conducted Emissions     | 08/11/2005  | No EMI suppression devices were added or modified during this test. | Same configuration as in previous test.                  | EUT remained at Northwest EMC. |
| 4                              | Power Spectral Density           | 08/11/2005  | No EMI suppression devices were added or modified during this test. | Same configuration as in previous test.                  | EUT remained at Northwest EMC. |
| 5                              | Output Power                     | 08/11/2005  | No EMI suppression devices were added or modified during this test. | Same configuration as in previous test.                  | EUT remained at Northwest EMC. |
| 6                              | Spurious Radiated Emissions      | 08/14/2005  | No EMI suppression devices were added or modified during this test. | Same configuration as in previous test.                  | EUT remained at Northwest EMC. |
| 7                              | Radiated Emissions (DoC)         | 08/30/2005  | No EMI suppression devices were added or modified during this test. | Dongle and Headset operating side by side. 230V testing. | EUT remained at Northwest EMC. |
| 8                              | AC Powerline Conducted Emissions | 08/31/2005  | No EMI suppression devices were added or modified during this test. | Headset only.                                            | EUT remained at Northwest EMC. |
| 9                              | Radiated Emissions (DoC)         | 09/08/2005  | No EMI suppression devices were added or modified during this test. | Dongle and Headset operating side by side. 120V testing. | EUT remained at Northwest EMC. |

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

**Operating Modes Investigated:**

|                                            |
|--------------------------------------------|
| Loop back Mode                             |
| Headset Charging                           |
| <b>Operating Mode used for Final Test:</b> |
| Loop back Mode                             |

**Power Input Settings Investigated:**

|                                                    |
|----------------------------------------------------|
| 230 VAC, 50 Hz to Xbox, 230VAC to charging headset |
| 230 VAC, 50 Hz to Xbox, Headset on battery         |
| 120 VAC, 60 Hz to Xbox, 120VAC to charging headset |
| 120 VAC, 60 Hz to Xbox, Headset on battery         |
| <b>Input Power Setting used for Final Test:</b>    |
| 230 VAC, 50 Hz to Xbox, Headset on battery         |
| 120 VAC, 60 Hz to Xbox, Headset on battery         |

**Frequency Range Investigated**

|                        |        |                       |       |
|------------------------|--------|-----------------------|-------|
| <b>Start Frequency</b> | 30 MHz | <b>Stop Frequency</b> | 1 GHz |
|------------------------|--------|-----------------------|-------|

**Software\Firmware Applied During Test**

|                                                                                                                              |                          |                |         |
|------------------------------------------------------------------------------------------------------------------------------|--------------------------|----------------|---------|
| <b>Operating system</b>                                                                                                      | Unknown                  | <b>Version</b> | Unknown |
| <b>Exercise software</b>                                                                                                     | Voice Loop back Software | <b>Version</b> | Unknown |
| <b>Description</b>                                                                                                           |                          |                |         |
| The system was tested using Voice Loop back Software on the Xbox to exercise the functions of the device during the testing. |                          |                |         |

**EUT and Peripherals in Test Setup Boundary**

| Description                                       | Manufacturer   | Model/Part Number | Serial Number |
|---------------------------------------------------|----------------|-------------------|---------------|
| EUT - Bluetooth Headset                           | Logitech, Inc. | A-0363C           | Unknown       |
| Bluetooth Dongle                                  | Logitech, Inc. | A-0363D           | Unknown       |
| Controller                                        | Microsoft      | Unknown           | 751412929A    |
| Xbox - EU                                         | Microsoft      | Unknown           | 412407321303  |
| Television                                        | Thomson        | 418X-TX807C       | 3244480104088 |
| US AC Adapter (used during headset charging mode) | Logitech, Inc. | AU055V150T        | Unknown       |
| EU AC Adapter (used during headset charging mode) | Logitech, Inc. | P925BW05050ABD3   | Unknown       |
| Xbox – US                                         | Microsoft      | Unknown           | 393229733206  |

| Cables                                                                                                 |        |            |         |               |              |
|--------------------------------------------------------------------------------------------------------|--------|------------|---------|---------------|--------------|
| Cable Type                                                                                             | Shield | Length (m) | Ferrite | Connection 1  | Connection 2 |
| AC Power                                                                                               | No     | 1.4        | No      | Xbox          | AC Mains     |
| AC Power                                                                                               | No     | 2.0        | No      | Television    | AC Mains     |
| Video                                                                                                  | No     | 2.0        | No      | Xbox          | Television   |
| Control                                                                                                | No     | 2.6        | Yes     | Controller    | Xbox         |
| DC Power (used only during charging mode)                                                              | No     | 1.2        | No      | EU AC Adapter | Headset      |
| DC Power (used only during charging mode)                                                              | No     | 1.4        | No      | US AC Adapter | Headset      |
| PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown. |        |            |         |               |              |

| Measurement Equipment |              |              |            |            |          |
|-----------------------|--------------|--------------|------------|------------|----------|
| Description           | Manufacturer | Model        | Identifier | Last Cal   | Interval |
| Antenna, Biconilog    | EMCO         | 3141         | AXE        | 12/03/2003 | 24 mo    |
| Pre-Amplifier         | Miteq        | AM-1616-1000 | AOL        | 08/02/2005 | 13 mo    |
| Spectrum Analyzer     | Agilent      | E4446A       | AAQ        | 04/08/2005 | 13 mo    |

## Test Description


The final radiated emissions test was performed using the parameters described above as worst case. That final test was conducted at a facility that meets the ANSI C63.4 NSA requirements. The frequency range noted in the data sheets was scanned/tested at that facility. Emissions were maximized as specified, by maximizing table azimuth, antenna height, and cable manipulation.


Using the mode of operation and configuration noted within this report, a final radiated emissions test was performed. The frequency range investigated (scanned), is also noted in this report. Radiated emissions measurements were made at the EUT azimuth and antenna height such that the maximum radiated emissions level will be detected. This requires the use of a turntable and an antenna positioner. The preferred method of a continuous azimuth search is utilized for frequency scans of the EUT field strength with both polarities of the measuring antenna. A calibrated, linearly polarized antenna was positioned at the specified distance from the periphery of the EUT.

*Note: The specified distance is the horizontal separation between the closest periphery of the EUT and the center of the axis of the elements of the receiving antenna. However, if the receiving antenna is a log-periodic array, the specified distance shall be the distance between the closest periphery of the EUT and the front-to-back center of the array of elements.*

Tests were made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement was varied in height above the conducting ground plane to obtain the maximum signal strength. Though specified in the report, the measurement distance shall be 1 meter, 3 meters, 5 meters, 10 meters, or 30 meters. At any measurement distance, the antenna height was varied from 1 meter to 4 meters. These height scans apply for both horizontal and vertical polarization, except that for vertical polarization the minimum height of the center of the antenna shall be increased so that the lowest point of the bottom of the antenna clears the ground surface by at least 25 cm.

| Measurement Bandwidths                                                                                |                    |                          |                       |
|-------------------------------------------------------------------------------------------------------|--------------------|--------------------------|-----------------------|
| Frequency Range<br>(MHz)                                                                              | Peak Data<br>(kHz) | Quasi-Peak Data<br>(kHz) | Average Data<br>(kHz) |
| 0.01 – 0.15                                                                                           | 1.0                | 0.2                      | 0.2                   |
| 0.15 – 30.0                                                                                           | 10.0               | 9.0                      | 9.0                   |
| 30.0 - 1000                                                                                           | 100.0              | 120.0                    | 120.0                 |
| Above 1000                                                                                            | 1000.0             | N/A                      | 1000.0                |
| <i>Measurements were made using the bandwidths and detectors specified. No video filter was used.</i> |                    |                          |                       |

**Completed by:**
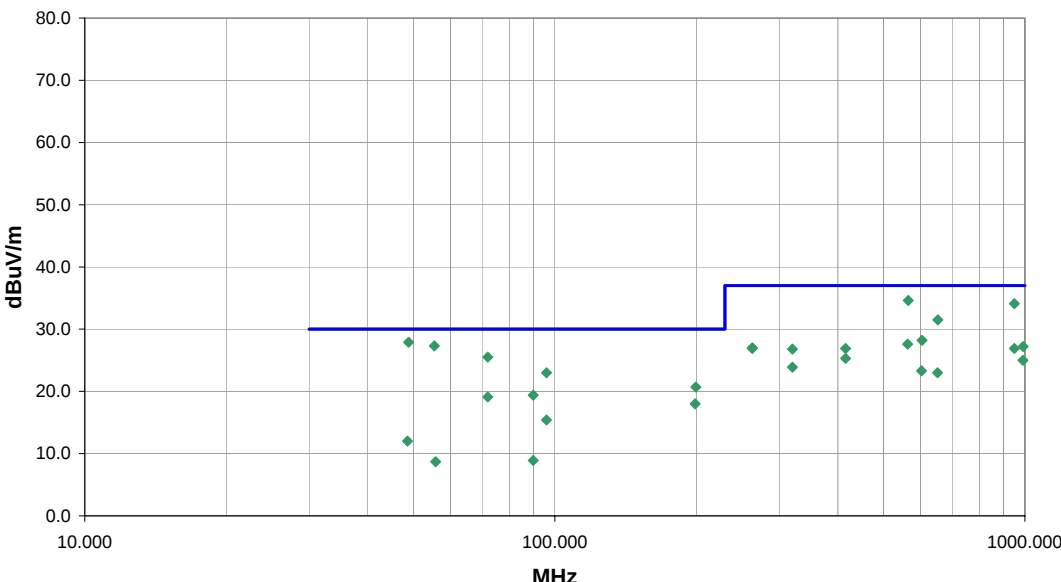
| NORTHWEST<br>EMC                                                                    |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | RADIATED EMISSIONS DATA SHEET |                    |                        |  | PSA 2005.8.22<br>EMI 2005.8.18 |  |
|-------------------------------------------------------------------------------------|------------------|-------------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|----------|----------|--------------------------|-------------------------------|--------------------|------------------------|--|--------------------------------|--|
| EUT: MN: A-0363C Cordless Headset                                                   |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Work Order: LABT0149          |                    |                        |  |                                |  |
| Serial Number: Unknown                                                              |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Date: 08/30/05                |                    |                        |  |                                |  |
| Customer: Logitech, Inc.                                                            |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Temperature: 23               |                    |                        |  |                                |  |
| Attendees: None                                                                     |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Humidity: 42%                 |                    |                        |  |                                |  |
| Project: None                                                                       |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Barometric Pressure: 29.98    |                    |                        |  |                                |  |
| Tested by: Holly Ashkannejhad                                                       |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Power: 230VAC, 50Hz           |                    |                        |  | Job Site: EV01                 |  |
| TEST SPECIFICATIONS                                                                 |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Test Method                   |                    |                        |  |                                |  |
| FCC 15.109(g) (CISPR 22:1997) Class B:2005-04                                       |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | ANSI C63.4:2003               |                    |                        |  |                                |  |
| TEST PARAMETERS                                                                     |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                        |  |                                |  |
| Antenna Height(s) (m)                                                               |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | 1 - 4                         |                    | Test Distance (m)      |  | 5                              |  |
| COMMENTS                                                                            |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                        |  |                                |  |
| Dongle, Headset, XBox, and Monitor in chamber. Headset battery powered.             |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                        |  |                                |  |
| EUT OPERATING MODES                                                                 |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                        |  |                                |  |
| Running Voice Loopback Software on XBox                                             |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                        |  |                                |  |
| DEVIATIONS FROM TEST STANDARD                                                       |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                        |  |                                |  |
| No deviations.                                                                      |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                        |  |                                |  |
| Run #                                                                               |                  | 1           |                   | <div style="text-align: center;"> <br/>           Signature         </div> |                   |                           |          |          |                          |                               |                    |                        |  |                                |  |
| Configuration #                                                                     |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                        |  |                                |  |
| Results                                                                             |                  | Pass        |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                        |  |                                |  |
|  |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                        |  |                                |  |
| Freq (MHz)                                                                          | Amplitude (dBuV) | Factor (dB) | Azimuth (degrees) | Height (meters)                                                                                                                                             | Distance (meters) | External Attenuation (dB) | Polarity | Detector | Distance Adjustment (dB) | Adjusted dBuV/m               | Spec. Limit dBuV/m | Compared to Spec. (dB) |  |                                |  |
| 48.870                                                                              | 33.6             | -5.7        | 122.0             | 1.0                                                                                                                                                         | 5.0               | 0.0                       | V-Bilog  | QP       | 0.0                      | 27.9                          | 30.0               | -2.1                   |  |                                |  |
| 564.572                                                                             | 29.0             | 5.6         | 256.0             | 2.3                                                                                                                                                         | 5.0               | 0.0                       | H-Bilog  | QP       | 0.0                      | 34.6                          | 37.0               | -2.4                   |  |                                |  |
| 55.426                                                                              | 34.2             | -6.9        | 323.0             | 1.3                                                                                                                                                         | 5.0               | 0.0                       | V-Bilog  | QP       | 0.0                      | 27.3                          | 30.0               | -2.7                   |  |                                |  |
| 949.321                                                                             | 24.6             | 9.5         | 8.0               | 1.0                                                                                                                                                         | 5.0               | 0.0                       | V-Bilog  | QP       | 0.0                      | 34.1                          | 37.0               | -2.9                   |  |                                |  |
| 72.008                                                                              | 34.0             | -8.5        | 283.0             | 1.9                                                                                                                                                         | 5.0               | 0.0                       | V-Bilog  | QP       | 0.0                      | 25.5                          | 30.0               | -4.5                   |  |                                |  |
| 652.664                                                                             | 24.4             | 7.1         | 262.0             | 2.1                                                                                                                                                         | 5.0               | 0.0                       | H-Bilog  | QP       | 0.0                      | 31.5                          | 37.0               | -5.5                   |  |                                |  |
| 95.995                                                                              | 29.9             | -6.9        | 297.0             | 1.0                                                                                                                                                         | 5.0               | 0.0                       | V-Bilog  | QP       | 0.0                      | 23.0                          | 30.0               | -7.0                   |  |                                |  |
| 603.912                                                                             | 22.6             | 5.6         | 250.0             | 1.0                                                                                                                                                         | 5.0               | 0.0                       | H-Bilog  | QP       | 0.0                      | 28.2                          | 37.0               | -8.8                   |  |                                |  |
| 199.472                                                                             | 25.2             | -4.5        | 46.0              | 2.3                                                                                                                                                         | 5.0               | 0.0                       | H-Bilog  | QP       | 0.0                      | 20.7                          | 30.0               | -9.3                   |  |                                |  |
| 563.014                                                                             | 22.0             | 5.6         | 175.0             | 1.0                                                                                                                                                         | 5.0               | 0.0                       | V-Bilog  | QP       | 0.0                      | 27.6                          | 37.0               | -9.4                   |  |                                |  |
| 991.726                                                                             | 17.4             | 9.8         | 312.0             | 1.0                                                                                                                                                         | 5.0               | 0.0                       | V-Bilog  | QP       | 0.0                      | 27.2                          | 37.0               | -9.8                   |  |                                |  |
| 263.125                                                                             | 28.6             | -1.6        | 106.0             | 3.2                                                                                                                                                         | 5.0               | 0.0                       | V-Bilog  | QP       | 0.0                      | 27.0                          | 37.0               | -10.0                  |  |                                |  |
| 263.127                                                                             | 28.5             | -1.6        | 12.0              | 2.0                                                                                                                                                         | 5.0               | 0.0                       | H-Bilog  | QP       | 0.0                      | 26.9                          | 37.0               | -10.1                  |  |                                |  |
| 415.331                                                                             | 24.6             | 2.3         | 189.0             | 1.7                                                                                                                                                         | 5.0               | 0.0                       | V-Bilog  | QP       | 0.0                      | 26.9                          | 37.0               | -10.1                  |  |                                |  |
| 949.323                                                                             | 17.4             | 9.5         | 251.0             | 2.0                                                                                                                                                         | 5.0               | 0.0                       | H-Bilog  | QP       | 0.0                      | 26.9                          | 37.0               | -10.1                  |  |                                |  |
| 320.144                                                                             | 27.3             | -0.5        | 252.0             | 2.8                                                                                                                                                         | 5.0               | 0.0                       | V-Bilog  | QP       | 0.0                      | 26.8                          | 37.0               | -10.2                  |  |                                |  |
| 89.968                                                                              | 26.8             | -7.4        | 252.0             | 1.7                                                                                                                                                         | 5.0               | 0.0                       | V-Bilog  | QP       | 0.0                      | 19.4                          | 30.0               | -10.6                  |  |                                |  |
| 72.007                                                                              | 27.6             | -8.5        | 320.0             | 3.9                                                                                                                                                         | 5.0               | 0.0                       | H-Bilog  | QP       | 0.0                      | 19.1                          | 30.0               | -10.9                  |  |                                |  |
| 415.330                                                                             | 23.0             | 2.3         | 254.0             | 2.9                                                                                                                                                         | 5.0               | 0.0                       | H-Bilog  | QP       | 0.0                      | 25.3                          | 37.0               | -11.7                  |  |                                |  |
| 198.763                                                                             | 22.5             | -4.5        | 333.0             | 1.0                                                                                                                                                         | 5.0               | 0.0                       | V-Bilog  | QP       | 0.0                      | 18.0                          | 30.0               | -12.0                  |  |                                |  |
| 990.323                                                                             | 15.2             | 9.8         | 324.0             | 2.0                                                                                                                                                         | 5.0               | 0.0                       | H-Bilog  | QP       | 0.0                      | 25.0                          | 37.0               | -12.0                  |  |                                |  |
| 320.144                                                                             | 24.4             | -0.5        | 331.0             | 1.8                                                                                                                                                         | 5.0               | 0.0                       | H-Bilog  | QP       | 0.0                      | 23.9                          | 37.0               | -13.1                  |  |                                |  |
| 602.805                                                                             | 17.8             | 5.5         | 317.0             | 1.5                                                                                                                                                         | 5.0               | 0.0                       | V-Bilog  | QP       | 0.0                      | 23.3                          | 37.0               | -13.7                  |  |                                |  |
| 651.674                                                                             | 15.9             | 7.1         | 174.0             | 2.3                                                                                                                                                         | 5.0               | 0.0                       | V-Bilog  | QP       | 0.0                      | 23.0                          | 37.0               | -14.0                  |  |                                |  |
| 96.001                                                                              | 22.3             | -6.9        | 193.0             | 3.0                                                                                                                                                         | 5.0               | 0.0                       | H-Bilog  | QP       | 0.0                      | 15.4                          | 30.0               | -14.6                  |  |                                |  |
| 48.596                                                                              | 17.6             | -5.6        | 272.0             | 2.0                                                                                                                                                         | 5.0               | 0.0                       | H-Bilog  | QP       | 0.0                      | 12.0                          | 30.0               | -18.0                  |  |                                |  |
| 89.988                                                                              | 16.3             | -7.4        | 317.0             | 2.1                                                                                                                                                         | 5.0               | 0.0                       | H-Bilog  | QP       | 0.0                      | 8.9                           | 30.0               | -21.1                  |  |                                |  |
| 55.777                                                                              | 15.6             | -6.9        | 360.0             | 1.0                                                                                                                                                         | 5.0               | 0.0                       | H-Bilog  | QP       | 0.0                      | 8.7                           | 30.0               | -21.3                  |  |                                |  |

| NORTHWEST<br><b>EMC</b>                                                 |                         |                    |                          |                                                                                                     |                          | <b>RADIATED EMISSIONS DATA SHEET</b> |                 |                 |                                 |                        |                           | PSA 2005.8.22<br>EMI 2005.8.31 |  |
|-------------------------------------------------------------------------|-------------------------|--------------------|--------------------------|-----------------------------------------------------------------------------------------------------|--------------------------|--------------------------------------|-----------------|-----------------|---------------------------------|------------------------|---------------------------|--------------------------------|--|
| EUT: MN: A-0363C Cordless Headset                                       |                         |                    |                          |                                                                                                     |                          | Work Order: LABT0149                 |                 |                 |                                 |                        |                           |                                |  |
| Serial Number: Unknown                                                  |                         |                    |                          |                                                                                                     |                          | Date: 09/08/05                       |                 |                 |                                 |                        |                           |                                |  |
| Customer: Logitech, Inc.                                                |                         |                    |                          |                                                                                                     |                          | Temperature: 25                      |                 |                 |                                 |                        |                           |                                |  |
| Attendees: None                                                         |                         |                    |                          |                                                                                                     |                          | Humidity: 36%                        |                 |                 |                                 |                        |                           |                                |  |
| Project: None                                                           |                         |                    |                          |                                                                                                     |                          | Barometric Pressure: 29.83           |                 |                 |                                 |                        |                           |                                |  |
| Tested by: Holly Ashkannejhad                                           |                         |                    |                          | Power: 120VAC, 60Hz                                                                                 |                          | Job Site: EV01                       |                 |                 |                                 |                        |                           |                                |  |
| <b>TEST SPECIFICATIONS</b>                                              |                         |                    |                          |                                                                                                     |                          | <b>Test Method</b>                   |                 |                 |                                 |                        |                           |                                |  |
| FCC 15.109(g) (CISPR 22:1997) Class B:2005-04                           |                         |                    |                          |                                                                                                     |                          | ANSI C63.4:2003                      |                 |                 |                                 |                        |                           |                                |  |
| <b>TEST PARAMETERS</b>                                                  |                         |                    |                          |                                                                                                     |                          |                                      |                 |                 |                                 |                        |                           |                                |  |
| Antenna Height(s) (m)                                                   |                         |                    |                          | 1 - 4                                                                                               |                          | Test Distance (m)                    |                 |                 |                                 | 5                      |                           |                                |  |
| <b>COMMENTS</b>                                                         |                         |                    |                          |                                                                                                     |                          |                                      |                 |                 |                                 |                        |                           |                                |  |
| Dongle, Headset, Xbox, and Monitor in chamber. Headset battery powered. |                         |                    |                          |                                                                                                     |                          |                                      |                 |                 |                                 |                        |                           |                                |  |
| <b>EUT OPERATING MODES</b>                                              |                         |                    |                          |                                                                                                     |                          |                                      |                 |                 |                                 |                        |                           |                                |  |
| Running Voice Loopback Software on Xbox                                 |                         |                    |                          |                                                                                                     |                          |                                      |                 |                 |                                 |                        |                           |                                |  |
| <b>DEVIATIONS FROM TEST STANDARD</b>                                    |                         |                    |                          |                                                                                                     |                          |                                      |                 |                 |                                 |                        |                           |                                |  |
| No deviations.                                                          |                         |                    |                          |                                                                                                     |                          |                                      |                 |                 |                                 |                        |                           |                                |  |
| <b>Run #</b>                                                            |                         | 2                  |                          | <div style="text-align: center;"> <i>Holly Ashkannejhad</i><br/>           Signature         </div> |                          |                                      |                 |                 |                                 |                        |                           |                                |  |
| <b>Configuration #</b>                                                  |                         |                    |                          |                                                                                                     |                          |                                      |                 |                 |                                 |                        |                           |                                |  |
| <b>Results</b>                                                          |                         | Pass               |                          |                                                                                                     |                          |                                      |                 |                 |                                 |                        |                           |                                |  |
|                                                                         |                         |                    |                          |                                                                                                     |                          |                                      |                 |                 |                                 |                        |                           |                                |  |
| <b>Freq (MHz)</b>                                                       | <b>Amplitude (dBuV)</b> | <b>Factor (dB)</b> | <b>Azimuth (degrees)</b> | <b>Height (meters)</b>                                                                              | <b>Distance (meters)</b> | <b>External Attenuation (dB)</b>     | <b>Polarity</b> | <b>Detector</b> | <b>Distance Adjustment (dB)</b> | <b>Adjusted dBuV/m</b> | <b>Spec. Limit dBuV/m</b> | <b>Compared to Spec. (dB)</b>  |  |
| 201.748                                                                 | 31.8                    | -4.4               | 148.0                    | 1.0                                                                                                 | 5.0                      | 0.0                                  | V-Bilog         | QP              | 0.0                             | 27.4                   | 30.0                      | -2.6                           |  |
| 96.778                                                                  | 30.9                    | -6.8               | 27.0                     | 3.8                                                                                                 | 5.0                      | 0.0                                  | H-Bilog         | QP              | 0.0                             | 24.1                   | 30.0                      | -5.9                           |  |
| 201.708                                                                 | 27.4                    | -4.4               | 190.0                    | 3.0                                                                                                 | 5.0                      | 0.0                                  | H-Bilog         | QP              | 0.0                             | 23.0                   | 30.0                      | -7.0                           |  |
| 992.889                                                                 | 19.6                    | 9.7                | 218.0                    | 1.2                                                                                                 | 5.0                      | 0.0                                  | H-Bilog         | QP              | 0.0                             | 29.3                   | 37.0                      | -7.7                           |  |
| 603.354                                                                 | 21.0                    | 5.6                | 163.0                    | 1.0                                                                                                 | 5.0                      | 0.0                                  | V-Bilog         | QP              | 0.0                             | 26.6                   | 37.0                      | -10.4                          |  |
| 992.901                                                                 | 16.8                    | 9.7                | 234.0                    | 2.1                                                                                                 | 5.0                      | 0.0                                  | V-Bilog         | QP              | 0.0                             | 26.5                   | 37.0                      | -10.5                          |  |
| 603.920                                                                 | 20.7                    | 5.6                | 232.0                    | 2.6                                                                                                 | 5.0                      | 0.0                                  | H-Bilog         | QP              | 0.0                             | 26.3                   | 37.0                      | -10.7                          |  |
| 51.575                                                                  | 17.0                    | -6.2               | 28.0                     | 3.0                                                                                                 | 5.0                      | 0.0                                  | H-Bilog         | QP              | 0.0                             | 10.8                   | 30.0                      | -19.2                          |  |



**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

Low

Mid

High

**Operating Modes Investigated:**

No Hop

**Data Rates Investigated:**

Maximum

**Output Power Setting(s) Investigated:**

Maximum

**Power Input Settings Investigated:**

Battery

**Software\Firmware Applied During Test**

| Exercise software                                                                                                                                                                                                                                                                                   | BlueCore-Audio | Version | 1.0 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------|-----|
| Description                                                                                                                                                                                                                                                                                         |                |         |     |
| The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band. |                |         |     |

**EUT and Peripherals**

| Description             | Manufacturer                  | Model/Part Number | Serial Number |
|-------------------------|-------------------------------|-------------------|---------------|
| EUT - Bluetooth Headset | Logitech, Inc.                | A-0363C           | Unknown       |
| Development Module      | Cambridge Silicon Radio, Ltd. | BCES301199/1      | 7467 08 08 03 |
| AC Adapter              | Egston                        | N2GFSW3           | 42251         |

**Remote Equipment Outside of Test Setup Boundary**

| Description                                                                                                                           | Manufacturer | Model/Part Number | Serial Number |
|---------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------------|---------------|
| Laptop PC                                                                                                                             | IBM          | A21M              | IS108         |
| AC Adapter                                                                                                                            | IBM          | 02K6657           | None          |
| Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary |              |                   |               |

| Cables                                                                                                 |        |            |         |                    |                         |
|--------------------------------------------------------------------------------------------------------|--------|------------|---------|--------------------|-------------------------|
| Cable Type                                                                                             | Shield | Length (m) | Ferrite | Connection 1       | Connection 2            |
| Serial                                                                                                 | No     | 2.1        | No      | Laptop PC          | Development Module      |
| I/O                                                                                                    | No     | 1.2        | No      | Development Module | EUT - Bluetooth Headset |
| DC Leads                                                                                               | No     | 1.8        | PA      | AC Adapter         | Development Module      |
| PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown. |        |            |         |                    |                         |


| Measurement Equipment |              |       |            |            |          |
|-----------------------|--------------|-------|------------|------------|----------|
| Description           | Manufacturer | Model | Identifier | Last Cal   | Interval |
| Spectrum Analyzer     | Tektronix    | 2784  | AAO        | 01/02/2005 | 12 mo    |


### Test Description


**Requirement:** Bluetooth can be authorized as either a Frequency Hopping System (FHSS), a Digital Transmission System (DTS), or a Hybrid System. As a FHSS, the maximum 20dB bandwidth of the hopping channel is equal to 1.5 times the channel separation. For example, channel separation for Bluetooth is 1 MHz, therefore the maximum 20 dB bandwidth is 1.5 MHz. The measurement is made with the spectrum analyzer's resolution bandwidth set to  $\geq 1\%$  of the 20dB bandwidth, and the video bandwidth set to greater than or equal to the resolution bandwidth.

**Configuration:** The occupied bandwidth was measured with the EUT set to low, medium, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode.


Completed by:




| NORTHWEST<br>EMC                                                                                                                                                                                                     |  | OCCUPIED BANDWIDTH      |                      | Rev BETA<br>01/30/01          |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------|----------------------|-------------------------------|--|
| EUT: MN: A-0363C Cordless Headset                                                                                                                                                                                    |  |                         | Work Order: LABT0149 |                               |  |
| Serial Number: Unknown                                                                                                                                                                                               |  |                         | Date: 08/11/05       |                               |  |
| Customer: Logitech, Inc.                                                                                                                                                                                             |  |                         | Temperature: 73 °F   |                               |  |
| Attendees: None                                                                                                                                                                                                      |  | Tested by: Rod Peloquin |                      | Humidity: 42% RH              |  |
| Customer Ref. No.: None                                                                                                                                                                                              |  | Power: Battery          |                      | Job Site: EV06                |  |
| TEST SPECIFICATIONS                                                                                                                                                                                                  |  |                         |                      |                               |  |
| Specification: 47 CFR 15.247(a)                                                                                                                                                                                      |  | Year: 2005-04           |                      | Method: DA 00-705, ANSI C63.4 |  |
|                                                                                                                                                                                                                      |  |                         |                      | Year: 2003                    |  |
| SAMPLE CALCULATIONS                                                                                                                                                                                                  |  |                         |                      |                               |  |
| COMMENTS                                                                                                                                                                                                             |  |                         |                      |                               |  |
| Measured with a direct connection between the RF output and a spectrum analyzer.                                                                                                                                     |  |                         |                      |                               |  |
| EUT OPERATING MODES                                                                                                                                                                                                  |  |                         |                      |                               |  |
| Modulated by PRBS at maximum data rate                                                                                                                                                                               |  |                         |                      |                               |  |
| DEVIATIONS FROM TEST STANDARD                                                                                                                                                                                        |  |                         |                      |                               |  |
| None                                                                                                                                                                                                                 |  |                         |                      |                               |  |
| REQUIREMENTS                                                                                                                                                                                                         |  |                         |                      |                               |  |
| Bluetooth can be authorized as either a Frequency Hopping System (FHSS), a Digital Transmission System (DTS), or a Hybrid System.                                                                                    |  |                         |                      |                               |  |
| As a FHSS, the maximum 20dB bandwidth of the hopping channel is equal to 1.5 times the channel separation. For example, channel separation for Bluetooth is 1 MHz, therefore the maximum 20 dB bandwidth is 1.5 MHz. |  |                         |                      |                               |  |
| As a DTS system, the minimum 6 dB bandwidth is 500 kHz. As a Hybrid, it must meet the FHSS requirement as described above.                                                                                           |  |                         |                      |                               |  |
| RESULTS                                                                                                                                                                                                              |  |                         | BANDWIDTH            |                               |  |
| Pass                                                                                                                                                                                                                 |  |                         | 0.897 MHz            |                               |  |
| SIGNATURE                                                                                                                                                                                                            |  |                         |                      |                               |  |
| <br>Tested By: _____                                                                                                                |  |                         |                      |                               |  |
| DESCRIPTION OF TEST                                                                                                                                                                                                  |  |                         |                      |                               |  |
| 20dB Bandwidth - Low Channel                                                                                                                                                                                         |  |                         |                      |                               |  |

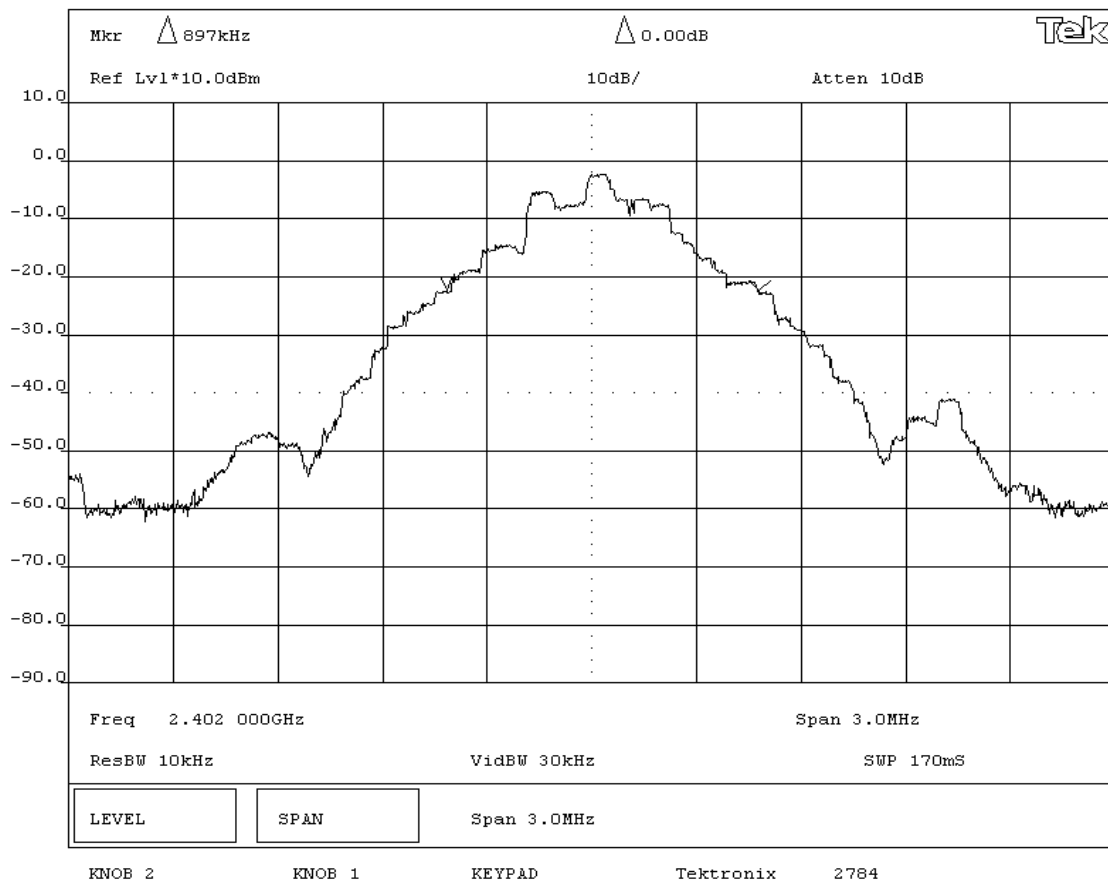


| NORTHWEST<br>EMC                                                                                                                                                                                                     |  | OCCUPIED BANDWIDTH      |                      | Rev BETA<br>01/30/01          |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------|----------------------|-------------------------------|--|
| EUT: MN: A-0363C Cordless Headset                                                                                                                                                                                    |  |                         | Work Order: LABT0149 |                               |  |
| Serial Number: Unknown                                                                                                                                                                                               |  |                         | Date: 08/11/05       |                               |  |
| Customer: Logitech, Inc.                                                                                                                                                                                             |  |                         | Temperature: 73 °F   |                               |  |
| Attendees: None                                                                                                                                                                                                      |  | Tested by: Rod Peloquin |                      | Humidity: 42% RH              |  |
| Customer Ref. No.: None                                                                                                                                                                                              |  | Power: Battery          |                      | Job Site: EV06                |  |
| TEST SPECIFICATIONS                                                                                                                                                                                                  |  |                         |                      |                               |  |
| Specification: 47 CFR 15.247(a)                                                                                                                                                                                      |  | Year: 2005-04           |                      | Method: DA 00-705, ANSI C63.4 |  |
|                                                                                                                                                                                                                      |  |                         |                      | Year: 2003                    |  |
| SAMPLE CALCULATIONS                                                                                                                                                                                                  |  |                         |                      |                               |  |
| COMMENTS                                                                                                                                                                                                             |  |                         |                      |                               |  |
| Measured with a direct connection between the RF output and a spectrum analyzer.                                                                                                                                     |  |                         |                      |                               |  |
| EUT OPERATING MODES                                                                                                                                                                                                  |  |                         |                      |                               |  |
| Modulated by PRBS at maximum data rate                                                                                                                                                                               |  |                         |                      |                               |  |
| DEVIATIONS FROM TEST STANDARD                                                                                                                                                                                        |  |                         |                      |                               |  |
| None                                                                                                                                                                                                                 |  |                         |                      |                               |  |
| REQUIREMENTS                                                                                                                                                                                                         |  |                         |                      |                               |  |
| Bluetooth can be authorized as either a Frequency Hopping System (FHSS), a Digital Transmission System (DTS), or a Hybrid System.                                                                                    |  |                         |                      |                               |  |
| As a FHSS, the maximum 20dB bandwidth of the hopping channel is equal to 1.5 times the channel separation. For example, channel separation for Bluetooth is 1 MHz, therefore the maximum 20 dB bandwidth is 1.5 MHz. |  |                         |                      |                               |  |
| As a DTS system, the minimum 6 dB bandwidth is 500 kHz. As a Hybrid, it must meet the FHSS requirement as described above.                                                                                           |  |                         |                      |                               |  |
| RESULTS                                                                                                                                                                                                              |  |                         | BANDWIDTH            |                               |  |
| Pass                                                                                                                                                                                                                 |  |                         | 0.939 MHz            |                               |  |
| SIGNATURE                                                                                                                                                                                                            |  |                         |                      |                               |  |
| <br>Tested By: _____                                                                                                                |  |                         |                      |                               |  |
| DESCRIPTION OF TEST                                                                                                                                                                                                  |  |                         |                      |                               |  |
| 20dB Bandwidth - Mid Channel                                                                                                                                                                                         |  |                         |                      |                               |  |

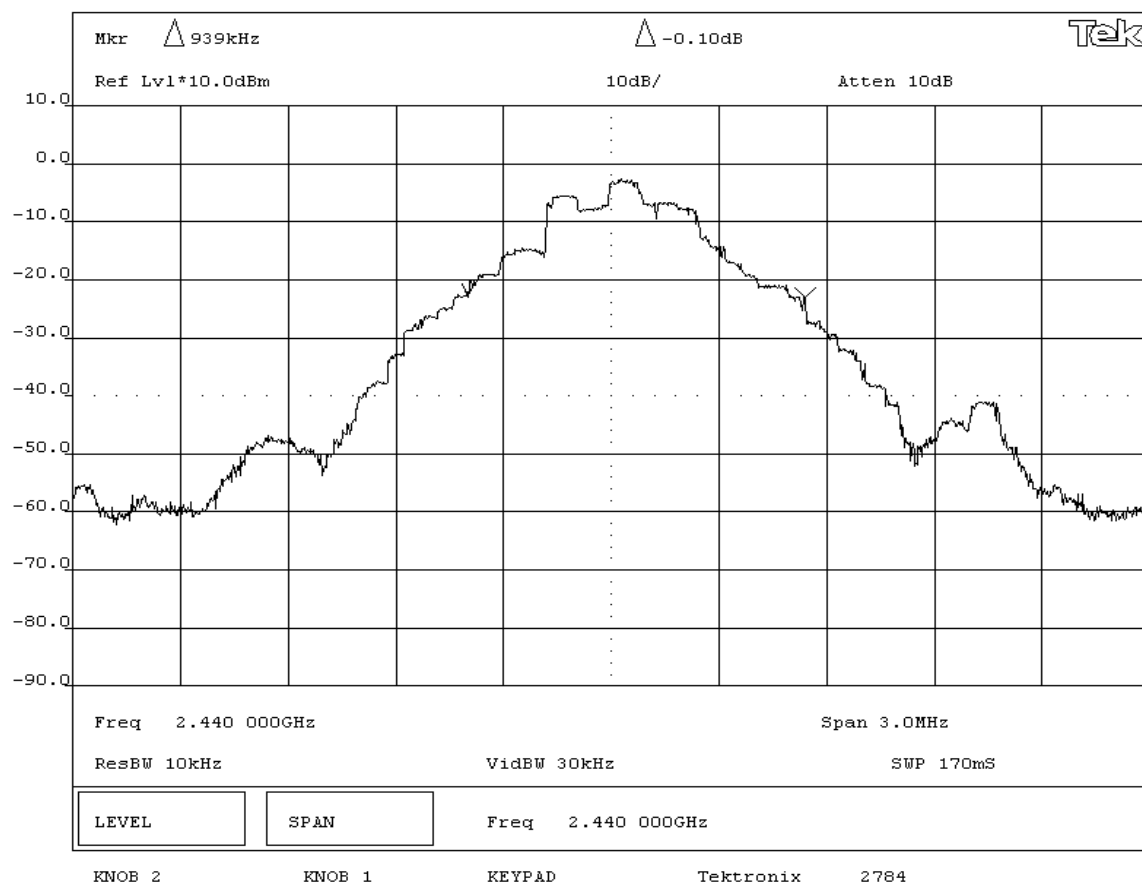

| NORTHWEST<br>EMC                                                                                                                                                                                                     |  | OCCUPIED BANDWIDTH      |                      | Rev BETA<br>01/30/01          |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------|----------------------|-------------------------------|--|
| EUT: MN: A-0363C Cordless Headset                                                                                                                                                                                    |  |                         | Work Order: LABT0149 |                               |  |
| Serial Number: Unknown                                                                                                                                                                                               |  |                         | Date: 08/11/05       |                               |  |
| Customer: Logitech, Inc.                                                                                                                                                                                             |  |                         | Temperature: 73 °F   |                               |  |
| Attendees: None                                                                                                                                                                                                      |  | Tested by: Rod Peloquin |                      | Humidity: 42% RH              |  |
| Customer Ref. No.: None                                                                                                                                                                                              |  | Power: Battery          |                      | Job Site: EV06                |  |
| TEST SPECIFICATIONS                                                                                                                                                                                                  |  |                         |                      |                               |  |
| Specification: 47 CFR 15.247(a)                                                                                                                                                                                      |  | Year: 2005-06           |                      | Method: DA 00-705, ANSI C63.4 |  |
|                                                                                                                                                                                                                      |  |                         |                      | Year: 2003                    |  |
| SAMPLE CALCULATIONS                                                                                                                                                                                                  |  |                         |                      |                               |  |
| COMMENTS                                                                                                                                                                                                             |  |                         |                      |                               |  |
| Measured with a direct connection between the RF output and a spectrum analyzer.                                                                                                                                     |  |                         |                      |                               |  |
| EUT OPERATING MODES                                                                                                                                                                                                  |  |                         |                      |                               |  |
| Modulated by PRBS at maximum data rate                                                                                                                                                                               |  |                         |                      |                               |  |
| DEVIATIONS FROM TEST STANDARD                                                                                                                                                                                        |  |                         |                      |                               |  |
| None                                                                                                                                                                                                                 |  |                         |                      |                               |  |
| REQUIREMENTS                                                                                                                                                                                                         |  |                         |                      |                               |  |
| Bluetooth can be authorized as either a Frequency Hopping System (FHSS), a Digital Transmission System (DTS), or a Hybrid System.                                                                                    |  |                         |                      |                               |  |
| As a FHSS, the maximum 20dB bandwidth of the hopping channel is equal to 1.5 times the channel separation. For example, channel separation for Bluetooth is 1 MHz, therefore the maximum 20 dB bandwidth is 1.5 MHz. |  |                         |                      |                               |  |
| As a DTS system, the minimum 6 dB bandwidth is 500 kHz. As a Hybrid, it must meet the FHSS requirement as described above.                                                                                           |  |                         |                      |                               |  |
| RESULTS                                                                                                                                                                                                              |  |                         | BANDWIDTH            |                               |  |
| Pass                                                                                                                                                                                                                 |  |                         | 0.954 MHz            |                               |  |
| SIGNATURE                                                                                                                                                                                                            |  |                         |                      |                               |  |
| <br>Tested By: _____                                                                                                                |  |                         |                      |                               |  |
| DESCRIPTION OF TEST                                                                                                                                                                                                  |  |                         |                      |                               |  |
| 20dB Bandwidth - High Channel                                                                                                                                                                                        |  |                         |                      |                               |  |

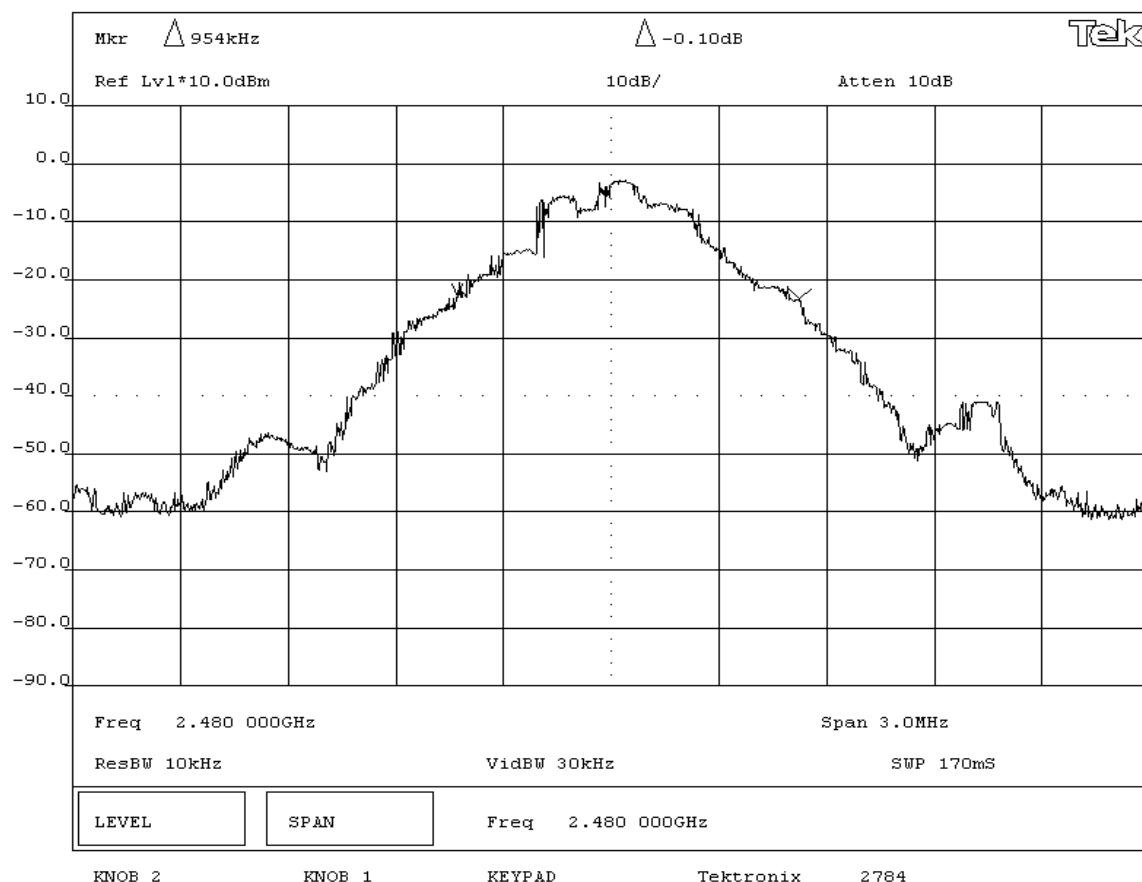

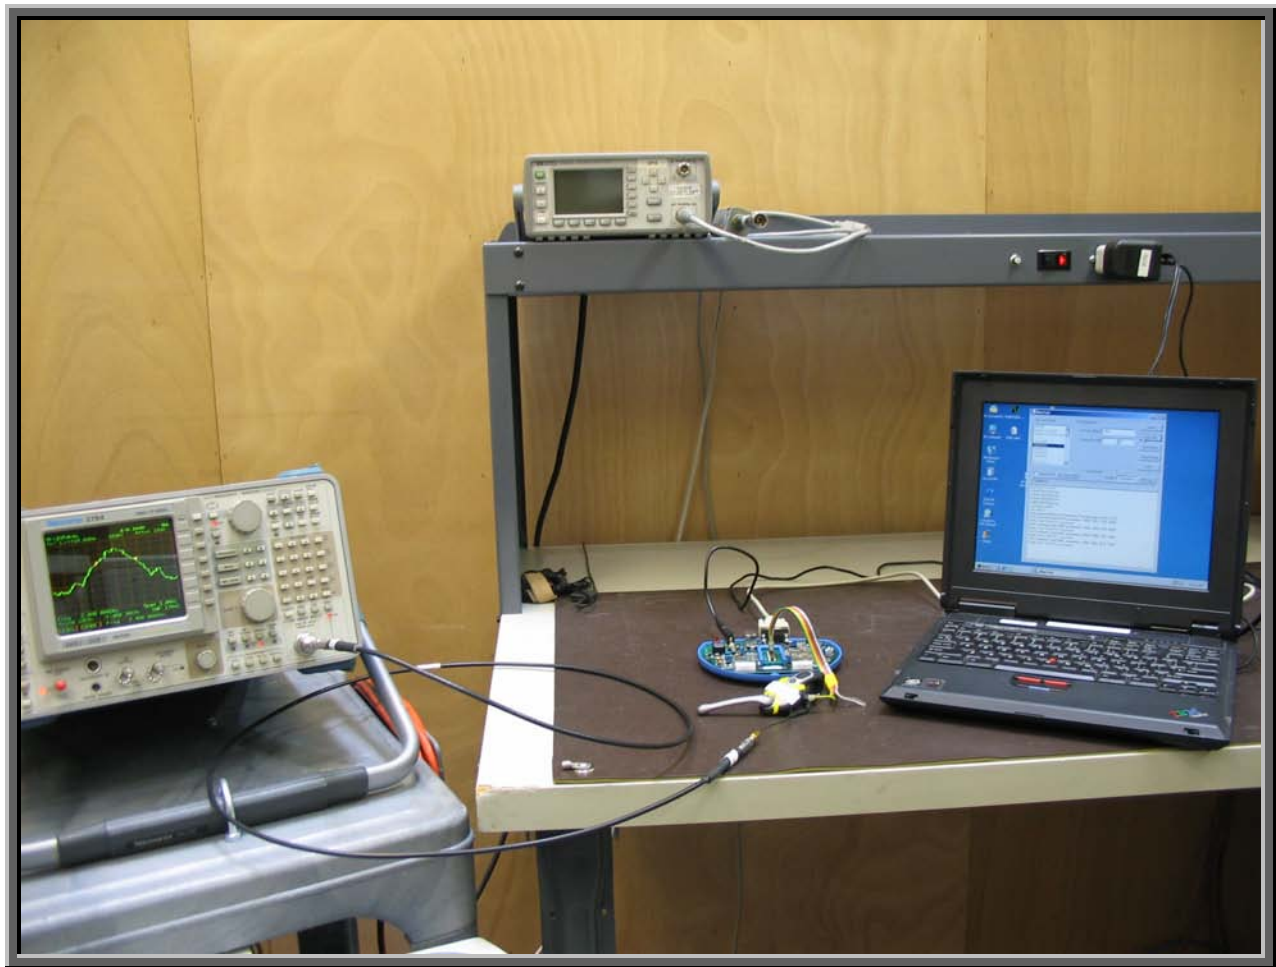

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

Low

Mid

High

**Operating Modes Investigated:**

No Hop

**Data Rates Investigated:**

Maximum

**Output Power Setting(s) Investigated:**

Maximum

**Power Input Settings Investigated:**

Battery

**Software\Firmware Applied During Test**

| Exercise software                                                                                                                                                                                                                                                                                   | BlueCore-Audio | Version | 1.0 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------|-----|
| Description                                                                                                                                                                                                                                                                                         |                |         |     |
| The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band. |                |         |     |

**EUT and Peripherals**

| Description             | Manufacturer                  | Model/Part Number | Serial Number |
|-------------------------|-------------------------------|-------------------|---------------|
| EUT - Bluetooth Headset | Logitech, Inc.                | A-0363C           | Unknown       |
| Development Module      | Cambridge Silicon Radio, Ltd. | BCES301199/1      | 7467 08 08 03 |
| AC Adapter              | Egston                        | N2GFSW3           | 42251         |

**Remote Equipment Outside of Test Setup Boundary**

| Description                                                                                                                           | Manufacturer | Model/Part Number | Serial Number |
|---------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------------|---------------|
| Laptop PC                                                                                                                             | IBM          | A21M              | IS108         |
| AC Adapter                                                                                                                            | IBM          | 02K6657           | None          |
| Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary |              |                   |               |

| Cables                                                                                                 |        |            |         |                    |                         |
|--------------------------------------------------------------------------------------------------------|--------|------------|---------|--------------------|-------------------------|
| Cable Type                                                                                             | Shield | Length (m) | Ferrite | Connection 1       | Connection 2            |
| Serial                                                                                                 | No     | 2.1        | No      | Laptop PC          | Development Module      |
| I/O                                                                                                    | No     | 1.2        | No      | Development Module | EUT - Bluetooth Headset |
| DC Leads                                                                                               | No     | 1.8        | PA      | AC Adapter         | Development Module      |
| PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown. |        |            |         |                    |                         |

| Measurement Equipment |                 |          |            |            |          |
|-----------------------|-----------------|----------|------------|------------|----------|
| Description           | Manufacturer    | Model    | Identifier | Last Cal   | Interval |
| Oscilloscope          | Tektronix       | TDS 3052 | TOF        | 12/02/2004 | 13 mo    |
| Power Meter           | Hewlett Packard | E4418A   | SPA        | 07/23/2004 | 24 mo    |
| Power Sensor          | Hewlett-Packard | 8481H    | SPB        | 07/23/2004 | 24 mo    |
| RF Detector           | RLC Electronics | CR-133-R | ZZA        | NCR        | NA       |
| Signal Generator      | Hewlett Packard | 8341B    | TGN        | 02/07/2005 | 13 mo    |

### Test Description


**Requirement:** Per 47 CFR 15.247(b)(3), the maximum peak output power must not exceed 1 Watt.

**Configuration:** The peak output power was measured with the EUT set to low, medium, and high transmit frequencies. The EUT was transmitting at its maximum output power. The data rate of the radio was varied to determine the level that produced the highest output power.

The measurement was made using a direct connection between the RF output of the EUT and a RF detector diode. The DC output of the diode was measured with the oscilloscope. The signal generator, tuned to the transmit frequency, was then substituted for the EUT. The CW output of the signal generator was adjusted until the DC output of the RF detector diode match the peak level produced when connected to the EUT. To further reduce measurement error, the power meter and sensor were then used to measure the output power level of the signal generator.


**De Facto EIRP Limit:** Per 47 CFR 15.247 (b)(1-3), the EUT meets the de facto EIRP limit of +36dBm.

Completed by:



|                                                                                                                                                  |                              |            |            |                     |                       |                      |      |
|--------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|------------|------------|---------------------|-----------------------|----------------------|------|
| NORTHWEST                                                                                                                                        |                              | <b>EMC</b> |            | <b>OUTPUT POWER</b> |                       | Rev BETA<br>01/30/01 |      |
| EUT:                                                                                                                                             | MN: A-0363C Cordless Headset |            |            | Work Order:         | LABT0149              |                      |      |
| Serial Number:                                                                                                                                   | Unknown                      |            |            | Date:               | 08/11/05              |                      |      |
| Customer:                                                                                                                                        | Logitech, Inc.               |            |            | Temperature:        | 73 °F                 |                      |      |
| Attendees:                                                                                                                                       | None                         |            | Tested by: | Rod Peloquin        | Humidity:             | 42% RH               |      |
| Customer Ref. No.:                                                                                                                               | None                         |            | Power:     | 3.7 VDC             | Job Site:             | EV06                 |      |
| <b>TEST SPECIFICATIONS</b>                                                                                                                       |                              |            |            |                     |                       |                      |      |
| Specification:                                                                                                                                   | 47 CFR 15.247(b)             | Year:      | 2005-06    | Method:             | DA 00-705, ANSI C63.4 | Year:                | 2003 |
| <b>SAMPLE CALCULATIONS</b>                                                                                                                       |                              |            |            |                     |                       |                      |      |
|                                                                                                                                                  |                              |            |            |                     |                       |                      |      |
| <b>COMMENTS</b>                                                                                                                                  |                              |            |            |                     |                       |                      |      |
|                                                                                                                                                  |                              |            |            |                     |                       |                      |      |
| <b>EUT OPERATING MODES</b>                                                                                                                       |                              |            |            |                     |                       |                      |      |
| Modulated by PRBS at maximum data rate                                                                                                           |                              |            |            |                     |                       |                      |      |
| <b>DEVIATIONS FROM TEST STANDARD</b>                                                                                                             |                              |            |            |                     |                       |                      |      |
| None                                                                                                                                             |                              |            |            |                     |                       |                      |      |
| <b>REQUIREMENTS</b>                                                                                                                              |                              |            |            |                     |                       |                      |      |
| Maximum peak conducted output power does not exceed 1 Watt                                                                                       |                              |            |            |                     |                       |                      |      |
| <b>RESULTS</b>                                                                                                                                   |                              |            |            | <b>AMPLITUDE</b>    |                       |                      |      |
| Pass                                                                                                                                             |                              |            |            | 2.38 mW             |                       |                      |      |
| <b>SIGNATURE</b>                                                                                                                                 |                              |            |            |                     |                       |                      |      |
| <div style="text-align: center;"> <br/> Tested By: _____ </div> |                              |            |            |                     |                       |                      |      |
| <b>DESCRIPTION OF TEST</b>                                                                                                                       |                              |            |            |                     |                       |                      |      |
| Output Power                                                                                                                                     |                              |            |            |                     |                       |                      |      |

| Frequency<br>(MHz) | Peak Power Measured w/ Diode<br>Detector<br>(dBm) | Peak Power<br>(mW) | Spec<br>(mW) |
|--------------------|---------------------------------------------------|--------------------|--------------|
| 2402.0             | 3.74                                              | 2.37               | 1000.0       |
| 2441.0             | 3.42                                              | 2.20               | 1000.0       |
| 2480.0             | 3.76                                              | 2.38               | 1000.0       |

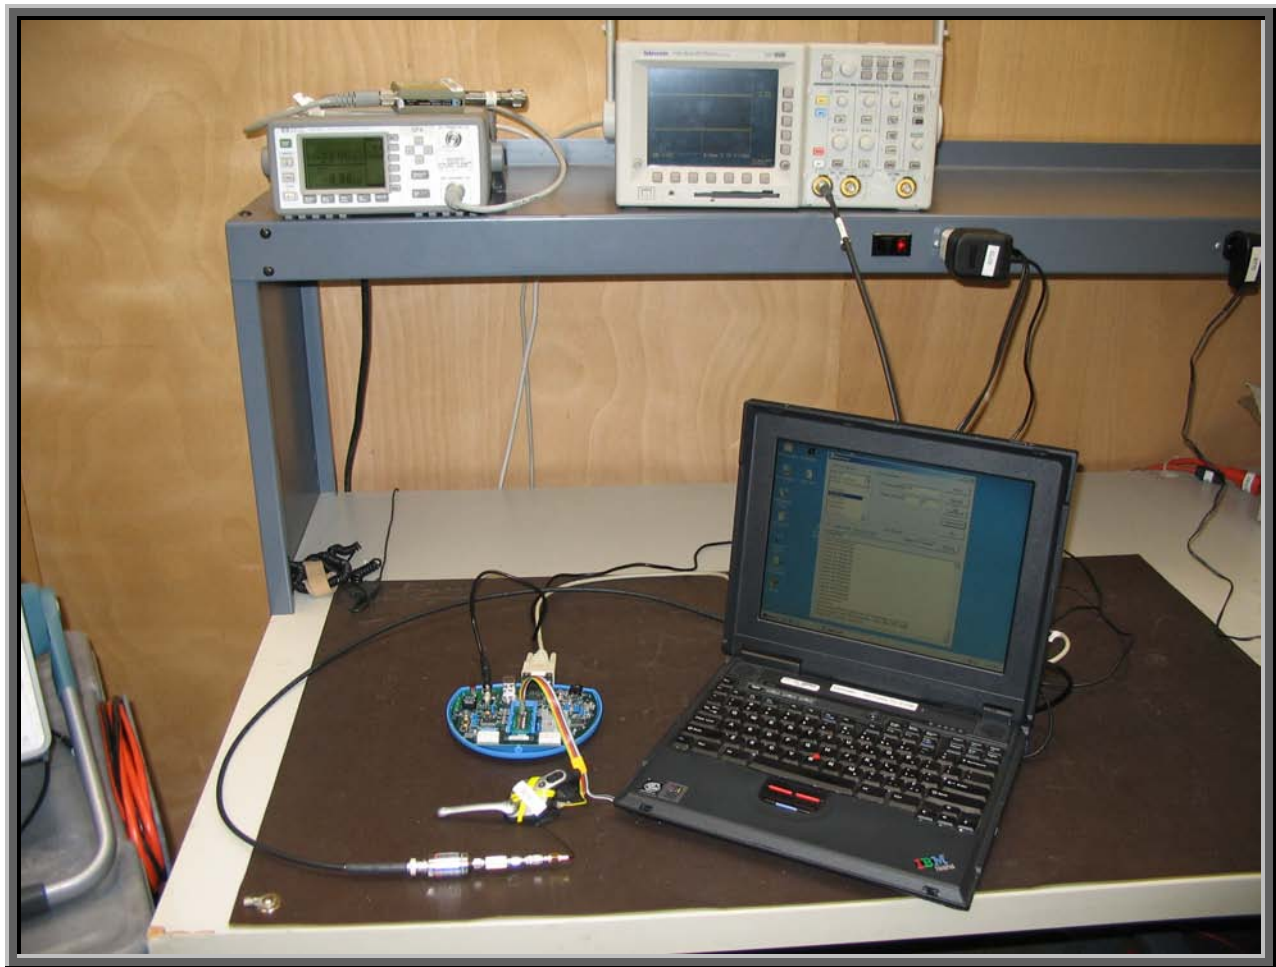

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

Low

High

**Operating Modes Investigated:**

No Hop

**Data Rates Investigated:**

Maximum

**Output Power Setting(s) Investigated:**

Maximum

**Power Input Settings Investigated:**

Battery

**Software\Firmware Applied During Test**

| Exercise software                                                                                                                                                                                                                                                                        | BlueCore-Audio | Version | 1.0 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------|-----|
| Description                                                                                                                                                                                                                                                                              |                |         |     |
| The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest and the highest channels in the operating band. |                |         |     |

**EUT and Peripherals**

| Description             | Manufacturer                  | Model/Part Number | Serial Number |
|-------------------------|-------------------------------|-------------------|---------------|
| EUT - Bluetooth Headset | Logitech, Inc.                | A-0363C           | Unknown       |
| Development Module      | Cambridge Silicon Radio, Ltd. | BCES301199/1      | 7467 08 08 03 |
| AC Adapter              | Egston                        | N2GFSW3           | 42251         |

**Remote Equipment Outside of Test Setup Boundary**

| Description                                                                                                                           | Manufacturer | Model/Part Number | Serial Number |
|---------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------------|---------------|
| Laptop PC                                                                                                                             | IBM          | A21M              | IS108         |
| AC Adapter                                                                                                                            | IBM          | 02K6657           | None          |
| Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary |              |                   |               |

| Cables                                                                                                 |        |            |         |                    |                         |
|--------------------------------------------------------------------------------------------------------|--------|------------|---------|--------------------|-------------------------|
| Cable Type                                                                                             | Shield | Length (m) | Ferrite | Connection 1       | Connection 2            |
| Serial                                                                                                 | No     | 2.1        | No      | Laptop PC          | Development Module      |
| I/O                                                                                                    | No     | 1.2        | No      | Development Module | EUT - Bluetooth Headset |
| DC Leads                                                                                               | No     | 1.8        | PA      | AC Adapter         | Development Module      |
| PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown. |        |            |         |                    |                         |

| Measurement Equipment |              |       |            |            |          |
|-----------------------|--------------|-------|------------|------------|----------|
| Description           | Manufacturer | Model | Identifier | Last Cal   | Interval |
| Spectrum Analyzer     | Tektronix    | 2784  | AAO        | 01/02/2005 | 12 mo    |

### Test Description

**Requirement:** Per 47 CFR 15.247(d), in any 100 kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100 kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

**Configuration:** The spurious RF conducted emissions at the edges of the authorized band were measured with the EUT set to low and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode. The channels closest to the band edges were selected. The spectrum was scanned across each band edge from 5 MHz below the band edge to 5 MHz above the band edge.

Completed by:



NORTHWEST  
**EMC**

# BAND EDGE COMPLIANCE

Rev BETA  
01/30/01

|                                   |  |  |                      |  |  |
|-----------------------------------|--|--|----------------------|--|--|
| EUT: MN: A-0363C Cordless Headset |  |  | Work Order: LABT0149 |  |  |
| Serial Number: Unknown            |  |  | Date: 08/11/05       |  |  |
| Customer: Logitech, Inc.          |  |  | Temperature: 73 °F   |  |  |
| Attendees: None                   |  |  | Humidity: 42% RH     |  |  |
| Customer Ref. No.: None           |  |  | Job Site: EV06       |  |  |
| Tested by: Rod Peloquin           |  |  | Power: Battery       |  |  |

|                     |                  |       |         |         |                       |       |      |
|---------------------|------------------|-------|---------|---------|-----------------------|-------|------|
| TEST SPECIFICATIONS |                  |       |         |         |                       |       |      |
| Specification:      | 47 CFR 15.247(d) | Year: | 2005-04 | Method: | DA 00-705, ANSI C63.4 | Year: | 2003 |
| SAMPLE CALCULATIONS |                  |       |         |         |                       |       |      |

## COMMENTS

## EUT OPERATING MODES

Modulated by PRBS at maximum data rate

## DEVIATIONS FROM TEST STANDARD

None


## REQUIREMENTS

Maximum level of any spurious emission at the edge of the authorized band is 20 dB down from the fundamental

## RESULTS


Pass -53.10 dB

## SIGNATURE


Tested By: 


## DESCRIPTION OF TEST

Band Edge Compliance - Low Channel

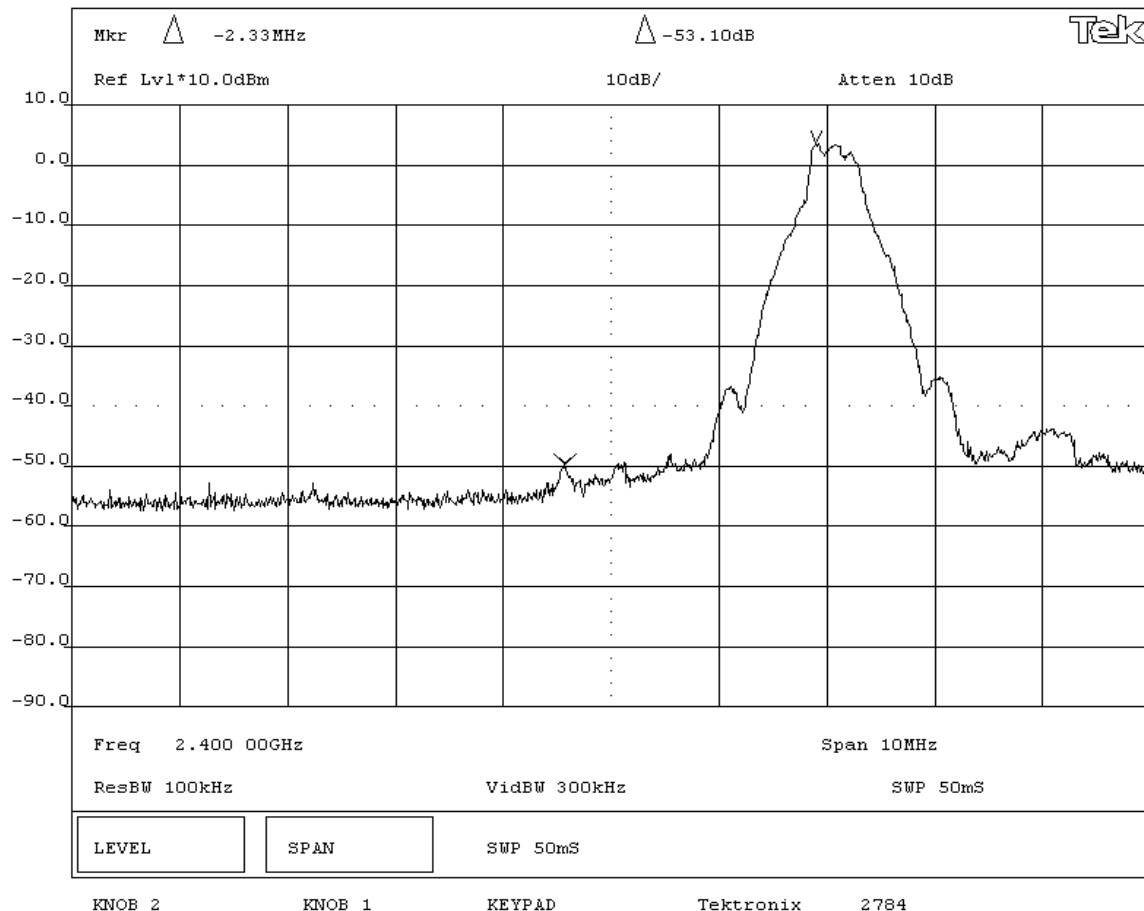

| NORTHWEST<br>EMC                                                                                             |                              | BAND EDGE COMPLIANCE |              | Rev BETA<br>01/30/01 |                       |
|--------------------------------------------------------------------------------------------------------------|------------------------------|----------------------|--------------|----------------------|-----------------------|
| EUT:                                                                                                         | MN: A-0363C Cordless Headset | Work Order:          | LABT0149     |                      |                       |
| Serial Number:                                                                                               | Unknown                      | Date:                | 08/11/05     |                      |                       |
| Customer:                                                                                                    | Logitech, Inc.               | Temperature:         | 73 °F        |                      |                       |
| Attendees:                                                                                                   | None                         | Tested by:           | Rod Peloquin | Humidity:            | 42% RH                |
| Customer Ref. No.:                                                                                           | None                         | Power:               | Battery      | Job Site:            | EV06                  |
| TEST SPECIFICATIONS                                                                                          |                              |                      |              |                      |                       |
| Specification:                                                                                               | 47 CFR 15.247(d)             | Year:                | 2005-06      | Method:              | DA 00-705, ANSI C63.4 |
|                                                                                                              |                              |                      |              | Year:                | 2003                  |
| SAMPLE CALCULATIONS                                                                                          |                              |                      |              |                      |                       |
| COMMENTS                                                                                                     |                              |                      |              |                      |                       |
| EUT OPERATING MODES                                                                                          |                              |                      |              |                      |                       |
| Modulated by PRBS at maximum data rate                                                                       |                              |                      |              |                      |                       |
| DEVIATIONS FROM TEST STANDARD                                                                                |                              |                      |              |                      |                       |
| None                                                                                                         |                              |                      |              |                      |                       |
| REQUIREMENTS                                                                                                 |                              |                      |              |                      |                       |
| Maximum level of any spurious emission at the edge of the authorized band is 20 dB down from the fundamental |                              |                      |              |                      |                       |
| RESULTS                                                                                                      |                              | AMPLITUDE            |              |                      |                       |
| Pass                                                                                                         |                              | -47.5 dB             |              |                      |                       |
| SIGNATURE                                                                                                    |                              |                      |              |                      |                       |
| <br>Tested By: _____        |                              |                      |              |                      |                       |
| DESCRIPTION OF TEST                                                                                          |                              |                      |              |                      |                       |
| Band Edge Compliance - High Channel                                                                          |                              |                      |              |                      |                       |

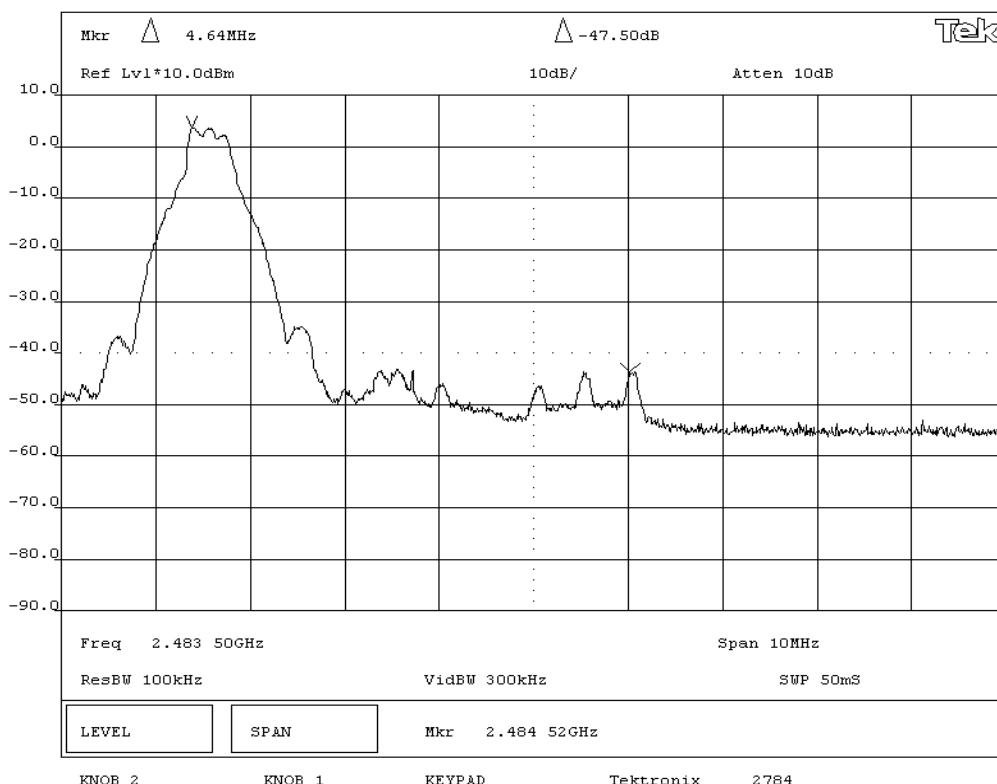

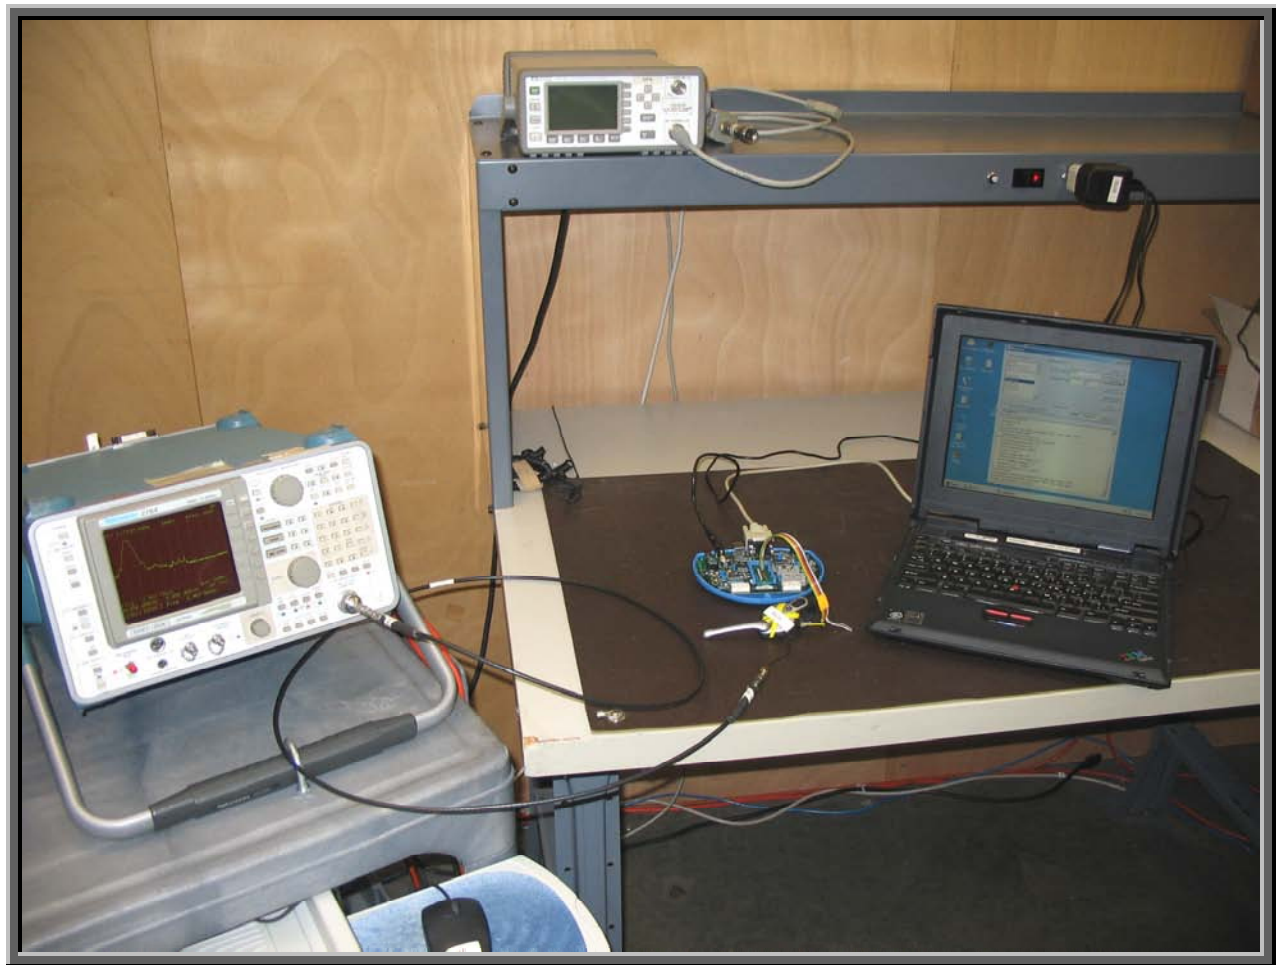

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

Low

Mid

High

**Operating Modes Investigated:**

No Hop

**Data Rates Investigated:**

Maximum

**Output Power Setting(s) Investigated:**

Maximum

**Power Input Settings Investigated:**

Battery

**Software\Firmware Applied During Test**

| Exercise software                                                                                                                                                                                                                                                                                   | BlueCore-Audio | Version | 1.0 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------|-----|
| Description                                                                                                                                                                                                                                                                                         |                |         |     |
| The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band. |                |         |     |

**EUT and Peripherals**

| Description             | Manufacturer                  | Model/Part Number | Serial Number |
|-------------------------|-------------------------------|-------------------|---------------|
| EUT - Bluetooth Headset | Logitech, Inc.                | A-0363C           | Unknown       |
| Development Module      | Cambridge Silicon Radio, Ltd. | BCES301199/1      | 7467 08 08 03 |
| AC Adapter              | Egston                        | N2GFSW3           | 42251         |

**Remote Equipment Outside of Test Setup Boundary**

| Description                                                                                                                           | Manufacturer | Model/Part Number | Serial Number |
|---------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------------|---------------|
| Laptop PC                                                                                                                             | IBM          | A21M              | IS108         |
| AC Adapter                                                                                                                            | IBM          | 02K6657           | None          |
| Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary |              |                   |               |

| Cables                                                                                                 |        |            |         |                    |                         |
|--------------------------------------------------------------------------------------------------------|--------|------------|---------|--------------------|-------------------------|
| Cable Type                                                                                             | Shield | Length (m) | Ferrite | Connection 1       | Connection 2            |
| Serial                                                                                                 | No     | 2.1        | No      | Laptop PC          | Development Module      |
| I/O                                                                                                    | No     | 1.2        | No      | Development Module | EUT - Bluetooth Headset |
| DC Leads                                                                                               | No     | 1.8        | PA      | AC Adapter         | Development Module      |
| PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown. |        |            |         |                    |                         |


| Measurement Equipment |              |       |            |            |          |
|-----------------------|--------------|-------|------------|------------|----------|
| Description           | Manufacturer | Model | Identifier | Last Cal   | Interval |
| Spectrum Analyzer     | Tektronix    | 2784  | AAO        | 01/02/2005 | 12 mo    |

### Test Description


**Requirement:** Per 47 CFR 15.247(d), in any 100 kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100 kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

**Configuration:** The spurious RF conducted emissions were measured with the EUT set to low, medium, and high transmit frequencies. The measurements were made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode. For each transmit frequency, the spectrum was scanned throughout the specified frequency.


Completed by:



| NORTHWEST<br>EMC                                                                                         |  | EMISSIONS DATA SHEET    |                      | Rev BETA<br>01/30/01          |  |
|----------------------------------------------------------------------------------------------------------|--|-------------------------|----------------------|-------------------------------|--|
| EUT: MN: A-0363C Cordless Headset                                                                        |  |                         | Work Order: LABT0149 |                               |  |
| Serial Number: Unknown                                                                                   |  |                         | Date: 08/11/05       |                               |  |
| Customer: Logitech, Inc.                                                                                 |  |                         | Temperature: 73 °F   |                               |  |
| Attendees: None                                                                                          |  | Tested by: Rod Peloquin |                      | Humidity: 42% RH              |  |
| Customer Ref. No.: None                                                                                  |  | Power: Battery          |                      | Job Site: EV06                |  |
| TEST SPECIFICATIONS                                                                                      |  |                         |                      |                               |  |
| Specification: 47 CFR 15.247(d)                                                                          |  | Year: 2005-04           |                      | Method: DA 00-705, ANSI C63.4 |  |
|                                                                                                          |  |                         |                      | Year: 2003                    |  |
| SAMPLE CALCULATIONS                                                                                      |  |                         |                      |                               |  |
| COMMENTS                                                                                                 |  |                         |                      |                               |  |
| EUT OPERATING MODES                                                                                      |  |                         |                      |                               |  |
| Modulated by PRBS at maximum data rate                                                                   |  |                         |                      |                               |  |
| DEVIATIONS FROM TEST STANDARD                                                                            |  |                         |                      |                               |  |
| None                                                                                                     |  |                         |                      |                               |  |
| REQUIREMENTS                                                                                             |  |                         |                      |                               |  |
| Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental |  |                         |                      |                               |  |
| RESULTS                                                                                                  |  |                         |                      |                               |  |
| Pass                                                                                                     |  |                         |                      |                               |  |
| SIGNATURE                                                                                                |  |                         |                      |                               |  |
| <br>Tested By: _____    |  |                         |                      |                               |  |
| DESCRIPTION OF TEST                                                                                      |  |                         |                      |                               |  |
| Antenna Conducted Spurious Emissions - Low Channel 0MHz-3GHz                                             |  |                         |                      |                               |  |

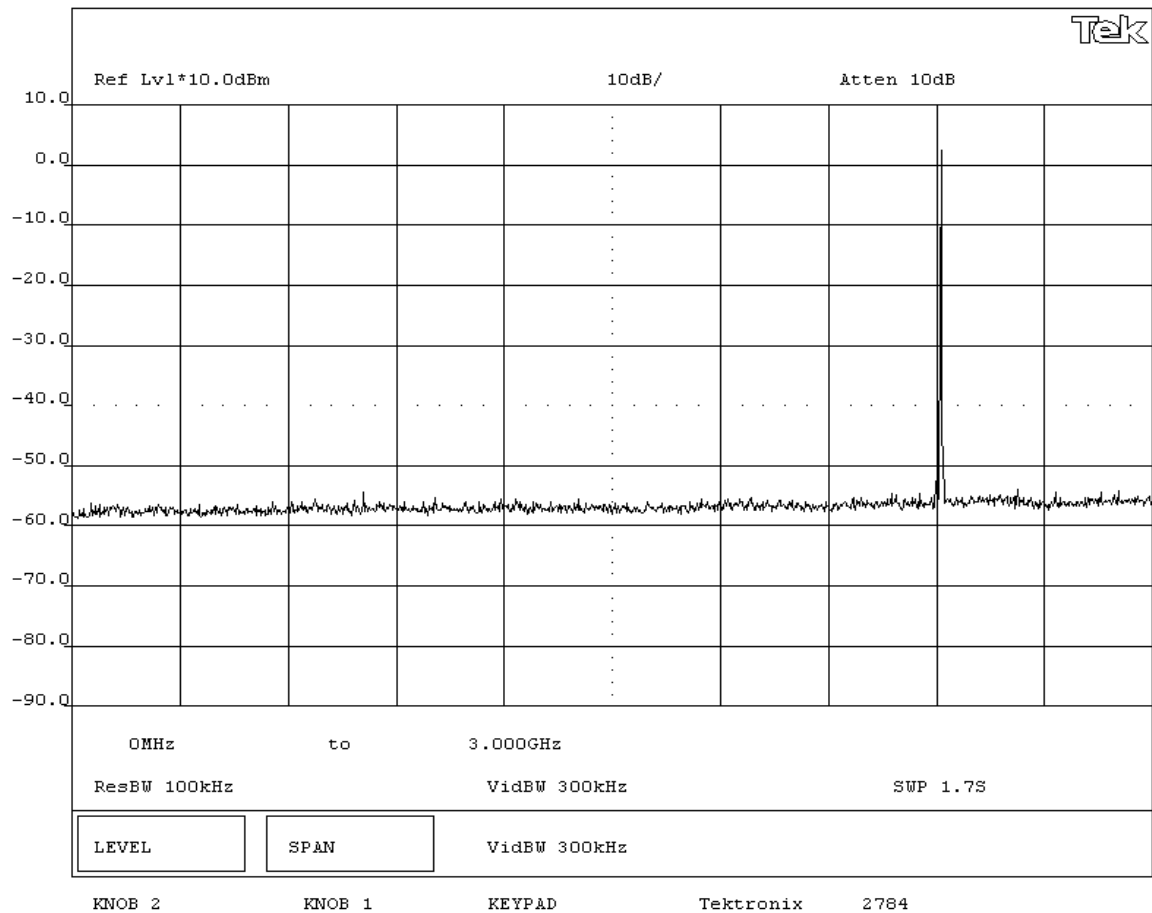

| NORTHWEST<br><b>EMC</b>                                                                                  |  | <b>EMISSIONS DATA SHEET</b> |                      | Rev BETA<br>01/30/01          |  |
|----------------------------------------------------------------------------------------------------------|--|-----------------------------|----------------------|-------------------------------|--|
| EUT: MN: A-0363C Cordless Headset                                                                        |  |                             | Work Order: LABT0149 |                               |  |
| Serial Number: Unknown                                                                                   |  |                             | Date: 08/11/05       |                               |  |
| Customer: Logitech, Inc.                                                                                 |  |                             | Temperature: 73 °F   |                               |  |
| Attendees: None                                                                                          |  | Tested by: Rod Peloquin     |                      | Humidity: 42% RH              |  |
| Customer Ref. No.: None                                                                                  |  | Power: Battery              |                      | Job Site: EV06                |  |
| <b>TEST SPECIFICATIONS</b>                                                                               |  |                             |                      |                               |  |
| Specification: 47 CFR 15.247(d)                                                                          |  | Year: 2005-04               |                      | Method: DA 00-705, ANSI C63.4 |  |
|                                                                                                          |  |                             |                      | Year: 2003                    |  |
| <b>SAMPLE CALCULATIONS</b>                                                                               |  |                             |                      |                               |  |
|                                                                                                          |  |                             |                      |                               |  |
| <b>COMMENTS</b>                                                                                          |  |                             |                      |                               |  |
|                                                                                                          |  |                             |                      |                               |  |
| <b>EUT OPERATING MODES</b>                                                                               |  |                             |                      |                               |  |
| Modulated by PRBS at maximum data rate                                                                   |  |                             |                      |                               |  |
| <b>DEVIATIONS FROM TEST STANDARD</b>                                                                     |  |                             |                      |                               |  |
| None                                                                                                     |  |                             |                      |                               |  |
| <b>REQUIREMENTS</b>                                                                                      |  |                             |                      |                               |  |
| Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental |  |                             |                      |                               |  |
| <b>RESULTS</b>                                                                                           |  |                             |                      |                               |  |
| Pass                                                                                                     |  |                             |                      |                               |  |
| <b>SIGNATURE</b>                                                                                         |  |                             |                      |                               |  |
| <br>Tested By: _____    |  |                             |                      |                               |  |
| <b>DESCRIPTION OF TEST</b>                                                                               |  |                             |                      |                               |  |
| <b>Antenna Conducted Spurious Emissions - Low Channel 3GHz-6.5GHz</b>                                    |  |                             |                      |                               |  |

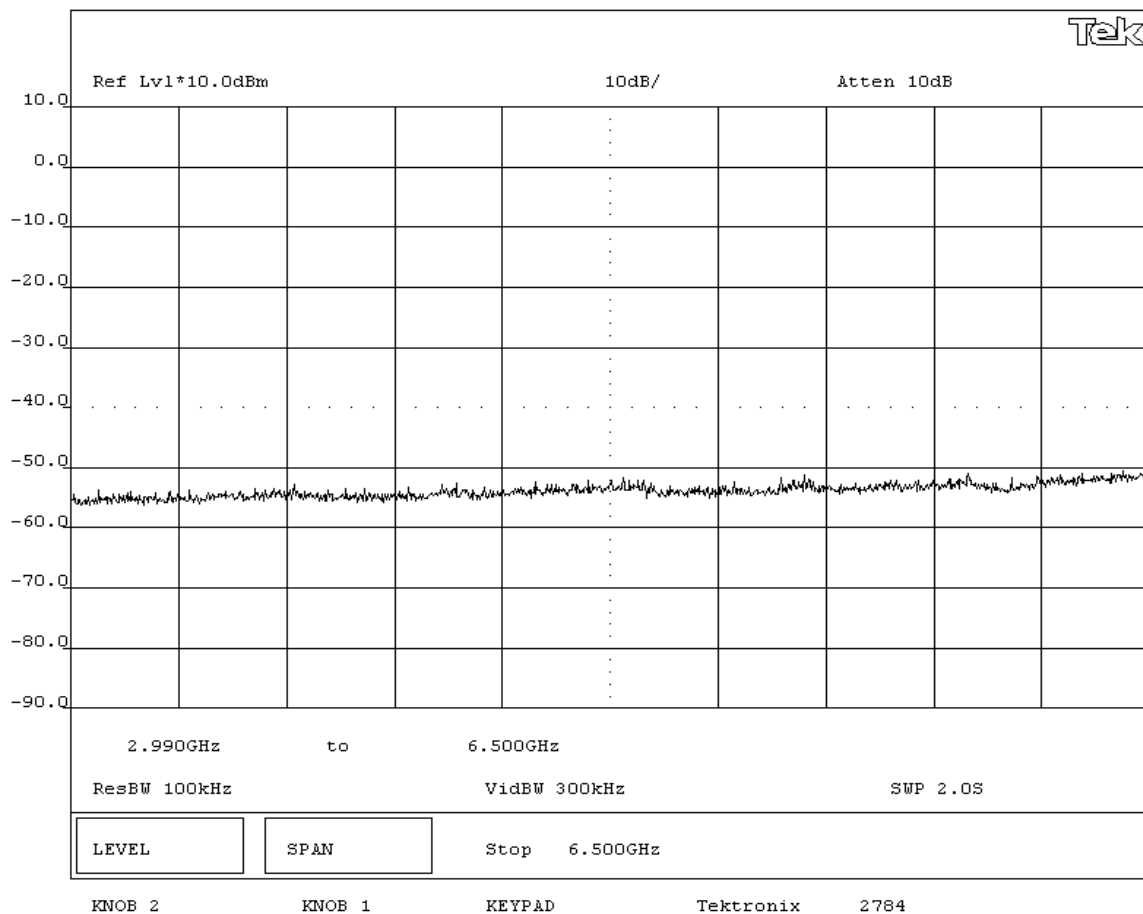

NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

|                                   |  |                         |  |                      |  |
|-----------------------------------|--|-------------------------|--|----------------------|--|
| EUT: MN: A-0363C Cordless Headset |  |                         |  | Work Order: LABT0149 |  |
| Serial Number: Unknown            |  |                         |  | Date: 08/11/05       |  |
| Customer: Logitech, Inc.          |  |                         |  | Temperature: 73 °F   |  |
| Attendees: None                   |  | Tested by: Rod Peloquin |  | Humidity: 42% RH     |  |
| Customer Ref. No.: None           |  | Power: Battery          |  | Job Site: EV06       |  |

**TEST SPECIFICATIONS**

|                                 |               |                               |            |
|---------------------------------|---------------|-------------------------------|------------|
| Specification: 47 CFR 15.247(d) | Year: 2005-04 | Method: DA 00-705, ANSI C63.4 | Year: 2003 |
|---------------------------------|---------------|-------------------------------|------------|

**SAMPLE CALCULATIONS****COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**



None

**REQUIREMENTS**


Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

**RESULTS**

Pass

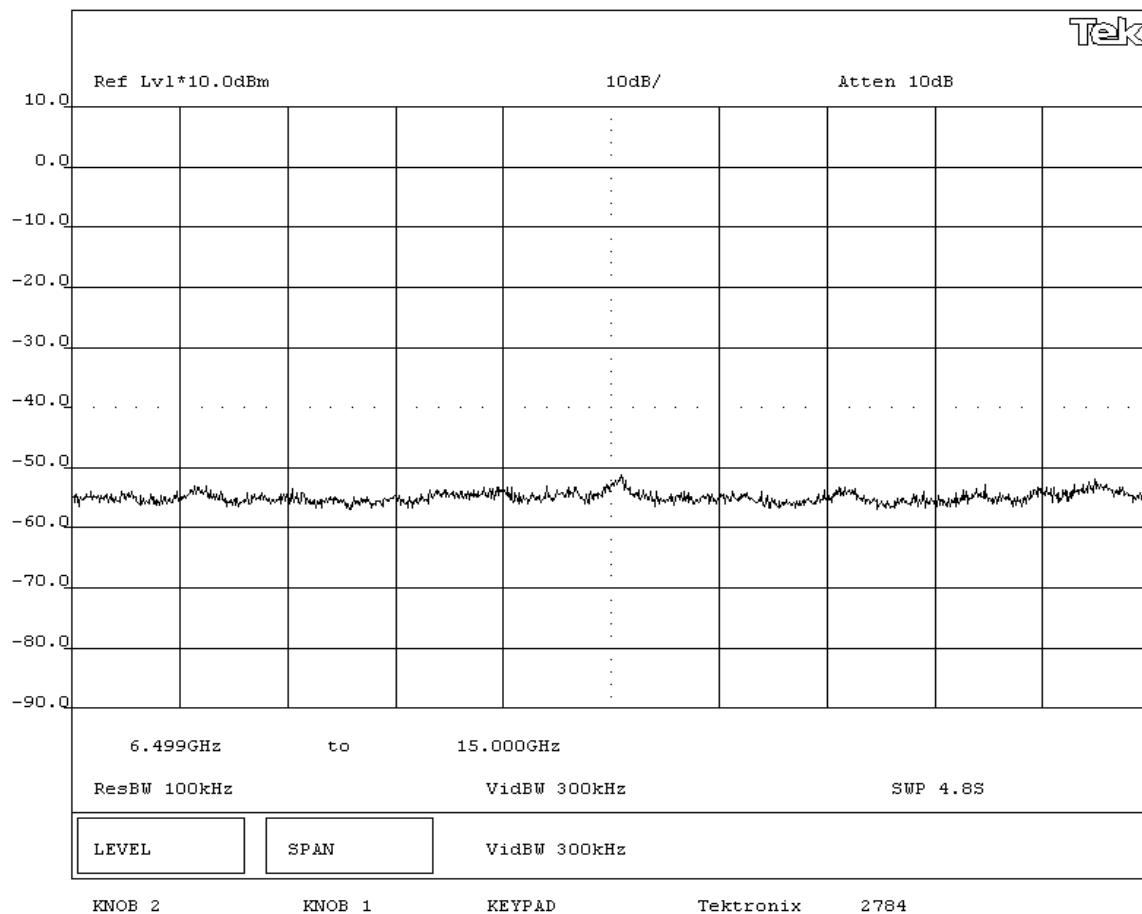**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Antenna Conducted Spurious Emissions - Low Channel 6.5GHz-15GHz**

| NORTHWEST<br>EMC                                                                                         |  | EMISSIONS DATA SHEET    |                      | Rev BETA<br>01/30/01          |  |
|----------------------------------------------------------------------------------------------------------|--|-------------------------|----------------------|-------------------------------|--|
| EUT: MN: A-0363C Cordless Headset                                                                        |  |                         | Work Order: LABT0149 |                               |  |
| Serial Number: Unknown                                                                                   |  |                         | Date: 08/11/05       |                               |  |
| Customer: Logitech, Inc.                                                                                 |  |                         | Temperature: 73 °F   |                               |  |
| Attendees: None                                                                                          |  | Tested by: Rod Peloquin |                      | Humidity: 42% RH              |  |
| Customer Ref. No.: None                                                                                  |  | Power: Battery          |                      | Job Site: EV06                |  |
| TEST SPECIFICATIONS                                                                                      |  |                         |                      |                               |  |
| Specification: 47 CFR 15.247(d)                                                                          |  | Year: 2005-04           |                      | Method: DA 00-705, ANSI C63.4 |  |
|                                                                                                          |  |                         |                      | Year: 2003                    |  |
| SAMPLE CALCULATIONS                                                                                      |  |                         |                      |                               |  |
|                                                                                                          |  |                         |                      |                               |  |
| COMMENTS                                                                                                 |  |                         |                      |                               |  |
|                                                                                                          |  |                         |                      |                               |  |
| EUT OPERATING MODES                                                                                      |  |                         |                      |                               |  |
| Modulated by PRBS at maximum data rate                                                                   |  |                         |                      |                               |  |
| DEVIATIONS FROM TEST STANDARD                                                                            |  |                         |                      |                               |  |
| None                                                                                                     |  |                         |                      |                               |  |
| REQUIREMENTS                                                                                             |  |                         |                      |                               |  |
| Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental |  |                         |                      |                               |  |
| RESULTS                                                                                                  |  |                         |                      |                               |  |
| Pass                                                                                                     |  |                         |                      |                               |  |
| SIGNATURE                                                                                                |  |                         |                      |                               |  |
| <br>Tested By: _____    |  |                         |                      |                               |  |
| DESCRIPTION OF TEST                                                                                      |  |                         |                      |                               |  |
| Antenna Conducted Spurious Emissions - Low Channel 15GHz - 25GHz                                         |  |                         |                      |                               |  |

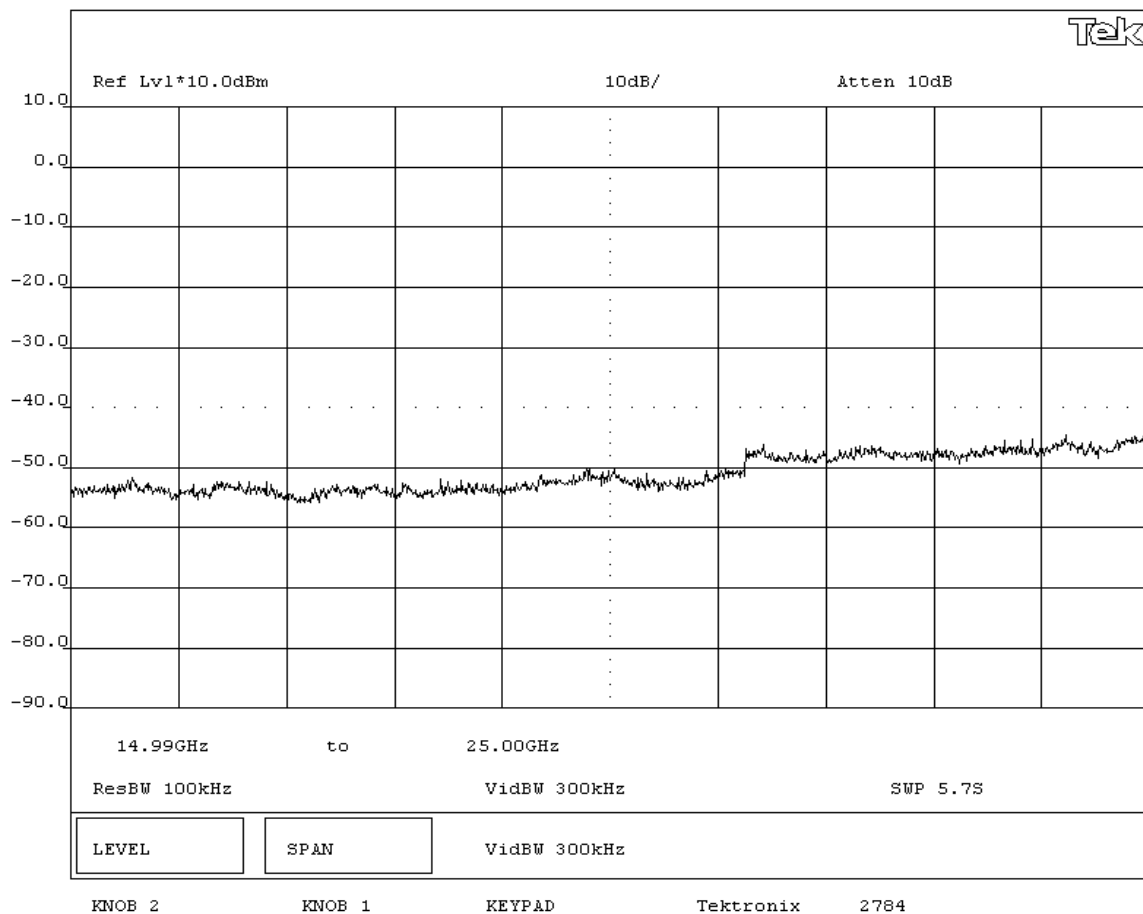

NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

|                                   |  |  |                      |  |  |
|-----------------------------------|--|--|----------------------|--|--|
| EUT: MN: A-0363C Cordless Headset |  |  | Work Order: LABT0149 |  |  |
| Serial Number: Unknown            |  |  | Date: 08/11/05       |  |  |
| Customer: Logitech, Inc.          |  |  | Temperature: 73 °F   |  |  |
| Attendees: None                   |  |  | Humidity: 42% RH     |  |  |
| Customer Ref. No.: None           |  |  | Job Site: EV06       |  |  |
| Tested by: Rod Peloquin           |  |  | Power: Battery       |  |  |

**TEST SPECIFICATIONS**

|                                 |               |                               |            |
|---------------------------------|---------------|-------------------------------|------------|
| Specification: 47 CFR 15.247(d) | Year: 2005-04 | Method: DA 00-705, ANSI C63.4 | Year: 2003 |
|---------------------------------|---------------|-------------------------------|------------|

**SAMPLE CALCULATIONS****COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**

None

**REQUIREMENTS**



Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

**RESULTS**

Pass

**SIGNATURE**

Tested By. \_\_\_\_\_

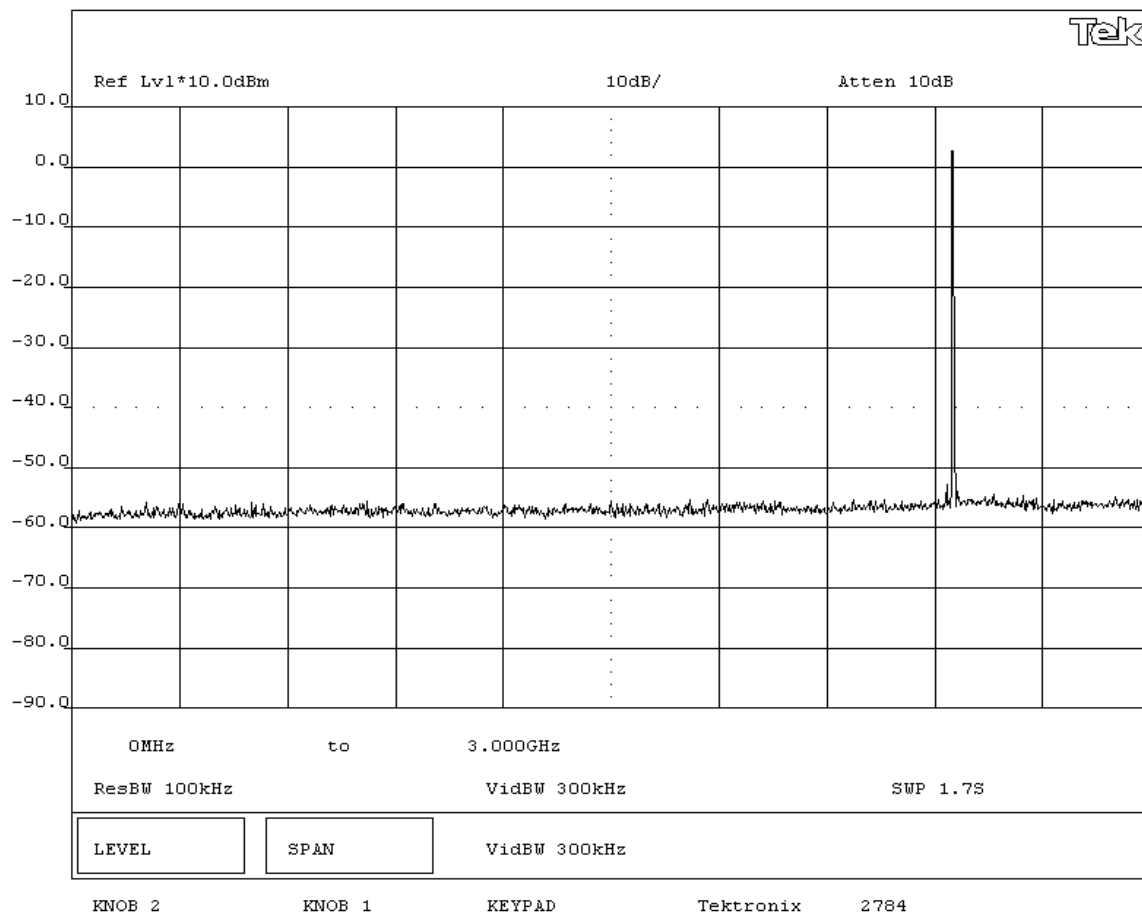**DESCRIPTION OF TEST****Antenna Conducted Spurious Emissions - Mid Channel 0MHz-3GHz**

NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

|                                   |  |                         |  |                      |  |
|-----------------------------------|--|-------------------------|--|----------------------|--|
| EUT: MN: A-0363C Cordless Headset |  |                         |  | Work Order: LABT0149 |  |
| Serial Number: Unknown            |  |                         |  | Date: 08/11/05       |  |
| Customer: Logitech, Inc.          |  |                         |  | Temperature: 73 °F   |  |
| Attendees: None                   |  | Tested by: Rod Peloquin |  | Humidity: 42% RH     |  |
| Customer Ref. No.: None           |  | Power: Battery          |  | Job Site: EV06       |  |

**TEST SPECIFICATIONS**

|                                 |               |                               |            |
|---------------------------------|---------------|-------------------------------|------------|
| Specification: 47 CFR 15.247(d) | Year: 2005-04 | Method: DA 00-705, ANSI C63.4 | Year: 2003 |
|---------------------------------|---------------|-------------------------------|------------|

**SAMPLE CALCULATIONS****COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**



None

**REQUIREMENTS**


Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental


**RESULTS**


Pass

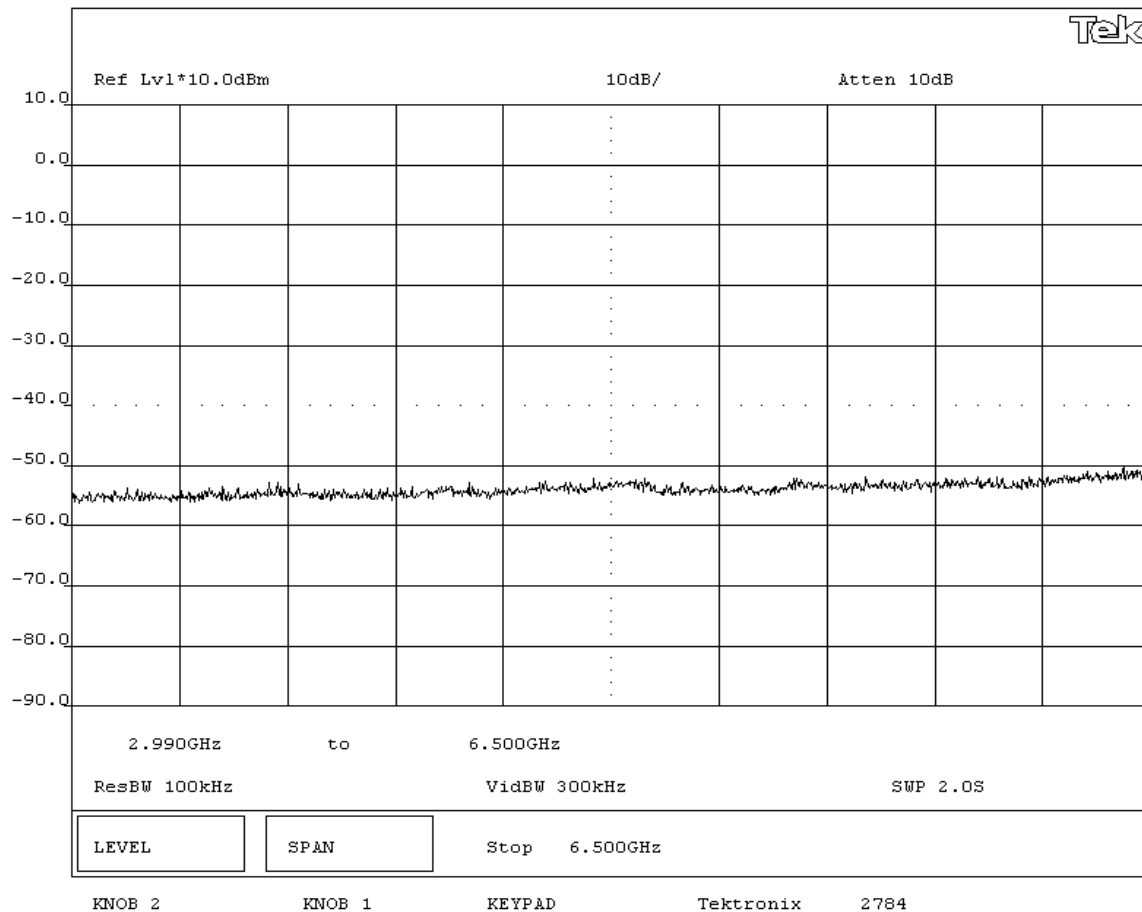
**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Antenna Conducted Spurious Emissions - Mid Channel 3GHz-6.5GHz**


| NORTHWEST<br><b>EMC</b>                                                                                                                                            |  |  |  | <b>EMISSIONS DATA SHEET</b> |  |                               |  | Rev BETA<br>01/30/01 |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|-----------------------------|--|-------------------------------|--|----------------------|--|
| EUT: MN: A-0363C Cordless Headset                                                                                                                                  |  |  |  |                             |  | Work Order: LABT0149          |  |                      |  |
| Serial Number: Unknown                                                                                                                                             |  |  |  |                             |  | Date: 08/11/05                |  |                      |  |
| Customer: Logitech, Inc.                                                                                                                                           |  |  |  |                             |  | Temperature: 73 °F            |  |                      |  |
| Attendees: None                                                                                                                                                    |  |  |  | Tested by: Rod Peloquin     |  | Humidity: 42% RH              |  |                      |  |
| Customer Ref. No.: None                                                                                                                                            |  |  |  | Power: Battery              |  | Job Site: EV06                |  |                      |  |
| <b>TEST SPECIFICATIONS</b>                                                                                                                                         |  |  |  |                             |  |                               |  |                      |  |
| Specification: 47 CFR 15.247(d)                                                                                                                                    |  |  |  | Year: 2005-04               |  | Method: DA 00-705, ANSI C63.4 |  | Year: 2003           |  |
| <b>SAMPLE CALCULATIONS</b>                                                                                                                                         |  |  |  |                             |  |                               |  |                      |  |
|                                                                                                                                                                    |  |  |  |                             |  |                               |  |                      |  |
| <b>COMMENTS</b>                                                                                                                                                    |  |  |  |                             |  |                               |  |                      |  |
|                                                                                                                                                                    |  |  |  |                             |  |                               |  |                      |  |
| <b>EUT OPERATING MODES</b>                                                                                                                                         |  |  |  |                             |  |                               |  |                      |  |
| Modulated by PRBS at maximum data rate                                                                                                                             |  |  |  |                             |  |                               |  |                      |  |
| <b>DEVIATIONS FROM TEST STANDARD</b>                                                                                                                               |  |  |  |                             |  |                               |  |                      |  |
| None                                                                                                                                                               |  |  |  |                             |  |                               |  |                      |  |
| <b>REQUIREMENTS</b>                                                                                                                                                |  |  |  |                             |  |                               |  |                      |  |
| Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental                                                           |  |  |  |                             |  |                               |  |                      |  |
| <b>RESULTS</b>                                                                                                                                                     |  |  |  |                             |  |                               |  |                      |  |
| Pass                                                                                                                                                               |  |  |  |                             |  |                               |  |                      |  |
| <b>SIGNATURE</b>                                                                                                                                                   |  |  |  |                             |  |                               |  |                      |  |
| <div style="text-align: center;"> <br/>           Tested By: _____         </div> |  |  |  |                             |  |                               |  |                      |  |
| <b>DESCRIPTION OF TEST</b>                                                                                                                                         |  |  |  |                             |  |                               |  |                      |  |
| <b>Antenna Conducted Spurious Emissions - Mid Channel 6.5GHz-15GHz</b>                                                                                             |  |  |  |                             |  |                               |  |                      |  |

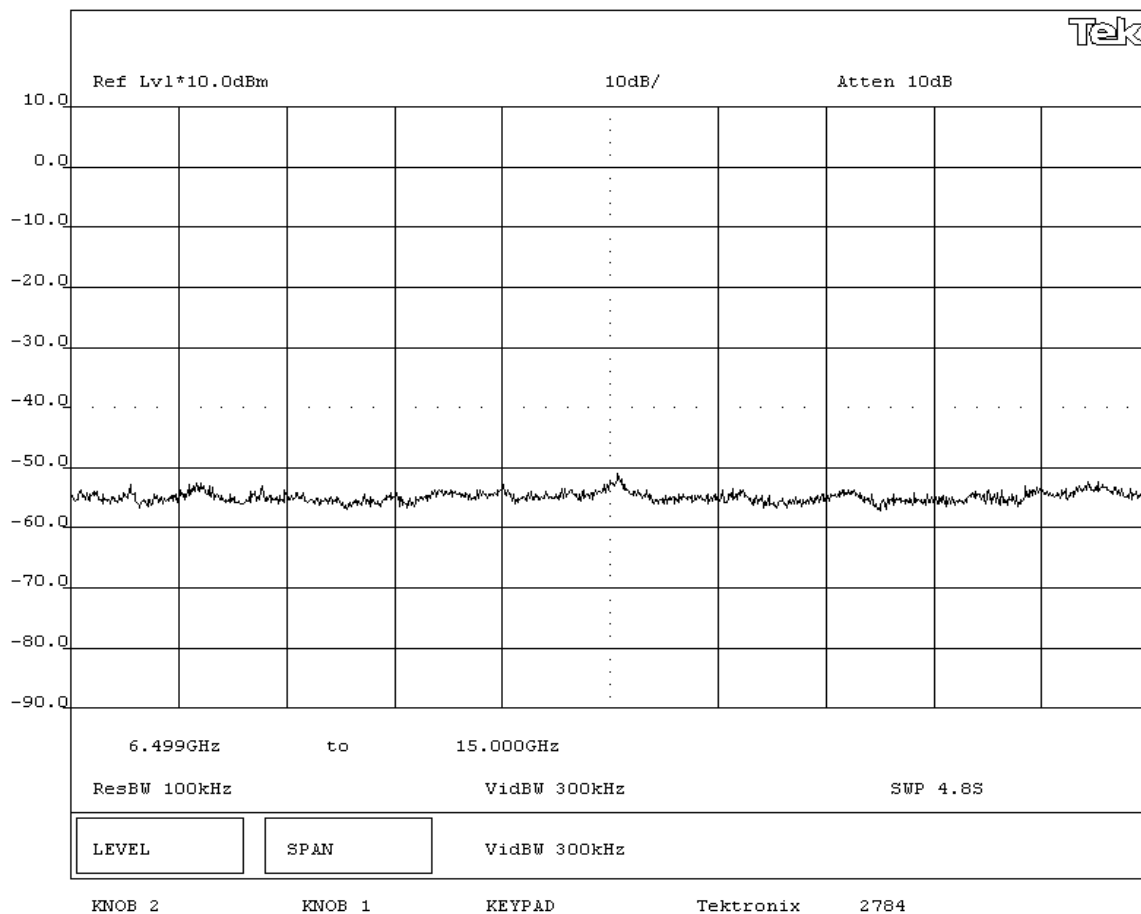



| NORTHWEST<br><b>EMC</b>                                                                                                                                            |  |  |  | <b>EMISSIONS DATA SHEET</b> |  |                               |  | Rev BETA<br>01/30/01 |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|-----------------------------|--|-------------------------------|--|----------------------|--|
| EUT: MN: A-0363C Cordless Headset                                                                                                                                  |  |  |  |                             |  | Work Order: LABT0149          |  |                      |  |
| Serial Number: Unknown                                                                                                                                             |  |  |  |                             |  | Date: 08/11/05                |  |                      |  |
| Customer: Logitech, Inc.                                                                                                                                           |  |  |  |                             |  | Temperature: 73 °F            |  |                      |  |
| Attendees: None                                                                                                                                                    |  |  |  | Tested by: Rod Peloquin     |  | Humidity: 42% RH              |  |                      |  |
| Customer Ref. No.: None                                                                                                                                            |  |  |  | Power: Battery              |  | Job Site: EV06                |  |                      |  |
| <b>TEST SPECIFICATIONS</b>                                                                                                                                         |  |  |  |                             |  |                               |  |                      |  |
| Specification: 47 CFR 15.247(d)                                                                                                                                    |  |  |  | Year: 2005-04               |  | Method: DA 00-705, ANSI C63.4 |  | Year: 2003           |  |
| <b>SAMPLE CALCULATIONS</b>                                                                                                                                         |  |  |  |                             |  |                               |  |                      |  |
|                                                                                                                                                                    |  |  |  |                             |  |                               |  |                      |  |
| <b>COMMENTS</b>                                                                                                                                                    |  |  |  |                             |  |                               |  |                      |  |
|                                                                                                                                                                    |  |  |  |                             |  |                               |  |                      |  |
| <b>EUT OPERATING MODES</b>                                                                                                                                         |  |  |  |                             |  |                               |  |                      |  |
| Modulated by PRBS at maximum data rate                                                                                                                             |  |  |  |                             |  |                               |  |                      |  |
| <b>DEVIATIONS FROM TEST STANDARD</b>                                                                                                                               |  |  |  |                             |  |                               |  |                      |  |
| None                                                                                                                                                               |  |  |  |                             |  |                               |  |                      |  |
| <b>REQUIREMENTS</b>                                                                                                                                                |  |  |  |                             |  |                               |  |                      |  |
| Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental                                                           |  |  |  |                             |  |                               |  |                      |  |
| <b>RESULTS</b>                                                                                                                                                     |  |  |  |                             |  |                               |  |                      |  |
| Pass                                                                                                                                                               |  |  |  |                             |  |                               |  |                      |  |
| <b>SIGNATURE</b>                                                                                                                                                   |  |  |  |                             |  |                               |  |                      |  |
| <div style="text-align: center;"> <br/>           Tested By: _____         </div> |  |  |  |                             |  |                               |  |                      |  |
| <b>DESCRIPTION OF TEST</b>                                                                                                                                         |  |  |  |                             |  |                               |  |                      |  |
| <b>Antenna Conducted Spurious Emissions - Mid Channel 15GHz-25GHz</b>                                                                                              |  |  |  |                             |  |                               |  |                      |  |

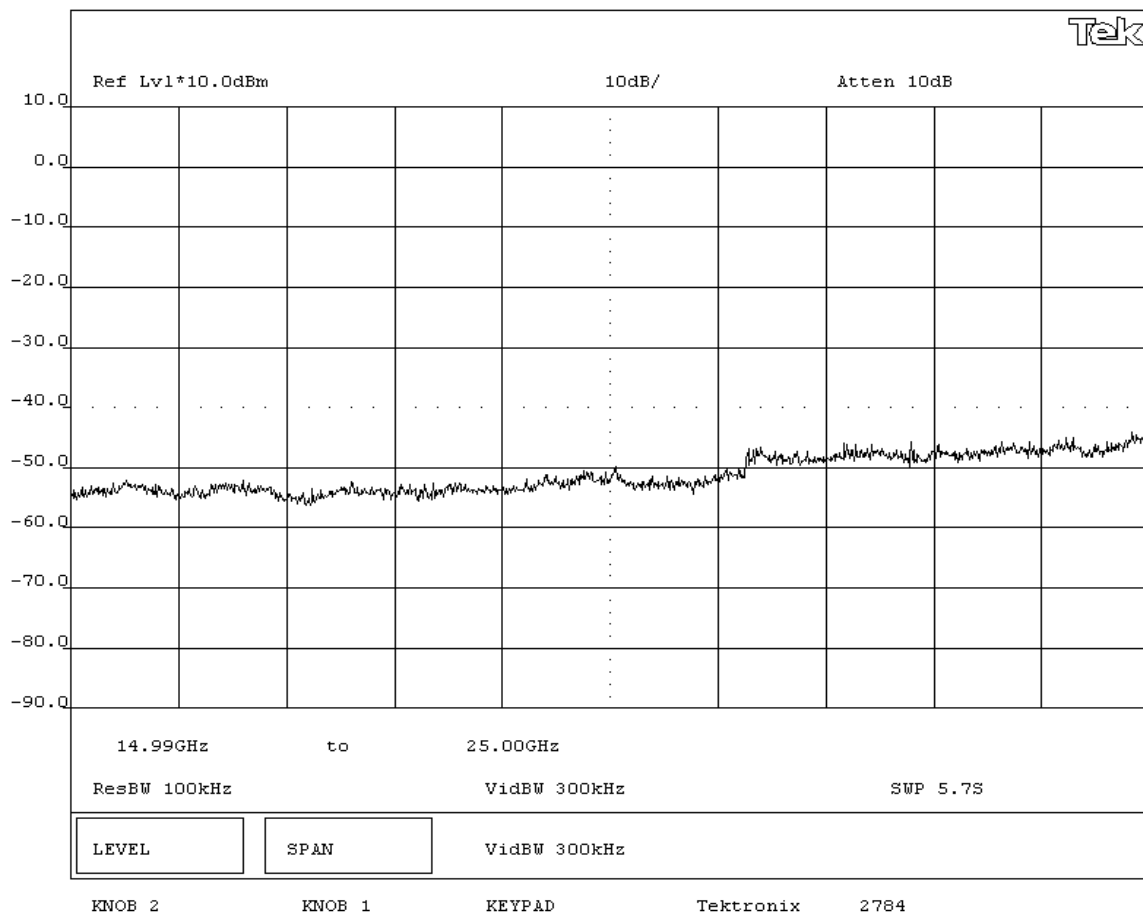

| NORTHWEST<br>EMC                                                                                         |  | EMISSIONS DATA SHEET    |                      | Rev BETA<br>01/30/01          |  |
|----------------------------------------------------------------------------------------------------------|--|-------------------------|----------------------|-------------------------------|--|
| EUT: MN: A-0363C Cordless Headset                                                                        |  |                         | Work Order: LABT0149 |                               |  |
| Serial Number: Unknown                                                                                   |  |                         | Date: 08/11/05       |                               |  |
| Customer: Logitech, Inc.                                                                                 |  |                         | Temperature: 73 °F   |                               |  |
| Attendees: None                                                                                          |  | Tested by: Rod Peloquin |                      | Humidity: 42% RH              |  |
| Customer Ref. No.: None                                                                                  |  | Power: Battery          |                      | Job Site: EV06                |  |
| TEST SPECIFICATIONS                                                                                      |  |                         |                      |                               |  |
| Specification: 47 CFR 15.247(d)                                                                          |  | Year: 2005-04           |                      | Method: DA 00-705, ANSI C63.4 |  |
|                                                                                                          |  |                         |                      | Year: 2003                    |  |
| SAMPLE CALCULATIONS                                                                                      |  |                         |                      |                               |  |
|                                                                                                          |  |                         |                      |                               |  |
| COMMENTS                                                                                                 |  |                         |                      |                               |  |
|                                                                                                          |  |                         |                      |                               |  |
| EUT OPERATING MODES                                                                                      |  |                         |                      |                               |  |
| Modulated by PRBS at maximum data rate                                                                   |  |                         |                      |                               |  |
| DEVIATIONS FROM TEST STANDARD                                                                            |  |                         |                      |                               |  |
| None                                                                                                     |  |                         |                      |                               |  |
| REQUIREMENTS                                                                                             |  |                         |                      |                               |  |
| Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental |  |                         |                      |                               |  |
| RESULTS                                                                                                  |  |                         |                      |                               |  |
| Pass                                                                                                     |  |                         |                      |                               |  |
| SIGNATURE                                                                                                |  |                         |                      |                               |  |
| <br>Tested By: _____    |  |                         |                      |                               |  |
| DESCRIPTION OF TEST                                                                                      |  |                         |                      |                               |  |
| Antenna Conducted Spurious Emissions - High Channel 0MHz-3GHz                                            |  |                         |                      |                               |  |

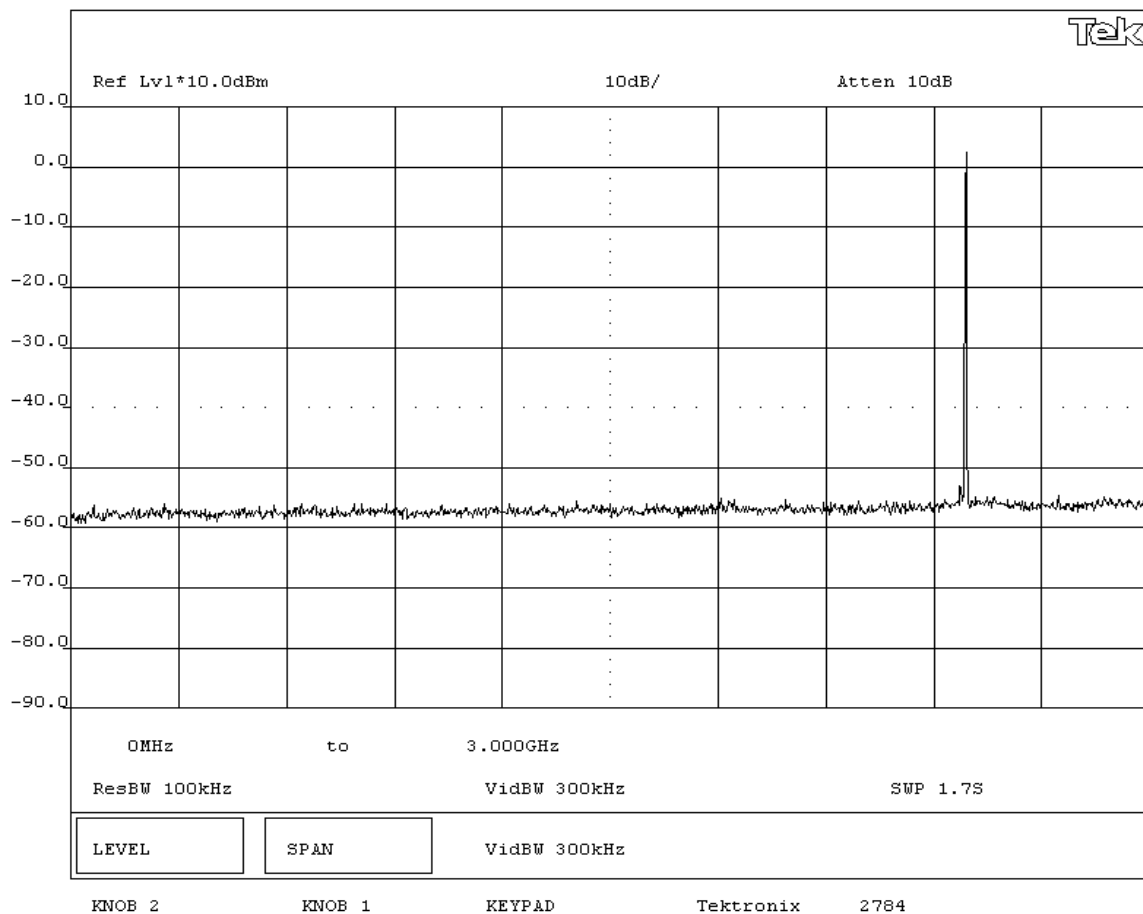

| NORTHWEST<br>EMC                                                                                                                                                   |  | EMISSIONS DATA SHEET    |                      | Rev BETA<br>01/30/01          |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------|----------------------|-------------------------------|--|
| EUT: MN: A-0363C Cordless Headset                                                                                                                                  |  |                         | Work Order: LABT0149 |                               |  |
| Serial Number: Unknown                                                                                                                                             |  |                         | Date: 08/11/05       |                               |  |
| Customer: Logitech, Inc.                                                                                                                                           |  |                         | Temperature: 73 °F   |                               |  |
| Attendees: None                                                                                                                                                    |  | Tested by: Rod Peloquin |                      | Humidity: 42% RH              |  |
| Customer Ref. No.: None                                                                                                                                            |  | Power: Battery          |                      | Job Site: EV06                |  |
| TEST SPECIFICATIONS                                                                                                                                                |  |                         |                      |                               |  |
| Specification: 47 CFR 15.247(d)                                                                                                                                    |  | Year: 2005-04           |                      | Method: DA 00-705, ANSI C63.4 |  |
|                                                                                                                                                                    |  |                         |                      | Year: 2003                    |  |
| SAMPLE CALCULATIONS                                                                                                                                                |  |                         |                      |                               |  |
|                                                                                                                                                                    |  |                         |                      |                               |  |
| COMMENTS                                                                                                                                                           |  |                         |                      |                               |  |
|                                                                                                                                                                    |  |                         |                      |                               |  |
| EUT OPERATING MODES                                                                                                                                                |  |                         |                      |                               |  |
| Modulated by PRBS at maximum data rate                                                                                                                             |  |                         |                      |                               |  |
| DEVIATIONS FROM TEST STANDARD                                                                                                                                      |  |                         |                      |                               |  |
| None                                                                                                                                                               |  |                         |                      |                               |  |
| REQUIREMENTS                                                                                                                                                       |  |                         |                      |                               |  |
| Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental                                                           |  |                         |                      |                               |  |
| RESULTS                                                                                                                                                            |  |                         |                      |                               |  |
| Pass                                                                                                                                                               |  |                         |                      |                               |  |
| SIGNATURE                                                                                                                                                          |  |                         |                      |                               |  |
| <div style="text-align: center;"> <br/>           Tested By: _____         </div> |  |                         |                      |                               |  |
| DESCRIPTION OF TEST                                                                                                                                                |  |                         |                      |                               |  |
| Antenna Conducted Spurious Emissions - High Channel 3GHz-6.5GHz                                                                                                    |  |                         |                      |                               |  |

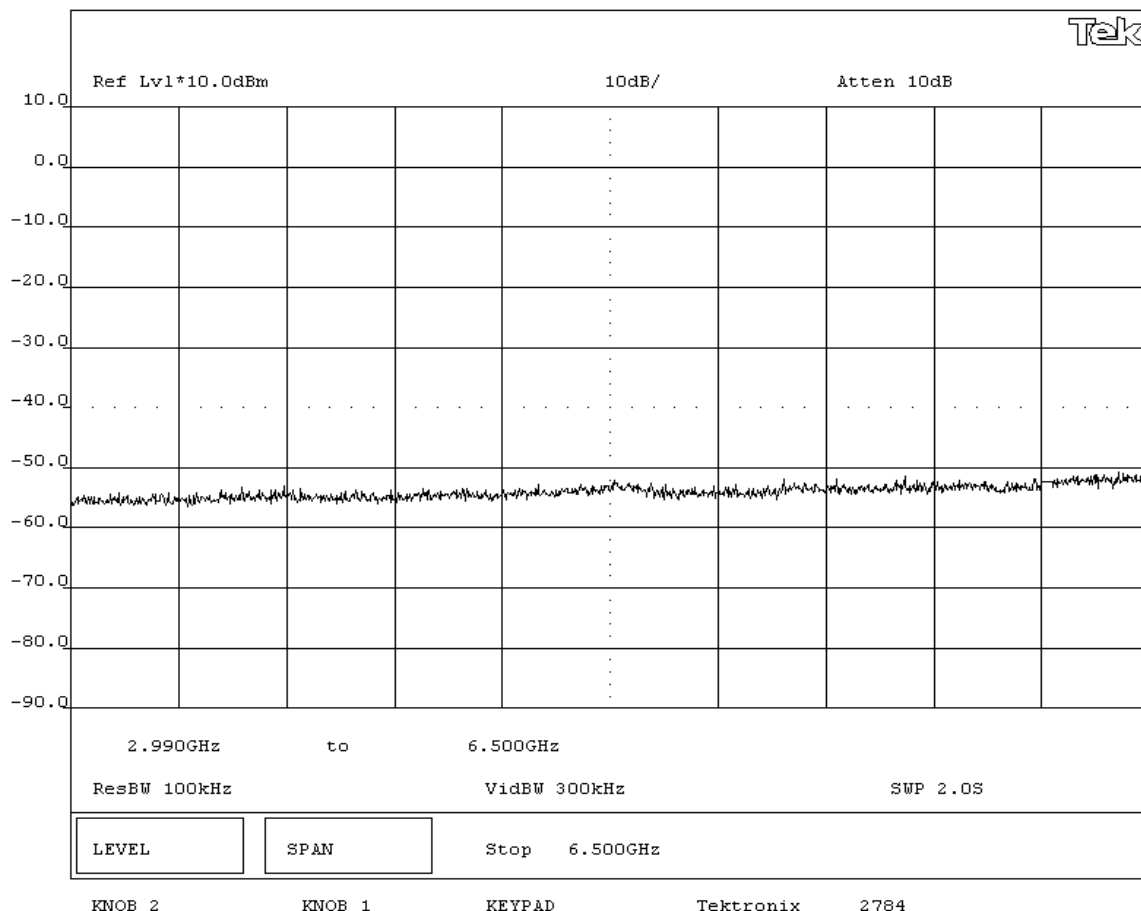

NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

|                                   |  |                         |  |                      |  |
|-----------------------------------|--|-------------------------|--|----------------------|--|
| EUT: MN: A-0363C Cordless Headset |  |                         |  | Work Order: LABT0149 |  |
| Serial Number: Unknown            |  |                         |  | Date: 08/11/05       |  |
| Customer: Logitech, Inc.          |  |                         |  | Temperature: 73 °F   |  |
| Attendees: None                   |  | Tested by: Rod Peloquin |  | Humidity: 42% RH     |  |
| Customer Ref. No.: None           |  | Power: Battery          |  | Job Site: EV06       |  |

**TEST SPECIFICATIONS**

|                                 |               |                               |            |
|---------------------------------|---------------|-------------------------------|------------|
| Specification: 47 CFR 15.247(d) | Year: 2005-04 | Method: DA 00-705, ANSI C63.4 | Year: 2003 |
|---------------------------------|---------------|-------------------------------|------------|

**SAMPLE CALCULATIONS****COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**


None

**REQUIREMENTS**

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

**RESULTS**

Pass

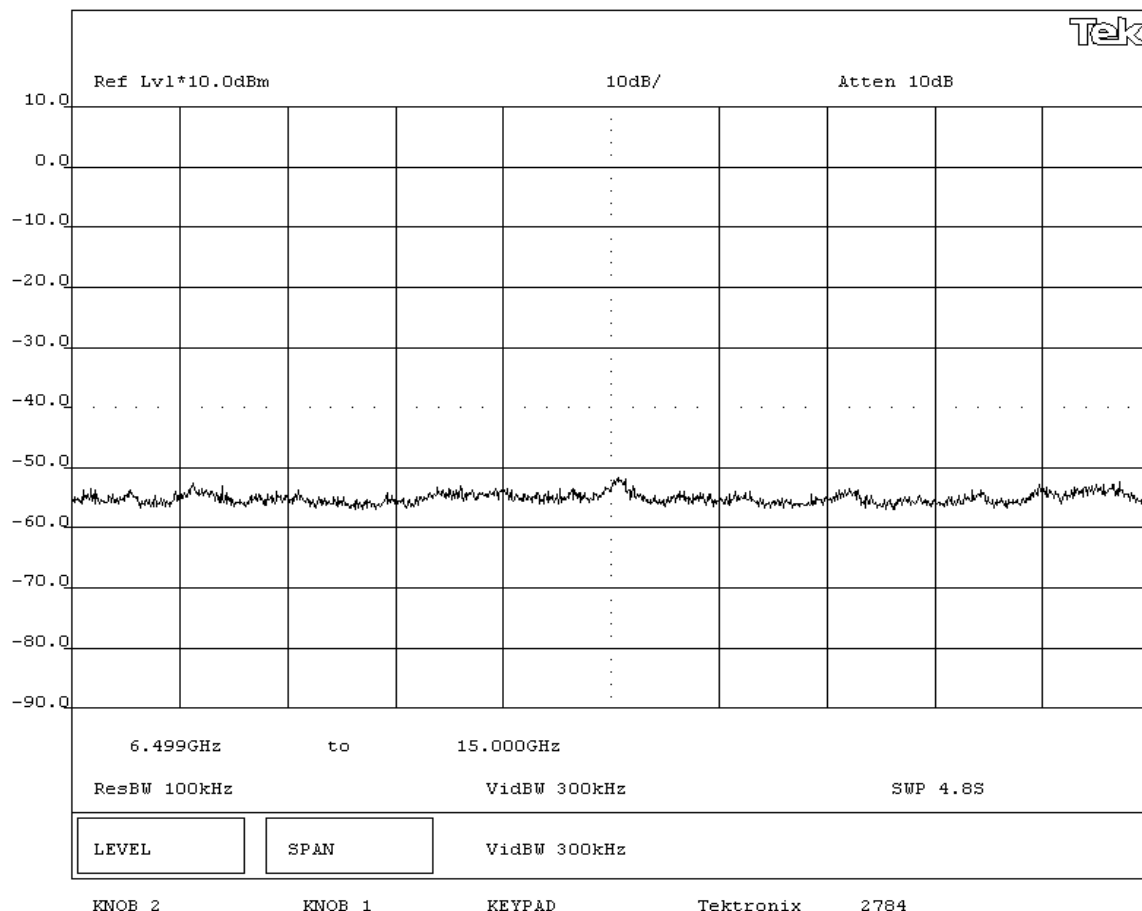**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Antenna Conducted Spurious Emissions - High Channel 6.5GHz-15GHz**

NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

|                                   |  |                         |  |                      |  |
|-----------------------------------|--|-------------------------|--|----------------------|--|
| EUT: MN: A-0363C Cordless Headset |  |                         |  | Work Order: LABT0149 |  |
| Serial Number: Unknown            |  |                         |  | Date: 08/11/05       |  |
| Customer: Logitech, Inc.          |  |                         |  | Temperature: 73 °F   |  |
| Attendees: None                   |  | Tested by: Rod Peloquin |  | Humidity: 42% RH     |  |
| Customer Ref. No.: None           |  | Power: Battery          |  | Job Site: EV06       |  |

**TEST SPECIFICATIONS**

|                                 |               |                               |            |
|---------------------------------|---------------|-------------------------------|------------|
| Specification: 47 CFR 15.247(d) | Year: 2005-04 | Method: DA 00-705, ANSI C63.4 | Year: 2003 |
|---------------------------------|---------------|-------------------------------|------------|

**SAMPLE CALCULATIONS****COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**


None


**REQUIREMENTS**

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

**RESULTS**

Pass

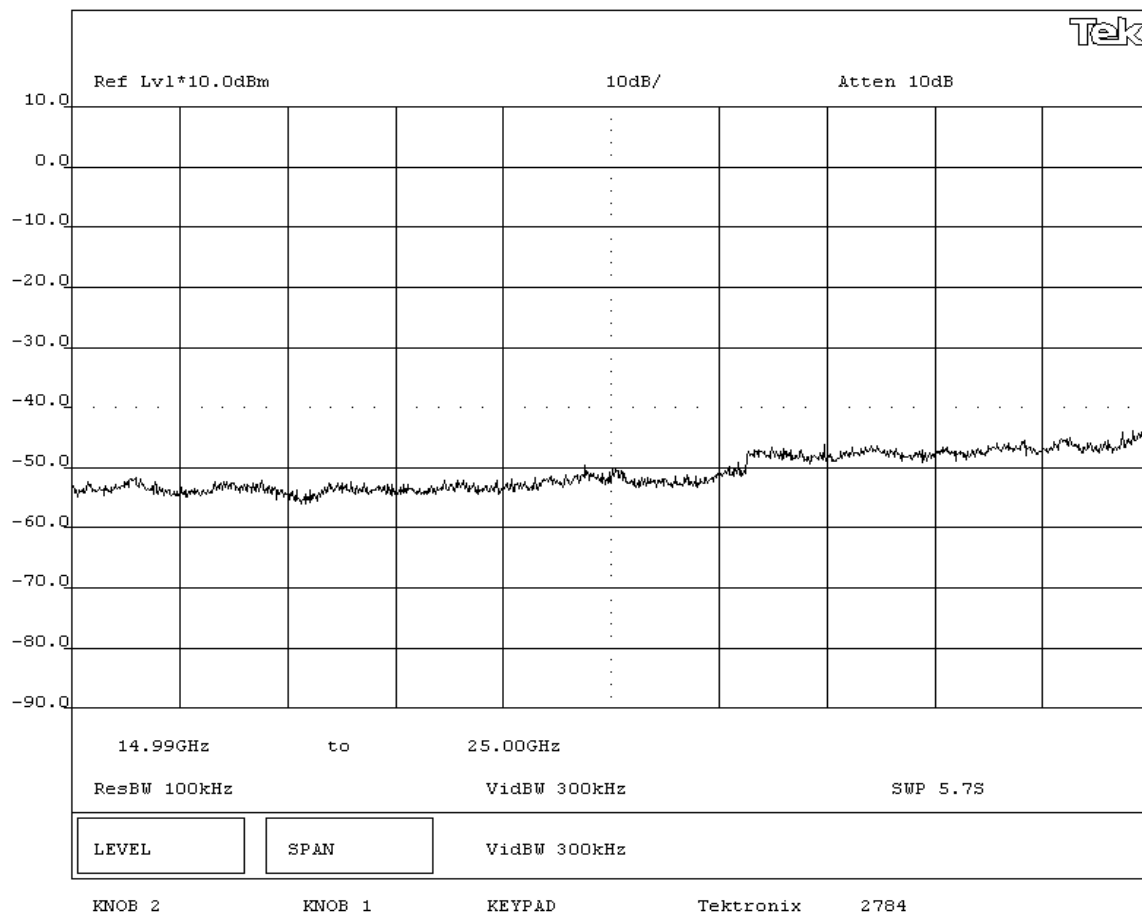**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Antenna Conducted Spurious Emissions - High Channel 15GHz-25GHz**

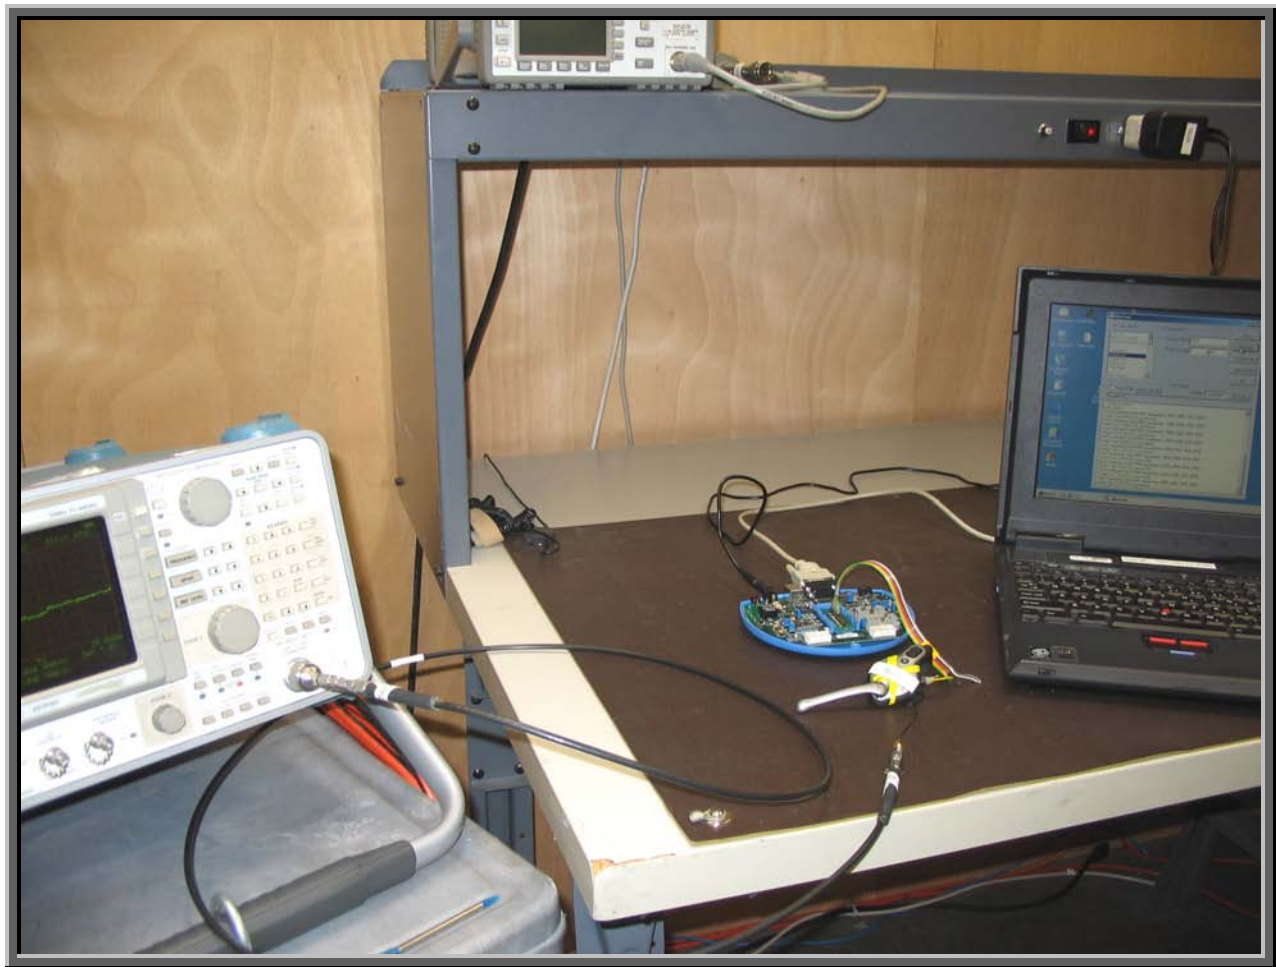

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

|      |
|------|
| Low  |
| Mid  |
| High |

**Operating Modes Investigated:**

|        |
|--------|
| No Hop |
|--------|

**Data Rates Investigated:**

|         |
|---------|
| Maximum |
|---------|

**Output Power Setting(s) Investigated:**

|         |
|---------|
| Maximum |
|---------|

**Power Input Settings Investigated:**

|         |
|---------|
| Battery |
|---------|

**Software\Firmware Applied During Test**

| Exercise software                                                                                                                                                                                                                                                                                   | BlueCore-Audio | Version | 1.0 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------|-----|
| Description                                                                                                                                                                                                                                                                                         |                |         |     |
| The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band. |                |         |     |

**EUT and Peripherals**

| Description             | Manufacturer                  | Model/Part Number | Serial Number |
|-------------------------|-------------------------------|-------------------|---------------|
| EUT - Bluetooth Headset | Logitech, Inc.                | A-0363C           | Unknown       |
| Development Module      | Cambridge Silicon Radio, Ltd. | BCES301199/1      | 7467 08 08 03 |
| AC Adapter              | Egston                        | N2GFSW3           | 42251         |

**Remote Equipment Outside of Test Setup Boundary**

| Description                                                                                                                           | Manufacturer | Model/Part Number | Serial Number |
|---------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------------|---------------|
| Laptop PC                                                                                                                             | IBM          | A21M              | IS108         |
| AC Adapter                                                                                                                            | IBM          | 02K6657           | None          |
| Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary |              |                   |               |

| Cables                                                                                                 |        |            |         |                    |                         |
|--------------------------------------------------------------------------------------------------------|--------|------------|---------|--------------------|-------------------------|
| Cable Type                                                                                             | Shield | Length (m) | Ferrite | Connection 1       | Connection 2            |
| Serial                                                                                                 | No     | 2.1        | No      | Laptop PC          | Development Module      |
| I/O                                                                                                    | No     | 1.2        | No      | Development Module | EUT - Bluetooth Headset |
| DC Leads                                                                                               | No     | 1.8        | PA      | AC Adapter         | Development Module      |
| PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown. |        |            |         |                    |                         |

| Measurement Equipment |              |       |            |            |          |
|-----------------------|--------------|-------|------------|------------|----------|
| Description           | Manufacturer | Model | Identifier | Last Cal   | Interval |
| Spectrum Analyzer     | Tektronix    | 2784  | AAO        | 01/02/2005 | 12 mo    |

### Test Description


**Requirement:** Per 47 CFR 15.247(e), the peak power spectral density conducted from the antenna port of a direct sequence transmitter must not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission.

**Configuration:** The peak power spectral density measurements were measured with the EUT set to low, mid, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate using direct sequence modulation. Per the procedure outlined in FCC 97-114, the spectrum analyzer was used as follows:

The emission peak(s) were located and zoom in on within the passband. The resolution bandwidth was set to 3 kHz, the video bandwidth was set to greater than or equal to the resolution bandwidth. The sweep speed was set equal to the span divided by 3 kHz (sweep = (SPAN/3 kHz)). For example, given a span of 1.5 MHz, the sweep should be  $1.5 \times 10^6 \div 3 \times 10^3 = 500$  seconds. External attenuation was used and added to the reading. The following FCC procedure was used for modifying the power spectral density measurements:

*"If the spectrum line spacing cannot be resolved on the available spectrum analyzer, the noise density function on most modern conventional spectrum analyzers will directly measure the noise power density normalized to a 1 Hz noise power bandwidth. Add 34.8 dB for correction to 3 kHz."*

Completed by:



NORTHWEST  
**EMC****POWER SPECTRAL DENSITY**Rev BETA  
01/30/01

|                                   |  |                         |                      |  |
|-----------------------------------|--|-------------------------|----------------------|--|
| EUT: MN: A-0363C Cordless Headset |  |                         | Work Order: LABT0149 |  |
| Serial Number: Unknown            |  |                         | Date: 08/11/05       |  |
| Customer: Logitech, Inc.          |  |                         | Temperature: 73 °F   |  |
| Attendees: None                   |  | Tested by: Rod Peloquin | Humidity: 42% RH     |  |
| Customer Ref. No.: None           |  | Power: Battery          | Job Site: EV06       |  |

**TEST SPECIFICATIONS**

|                                 |               |                                |            |
|---------------------------------|---------------|--------------------------------|------------|
| Specification: 47 CFR 15.247(e) | Year: 2005-06 | Method: FCC 97-114, ANSI C63.4 | Year: 2003 |
|---------------------------------|---------------|--------------------------------|------------|

**SAMPLE CALCULATIONS**

Meter reading on spectrum analyzer is internally compensated for cable loss and external attenuation.

Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.

Bandwidth Correction Factor =  $10 \cdot \log(3\text{kHz}/1\text{Hz}) = 34.8 \text{ dB}$ **COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**

None



**REQUIREMENTS**

Maximum peak power spectral density conducted from a DSSS transmitter does not exceed 8 dBm in any 3 kHz band

**RESULTS****AMPLITUDE**

Pass

Power Spectral Density = -7.0dBm / 3kHz

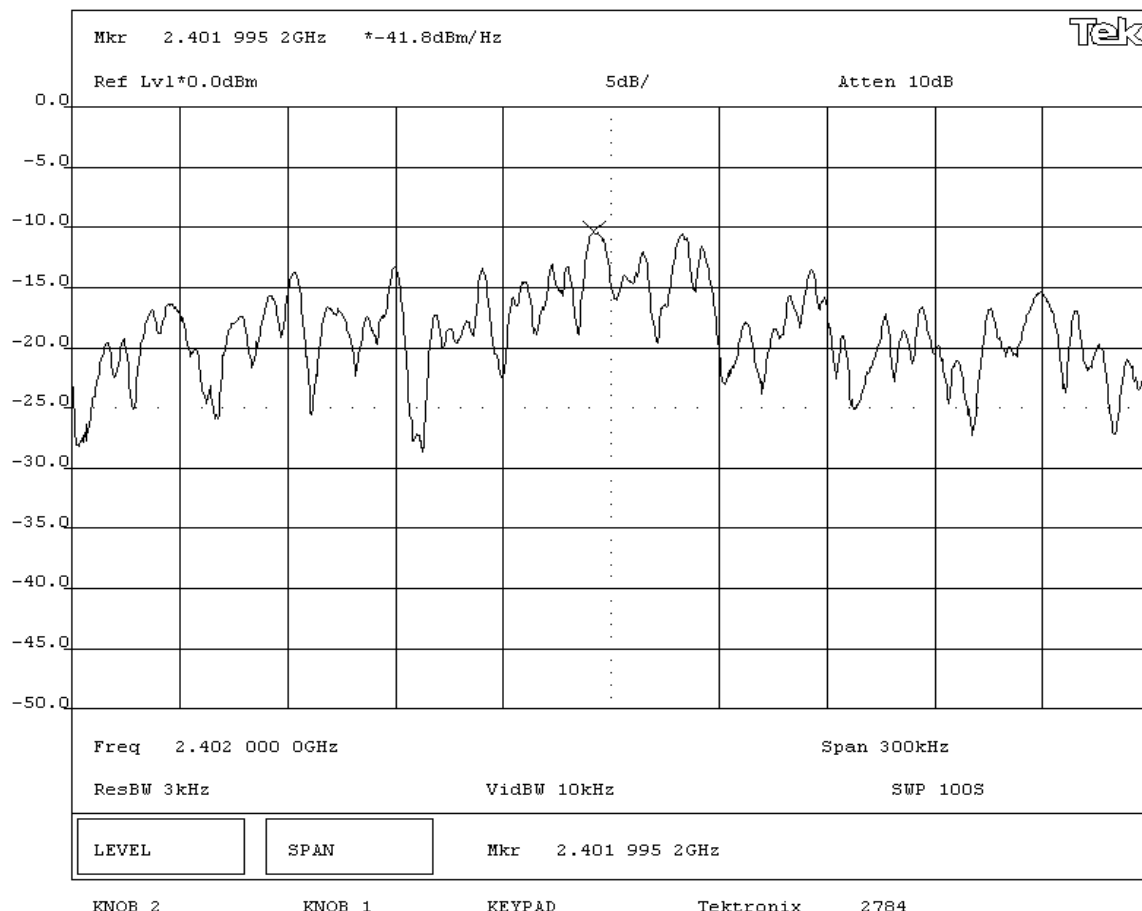**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Power Spectral Density - Low Channel**

NORTHWEST  
**EMC****POWER SPECTRAL DENSITY**Rev BETA  
01/30/01

|                                   |  |  |                      |  |  |
|-----------------------------------|--|--|----------------------|--|--|
| EUT: MN: A-0363C Cordless Headset |  |  | Work Order: LABT0149 |  |  |
| Serial Number: Unknown            |  |  | Date: 08/11/05       |  |  |
| Customer: Logitech, Inc.          |  |  | Temperature: 73 °F   |  |  |
| Attendees: None                   |  |  | Humidity: 42% RH     |  |  |
| Customer Ref. No.: None           |  |  | Job Site: EV06       |  |  |
| Tested by: Rod Peloquin           |  |  | Power: Battery       |  |  |

**TEST SPECIFICATIONS**

|                                 |               |                                |            |
|---------------------------------|---------------|--------------------------------|------------|
| Specification: 47 CFR 15.247(e) | Year: 2005-06 | Method: FCC 97-114, ANSI C63.4 | Year: 2003 |
|---------------------------------|---------------|--------------------------------|------------|

**SAMPLE CALCULATIONS**

Meter reading on spectrum analyzer is internally compensated for cable loss and external attenuation

Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.

Bandwidth Correction Factor =  $10 \cdot \log(3\text{kHz}/1\text{Hz}) = 34.8 \text{ dB}$ **COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**

None


**REQUIREMENTS**

Maximum peak power spectral density conducted from a DSSS transmitter does not exceed 8 dBm in any 3 kHz band

**RESULTS****AMPLITUDE**

Pass

Power Spectral Density = -7.1dBm / 3kHz

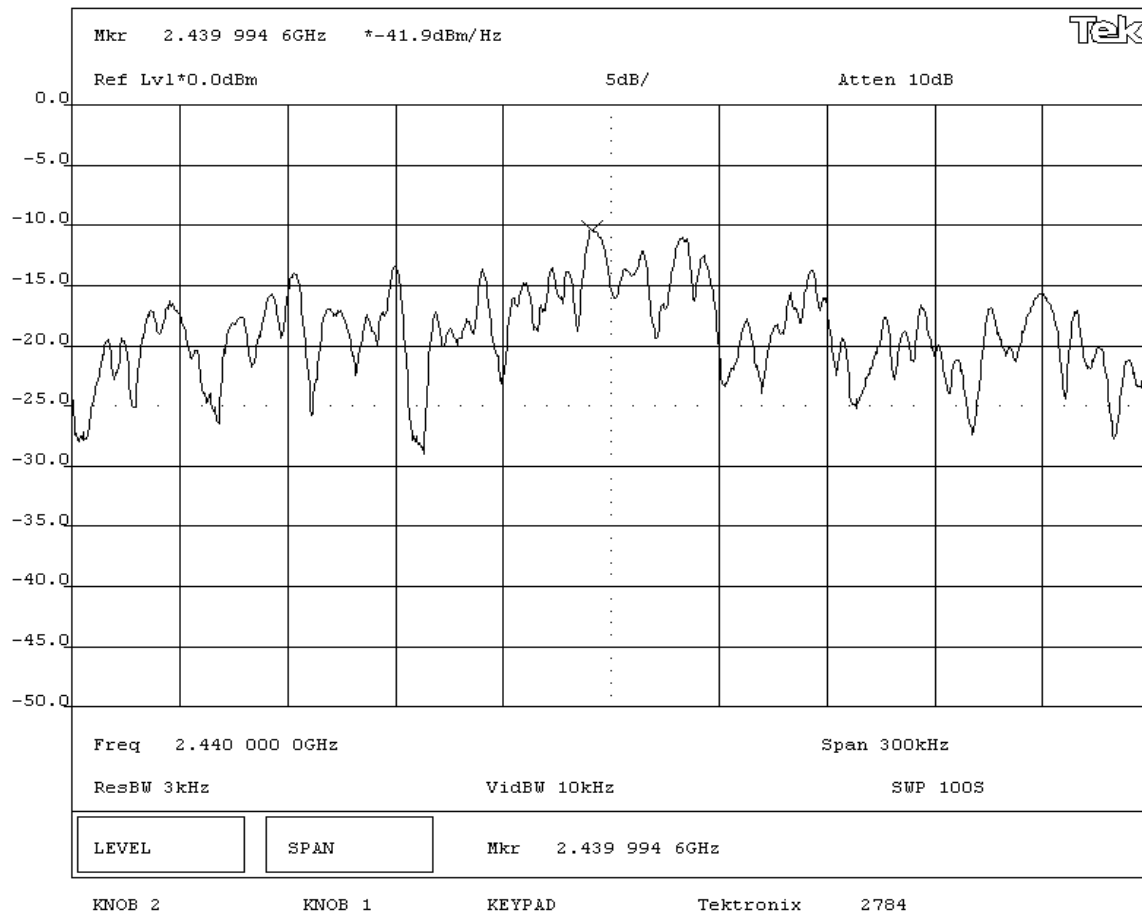**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Power Spectral Density - Mid Channel**

NORTHWEST  
**EMC****POWER SPECTRAL DENSITY**Rev BETA  
01/30/01

|                                   |  |                         |                      |  |
|-----------------------------------|--|-------------------------|----------------------|--|
| EUT: MN: A-0363C Cordless Headset |  |                         | Work Order: LABT0149 |  |
| Serial Number: Unknown            |  |                         | Date: 08/11/05       |  |
| Customer: Logitech, Inc.          |  |                         | Temperature: 73 °F   |  |
| Attendees: None                   |  | Tested by: Rod Peloquin | Humidity: 42% RH     |  |
| Customer Ref. No.: None           |  | Power: Battery          | Job Site: EV06       |  |

**TEST SPECIFICATIONS**

|                                 |               |                                |            |
|---------------------------------|---------------|--------------------------------|------------|
| Specification: 47 CFR 15.247(e) | Year: 2005-06 | Method: FCC 97-114, ANSI C63.4 | Year: 2003 |
|---------------------------------|---------------|--------------------------------|------------|

**SAMPLE CALCULATIONS**

Meter reading on spectrum analyzer is internally compensated for cable loss and external attenuation

Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.

Bandwidth Correction Factor =  $10 \cdot \log(3\text{kHz}/1\text{Hz}) = 34.8 \text{ dB}$ **COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**

None


**REQUIREMENTS**


Maximum peak power spectral density conducted from a DSSS transmitter does not exceed 8 dBm in any 3 kHz band

**RESULTS****AMPLITUDE**

Pass

Power Spectral Density = -7.5dBm / 3kHz

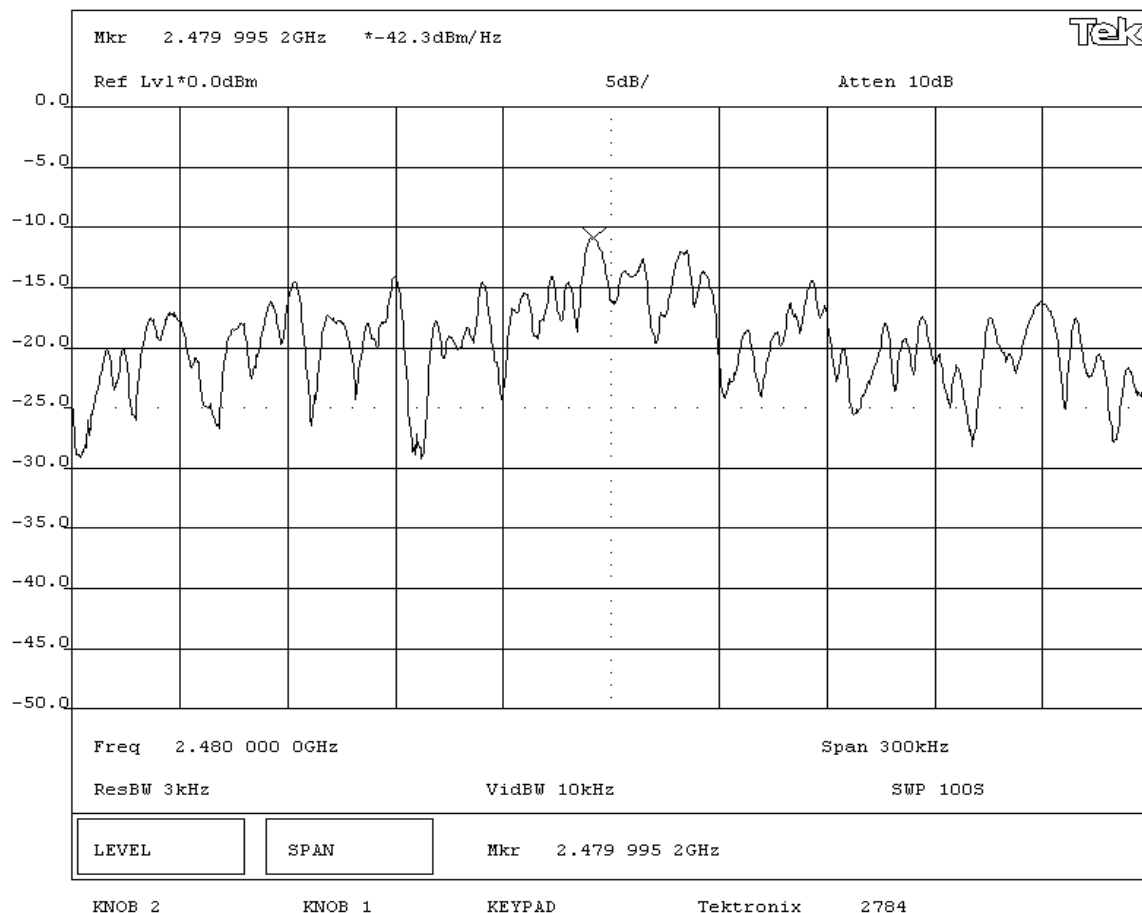**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Power Spectral Density - High Channel**

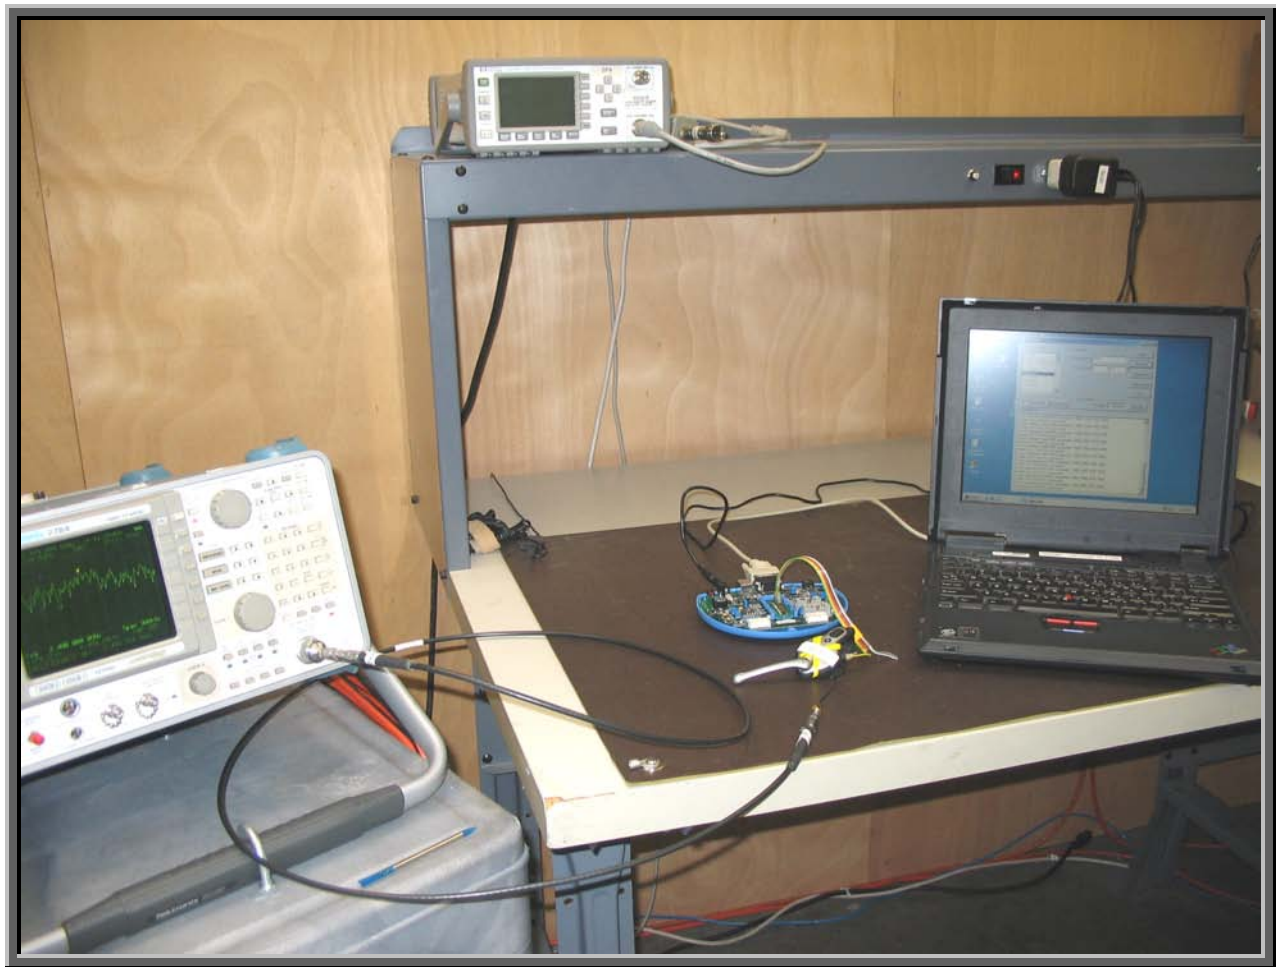

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

|      |
|------|
| Low  |
| Mid  |
| High |

**Operating Modes Investigated:**

|        |
|--------|
| No Hop |
|--------|

**Data Rates Investigated:**

|         |
|---------|
| Maximum |
|---------|

**Output Power Setting(s) Investigated:**

|         |
|---------|
| Maximum |
|---------|

**Power Input Settings Investigated:**

|         |
|---------|
| Battery |
|---------|

**Frequency Range Investigated**

|                        |        |                       |        |
|------------------------|--------|-----------------------|--------|
| <b>Start Frequency</b> | 30 MHz | <b>Stop Frequency</b> | 26 GHz |
|------------------------|--------|-----------------------|--------|

**Software\Firmware Applied During Test**

|                                                                                                                                                                                                                                                                                                     |                |                |     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------|-----|
| <b>Exercise software</b>                                                                                                                                                                                                                                                                            | BlueCore-Audio | <b>Version</b> | 1.0 |
| <b>Description</b>                                                                                                                                                                                                                                                                                  |                |                |     |
| The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band. |                |                |     |

**EUT and Peripherals**

|                         |                     |                          |                      |
|-------------------------|---------------------|--------------------------|----------------------|
| <b>Description</b>      | <b>Manufacturer</b> | <b>Model/Part Number</b> | <b>Serial Number</b> |
| EUT - Bluetooth Headset | Logitech, Inc.      | A-0363C                  | Unknown              |

| Remote Equipment Outside of Test Setup Boundary                                                                                       |                               |                   |               |
|---------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-------------------|---------------|
| Description                                                                                                                           | Manufacturer                  | Model/Part Number | Serial Number |
| Laptop PC                                                                                                                             | IBM                           | A21M              | IS108         |
| AC Adapter                                                                                                                            | IBM                           | 02K6657           | None          |
| Development Module                                                                                                                    | Cambridge Silicon Radio, Ltd. | BCES301199/1      | 7467 08 08 03 |
| AC Adapter                                                                                                                            | Egston                        | N2GHSW3           | 42251         |
| Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary |                               |                   |               |

| Cables                                                                                                 |        |            |         |                    |                         |
|--------------------------------------------------------------------------------------------------------|--------|------------|---------|--------------------|-------------------------|
| Cable Type                                                                                             | Shield | Length (m) | Ferrite | Connection 1       | Connection 2            |
| Serial                                                                                                 | No     | 2.1        | No      | Laptop PC          | Development Module      |
| I/O                                                                                                    | No     | 1.2        | No      | Development Module | EUT - Bluetooth Headset |
| DC Leads                                                                                               | No     | 1.8        | PA      | AC Adapter         | Development Module      |
| DC Leads                                                                                               | No     | 1.8        | PA      | AC Adapter         | Laptop PC               |
| AC Power                                                                                               | No     | 2.0        | No      | AC Adapter         | AC Mains                |
| PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown. |        |            |         |                    |                         |

| Measurement Equipment |               |                      |            |            |          |
|-----------------------|---------------|----------------------|------------|------------|----------|
| Description           | Manufacturer  | Model                | Identifier | Last Cal   | Interval |
| Antenna, Biconilog    | EMCO          | 3141                 | AXE        | 12/03/2003 | 24 mo    |
| Pre-Amplifier         | Miteq         | AM-1616-1000         | AOL        | 08/02/2005 | 13 mo    |
| Spectrum Analyzer     | Agilent       | E4446A               | AAQ        | 04/08/2005 | 13 mo    |
| Antenna, Horn         | EMCO          | 3115                 | AHC        | 09/07/2004 | 12 mo    |
| Pre-Amplifier         | Miteq         | AMF-4D-010100-24-10P | APW        | 08/02/2005 | 13 mo    |
| High Pass Filter      | Micro-Tronics | HPM50111             | HFO        | 03/09/2005 | 13 mo    |
| Antenna, Horn         | EMCO          | 3160-08              | AHK        | NCR        | NA       |
| Pre-Amplifier         | Miteq         | AMF-4D-005180-24-10P | APC        | 02/17/2005 | 13 mo    |
| Antenna, Horn         | EMCO          | 3160-09              | AHG        | NCR        | NA       |
| Pre-Amplifier         | Miteq         | JSD4-18002600-26-8P  | APU        | 02/15/2005 | 13 mo    |

## Test Description


**Requirement:** The field strength of any spurious emissions or modulation products that fall in a restricted band, as defined in 47 CFR 15.205, is measured. The peak level must comply with the limits specified in 47 CFR 15.35(b). The average level (taken with a 10Hz VBW) must comply with the limits specified in 15.209.


**Configuration:** The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization, and manipulating the EUT antenna in 3 orthogonal planes (per ANSI C63.4:2003). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.


| Bandwidths Used for Measurements                                                                      |                    |                          |                       |
|-------------------------------------------------------------------------------------------------------|--------------------|--------------------------|-----------------------|
| Frequency Range<br>(MHz)                                                                              | Peak Data<br>(kHz) | Quasi-Peak Data<br>(kHz) | Average Data<br>(kHz) |
| 0.01 – 0.15                                                                                           | 1.0                | 0.2                      | 0.2                   |
| 0.15 – 30.0                                                                                           | 10.0               | 9.0                      | 9.0                   |
| 30.0 – 1000                                                                                           | 100.0              | 120.0                    | 120.0                 |
| Above 1000                                                                                            | 1000.0             | N/A                      | 1000.0                |
| <i>Measurements were made using the bandwidths and detectors specified. No video filter was used.</i> |                    |                          |                       |


Completed by:

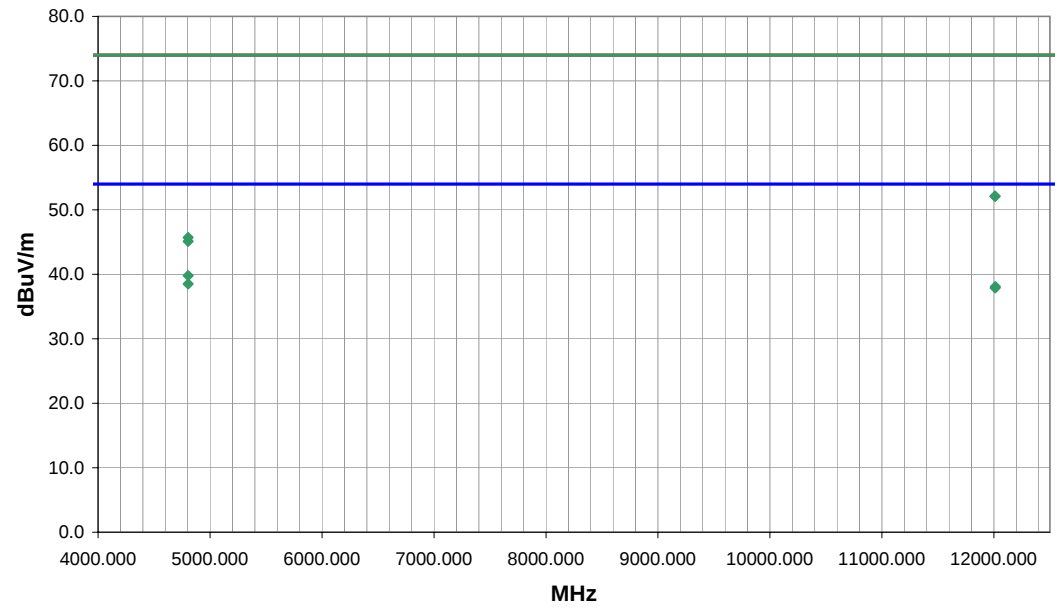



| NORTHWEST<br>EMC                                                                    |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | PSA 2005.7.20<br>EMI 2005.8.3  |                    |                   |                        |          |  |  |
|-------------------------------------------------------------------------------------|------------------|-------------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|----------|----------|--------------------------|--------------------------------|--------------------|-------------------|------------------------|----------|--|--|
| RADIATED EMISSIONS DATA SHEET                                                       |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                                |                    |                   |                        |          |  |  |
| EUT: MN: A-0363C Cordless Headset                                                   |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Work Order: LABT0149           |                    |                   |                        |          |  |  |
| Serial Number: Unknown                                                              |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Date: 08/14/05                 |                    |                   |                        |          |  |  |
| Customer: Logitech, Inc.                                                            |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Temperature: 27                |                    |                   |                        |          |  |  |
| Attendees: None                                                                     |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Humidity: 39%                  |                    |                   |                        |          |  |  |
| Project: None                                                                       |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Barometric Pressure: 29.86     |                    |                   |                        |          |  |  |
| Tested by: Holly Ashkannejhad                                                       |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Power: Battery                 |                    | Job Site: EV01    |                        |          |  |  |
| TEST SPECIFICATIONS                                                                 |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                                |                    |                   |                        |          |  |  |
| FCC 15.247(d) Spurious Radiated Emissions:2005-04                                   |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Test Method<br>ANSI C63.4:2003 |                    |                   |                        |          |  |  |
| TEST PARAMETERS                                                                     |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                                |                    |                   |                        |          |  |  |
| Antenna Height(s) (m)                                                               |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | 1 - 4                          |                    | Test Distance (m) |                        | 3        |  |  |
| COMMENTS                                                                            |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                                |                    |                   |                        |          |  |  |
| Headset.                                                                            |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                                |                    |                   |                        |          |  |  |
| EUT OPERATING MODES                                                                 |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                                |                    |                   |                        |          |  |  |
| Transmitting low channel                                                            |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                                |                    |                   |                        |          |  |  |
| DEVIATIONS FROM TEST STANDARD                                                       |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                                |                    |                   |                        |          |  |  |
| No deviations.                                                                      |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                                |                    |                   |                        |          |  |  |
| Run #                                                                               |                  | 1           |                   | <div style="text-align: center;"> <br/>           Signature         </div> |                   |                           |          |          |                          |                                |                    |                   |                        |          |  |  |
| Configuration #                                                                     |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                                |                    |                   |                        |          |  |  |
| Results                                                                             |                  | Pass        |                   |                                                                                                                                                             |                   |                           |          |          |                          |                                |                    |                   |                        |          |  |  |
|  |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                                |                    |                   |                        |          |  |  |
| Freq (MHz)                                                                          | Amplitude (dBuV) | Factor (dB) | Azimuth (degrees) | Height (meters)                                                                                                                                             | Distance (meters) | External Attenuation (dB) | Polarity | Detector | Distance Adjustment (dB) | Adjusted dBuV/m                | Spec. Limit dBuV/m | Spec. (dB)        | Compared to Spec. (dB) | Comments |  |  |
| 4804.042                                                                            | 33.4             | 6.4         | 100.0             | 1.4                                                                                                                                                         | 3.0               | 0.0                       | H-Horn   | AV       | 0.0                      | 39.8                           | 54.0               | -14.2             | EUT Vertical           |          |  |  |
| 4804.001                                                                            | 32.1             | 6.4         | 59.0              | 1.4                                                                                                                                                         | 3.0               | 0.0                       | V-Horn   | AV       | 0.0                      | 38.5                           | 54.0               | -15.5             | EUT on side            |          |  |  |
| 12012.220                                                                           | 22.1             | 16.0        | 210.0             | 1.0                                                                                                                                                         | 3.0               | 0.0                       | V-Horn   | AV       | 0.0                      | 38.1                           | 54.0               | -15.9             | EUT on side            |          |  |  |
| 12011.630                                                                           | 21.9             | 16.0        | 67.0              | 2.4                                                                                                                                                         | 3.0               | 0.0                       | H-Horn   | AV       | 0.0                      | 37.9                           | 54.0               | -16.1             | EUT Vertical           |          |  |  |
| 12009.690                                                                           | 36.1             | 16.0        | 210.0             | 1.0                                                                                                                                                         | 3.0               | 0.0                       | V-Horn   | PK       | 0.0                      | 52.1                           | 74.0               | -21.9             | EUT on side            |          |  |  |
| 12010.150                                                                           | 36.1             | 16.0        | 67.0              | 2.4                                                                                                                                                         | 3.0               | 0.0                       | H-Horn   | PK       | 0.0                      | 52.1                           | 74.0               | -21.9             | EUT Vertical           |          |  |  |
| 4803.766                                                                            | 39.3             | 6.4         | 100.0             | 1.4                                                                                                                                                         | 3.0               | 0.0                       | H-Horn   | PK       | 0.0                      | 45.7                           | 74.0               | -28.3             | EUT Vertical           |          |  |  |
| 4804.030                                                                            | 38.7             | 6.4         | 59.0              | 1.4                                                                                                                                                         | 3.0               | 0.0                       | V-Horn   | PK       | 0.0                      | 45.1                           | 74.0               | -28.9             | EUT on side            |          |  |  |

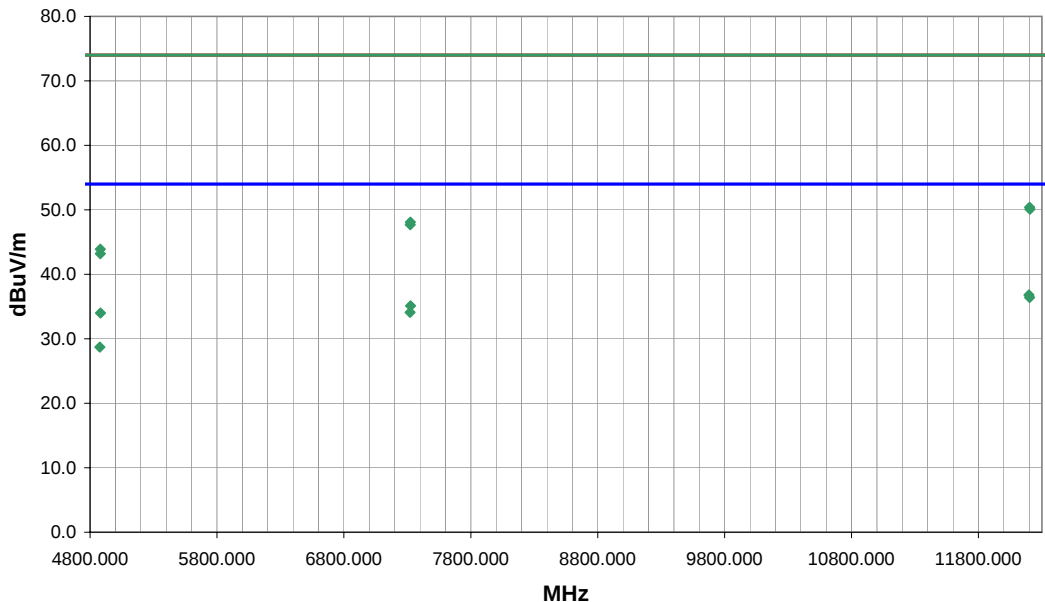
| NORTHWEST<br>EMC                                                                    |                  | RADIATED EMISSIONS DATA SHEET |                   |                                                                                                                                                             |                   |                            |          |                |                          |                 |                    | PSA 2005.7.20<br>EMI 2005.8.3 |              |
|-------------------------------------------------------------------------------------|------------------|-------------------------------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|----------------------------|----------|----------------|--------------------------|-----------------|--------------------|-------------------------------|--------------|
| EUT: MN: A-0363C Cordless Headset                                                   |                  |                               |                   |                                                                                                                                                             |                   | Work Order: LABT0149       |          |                |                          |                 |                    |                               |              |
| Serial Number: Unknown                                                              |                  |                               |                   |                                                                                                                                                             |                   | Date: 08/14/05             |          |                |                          |                 |                    |                               |              |
| Customer: Logitech, Inc.                                                            |                  |                               |                   |                                                                                                                                                             |                   | Temperature: 27            |          |                |                          |                 |                    |                               |              |
| Attendees: None                                                                     |                  |                               |                   |                                                                                                                                                             |                   | Humidity: 39%              |          |                |                          |                 |                    |                               |              |
| Project: None                                                                       |                  |                               |                   |                                                                                                                                                             |                   | Barometric Pressure: 29.86 |          |                |                          |                 |                    |                               |              |
| Tested by: Holly Ashkannejhad                                                       |                  |                               |                   |                                                                                                                                                             |                   | Power: Battery             |          | Job Site: EV01 |                          |                 |                    |                               |              |
| TEST SPECIFICATIONS                                                                 |                  |                               |                   |                                                                                                                                                             |                   |                            |          |                |                          |                 |                    | Test Method                   |              |
| FCC 15.247(d) Spurious Radiated Emissions:2005-04                                   |                  |                               |                   |                                                                                                                                                             |                   | ANSI C63.4:2003            |          |                |                          |                 |                    |                               |              |
| TEST PARAMETERS                                                                     |                  |                               |                   |                                                                                                                                                             |                   |                            |          |                |                          |                 |                    |                               |              |
| Antenna Height(s) (m)                                                               |                  | 1 - 4                         |                   |                                                                                                                                                             |                   | Test Distance (m)          |          | 3              |                          |                 |                    |                               |              |
| COMMENTS                                                                            |                  |                               |                   |                                                                                                                                                             |                   |                            |          |                |                          |                 |                    |                               |              |
| Headset.                                                                            |                  |                               |                   |                                                                                                                                                             |                   |                            |          |                |                          |                 |                    |                               |              |
| EUT OPERATING MODES                                                                 |                  |                               |                   |                                                                                                                                                             |                   |                            |          |                |                          |                 |                    |                               |              |
| Transmitting mid channel                                                            |                  |                               |                   |                                                                                                                                                             |                   |                            |          |                |                          |                 |                    |                               |              |
| DEVIATIONS FROM TEST STANDARD                                                       |                  |                               |                   |                                                                                                                                                             |                   |                            |          |                |                          |                 |                    |                               |              |
| No deviations.                                                                      |                  |                               |                   |                                                                                                                                                             |                   |                            |          |                |                          |                 |                    |                               |              |
| Run #                                                                               |                  | 2                             |                   | <div style="text-align: center;"> <br/>           Signature         </div> |                   |                            |          |                |                          |                 |                    |                               |              |
| Configuration #                                                                     |                  |                               |                   |                                                                                                                                                             |                   |                            |          |                |                          |                 |                    |                               |              |
| Results                                                                             |                  | Pass                          |                   |                                                                                                                                                             |                   |                            |          |                |                          |                 |                    |                               |              |
|  |                  |                               |                   |                                                                                                                                                             |                   |                            |          |                |                          |                 |                    |                               |              |
| Freq (MHz)                                                                          | Amplitude (dBuV) | Factor (dB)                   | Azimuth (degrees) | Height (meters)                                                                                                                                             | Distance (meters) | External Attenuation (dB)  | Polarity | Detector       | Distance Adjustment (dB) | Adjusted dBuV/m | Spec. Limit dBuV/m | Compared to Spec. (dB)        | Comments     |
| 12197.870                                                                           | 20.7             | 16.1                          | 169.0             | 3.4                                                                                                                                                         | 3.0               | 0.0                        | V-Horn   | AV             | 0.0                      | 36.8            | 54.0               | -17.2                         | EUT on side  |
| 12202.480                                                                           | 20.3             | 16.1                          | 211.0             | 2.4                                                                                                                                                         | 3.0               | 0.0                        | H-Horn   | AV             | 0.0                      | 36.4            | 54.0               | -17.6                         | EUT Vertical |
| 7324.841                                                                            | 21.6             | 13.5                          | 72.0              | 1.0                                                                                                                                                         | 3.0               | 0.0                        | H-Horn   | AV             | 0.0                      | 35.1            | 54.0               | -18.9                         | EUT Vertical |
| 7321.691                                                                            | 20.6             | 13.5                          | 299.0             | 1.0                                                                                                                                                         | 3.0               | 0.0                        | V-Horn   | AV             | 0.0                      | 34.1            | 54.0               | -19.9                         | EUT on side  |
| 4881.989                                                                            | 27.3             | 6.7                           | 106.0             | 1.0                                                                                                                                                         | 3.0               | 0.0                        | V-Horn   | AV             | 0.0                      | 34.0            | 54.0               | -20.0                         | EUT on side  |
| 12202.840                                                                           | 34.3             | 16.1                          | 169.0             | 3.4                                                                                                                                                         | 3.0               | 0.0                        | V-Horn   | PK             | 0.0                      | 50.4            | 74.0               | -23.6                         | EUT on side  |
| 12204.820                                                                           | 34.0             | 16.1                          | 211.0             | 2.4                                                                                                                                                         | 3.0               | 0.0                        | H-Horn   | PK             | 0.0                      | 50.1            | 74.0               | -23.9                         | EUT Vertical |
| 4876.407                                                                            | 22.0             | 6.7                           | 121.0             | 1.2                                                                                                                                                         | 3.0               | 0.0                        | H-Horn   | AV             | 0.0                      | 28.7            | 54.0               | -25.3                         | EUT Vertical |
| 7323.601                                                                            | 34.6             | 13.5                          | 299.0             | 1.0                                                                                                                                                         | 3.0               | 0.0                        | V-Horn   | PK             | 0.0                      | 48.1            | 74.0               | -25.9                         | EUT on side  |
| 7322.803                                                                            | 34.2             | 13.5                          | 72.0              | 1.0                                                                                                                                                         | 3.0               | 0.0                        | H-Horn   | PK             | 0.0                      | 47.7            | 74.0               | -26.3                         | EUT Vertical |
| 4880.894                                                                            | 37.2             | 6.7                           | 106.0             | 1.0                                                                                                                                                         | 3.0               | 0.0                        | V-Horn   | PK             | 0.0                      | 43.9            | 74.0               | -30.1                         | EUT on side  |
| 4880.647                                                                            | 36.5             | 6.7                           | 121.0             | 1.2                                                                                                                                                         | 3.0               | 0.0                        | H-Horn   | PK             | 0.0                      | 43.2            | 74.0               | -30.8                         | EUT Vertical |
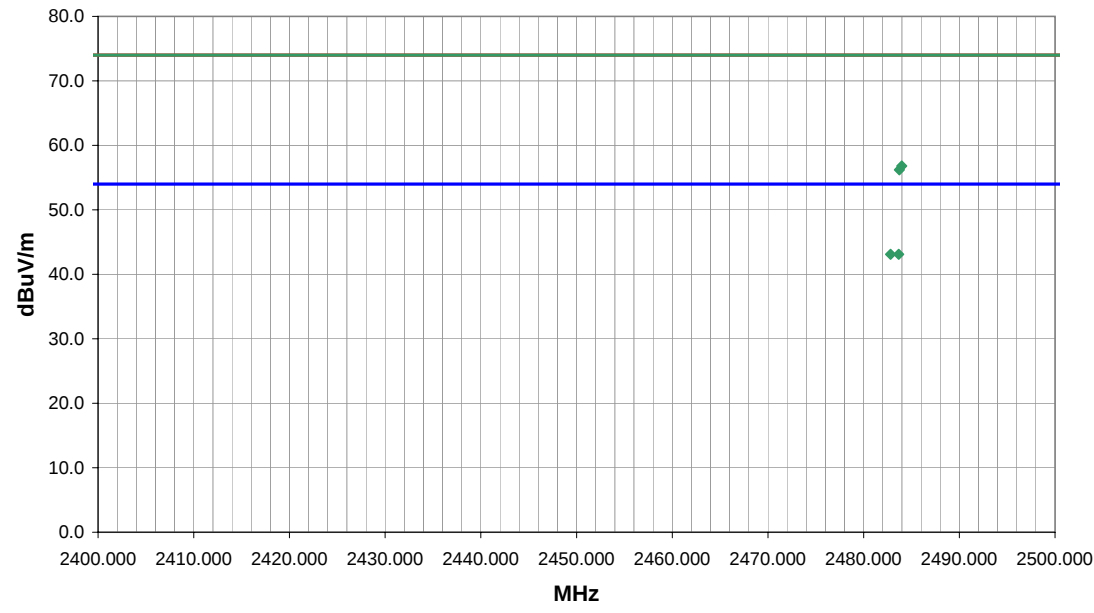
| NORTHWEST EMC                                                                       |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          | RADIATED EMISSIONS DATA SHEET |                    |                        |              | PSA 2005.7.20<br>EMI 2005.8.3 |  |
|-------------------------------------------------------------------------------------|------------------|-------------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|----------|----------------|--------------------------|-------------------------------|--------------------|------------------------|--------------|-------------------------------|--|
| EUT: MN: A-0363C Cordless Headset                                                   |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          | Work Order: LABT0149          |                    |                        |              |                               |  |
| Serial Number: Unknown                                                              |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          | Date: 08/14/05                |                    |                        |              |                               |  |
| Customer: Logitech, Inc.                                                            |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          | Temperature: 27               |                    |                        |              |                               |  |
| Attendees: None                                                                     |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          | Humidity: 39%                 |                    |                        |              |                               |  |
| Project: None                                                                       |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          | Barometric Pressure: 29.86    |                    |                        |              |                               |  |
| Tested by: Holly Ashkannejhad                                                       |                  |             |                   |                                                                                                                                                             |                   | Power: 120VAC, 60Hz       |          | Job Site: EV01 |                          |                               |                    |                        |              |                               |  |
| TEST SPECIFICATIONS                                                                 |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          | Test Method                   |                    |                        |              |                               |  |
| FCC 15.247(d) Spurious Radiated Emissions:2005-04                                   |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          | ANSI C63.4:2003               |                    |                        |              |                               |  |
| TEST PARAMETERS                                                                     |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          |                               |                    |                        |              |                               |  |
| Antenna Height(s) (m)                                                               |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          | 1 - 4                         |                    | Test Distance (m)      |              | 3                             |  |
| COMMENTS                                                                            |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          |                               |                    |                        |              |                               |  |
| Headset.                                                                            |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          |                               |                    |                        |              |                               |  |
| EUT OPERATING MODES                                                                 |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          |                               |                    |                        |              |                               |  |
| Transmitting high channel                                                           |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          |                               |                    |                        |              |                               |  |
| DEVIATIONS FROM TEST STANDARD                                                       |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          |                               |                    |                        |              |                               |  |
| No deviations.                                                                      |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          |                               |                    |                        |              |                               |  |
| Run #                                                                               |                  | 3           |                   | <div style="text-align: center;"> <br/>           Signature         </div> |                   |                           |          |                |                          |                               |                    |                        |              |                               |  |
| Configuration #                                                                     |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          |                               |                    |                        |              |                               |  |
| Results                                                                             |                  | Pass        |                   |                                                                                                                                                             |                   |                           |          |                |                          |                               |                    |                        |              |                               |  |
|  |                  |             |                   |                                                                                                                                                             |                   |                           |          |                |                          |                               |                    |                        |              |                               |  |
| Freq (MHz)                                                                          | Amplitude (dBuV) | Factor (dB) | Azimuth (degrees) | Height (meters)                                                                                                                                             | Distance (meters) | External Attenuation (dB) | Polarity | Detector       | Distance Adjustment (dB) | Adjusted dBuV/m               | Spec. Limit dBuV/m | Compared to Spec. (dB) | Comments     |                               |  |
| 2483.669                                                                            | 22.6             | 0.5         | 259.0             | 2.6                                                                                                                                                         | 3.0               | 20.0                      | V-Horn   | AV             | 0.0                      | 43.1                          | 54.0               | -10.9                  | EUT on side  |                               |  |
| 2482.812                                                                            | 22.6             | 0.5         | 310.0             | 1.0                                                                                                                                                         | 3.0               | 20.0                      | H-Horn   | AV             | 0.0                      | 43.1                          | 54.0               | -10.9                  | EUT Vertical |                               |  |
| 2483.990                                                                            | 36.3             | 0.5         | 259.0             | 2.6                                                                                                                                                         | 3.0               | 20.0                      | V-Horn   | PK             | 0.0                      | 56.8                          | 74.0               | -17.2                  | EUT on side  |                               |  |
| 2483.726                                                                            | 35.7             | 0.5         | 310.0             | 1.0                                                                                                                                                         | 3.0               | 20.0                      | H-Horn   | PK             | 0.0                      | 56.2                          | 74.0               | -17.8                  | EUT Vertical |                               |  |
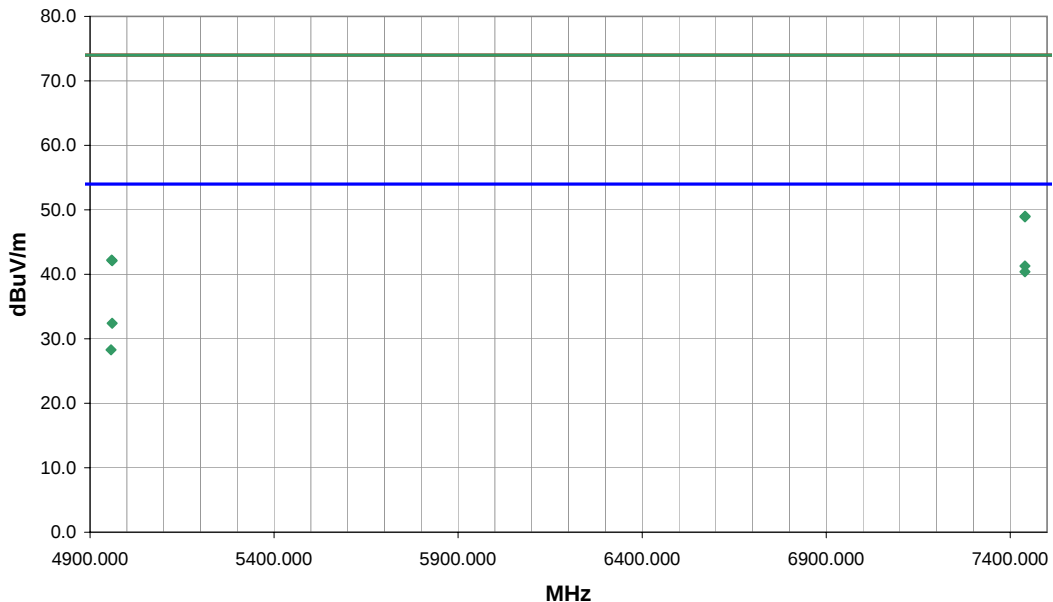
| NORTHWEST<br>EMC                                                                    |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | RADIATED EMISSIONS DATA SHEET |                    |                   |                        | PSA 2005.7.20<br>EMI 2005.8.3 |  |
|-------------------------------------------------------------------------------------|------------------|-------------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|----------|----------|--------------------------|-------------------------------|--------------------|-------------------|------------------------|-------------------------------|--|
| EUT: MN: A-0363C Cordless Headset                                                   |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Work Order: LABT0149          |                    |                   |                        |                               |  |
| Serial Number: Unknown                                                              |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Date: 08/14/05                |                    |                   |                        |                               |  |
| Customer: Logitech, Inc.                                                            |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Temperature: 27               |                    |                   |                        |                               |  |
| Attendees: None                                                                     |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Humidity: 39%                 |                    |                   |                        |                               |  |
| Project: None                                                                       |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Barometric Pressure: 29.86    |                    |                   |                        |                               |  |
| Tested by: Holly Ashkannejhad                                                       |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Power: 120VAC, 60Hz           |                    |                   |                        | Job Site: EV01                |  |
| TEST SPECIFICATIONS                                                                 |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | Test Method                   |                    |                   |                        |                               |  |
| FCC 15.247(d) Spurious Radiated Emissions:2005-04                                   |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | ANSI C63.4:2003               |                    |                   |                        |                               |  |
| TEST PARAMETERS                                                                     |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                   |                        |                               |  |
| Antenna Height(s) (m)                                                               |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          | 1 - 4                         |                    | Test Distance (m) |                        | 3                             |  |
| COMMENTS                                                                            |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                   |                        |                               |  |
| Headset.                                                                            |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                   |                        |                               |  |
| EUT OPERATING MODES                                                                 |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                   |                        |                               |  |
| Transmitting high channel                                                           |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                   |                        |                               |  |
| DEVIATIONS FROM TEST STANDARD                                                       |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                   |                        |                               |  |
| No deviations.                                                                      |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                   |                        |                               |  |
| Run #                                                                               |                  | 4           |                   | <div style="text-align: center;"> <br/>           Signature         </div> |                   |                           |          |          |                          |                               |                    |                   |                        |                               |  |
| Configuration #                                                                     |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                   |                        |                               |  |
| Results                                                                             |                  | Pass        |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                   |                        |                               |  |
|  |                  |             |                   |                                                                                                                                                             |                   |                           |          |          |                          |                               |                    |                   |                        |                               |  |
| Freq (MHz)                                                                          | Amplitude (dBuV) | Factor (dB) | Azimuth (degrees) | Height (meters)                                                                                                                                             | Distance (meters) | External Attenuation (dB) | Polarity | Detector | Distance Adjustment (dB) | Adjusted dBuV/m               | Spec. Limit dBuV/m | Spec. (dB)        | Compared to Spec. (dB) | Comments                      |  |
| 7440.003                                                                            | 27.4             | 13.9        | 341.0             | 1.0                                                                                                                                                         | 3.0               | 0.0                       | V-Horn   | AV       | 0.0                      | 41.3                          | 54.0               | -12.7             | EUT on side            |                               |  |
| 7439.980                                                                            | 26.5             | 13.9        | 318.0             | 1.1                                                                                                                                                         | 3.0               | 0.0                       | H-Horn   | AV       | 0.0                      | 40.4                          | 54.0               | -13.6             | EUT Vertical           |                               |  |
| 4960.055                                                                            | 25.6             | 6.8         | 297.0             | 1.0                                                                                                                                                         | 3.0               | 0.0                       | V-Horn   | AV       | 0.0                      | 32.4                          | 54.0               | -21.6             | EUT on side            |                               |  |
| 7440.387                                                                            | 35.1             | 13.9        | 318.0             | 1.1                                                                                                                                                         | 3.0               | 0.0                       | H-Horn   | PK       | 0.0                      | 49.0                          | 74.0               | -25.0             | EUT Vertical           |                               |  |
| 7439.895                                                                            | 35.0             | 13.9        | 341.0             | 1.0                                                                                                                                                         | 3.0               | 0.0                       | V-Horn   | PK       | 0.0                      | 48.9                          | 74.0               | -25.1             | EUT on side            |                               |  |
| 4956.993                                                                            | 21.5             | 6.8         | 87.0              | 1.0                                                                                                                                                         | 3.0               | 0.0                       | H-Horn   | AV       | 0.0                      | 28.3                          | 54.0               | -25.7             | EUT Vertical           |                               |  |
| 4958.653                                                                            | 35.4             | 6.8         | 87.0              | 1.0                                                                                                                                                         | 3.0               | 0.0                       | H-Horn   | PK       | 0.0                      | 42.2                          | 74.0               | -31.8             | EUT Vertical           |                               |  |
| 4959.820                                                                            | 35.3             | 6.8         | 297.0             | 1.0                                                                                                                                                         | 3.0               | 0.0                       | V-Horn   | PK       | 0.0                      | 42.1                          | 74.0               | -31.9             | EUT on side            |                               |  |



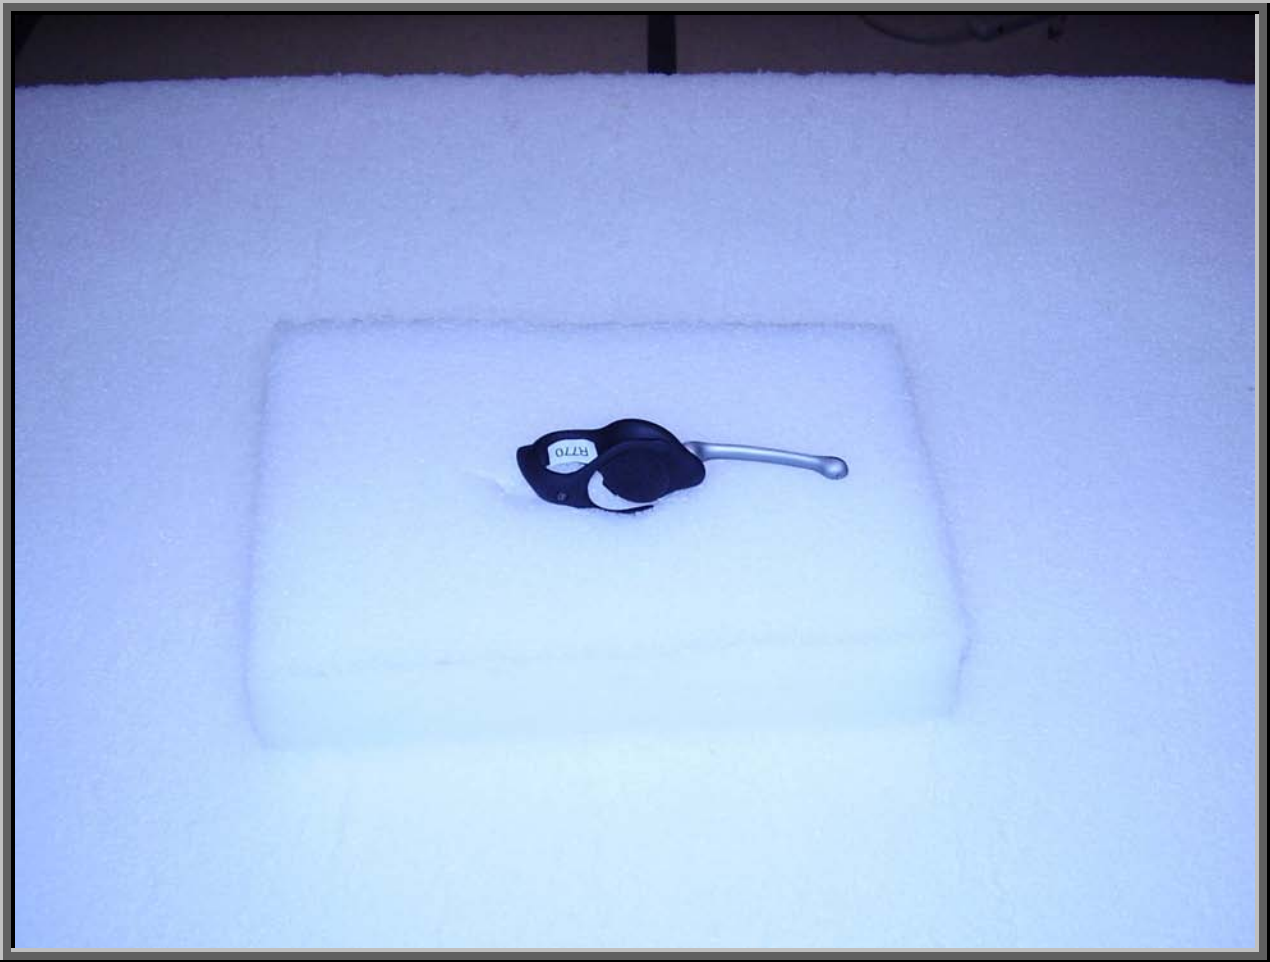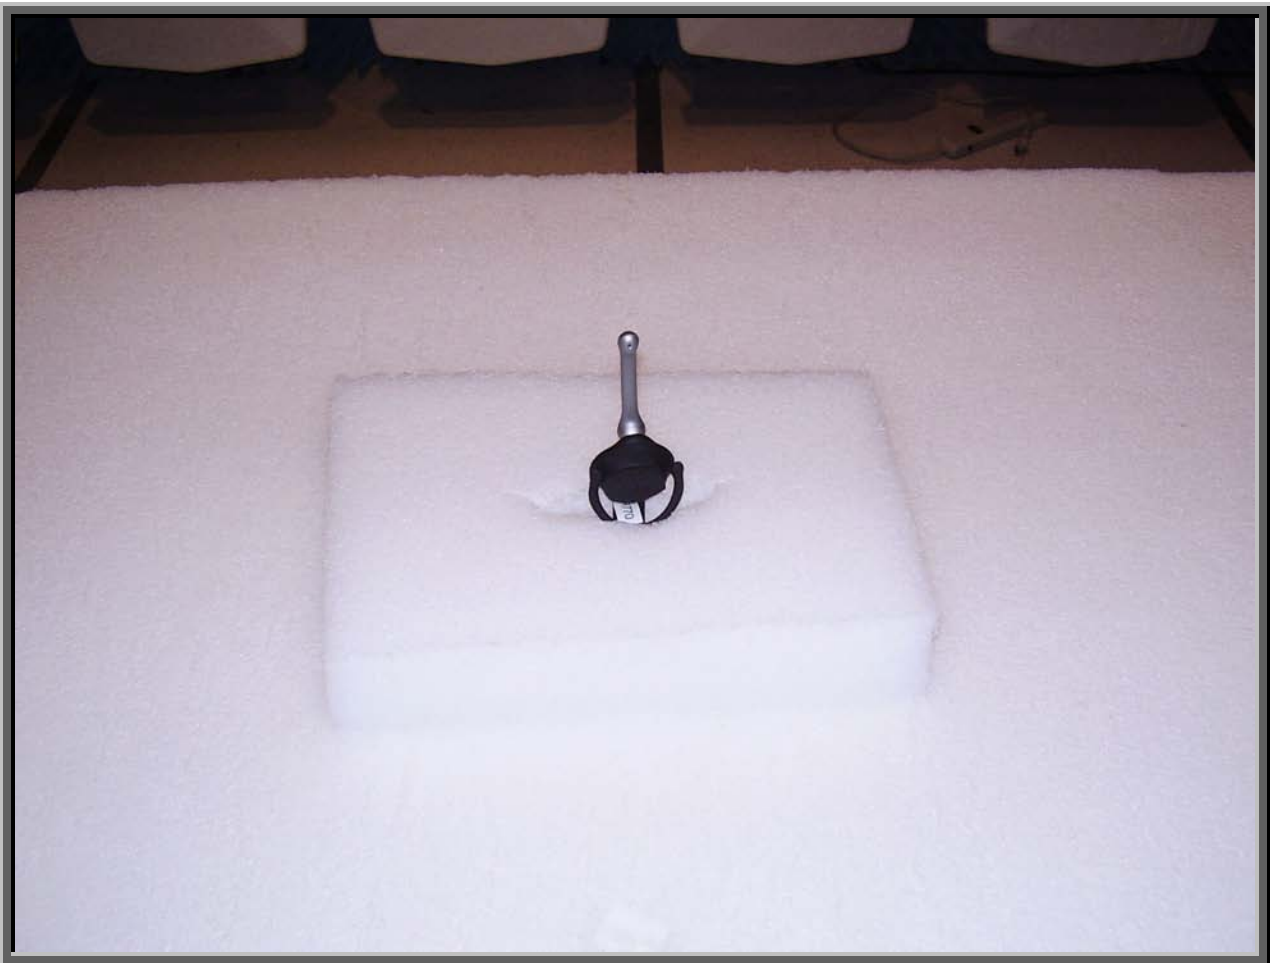

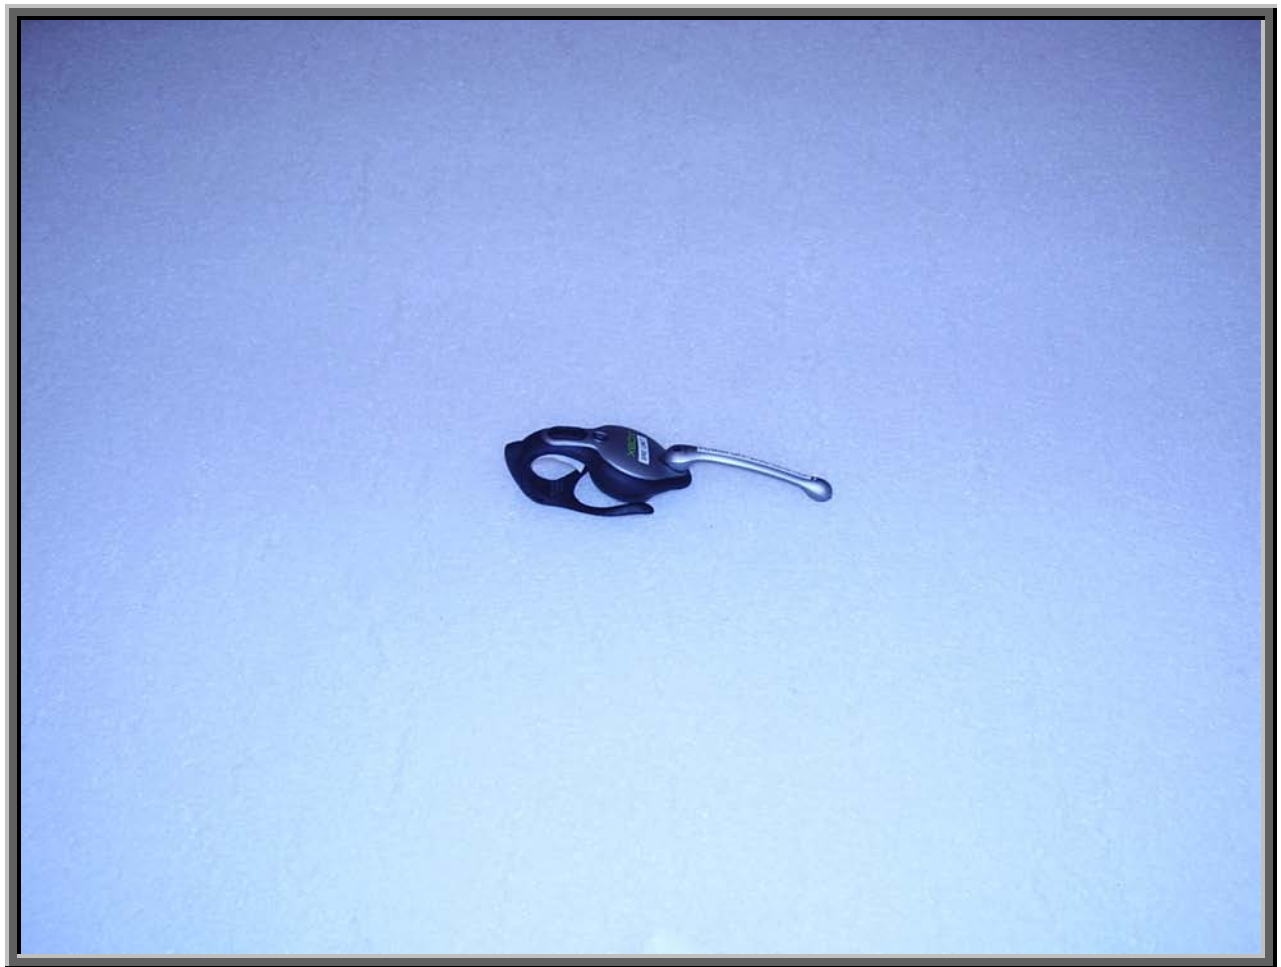

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

**Operating Modes Investigated:**

|               |
|---------------|
| Charging mode |
|---------------|

**Power Input Settings Investigated:**

|                |
|----------------|
| 230 VAC, 50 Hz |
|----------------|

|                |
|----------------|
| 120 VAC, 60 Hz |
|----------------|

**Software\Firmware Applied During Test**

| Exercise software                                                                                                                                                                                                                                                                                   | BlueCore-Audio | Version | 1.0 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------|-----|
| <b>Description</b>                                                                                                                                                                                                                                                                                  |                |         |     |
| The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band. |                |         |     |

**EUT and Peripherals in Test Setup Boundary**

| Description             | Manufacturer   | Model/Part Number | Serial Number |
|-------------------------|----------------|-------------------|---------------|
| EUT - Bluetooth Headset | Logitech, Inc. | A-0363C           | Unknown       |
| AC Adapter (US)         | Logitech, Inc. | AU055V150T        | Unknown       |
| AC Adapter (EU)         | Logitech, Inc. | P925BW05050ABD3   | Unknown       |

**Cables**

| Cable Type                                                                                             | Shield | Length (m) | Ferrite | Connection 1    | Connection 2 |
|--------------------------------------------------------------------------------------------------------|--------|------------|---------|-----------------|--------------|
| DC Leads                                                                                               | No     | 1.2        | No      | AC Adapter (US) | AC Mains     |
| DC Leads                                                                                               | No     | 1.4        | No      | AC Adapter (EU) | AC Mains     |
| PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown. |        |            |         |                 |              |

**Measurement Equipment**

| Description       | Manufacturer | Model            | Identifier | Last Cal   | Interval |
|-------------------|--------------|------------------|------------|------------|----------|
| LISN              | Solar        | 9252-50-R-24-BNC | LIN        | 12/29/2004 | 13 mo    |
| High Pass Filter  | TTE          | H97-100k-50-720B | HFC        | 12/29/2004 | 13 mo    |
| Attenuator        | Tektronix    | 011-0059-02      | ATH        | 12/29/2004 | 13 mo    |
| Spectrum Analyzer | Agilent      | E4446A           | AAQ        | 04/08/2005 | 13 mo    |

**Test Description**

Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50  $\Omega$  measuring port is terminated by a 50  $\Omega$  EMI meter or a 50  $\Omega$  resistive load. All 50  $\Omega$  measuring ports of the LISN are terminated by 50 $\Omega$ .


| <b>Measurement Bandwidths</b>                                                                         |                            |                                  |                               |
|-------------------------------------------------------------------------------------------------------|----------------------------|----------------------------------|-------------------------------|
| <b>Frequency Range<br/>(MHz)</b>                                                                      | <b>Peak Data<br/>(kHz)</b> | <b>Quasi-Peak Data<br/>(kHz)</b> | <b>Average Data<br/>(kHz)</b> |
| 0.01 – 0.15                                                                                           | 1.0                        | 0.2                              | 0.2                           |
| 0.15 – 30.0                                                                                           | 10.0                       | 9.0                              | 9.0                           |
| 30.0 - 1000                                                                                           | 100.0                      | 120.0                            | 120.0                         |
| Above 1000                                                                                            | 1000.0                     | N/A                              | 1000.0                        |
| <i>Measurements were made using the bandwidths and detectors specified. No video filter was used.</i> |                            |                                  |                               |

**Completed by:**


| NORTHWEST<br>EMC                  |                  | CONDUCTED EMISSIONS DATA SHEET |                                     | PSA 2005.8.22<br>EMI 2005.8.18 |                           |                                             |               |                  |                        |
|-----------------------------------|------------------|--------------------------------|-------------------------------------|--------------------------------|---------------------------|---------------------------------------------|---------------|------------------|------------------------|
| EUT: MN: A-0363C Cordless Headset |                  |                                | Work Order: LABT0149                |                                |                           |                                             |               |                  |                        |
| Serial Number: Unknown            |                  |                                | Date: 08/31/05                      |                                |                           |                                             |               |                  |                        |
| Customer: Logitech, Inc.          |                  |                                | Temperature: 23                     |                                |                           |                                             |               |                  |                        |
| Attendees: None                   |                  |                                | Humidity: 42%                       |                                |                           |                                             |               |                  |                        |
| Project: None                     |                  |                                | Barometric Pressure: 29.98          |                                |                           |                                             |               |                  |                        |
| Tested by: Holly Ashkannejhad     |                  | Power: 120VAC, 60Hz            |                                     | Job Site: EV01                 |                           |                                             |               |                  |                        |
| TEST SPECIFICATIONS               |                  |                                | Test Method                         |                                |                           |                                             |               |                  |                        |
| FCC 15.207 Class B:2005-04        |                  |                                | ANSI C63.4:2003                     |                                |                           |                                             |               |                  |                        |
| FCC 15.107 Class B:2005-04        |                  |                                | ANSI C63.4:2003                     |                                |                           |                                             |               |                  |                        |
| TEST PARAMETERS                   |                  |                                |                                     |                                |                           |                                             |               |                  |                        |
| Cable or Line Tested              |                  |                                | L1                                  |                                |                           |                                             |               |                  |                        |
| COMMENTS                          |                  |                                |                                     |                                |                           |                                             |               |                  |                        |
| US Adapter                        |                  |                                |                                     |                                |                           |                                             |               |                  |                        |
| EUT OPERATING MODES               |                  |                                |                                     |                                |                           |                                             |               |                  |                        |
| Charging                          |                  |                                |                                     |                                |                           |                                             |               |                  |                        |
| DEVIATIONS FROM TEST STANDARD     |                  |                                |                                     |                                |                           |                                             |               |                  |                        |
| No deviations.                    |                  |                                |                                     |                                |                           |                                             |               |                  |                        |
| Run #                             | 1                |                                | Signature <i>Holly Ashkannejhad</i> |                                |                           |                                             |               |                  |                        |
| Configuration #                   |                  |                                |                                     |                                |                           |                                             |               |                  |                        |
| Results                           | Pass             |                                |                                     |                                |                           |                                             |               |                  |                        |
|                                   |                  |                                |                                     |                                |                           |                                             |               |                  |                        |
| Freq (MHz)                        | Amplitude (dBuV) |                                | Transducer (dB)                     | Cable (dB)                     | External Attenuation (dB) | Detector (blank equal peaks [PK] from scan) | Adjusted dBuV | Spec. Limit dBuV | Compared to Spec. (dB) |
| 0.248                             | 20.0             |                                | 0.0                                 | 0.2                            | 20.0                      |                                             | 40.2          | 51.8             | -11.6                  |
| 0.165                             | 22.0             |                                | 0.0                                 | 0.2                            | 20.0                      |                                             | 42.2          | 55.2             | -13.0                  |
| 0.325                             | 15.2             |                                | 0.0                                 | 0.2                            | 20.0                      |                                             | 35.4          | 49.6             | -14.2                  |
| 0.412                             | 13.1             |                                | 0.0                                 | 0.2                            | 20.0                      |                                             | 33.3          | 47.6             | -14.3                  |
| 0.474                             | 11.9             |                                | 0.0                                 | 0.2                            | 20.0                      |                                             | 32.1          | 46.4             | -14.3                  |
| 0.489                             | 11.6             |                                | 0.0                                 | 0.2                            | 20.0                      |                                             | 31.8          | 46.2             | -14.3                  |
| 0.791                             | 10.8             |                                | 0.0                                 | 0.3                            | 20.0                      |                                             | 31.1          | 46.0             | -14.9                  |
| 0.609                             | 10.7             |                                | 0.0                                 | 0.3                            | 20.0                      |                                             | 31.0          | 46.0             | -15.0                  |
| 0.580                             | 10.2             |                                | 0.0                                 | 0.3                            | 20.0                      |                                             | 30.5          | 46.0             | -15.5                  |
| 0.759                             | 10.0             |                                | 0.0                                 | 0.3                            | 20.0                      |                                             | 30.3          | 46.0             | -15.7                  |
| 0.267                             | 15.2             |                                | 0.0                                 | 0.2                            | 20.0                      |                                             | 35.4          | 51.2             | -15.8                  |
| 0.536                             | 9.9              |                                | 0.0                                 | 0.3                            | 20.0                      |                                             | 30.2          | 46.0             | -15.8                  |
| 0.376                             | 12.2             |                                | 0.0                                 | 0.2                            | 20.0                      |                                             | 32.4          | 48.4             | -15.9                  |
| 0.522                             | 9.1              |                                | 0.0                                 | 0.2                            | 20.0                      |                                             | 29.3          | 46.0             | -16.7                  |
| 0.678                             | 8.7              |                                | 0.0                                 | 0.3                            | 20.0                      |                                             | 29.0          | 46.0             | -17.0                  |
| 0.839                             | 8.5              |                                | 0.0                                 | 0.3                            | 20.0                      |                                             | 28.8          | 46.0             | -17.2                  |
| 0.817                             | 8.0              |                                | 0.0                                 | 0.3                            | 20.0                      |                                             | 28.3          | 46.0             | -17.7                  |
| 0.868                             | 7.7              |                                | 0.0                                 | 0.3                            | 20.0                      |                                             | 28.0          | 46.0             | -18.0                  |
| 0.853                             | 7.7              |                                | 0.0                                 | 0.3                            | 20.0                      |                                             | 28.0          | 46.0             | -18.0                  |

|                                   |                  |                                     |                 |                |                           |                                             |               |                  |                        |
|-----------------------------------|------------------|-------------------------------------|-----------------|----------------|---------------------------|---------------------------------------------|---------------|------------------|------------------------|
| NORTHWEST                         |                  | CONDUCTED EMISSIONS DATA SHEET      |                 | PSA 2005.8.22  |                           |                                             |               |                  |                        |
| EMI                               |                  |                                     |                 | EMI 2005.8.18  |                           |                                             |               |                  |                        |
| EUT: MN: A-0363C Cordless Headset |                  | Work Order: LABT0149                |                 |                |                           |                                             |               |                  |                        |
| Serial Number: Unknown            |                  | Date: 08/31/05                      |                 |                |                           |                                             |               |                  |                        |
| Customer: Logitech, Inc.          |                  | Temperature: 23                     |                 |                |                           |                                             |               |                  |                        |
| Attendees: None                   |                  | Humidity: 42%                       |                 |                |                           |                                             |               |                  |                        |
| Project: None                     |                  | Barometric Pressure: 29.98          |                 |                |                           |                                             |               |                  |                        |
| Tested by: Holly Ashkannejhad     |                  | Power: 120VAC, 60Hz                 |                 | Job Site: EV01 |                           |                                             |               |                  |                        |
| TEST SPECIFICATIONS               |                  | Test Method                         |                 |                |                           |                                             |               |                  |                        |
| FCC 15.207 Class B:2005-04        |                  | ANSI C63.4:2003                     |                 |                |                           |                                             |               |                  |                        |
| FCC 15.107 Class B:2005-04        |                  | ANSI C63.4:2003                     |                 |                |                           |                                             |               |                  |                        |
| TEST PARAMETERS                   |                  |                                     |                 |                |                           |                                             |               |                  |                        |
| Cable or Line Tested              |                  | N                                   |                 |                |                           |                                             |               |                  |                        |
| COMMENTS                          |                  |                                     |                 |                |                           |                                             |               |                  |                        |
| US Adapter                        |                  |                                     |                 |                |                           |                                             |               |                  |                        |
| EUT OPERATING MODES               |                  |                                     |                 |                |                           |                                             |               |                  |                        |
| Charging                          |                  |                                     |                 |                |                           |                                             |               |                  |                        |
| DEVIATIONS FROM TEST STANDARD     |                  |                                     |                 |                |                           |                                             |               |                  |                        |
| No deviations.                    |                  |                                     |                 |                |                           |                                             |               |                  |                        |
| Run #                             | 2                | Signature <i>Holly Ashkannejhad</i> |                 |                |                           |                                             |               |                  |                        |
| Configuration #                   |                  |                                     |                 |                |                           |                                             |               |                  |                        |
| Results                           | Pass             |                                     |                 |                |                           |                                             |               |                  |                        |
|                                   |                  |                                     |                 |                |                           |                                             |               |                  |                        |
| Freq (MHz)                        | Amplitude (dBuV) |                                     | Transducer (dB) | Cable (dB)     | External Attenuation (dB) | Detector (blank equal peaks [PK] from scan) | Adjusted dBuV | Spec. Limit dBuV | Compared to Spec. (dB) |
| 0.245                             | 19.9             |                                     | 0.0             | 0.2            | 20.0                      |                                             | 40.1          | 51.9             | -11.8                  |
| 0.157                             | 21.3             |                                     | 0.0             | 0.2            | 20.0                      |                                             | 41.5          | 55.6             | -14.1                  |
| 0.398                             | 12.5             |                                     | 0.0             | 0.2            | 20.0                      |                                             | 32.7          | 47.9             | -15.2                  |
| 0.194                             | 18.3             |                                     | 0.0             | 0.2            | 20.0                      |                                             | 38.5          | 53.9             | -15.4                  |
| 0.493                             | 10.5             |                                     | 0.0             | 0.2            | 20.0                      |                                             | 30.7          | 46.1             | -15.4                  |
| 0.544                             | 8.7              |                                     | 0.0             | 0.3            | 20.0                      |                                             | 29.0          | 46.0             | -17.0                  |
| 0.208                             | 15.2             |                                     | 0.0             | 0.2            | 20.0                      |                                             | 35.4          | 53.3             | -17.9                  |
| 0.325                             | 11.2             |                                     | 0.0             | 0.2            | 20.0                      |                                             | 31.4          | 49.6             | -18.2                  |
| 0.573                             | 7.5              |                                     | 0.0             | 0.3            | 20.0                      |                                             | 27.8          | 46.0             | -18.2                  |
| 0.347                             | 10.1             |                                     | 0.0             | 0.2            | 20.0                      |                                             | 30.3          | 49.0             | -18.7                  |
| 0.842                             | 6.7              |                                     | 0.0             | 0.3            | 20.0                      |                                             | 27.0          | 46.0             | -19.0                  |
| 0.711                             | 6.7              |                                     | 0.0             | 0.3            | 20.0                      |                                             | 27.0          | 46.0             | -19.0                  |
| 0.460                             | 7.3              |                                     | 0.0             | 0.2            | 20.0                      |                                             | 27.5          | 46.7             | -19.2                  |
| 0.227                             | 13.1             |                                     | 0.0             | 0.2            | 20.0                      |                                             | 33.3          | 52.6             | -19.3                  |
| 0.795                             | 5.7              |                                     | 0.0             | 0.3            | 20.0                      |                                             | 26.0          | 46.0             | -20.0                  |
| 0.653                             | 5.7              |                                     | 0.0             | 0.3            | 20.0                      |                                             | 26.0          | 46.0             | -20.0                  |
| 0.740                             | 5.5              |                                     | 0.0             | 0.3            | 20.0                      |                                             | 25.8          | 46.0             | -20.2                  |
| 0.278                             | 10.1             |                                     | 0.0             | 0.2            | 20.0                      |                                             | 30.3          | 50.9             | -20.6                  |
| 1.305                             | 5.0              |                                     | 0.0             | 0.3            | 20.0                      |                                             | 25.3          | 46.0             | -20.7                  |

| NORTHWEST<br><b>EMC</b>                                  |      | <b>CONDUCTED EMISSIONS DATA SHEET</b> |                                     | PSA 2005.8.22<br>EMI 2005.8.18 |  |
|----------------------------------------------------------|------|---------------------------------------|-------------------------------------|--------------------------------|--|
| EUT: MN: A-0363C Cordless Headset                        |      |                                       | Work Order: LABT0149                |                                |  |
| Serial Number: Unknown                                   |      |                                       | Date: 08/31/05                      |                                |  |
| Customer: Logitech, Inc.                                 |      |                                       | Temperature: 23                     |                                |  |
| Attendees: None                                          |      |                                       | Humidity: 42%                       |                                |  |
| Project: None                                            |      |                                       | Barometric Pressure: 29.98          |                                |  |
| Tested by: Holly Ashkannejhad                            |      | Power: 230VAC, 50Hz                   |                                     | Job Site: EV01                 |  |
| <b>TEST SPECIFICATIONS</b>                               |      |                                       | <b>Test Method</b>                  |                                |  |
| FCC 15.207 Class B:2005-04<br>FCC 15.107 Class B:2005-04 |      |                                       | ANSI C63.4:2003<br>ANSI C63.4:2003  |                                |  |
| <b>TEST PARAMETERS</b>                                   |      |                                       |                                     |                                |  |
| Cable or Line Tested                                     |      |                                       | N                                   |                                |  |
| <b>COMMENTS</b>                                          |      |                                       |                                     |                                |  |
| EU Adapter                                               |      |                                       |                                     |                                |  |
| <b>EUT OPERATING MODES</b>                               |      |                                       |                                     |                                |  |
| Charging                                                 |      |                                       |                                     |                                |  |
| <b>DEVIATIONS FROM TEST STANDARD</b>                     |      |                                       |                                     |                                |  |
| No deviations.                                           |      |                                       |                                     |                                |  |
| Run #                                                    | 3    |                                       | Signature <i>Holly Ashkannejhad</i> |                                |  |
| Configuration #                                          |      |                                       |                                     |                                |  |
| Results                                                  | Pass |                                       |                                     |                                |  |

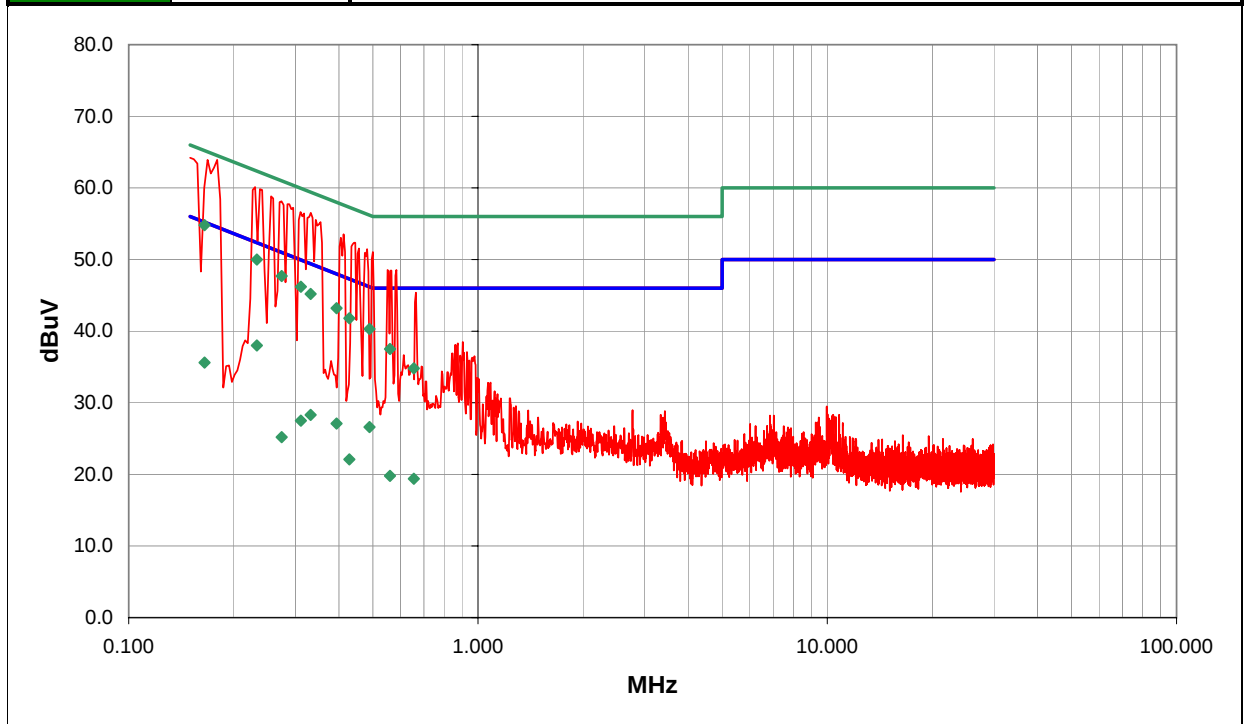

| Freq (MHz) | Amplitude (dBuV) |  |  | Transducer (dB) | Cable (dB) | External Attenuation (dB) |  | Detector (blank equal peaks [PK] from scan) |  | Adjusted dBuV | Spec. Limit dBuV | Compared to Spec. (dB) |
|------------|------------------|--|--|-----------------|------------|---------------------------|--|---------------------------------------------|--|---------------|------------------|------------------------|
| 0.165      | 34.8             |  |  | 0.0             | 0.0        | 20.0                      |  | QP                                          |  | 54.8          | 65.2             | -10.4                  |
| 0.233      | 30.0             |  |  | 0.0             | 0.0        | 20.0                      |  | QP                                          |  | 50.0          | 62.4             | -12.4                  |
| 0.274      | 27.7             |  |  | 0.0             | 0.0        | 20.0                      |  | QP                                          |  | 47.7          | 61.0             | -13.3                  |
| 0.311      | 26.2             |  |  | 0.0             | 0.0        | 20.0                      |  | QP                                          |  | 46.2          | 59.9             | -13.7                  |
| 0.332      | 25.2             |  |  | 0.0             | 0.0        | 20.0                      |  | QP                                          |  | 45.2          | 59.4             | -14.2                  |
| 0.233      | 18.0             |  |  | 0.0             | 0.0        | 20.0                      |  | AV                                          |  | 38.0          | 52.4             | -14.4                  |
| 0.393      | 23.2             |  |  | 0.0             | 0.0        | 20.0                      |  | QP                                          |  | 43.2          | 58.0             | -14.8                  |
| 0.428      | 21.8             |  |  | 0.0             | 0.0        | 20.0                      |  | QP                                          |  | 41.8          | 57.3             | -15.5                  |
| 0.489      | 20.3             |  |  | 0.0             | 0.0        | 20.0                      |  | QP                                          |  | 40.3          | 56.2             | -15.9                  |
| 0.560      | 17.5             |  |  | 0.0             | 0.0        | 20.0                      |  | QP                                          |  | 37.5          | 56.0             | -18.5                  |
| 0.489      | 6.6              |  |  | 0.0             | 0.0        | 20.0                      |  | AV                                          |  | 26.6          | 46.2             | -19.6                  |
| 0.165      | 15.6             |  |  | 0.0             | 0.0        | 20.0                      |  | AV                                          |  | 35.6          | 55.2             | -19.6                  |
| 0.393      | 7.1              |  |  | 0.0             | 0.0        | 20.0                      |  | AV                                          |  | 27.1          | 48.0             | -20.9                  |
| 0.332      | 8.3              |  |  | 0.0             | 0.0        | 20.0                      |  | AV                                          |  | 28.3          | 49.4             | -21.1                  |
| 0.655      | 14.8             |  |  | 0.0             | 0.0        | 20.0                      |  | QP                                          |  | 34.8          | 56.0             | -21.2                  |
| 0.311      | 7.5              |  |  | 0.0             | 0.0        | 20.0                      |  | AV                                          |  | 27.5          | 49.9             | -22.4                  |
| 0.428      | 2.1              |  |  | 0.0             | 0.0        | 20.0                      |  | AV                                          |  | 22.1          | 47.3             | -25.2                  |
| 0.274      | 5.2              |  |  | 0.0             | 0.0        | 20.0                      |  | AV                                          |  | 25.2          | 51.0             | -25.8                  |
| 0.560      | -0.2             |  |  | 0.0             | 0.0        | 20.0                      |  | AV                                          |  | 19.8          | 46.0             | -26.2                  |
| 0.655      | -0.6             |  |  | 0.0             | 0.0        | 20.0                      |  | AV                                          |  | 19.4          | 46.0             | -26.6                  |
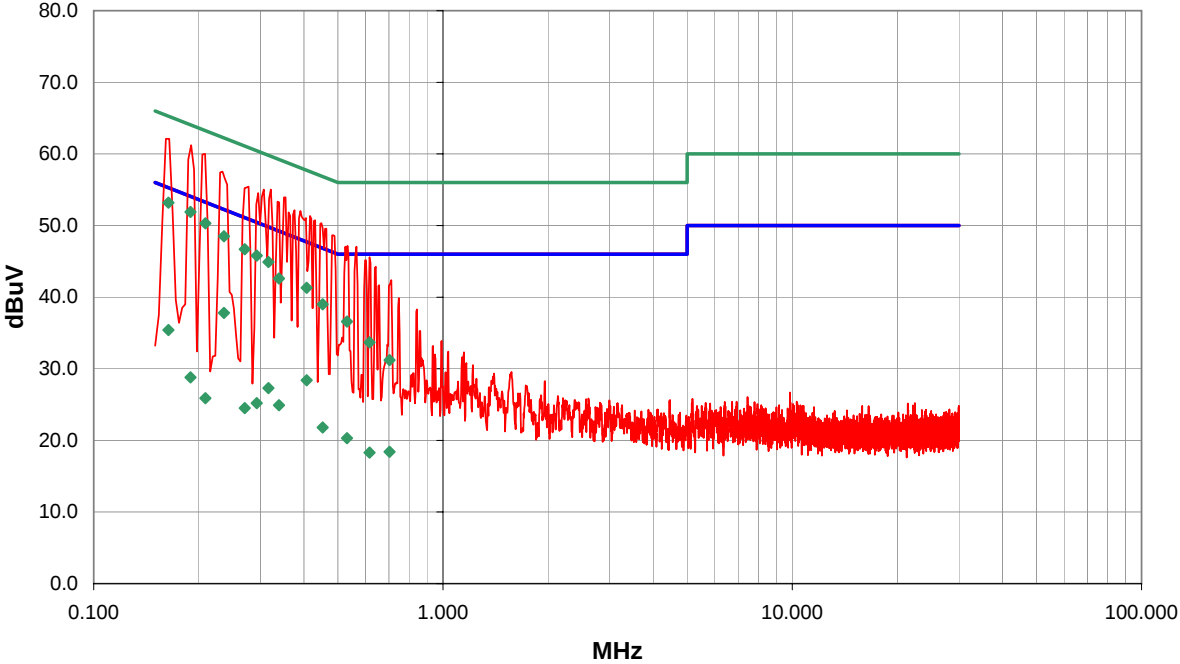
|                                                                                     |                  |                                |  |                                     |            |                           |  |                                             |  |               |                  |                        |
|-------------------------------------------------------------------------------------|------------------|--------------------------------|--|-------------------------------------|------------|---------------------------|--|---------------------------------------------|--|---------------|------------------|------------------------|
| NORTHWEST                                                                           |                  | CONDUCTED EMISSIONS DATA SHEET |  | PSA 2005.8.22                       |            |                           |  |                                             |  |               |                  |                        |
| EMI                                                                                 |                  |                                |  | EMI 2005.8.18                       |            |                           |  |                                             |  |               |                  |                        |
| EUT: MN: A-0363C Cordless Headset                                                   |                  |                                |  | Work Order: LABT0149                |            |                           |  |                                             |  |               |                  |                        |
| Serial Number: Unknown                                                              |                  |                                |  | Date: 08/31/05                      |            |                           |  |                                             |  |               |                  |                        |
| Customer: Logitech, Inc.                                                            |                  |                                |  | Temperature: 23                     |            |                           |  |                                             |  |               |                  |                        |
| Attendees: None                                                                     |                  |                                |  | Humidity: 42%                       |            |                           |  |                                             |  |               |                  |                        |
| Project: None                                                                       |                  |                                |  | Barometric Pressure: 29.98          |            |                           |  |                                             |  |               |                  |                        |
| Tested by: Holly Ashkannejhad                                                       |                  | Power: 230VAC, 50Hz            |  | Job Site: EV01                      |            |                           |  |                                             |  |               |                  |                        |
| TEST SPECIFICATIONS                                                                 |                  |                                |  | Test Method                         |            |                           |  |                                             |  |               |                  |                        |
| FCC 15.207 Class B:2005-04                                                          |                  |                                |  | ANSI C63.4:2003                     |            |                           |  |                                             |  |               |                  |                        |
| FCC 15.107 Class B:2005-04                                                          |                  |                                |  | ANSI C63.4:2003                     |            |                           |  |                                             |  |               |                  |                        |
| TEST PARAMETERS                                                                     |                  |                                |  |                                     |            |                           |  |                                             |  |               |                  |                        |
| Cable or Line Tested: L1                                                            |                  |                                |  |                                     |            |                           |  |                                             |  |               |                  |                        |
| COMMENTS                                                                            |                  |                                |  |                                     |            |                           |  |                                             |  |               |                  |                        |
| EU Adapter                                                                          |                  |                                |  |                                     |            |                           |  |                                             |  |               |                  |                        |
| EUT OPERATING MODES                                                                 |                  |                                |  |                                     |            |                           |  |                                             |  |               |                  |                        |
| Charging                                                                            |                  |                                |  |                                     |            |                           |  |                                             |  |               |                  |                        |
| DEVIATIONS FROM TEST STANDARD                                                       |                  |                                |  |                                     |            |                           |  |                                             |  |               |                  |                        |
| No deviations.                                                                      |                  |                                |  |                                     |            |                           |  |                                             |  |               |                  |                        |
| Run #                                                                               |                  | 4                              |  | Signature <i>Holly Ashkannejhad</i> |            |                           |  |                                             |  |               |                  |                        |
| Configuration #                                                                     |                  |                                |  |                                     |            |                           |  |                                             |  |               |                  |                        |
| Results                                                                             |                  | Pass                           |  |                                     |            |                           |  |                                             |  |               |                  |                        |
|  |                  |                                |  |                                     |            |                           |  |                                             |  |               |                  |                        |
| Freq (MHz)                                                                          | Amplitude (dBuV) |                                |  | Transducer (dB)                     | Cable (dB) | External Attenuation (dB) |  | Detector (blank equal peaks [PK] from scan) |  | Adjusted dBuV | Spec. Limit dBuV | Compared to Spec. (dB) |
| 0.164                                                                               | 33.2             |                                |  | 0.0                                 | 0.0        | 20.0                      |  | QP                                          |  | 53.2          | 65.3             | -12.1                  |
| 0.189                                                                               | 31.9             |                                |  | 0.0                                 | 0.0        | 20.0                      |  | QP                                          |  | 51.9          | 64.1             | -12.2                  |
| 0.209                                                                               | 30.3             |                                |  | 0.0                                 | 0.0        | 20.0                      |  | QP                                          |  | 50.3          | 63.3             | -13.0                  |
| 0.236                                                                               | 28.5             |                                |  | 0.0                                 | 0.0        | 20.0                      |  | QP                                          |  | 48.5          | 62.2             | -13.7                  |
| 0.271                                                                               | 26.7             |                                |  | 0.0                                 | 0.0        | 20.0                      |  | QP                                          |  | 46.7          | 61.1             | -14.4                  |
| 0.236                                                                               | 17.8             |                                |  | 0.0                                 | 0.0        | 20.0                      |  | AV                                          |  | 37.8          | 52.2             | -14.4                  |
| 0.293                                                                               | 25.8             |                                |  | 0.0                                 | 0.0        | 20.0                      |  | QP                                          |  | 45.8          | 60.4             | -14.6                  |
| 0.316                                                                               | 24.9             |                                |  | 0.0                                 | 0.0        | 20.0                      |  | QP                                          |  | 44.9          | 59.8             | -14.9                  |
| 0.407                                                                               | 21.3             |                                |  | 0.0                                 | 0.0        | 20.0                      |  | QP                                          |  | 41.3          | 57.7             | -16.4                  |
| 0.339                                                                               | 22.6             |                                |  | 0.0                                 | 0.0        | 20.0                      |  | QP                                          |  | 42.6          | 59.2             | -16.6                  |
| 0.453                                                                               | 19.0             |                                |  | 0.0                                 | 0.0        | 20.0                      |  | QP                                          |  | 39.0          | 56.8             | -17.8                  |
| 0.407                                                                               | 8.4              |                                |  | 0.0                                 | 0.0        | 20.0                      |  | AV                                          |  | 28.4          | 47.7             | -19.3                  |
| 0.531                                                                               | 16.6             |                                |  | 0.0                                 | 0.0        | 20.0                      |  | QP                                          |  | 36.6          | 56.0             | -19.4                  |
| 0.164                                                                               | 15.4             |                                |  | 0.0                                 | 0.0        | 20.0                      |  | AV                                          |  | 35.4          | 55.3             | -19.9                  |
| 0.616                                                                               | 13.7             |                                |  | 0.0                                 | 0.0        | 20.0                      |  | QP                                          |  | 33.7          | 56.0             | -22.3                  |
| 0.316                                                                               | 7.3              |                                |  | 0.0                                 | 0.0        | 20.0                      |  | AV                                          |  | 27.3          | 49.8             | -22.5                  |
| 0.339                                                                               | 4.9              |                                |  | 0.0                                 | 0.0        | 20.0                      |  | AV                                          |  | 24.9          | 49.2             | -24.3                  |
| 0.703                                                                               | 11.2             |                                |  | 0.0                                 | 0.0        | 20.0                      |  | QP                                          |  | 31.2          | 56.0             | -24.8                  |
| 0.453                                                                               | 1.8              |                                |  | 0.0                                 | 0.0        | 20.0                      |  | AV                                          |  | 21.8          | 46.8             | -25.0                  |
| 0.293                                                                               | 5.2              |                                |  | 0.0                                 | 0.0        | 20.0                      |  | AV                                          |  | 25.2          | 50.4             | -25.2                  |

| Freq<br>(MHz) | Amplitude<br>(dBuV) |  |  | Transducer<br>(dB) | Cable<br>(dB) | External<br>Attenuation<br>(dB) |  | Detector<br><small>(blank equal peaks<br/>[PK] from scan)</small> |  | Adjusted<br>dBuV | Spec. Limit<br>dBuV | Compared to<br>Spec.<br>(dB) |
|---------------|---------------------|--|--|--------------------|---------------|---------------------------------|--|-------------------------------------------------------------------|--|------------------|---------------------|------------------------------|
| 0.189         | 8.8                 |  |  | 0.0                | 0.0           | 20.0                            |  | AV                                                                |  | 28.8             | 54.1                | -25.3                        |
| 0.531         | 0.3                 |  |  | 0.0                | 0.0           | 20.0                            |  | AV                                                                |  | 20.3             | 46.0                | -25.7                        |
| 0.271         | 4.5                 |  |  | 0.0                | 0.0           | 20.0                            |  | AV                                                                |  | 24.5             | 51.1                | -26.6                        |
| 0.209         | 5.9                 |  |  | 0.0                | 0.0           | 20.0                            |  | AV                                                                |  | 25.9             | 53.3                | -27.4                        |
| 0.703         | -1.6                |  |  | 0.0                | 0.0           | 20.0                            |  | AV                                                                |  | 18.4             | 46.0                | -27.6                        |
| 0.616         | -1.7                |  |  | 0.0                | 0.0           | 20.0                            |  | AV                                                                |  | 18.3             | 46.0                | -27.7                        |





## **BLUETOOTH APPROVALS**

**FCC Procedure Received from Joe Dichoso on 2-15-02**

The following exhibit indicates the FCC Spread Spectrum requirements in Section 15.247 for devices meeting the Bluetooth Specifications in the 2.4 GHz band as of February 2001 operating in the USA. The purpose of this exhibit is to help expedite the approval process for Bluetooth devices. This exhibit provides items that vary for each device and also provides a list of items that are common to Bluetooth devices that explains the remaining requirements. The list of common items can be submitted for each application for equipment authorization. This exhibit only specifies requirements in Section 15.247, requirements in other rule Sections for intentional radiators such as in Section 15.203 or 15.207 must be also be addressed. A Bluetooth device is a FHSS transmitter in the data mode and applies as a Hybrid spread spectrum device in the acquisition mode.

For each individual device, the following items, 1-7 will vary from one device to another and must be submitted.

- 1) The occupied bandwidth in Section 15.247(a)(1)(ii).
- 2) Conducted output power specified in Section 15.247(b)(1).
- 3) EIRP limit in Section 15.247(b)(3).
- 4) RF safety requirement in Section 15.247(b)(4)
- 5) Spurious emission limits in Section 15.247(c).
- 6) Processing gain and requirements for Hybrids in Section 15.247(f) in the acquisition mode.
- 7) Power spectral density requirement in Section 15.247(f) in the acquisition mode.

For all devices, the following items, 1-12, are common to all Bluetooth devices and will not vary from one device to another. This list can be copied into the filing.

### **1 Output power and channel separation of a Bluetooth device in the different operating modes:**

The different operating modes (data-mode, acquisition-mode) of a Bluetooth device don't influence the output power and the channel spacing. There is only one transmitter which is driven by identical input parameters concerning these two parameters. Only a different hopping sequence will be used. For this reason, the RF parameters in one op-mode is sufficient.

### **2 Frequency range of a Bluetooth device:**

The maximum frequency of the device is: **2402 – 2480 MHz**.

This is according the Bluetooth Core Specification V 1.0B (+ critical errata) for devices which will be operated in the USA. Other frequency ranges ( e.g. for Spain, France, Japan) which are allowed according the Core Specification must **not be** supported by the device.

### **3 Co-ordination of the hopping sequence in data mode to avoid simultaneous occupancy by multiple transmitters:**

Bluetooth units which want to communicate with other units must be organized in a structure called piconet. This piconet consist of max. 8 Bluetooth units. One unit is the master the other seven are the slaves. The master co-ordinates frequency occupation in this piconet for all units. As the master hop sequence is derived from it's BD address which is unique for every Bluetooth device, additional masters intending to establish new piconets will always use different hop sequences.

### **4 Example of a hopping sequence in data mode:**

Example of a 79 hopping sequence in data mode:

40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67,  
56, 37, 60, 39, 58, 69, 62, 71, 64, 25, 68, 27, 66, 57, 70, 59,  
72, 29, 76, 31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75,  
09, 45, 13, 47, 11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06,  
01, 51, 03, 55, 05, 04

#### **5 Equally average use of frequencies in data mode and short transmissions:**

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection
2. Internal master clock

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD\_ADDRESS. The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronization with other units, only the offsets are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5  $\mu$ s. The clock has a cycle of about one day (23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions, the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence is generated. For transmitting the wanted data, the complete hopping sequence is not used and the connection ends. The second connection will be established. A new hopping sequence is generated. Due to the fact that the Bluetooth clock has a different value, because the period between the two transmission is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5  $\mu$ s). The hopping sequence will always differ from the first one.

#### **6 Receiver input bandwidth, synchronization and repeated single or multiple packets:**

The input bandwidth of the receiver is 1 MHz.

In every connection, one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence (see chapter 5). The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single or multi-slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing is according to the packet type of the connection. Also, the slave of the connection uses these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence

#### **7 Dwell time in data mode**

The dwell time of 0.3797s within a 30 second period in data mode is independent from the packet type (packet length). The calculation for a 30 second period is as follows:

Dwell time = time slot length \* hop rate / number of hopping channels \* 30s

Example for a DH1 packet (with a maximum length of one time slot)

Dwell time = 625  $\mu$ s \* 1600 1/s / 79 \* 30s = 0.3797s (in a 30s period)

For multi-slot packet the hopping is reduced according to the length of the packet.

Example for a DH5 packet (with a maximum length of five time slots)

Dwell time =  $5 * 625 \mu s * 1600 * 1/5 * 1/s / 79 * 30s = 0.3797s$  (in a 30s period)

This is according the Bluetooth Core Specification V 1.0B (+ critical errata) for all Bluetooth devices. Therefore, all Bluetooth devices **comply** with the FCC dwell time requirement in the data mode.

This was checked during the Bluetooth Qualification tests.

The Dwell time in hybrid mode is approximately 2.6 mS (in a 12.8s period)

### **8 Channel Separation in hybrid mode**

The nominal channel spacing of the Bluetooth system is 1Mhz independent of the operating mode.

The maximum "initial carrier frequency tolerance" which is allowed for Bluetooth is  $f_{center} = 75 \text{ kHz}$ .

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/07-E) for three frequencies (2402, 2441, 2480 MHz).

### **9 Derivation and examples for a hopping sequence in hybrid mode**

For the generation of the inquiry and page hop sequences the same procedures as described for the data mode are used (see item 5), but this time with different input vectors:

**\*\*For the inquiry hop sequence, a predefined fixed address is always used. This results in the same 32 frequencies used by all devices doing an inquiry but every time with a different start frequency and phase in this sequence.**

**\*\*For the page hop sequence, the device address of the paged unit is used as the input vector. This results in the use of a subset of 32 frequencies which is specific for that initial state of the connection establishment between the two units. A page to different devices would result in a different subset of 32 frequencies.**

So it is ensured that also in hybrid mode, the frequency is used equally on average.

Example of a hopping sequence in inquiry mode:

48, 50, 09, 13, 52, 54, 41, 45, 56, 58, 11, 15, 60, 62, 43, 47, 00, 02, 64, 68, 04, 06, 17, 21, 08, 10, 66, 70, 12, 14, 19, 23

Example of a hopping sequence in paging mode:

08, 57, 68, 70, 51, 02, 42, 40, 04, 61, 44, 46, 63, 14, 50, 48, 16, 65, 52, 54, 67, 18, 58, 56, 20, 53, 60, 62, 55, 06, 66, 64

### **10 Receiver input bandwidth and synchronization in hybrid mode:**

The receiver input bandwidth is the same as in the data mode (1 MHz). When two Bluetooth devices establish contact for the first time, one device sends an inquiry access code and the other device is scanning for this inquiry access code. If two devices have been connected previously and want to start a new transmission, a similar procedure takes place. The only difference is, instead of the inquiry access code, a special access code, derived from the BD\_ADDRESS of the paged device will be, will be sent by the master of this connection. Due to the fact that both units have been connected before (in the inquiry procedure) the paging unit has timing and frequency information about the page scan of the paged unit. For this reason the time to establish the connection is reduced.

### **11 Spread rate / data rate of the direct sequence signal**

The Spread rate / Data rate in inquiry and paging mode can be defined via the access code. The access code is the only criterion for the system to check if there is a valid transmission or not. If you regard the presence of a valid access code as one bit of information, and compare it with the length of the access code of 68 bits, the Spread rate / Data rate will be 68/1.

### **12 Spurious emission in hybrid mode**

The Dwell in hybrid mode is shorter than in data mode. For this reason the spurious emissions average level in data mode is worst case. The spurious emissions peak level is the same for both modes.