

DATA SHEET

2.45/5GHz P2 Multi Band Antenna with Cable & Connector for IEEE802.11b, 11g, 11a & UNII

Product specification: Version X04 (A00)


Jul 24, 2003

2.45/5GHz P2 Multi Band Antenna with Cable & Connector for IEEE802.11b, 11g, 11a, UNII				CAN4313 351 012501B CAN4313 351 022501B CAN4313 351 032501B CAN4313 351 042501B				—	X04	Jul 24, 03	
								— ▶	2		
								— ▶	3		
								BY / 製定者	Cliff/Howard	SUPER / 原圖編號	
CHECK				DATE / 日期		Jul. 24, 2003			— ▶	5	

**P2 Multi Band Antenna
FOR WLAN IEEE 802.11b/11g/11a, UNII
(With Cable & Mini PCI Connector)**

Product Specification

QUICK REFERENCE DATA

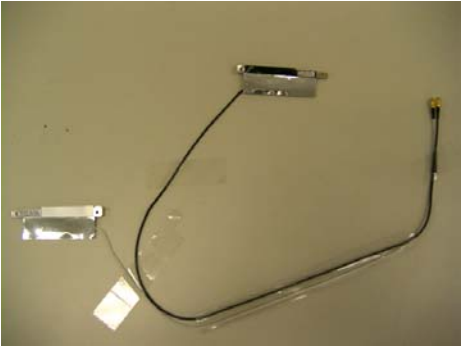Antenna Patch Dimension	64*7*0.5 mm Main Antenna 64*7*0.5 mm Aux Antenna	
Main LCD Cable Length	350 mm, Color White (CAN4313351012501B)	
Main Base Cable Length	180 mm, Color White (CAN4313351022501B)	
Aux LCD Cable Length	450 mm, Color Black (CAN4313351032501B)	
Aux Base Cable Length	200 mm, Color Black (CAN4313351042501B)	
MMCX Connector	Molex/Aliner or Compatible	
MiniPCI Connector	Ipex/Hirose or Compatible	
Peak Gain	2.9 dBi/2.45GHz Band 3.1 dBi/5GHz Band	
VSWR	2.0 for 2.45GHz band 2.5 for 5GHz band	
Polarization	Linear	
Impedance	50Ω	
Operating Temperature	-40~90 °C	
Maximum Power	1W	
Supplier Address	Yageo/Phycomp (Taiwan) Ltd. 16, west 3rd Street, N.E.P.Z. Kaohsiung, 811 Taiwan, R.O.C. Yegeo/Phycomp Electronics (China) Co, Ltd. No. 10, Zhu Yuan Road, Suzhou New District, Suzhou, PRC	

2.45/5GHz P2 Multi Band Antenna with Cable & Connector for IEEE802.11b, 11g, 11a, UNII				CAN4313 351 012501B CAN4313 351 022501B CAN4313 351 032501B CAN4313 351 042501B				—	X04	Jul 24, 03	
								— ▶	2		
								— ▶	3		
								— ▶	4		
BY / 製定者	Cliff/Howard	SUPER / 原圖編號		TLL.SH / 共頁	13	PAGE/ 頁	2	SH nr.	— ▶	5	
CHECK				DATE / 日期		Jul. 24, 2003			— ▶	5	

- Antenna Body (Main and Aux, Copper Metal Material):



Figure 1: Schematic diagram of the antenna assembly. The diagram illustrates the dimensions and components of the antenna assembly, including the Main Antenna (Left), Aux Antenna (Right), MMCX Plug (Male), MMCX Jack (Female), and UFL connector. Dimensions are provided in millimeters (mm) with tolerances.

Left View (Main Antenna and Aux Antenna):

- Main Antenna (Left): Length 350 ± 4 mm.
- Aux Antenna (Right): Length 20 mm.
- MMCX Plug (Male): Length 35 ± 2 mm.
- MMCX Jack (Female): Length 90 ± 2 mm.
- Cable color = White (Main Antenna).
- Cable color = Black (Aux Antenna).
- Heat shrink tube or Tape is used for the main antenna cable.
- 3M No.5 Polyester tape or clearly tape, Width 15mm is used for the aux antenna cable.


Right View (MMCX Jack and MMCX Plug):

- MMCX Jack (Female): Length 40 ± 2 mm.
- MMCX Plug (Male): Length 200 ± 4 mm.
- UFL connector: Length 180 ± 4 mm.
- Cable color = White (MMCX Jack).
- Cable color = Black (MMCX Plug).
- Heat shrink tube or Tape is used for the MMCX Jack cable.


Note: MMCX connector is made of Brass and gold plated with Teflon insulator. Maximum matching force is 3.4 lbs and un-mating force is 1.0~3.0 lbs. Dielectric withstanding voltage 500 Vrms, Insulation Resistance 1000M Ohm. Typical VSWR 1.12 @ 6GHz. Moisture Resistance follows MIL-STD-202, method 106 with 200Mohm.



Typical VSWR (After Installation in Notebook)

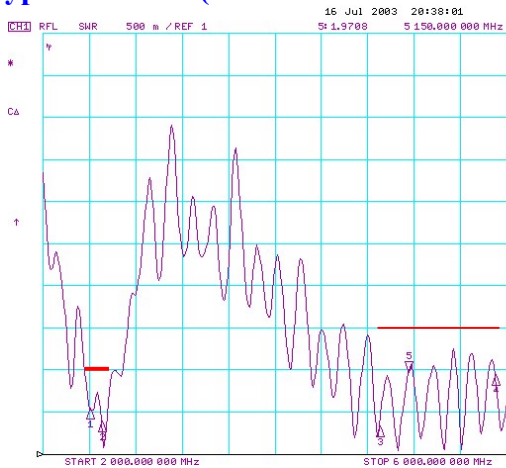

Main Antenna

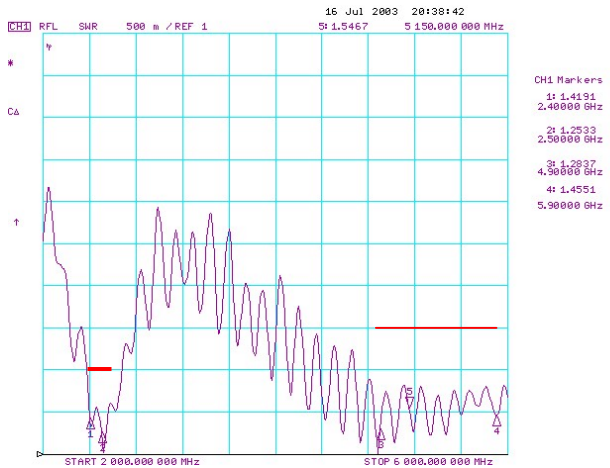


Aux Antenna

Note: May vary for different devices


Typical Radiation Pattern Polar Plot (Based on After Antenna Installation)

- Main

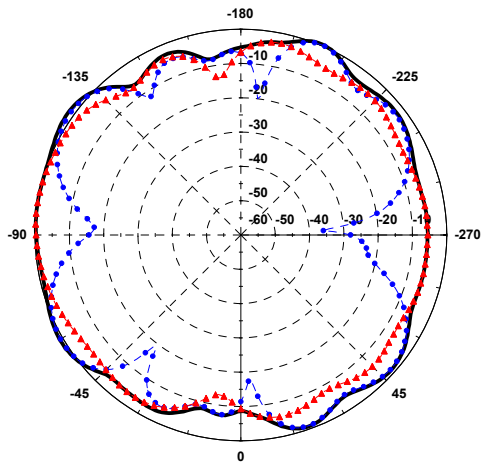


2400 MHz (Max Gain: 2.9dBi)

-Aux Antenna

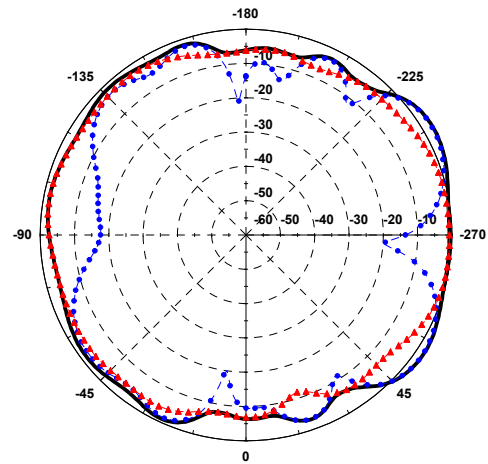


2400 MHz (Max Gain: 1.7dBi)


2.45/5GHz P2 Multi Band Antenna with Cable & Connector for IEEE802.11b, 11g, 11a, UNII				CAN4313 351 012501B			—	X04	Jul 24, 03
				CAN4313 351 022501B			—	2	
				CAN4313 351 032501B			▶	3	
				CAN4313 351 042501B			▶	4	
BY / 製定者	Cliff/Howard	SUPER / 原圖編號		TLL.SH / 共頁	13	PAGE/ 頁	4	SH nr.	4
CHECK				DATE / 日期	Jul. 24, 2003		— ▶	5	

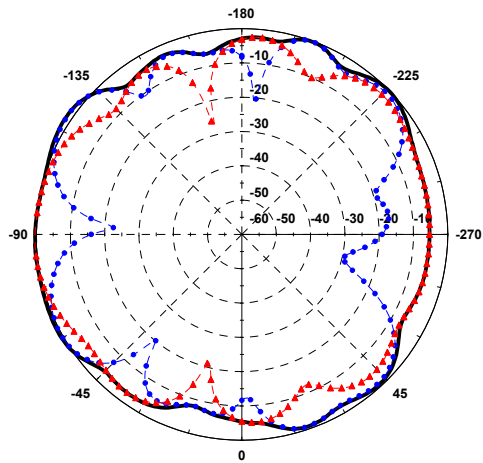


2450 MHz (Max Gain: 2.9dBi)

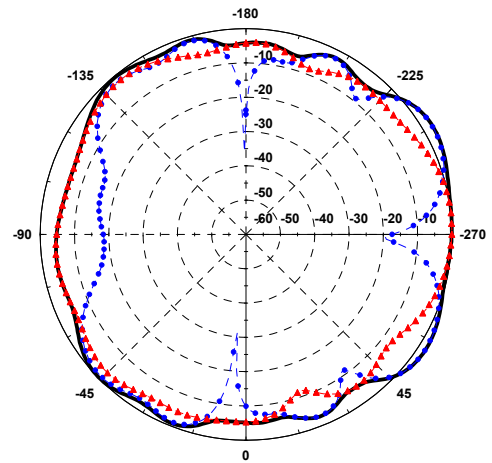

2450 MHz (Max Gain: 1.6dBi)

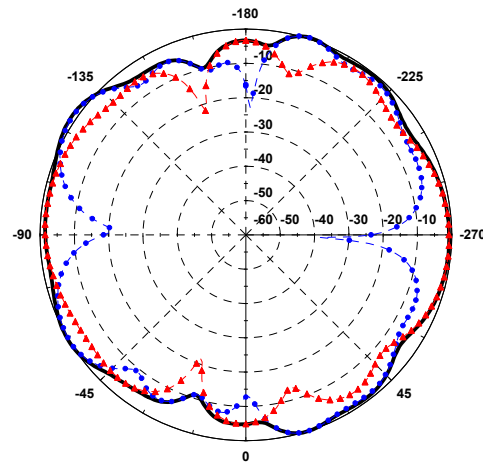


2500 MHz (Max Gain: 1.6dBi)

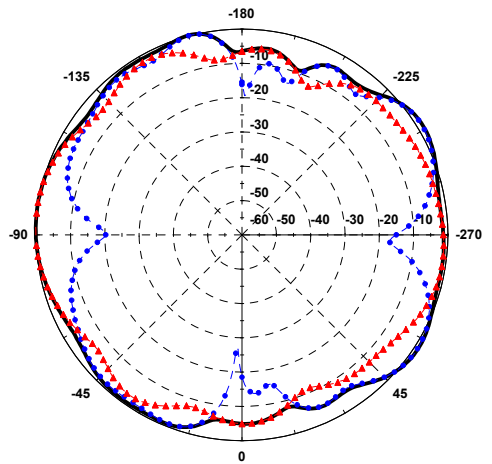


2500 MHz (Max Gain: 1.4dBi)


2.45/5GHz P2 Multi Band Antenna with Cable & Connector for IEEE802.11b, 11g, 11a, UNII				CAN4313 351 012501B CAN4313 351 022501B CAN4313 351 032501B CAN4313 351 042501B				—	X04	Jul 24, 03	
								— ▶	2		
								— ▶	3		
BY / 製定者	Cliff/Howard	SUPER / 原圖編號		TLL.SH / 共頁	13	PAGE/ 頁	5	SH nr.	— ▶	4	
CHECK				DATE / 日期		Jul. 24, 2003			— ▶	5	

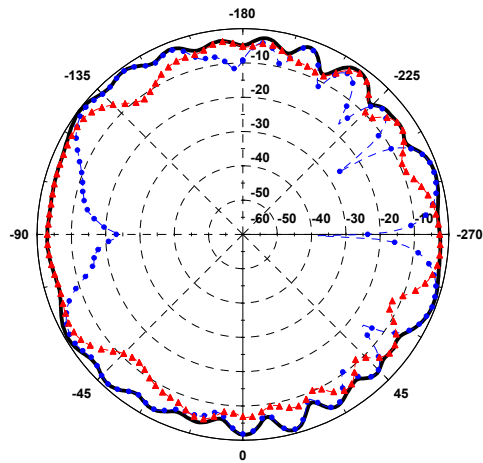


4900 MHz (Max Gain: -0.3dBi)

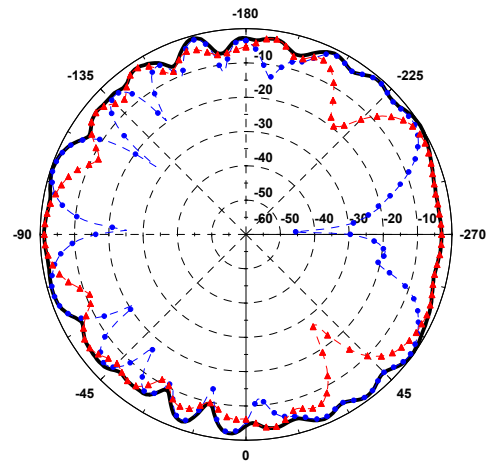

4900 MHz (Max Gain: -0.1dBi)

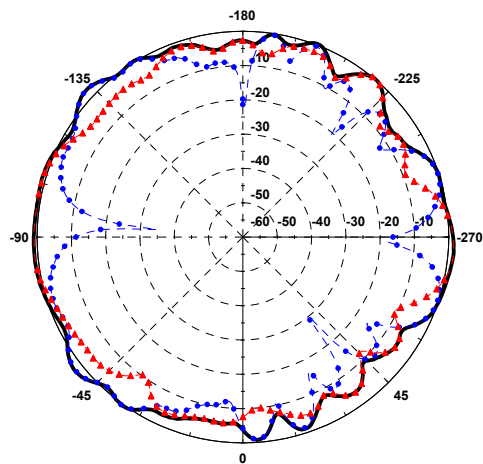

5150 MHz (Max Gain: 2.6dBi)

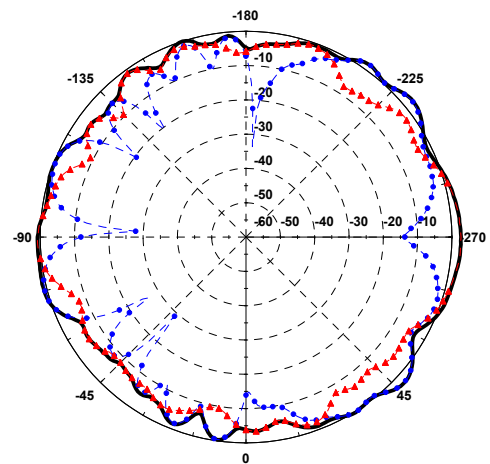


5150 MHz (Max Gain: 2.8dBi)

**2.45/5GHz P2 Multi Band Antenna
with Cable & Connector for
IEEE802.11b, 11g, 11a, UNII**


**CAN4313 351 012501B
CAN4313 351 022501B
CAN4313 351 032501B
CAN4313 351 042501B**

—	X04	Jul 24, 03
—	2	
▶	3	
—	4	
▶	5	


BY / 製定者	Cliff/Howard	SUPER / 原圖編號	TLL.SH / 共頁	13	PAGE/ 頁	6	SH nr.	— ▶	4	
CHECK			DATE / 日期	Jul. 24, 2003				— ▶	5	

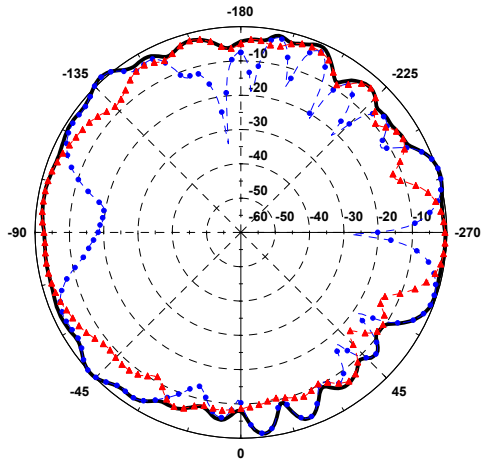


5350 MHz (Max Gain: 1.0dBi)

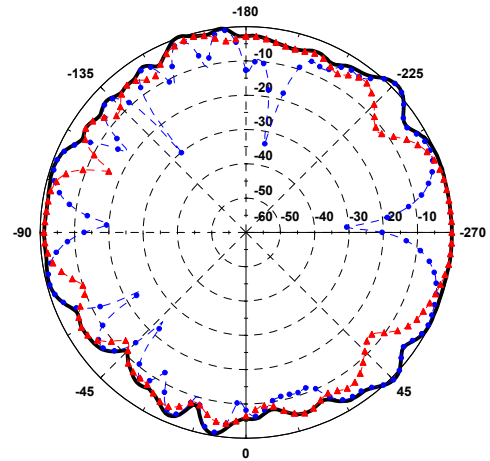

5350 MHz (Max Gain: 1.5dBi)

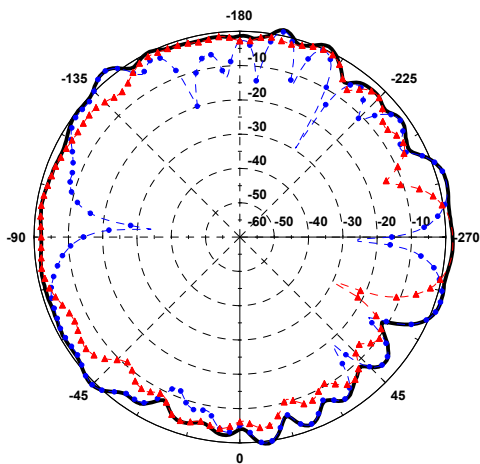


5470 MHz (Max Gain: 2.4dBi)

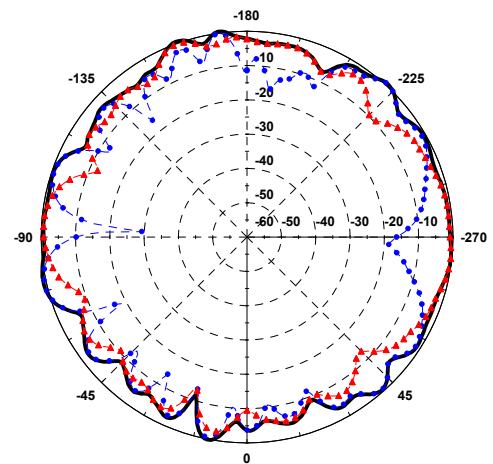


5470 MHz (Max Gain: 0.8dBi)


2.45/5GHz P2 Multi Band Antenna with Cable & Connector for IEEE802.11b, 11g, 11a, UNII				CAN4313 351 012501B CAN4313 351 022501B CAN4313 351 032501B CAN4313 351 042501B				—	X04	Jul 24, 03	
								— ▶	2		
								— ▶	3		
								— ▶	4		
BY / 製定者	Cliff/Howard	SUPER / 原圖編號		TLL.SH / 共頁	13	PAGE/ 頁	7	SH nr.	— ▶	5	
CHECK				DATE / 日期		Jul. 24, 2003			— ▶	5	

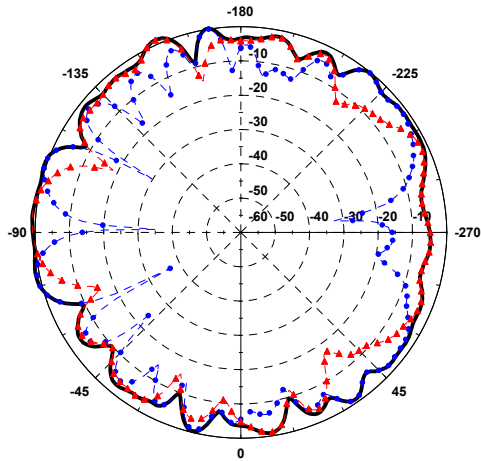


5725 MHz (Max Gain: 3.1dBi)

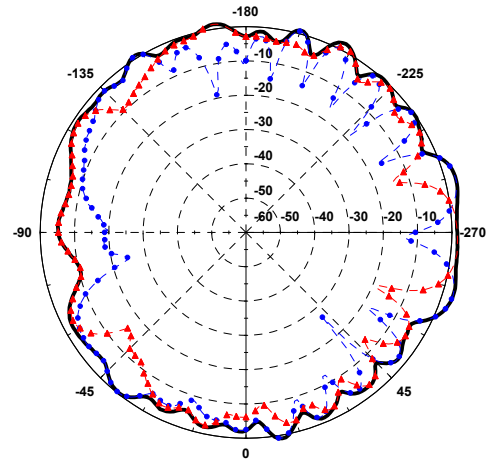

5725 MHz (Max Gain: 1.4dBi)

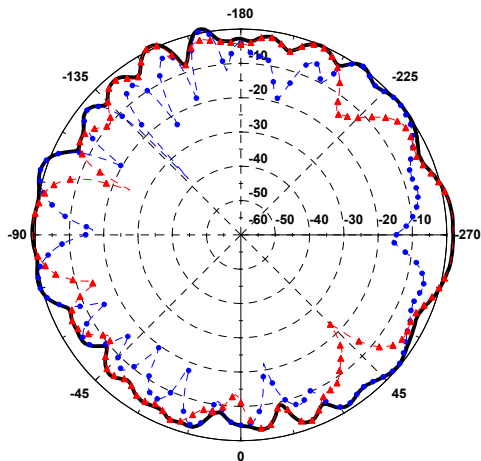

5900 MHz (Max Gain: 2.9dBi)

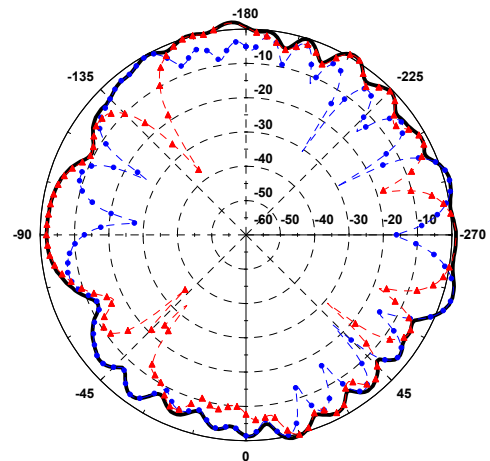

5900 MHz (Max Gain: 1.9dBi)


Note: May vary for different devices

2.45/5GHz P2 Multi Band Antenna with Cable & Connector for IEEE802.11b, 11g, 11a, UNII				CAN4313 351 012501B CAN4313 351 022501B CAN4313 351 032501B CAN4313 351 042501B				—	X04	Jul 24, 03	
								— ▶	2		
								— ▶	3		
BY / 製定者	Cliff/Howard	SUPER / 原圖編號		TLL.SH / 共頁	13	PAGE/ 頁	8	SH nr.	— ▶	4	
CHECK				DATE / 日期		Jul. 24, 2003			— ▶	5	

Typical Installation of Antenna and Connectors




- Notes for Installation and Removal of Cable and Connector

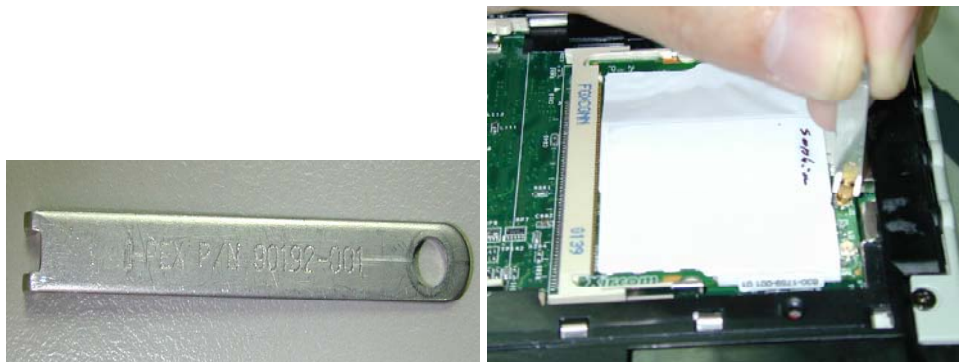

2.45/5GHz P2 Multi Band Antenna with Cable & Connector for IEEE802.11b, 11g, 11a, UNII				CAN4313 351 012501B CAN4313 351 022501B CAN4313 351 032501B CAN4313 351 042501B				—	X04	Jul 24, 03	
								— ▶	2		
								— ▶	3		
BY / 製定者	Cliff/Howard	SUPER / 原圖編號		TLL.SH / 共頁	13	PAGE/ 頁	9	SH nr.	— ▶	4	
CHECK				DATE / 日期		Jul. 24, 2003			— ▶	5	

IPRECAUTIONS FOR HANDLING

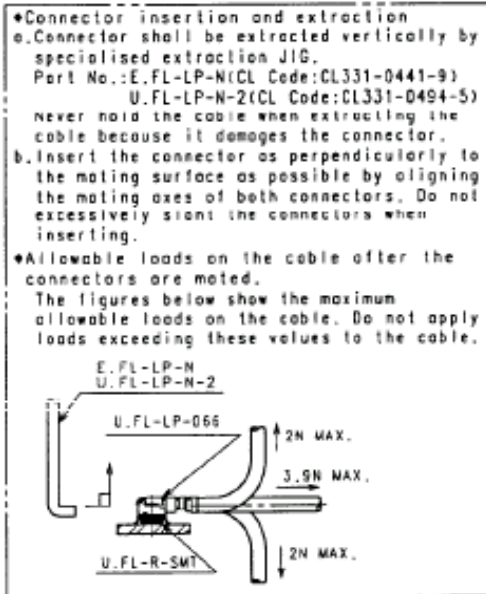

Use proper tooling to remove antenna cable such with proper force

Reliability Data for Connector

Item	Specification	Conditions
1. Contact resistance	Center: 20 mΩ max. Outside: 10 mΩ max.	Measured at 10 mA max.
2. Insulation resistance	500 MΩ min.	Measured at 100 V DC
3. Withstand voltage	No line or insulation breakdown	200 V AC for 1 minute
4. V.S.W.R.*	1.3 max.	DC to 3 GHz
	Dia.0.81Cable 1.35 Dia.1.13Cable 1.4 Dia.1.32Cable 1.5	3 to 6 GHz
5. Female contact holding force	0.15 N min.	Measured with a φ 0.475 pin gauge
6. Repetitive operation	Contact resistance 25 mΩ max. (Center) 15 mΩ max. (Outside)	30 cycles of insertion and disengagement
7. Vibration	No momentary disconnections of 1 μs min. No damage, cracks, or parts looseness min.	Frequency of 10 to 100 Hz, single amplitude of 1.5 mm, acceleration of 59 m/s ² , for 5 cycles in the direction of each of the 3 axes
8. Shock	No momentary disconnections of 1 μs min. No damage, cracks, or parts looseness	Acceleration of 735 m/s ² , 11 ms duration, sine half-wave waveform, for 6 cycles in the direction of each of the 3 axes
9. Humidity resistance (Steady state)	No damage, cracks, or parts looseness Insulation resistance 100 MΩ min.(High temperature) Insulation resistance 500 MΩ min.(Pry)	Temperature of 40°C, humidity of 95%, let stand for 96 hours
10. Temperature cycle	No damage, cracks, or parts looseness Contact resistance 25 mΩ max. (Center) 15 mΩ max. (Outside)	Temperature: +40°C → 5 to 35°C → +90°C → 5 to 35°C Time: 30 min. → Within 5 min. → 30 min. → Within 5 min. Cycles: 5
11. Salt spray test	No excessive corrosion	48 hours continuous exposure to 5% salt water

2.45/5GHz P2 Multi Band Antenna with Cable & Connector for IEEE802.11b, 11g, 11a, UNII				CAN4313 351 012501B CAN4313 351 022501B CAN4313 351 032501B CAN4313 351 042501B				—	X04	Jul 24, 03
								—	2	
								▶	3	
								▶	4	
BY / 製定者	Cliff/Howard	SUPER / 原圖編號		TLL.SH / 共頁	13	PAGE/ 頁	10	SH nr.	▶	5
CHECK				DATE / 日期		Jul. 24, 2003			▶	

RELIABILITY DATA for Antenna Patch (Reference to IEC Specification)

IEC 384-10/ CECC 32 100 CLAUSE	IEC 60068-2 TEST METHO D	TEST	PROCEDURE	REQUIREMENTS
4.12	4(Na)	Rapid change of temperature	-40 °C (30 minutes) to +90 °C (30 minutes); 5 cycles	No visible damage Central Freq. Change ± 6%
4.14	3(Ca)	Damp heat	500 ± 12 hours at 60 °C; 90 to 95 % RH	No visible damage 2 hours recovery Central Freq. Change ± 6%
4.15		Endurance	500 ± 12 hours at 90 °C;	No visible damage 2 hours recovery Central Freq. Change ± 6%

2.45/5GHz P2 Multi Band Antenna with Cable & Connector for IEEE802.11b, 11g, 11a, UNII				CAN4313 351 012501B CAN4313 351 022501B CAN4313 351 032501B CAN4313 351 042501B					—	X04	Jul 24, 03
									— ▶	2	
									— ▶	3	
BY / 製定者	Cliff/Howard	SUPER / 原圖編號		TLL.SH / 共頁	13	PAGE/ 頁	11	SH nr.	— ▶	4	
CHECK				DATE / 日期		Jul. 24, 2003			— ▶	5	

ORDERING INFORMATION: Yageo P/N Ordering Code

The antennas may be ordered by using the Yageo P/N ordering code. These code numbers can be determined by the following rules:

CAN4313 3 51 01 250 1B
F C M S T A P

F. Family Code

CAN43 = Antenna

C. Packing Type Code

13 = Bulk (1000 pcs)

M. Materials Code

3 = High Frequency Material

S. Size/Series Code

51 = 64*7*0.5 mm Main Antenna; 64*7*0.7 mm Aux Antenna

T. Tolerance/Cable

01 = Cable 1 Main Antenna LCD; **02** = Cable 2 Main Antenna Base

03 = Cable 3 Aux Antenna LCD; **04** = Cable 4 Aux Antenna Base

A. Working Frequency

250 = 2.45/5 GHz Triple Band

Example: 12NC 4313 351 01250

Product description: Antenna (43) by bulk 1000 pcs (13) of High Frequency Material (3), Size 64*7*0.5 mm for size code (51);

Cable (01) for Main LCD Cable;

Working Frequency (250) = 2.45/5.2G Hz

P. Packing

1B = 1000 pcs packing

2.45/5GHz P2 Multi Band Antenna with Cable & Connector for IEEE802.11b, 11g, 11a, UNII				CAN4313 351 012501B CAN4313 351 022501B CAN4313 351 032501B CAN4313 351 042501B				—	X04	Jul 24, 03	
								—	2		
								▶	3		
								▶	4		
BY / 製定者	Cliff/Howard	SUPER / 原圖編號		TLL.SH / 共頁	13	PAGE/ 頁	12	SH nr.	—	5	
CHECK				DATE / 日期		Jul. 24, 2003			▶	5	

Revision Control:

Revision	Date	Content	Remark
X00-P	Apr. 29, 2003	New issued, metal Antenna with Mylar	N/A.
X01-P	May 20, 2003	1. Add a Aluminum foil for extra ground. 2. Radiator pattern changes.	1. Add a Aluminum foil can improve the antenna gain effectively. 2. Radiator pattern changes to improve the VSWR and gain.
X02-P	Jun 25, 2003	1. Radiator pattern changes	1. The shift slight the resonant frequency of 2.4G band of main antenna.
X03-P	Jul 11, 2003	1. M/E changes to Tape free	1. For better installation.
X04-P (A00)	Jul 18, 2003	1. Main base cable length changes. 2. Radiator pattern changes.	1. To fit M/E request. 2. Improve the antenna gain.

2.45/5GHz P2 Multi Band Antenna with Cable & Connector for IEEE802.11b, 11g, 11a, UNII				CAN4313 351 012501B CAN4313 351 022501B CAN4313 351 032501B CAN4313 351 042501B				—	X04	Jul 24, 03	
								— ▶	2		
								— ▶	3		
BY / 製定者	Cliff/Howard	SUPER / 原圖編號		TLL.SH / 共頁	13	PAGE/ 頁	13	SH nr.	— ▶	4	
CHECK				DATE / 日期		Jul. 24, 2003		— ▶	5		