

FCC SAR TEST REPORT

FCC ID : E2KEXMG1A
Equipment : LTE Module
Brand Name : COMPAL
Model Name : EXM-G1A
Applicant : Dell Inc.
One Dell Way Round Rock, TX 78682, USA
Manufacturer : Dell Inc.
One Dell Way Round Rock, TX 78682, USA
Standard : FCC 47 CFR Part 2 (2.1093)

The product was installed into Portable Computer (Brand Name: DELL, Model Name: P208G) during test.

The product was received on Mar. 16, 2026 and testing was started from Apr. 02, 2026 and completed on Apr. 05, 2026. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. EMC & Wireless Communications Laboratory
No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	4
3. Equipment Under Test (EUT) Information.....	5
3.1 General Information	5
3.2 General LTE SAR Test and Reporting Considerations	9
4. Proximity Sensor Triggering Test.....	12
5. RF Exposure Limits.....	16
5.1 Uncontrolled Environment.....	16
5.2 Controlled Environment.....	16
5.3 RF Exposure limit for above 6GHz	17
6. Specific Absorption Rate (SAR).....	18
6.1 Introduction	18
6.2 SAR Definition.....	18
7. System Description and Setup	19
7.1 Test Site Location.....	19
7.2 E-Field Probe	20
7.3 Data Acquisition Electronics (DAE)	20
7.4 Phantom.....	21
7.5 Device Holder.....	22
8. Measurement Procedures	23
8.1 Spatial Peak SAR Evaluation.....	23
8.2 Power Reference Measurement.....	24
8.3 Area Scan	24
8.4 Zoom Scan.....	25
8.5 Volume Scan Procedures.....	25
8.6 Power Drift Monitoring.....	25
9. Test Equipment List.....	26
10. System Verification	27
10.1 Tissue Verification	27
10.2 System Performance Check Results.....	28
11. RF Exposure Positions.....	28
11.1 SAR Testing for Tablet	28
12. UMTS/LTE Output Power (Unit: dBm)	29
13. UL/DL Carrier aggregation	80
14. Antenna Location.....	84
15. SAR Test Results	88
15.1 Body SAR	89
15.2 Repeated SAR Measurement	92
16. Simultaneous Transmission Analysis	93
16.1 Body Conditions	94
16.2 SPLSR Evaluation and Analysis.....	95
17. Uncertainty Assessment	97
18. References.....	97
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASYS Calibration Certificate	
Appendix D. Test Setup Photos	

History of this test report

Report No.	Version	Description	Issued Date
FA622715	01	Initial issue of report	May 14, 2026

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for Dell Inc., LTE Module, EXM-G1A, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary		Highest Body Simultaneous Transmission 1g SAR (W/kg)
		Body (Separation 0mm)		
		1g SAR (W/kg)		
Licensed	WCDMA II	1.12		1.52
	WCDMA IV	1.13		
	WCDMA V	1.15		
	LTE Band 7	1.13		
	LTE Band 12	1.08		
	LTE Band 13	1.17		
	LTE Band 14	1.10		
	LTE Band 2/25	1.19		
	LTE Band 5/26	1.05		
	LTE Band 4/66	1.12		
	LTE Band 71	1.08		
	LTE Band 38/41	1.03		
	LTE Band 48	1.03		
Date of Testing:		2026/04/02 ~ 2026/04/05		

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Paula Chen

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02

3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	LTE Module
Brand Name	COMPAL
Model Name	EXM-G1A
FCC ID	E2KEXMG1A
Wireless Technology and Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz
Mode	RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA LTE: QPSK, 16QAM, 64QAM
Remark: 1. This device has two antenna vendors. RF exposure evaluation selects Speed as the main test sample, and WNC will be spot-checked based on the worst case found in Speed. 2. This device is convertible type notebook PC, and there are two mode as usage way, one is laptop mode, another is tablet mode.	

Host Information	
Equipment Name	Portable Computer
Brand Name	DELL
Model Name	P208G
Integrated WLAN Module 1	Brand Name: Intel Model Name: AX211NGW
Integrated WLAN Module 2	Brand Name: Intel Model Name: BE211NGW
Integrated WLAN Module 3	Brand Name: MediaTek Model Name: MT7922A22M
Integrated WLAN Module 4	Brand Name: MediaTek Model Name: MT7925B22M
Integrated RFID Module	Brand Name: Dell Model Name: DWRFRID2503
Wireless Technology and Frequency Range	WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 5.9 GHz Band: 5850 MHz ~ 5895 MHz WLAN 6GHz Band: 5925 MHz ~ 6425 MHz, 6425 MHz ~ 6525 MHz, 6525 MHz ~ 6875 MHz, 6875 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz RFID: 13.56 MHz
Mode	WLAN: 802.11a/b/g/n/ac/ax/be HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160/EHT20/EHT40/EHT80/EHT160/EHT320 Bluetooth BR/EDR/LE RFID: ASK
EUT Stage	Identical Prototype
Remark: 1. The FCC ID: PD9AX211NG, Intel AX211NGW WLAN/BT module is integrated into this host. 2. The FCC ID: PD9BE211NG, Intel BE211NGW WLAN/BT module is integrated into this host. 3. The MediaTek MT7922A22M WLAN/Bluetooth module is integrated into this host, WLAN/Bluetooth power and SAR testing data, which can be referred to Sporton SAR Test Report, (FCC ID: RAS-MT7922A22M, Report No.: FA622803) and the result is used to do simultaneous transmission analysis. 4. The MediaTek MT7925B22M WLAN/Bluetooth module is integrated into this host, WLAN/Bluetooth power and SAR testing data, which can be referred to Sporton SAR Test Report, (FCC ID: RAS-MT7925B22M, Report No.: FA620407) and the result is used to do simultaneous transmission analysis.	



WWAN Antenna Information

1A	1B	1C	1D	1E
Antenna Part Number	Manufacture	Antenna Type	Cable Assembly Part Number and Information	Peak Gain W (dBi)
(P/N: F-0G-FS-6231-001-00 / 025.90200.0001 Tx1/ Rx1 Antenna)	SPEED	PIFA	(1)Cable P/N: SY113SLL (2)Cable length: 321mm diameter: 1.13mm 50 ohm Coaxial (3)Connector P/N: I-PEX MHF4	617-698MHz
				-2.48 dBi (peak)
				698-821MHz
				0.64 dBi (peak)
				824-960MHz
				0.67 dBi (peak)
				1427-1610MHz
				-1.45 dBi (peak)
				1695-2180MHz
				2.38 dBi (peak)
				2300-2690MHz
				0.99 dBi (peak)
				3300-3890MHz
				0.91 dBi (peak)
				4200-5000MHz
				1.56 dBi (peak)
				5150-5925MHz
				1.71 dBi (peak)

1A	1B	1C	1D	1E
Antenna Part Number	Manufacture	Antenna Type	Cable Assembly Part Number and Information	Peak Gain W (dBi)
(P/N: F-0G-FS-6231-001-00 / 025.90200.0001 Tx2/Rx4 Antenna)	SPEED	PIFA	(1)Cable P/N: SY113 SLL (2)Cable length: 318mm diameter: 1.13mm 50 ohm Coaxial (3)Connector P/N: I-PEX MHF4	1427-1517MHz
				0.51 dBi (peak)
				1695-2180MHz
				1.87 dBi (peak)
				2300-2690MHz
				1.17 dBi (peak)
				3300-3980MHz
				1.53 dBi (peak)
				4200-5000MHz
				2.73 dBi (peak)
				5150-5925MHz
				2.10 dBi (peak)



1A	1B	1C	1D	1E
Antenna Part Number	Manufacture	Antenna Type	Cable Assembly Part Number and Information	Peak Gain W (dBi)
(P/N: 81ELBK15.G18 / 025.902OO.0011 Tx1/ Rx1 Antenna)	WNC	PIFA	(1)Cable P/N: SY113SLL (2)Cable length: 321mm diameter: 1.13mm 50 ohm Coaxial (3)Connector P/N: I-PEX MHF4	617-698MHz
				-2.48 dBi (peak)
				698-821MHz
				0.64 dBi (peak)
				824-960MHz
				0.67 dBi (peak)
				1427-1610MHz
				-1.45 dBi (peak)
				1695-2180MHz
				2.38 dBi (peak)
				2300-2690MHz
				0.99 dBi (peak)
				3300-3890MHz
				0.91 dBi (peak)
				4200-5000MHz
				1.56 dBi (peak)
				5150-5925MHz
				1.71 dBi (peak)

1A	1B	1C	1D	1E
Antenna Part Number	Manufacture	Antenna Type	Cable Assembly Part Number and Information	Peak Gain W (dBi)
(P/N: 81ELBK15.G18 / 025.902OO.0011 Tx2/Rx4 Antenna)	WNC	PIFA	(1)Cable P/N: SY113 SLL (2)Cable length: 318mm diameter: 1.13mm 50 ohm Coaxial (3)Connector P/N: I-PEX MHF4	1427-1517MHz
				0.51 dBi (peak)
				1695-2180MHz
				1.87 dBi (peak)
				2300-2690MHz
				1.17 dBi (peak)
				3300-3980MHz
				1.53 dBi (peak)
				4200-5000MHz
				2.73 dBi (peak)
				5150-5925MHz
				2.10 dBi (peak)



WLAN Antenna Information

SPEED_NB																
						2400 -2483.5 MHz	5150-5250 MHz	5250-5350 MHz	5470-5725 MHz	5725-5850 MHz	5850-5895 MHz	5925-6425 MHz	6425-6525 MHz	6525-6875 MHz	6875-7125 MHz	
Host Platform Name	Antenna- Manufacturer	Antenna-Type	Antenna-PN	Antenna 1/2	Antenna Metrics ²	2.4 GHz	5.2 GHz	5.3 GHz	5.6 GHz	5.8 GHz	5.9 GHz	6.2 GHz	6.5 GHz	6.7 GHz	7.0 GHz	
P208G	Speed	PIFA	025.902OP.0001	Ant.2	Gain	-0.75	3.51	2.98	3.40	3.54	2.47	4.22	4.22	4.19	4.07	
P208G	Speed	PIFA	025.902OQ.0001	Ant.1	Gain	-0.61	3.62	3.30	3.28	3.43	2.90	3.09	2.30	2.33	3.51	
SPEED_TB																
						2400 -2483.5 MHz	5150-5250 MHz	5250-5350 MHz	5470-5725 MHz	5725-5850 MHz	5850-5895 MHz	5925-6425 MHz	6425-6525 MHz	6525-6875 MHz	6875-7125 MHz	
Host Platform Name	Antenna- Manufacturer	Antenna-Type	Antenna-PN	Antenna 1/2	Antenna Metrics ²	2.4 GHz	5.2 GHz	5.3 GHz	5.6 GHz	5.8 GHz	5.9 GHz	6.2 GHz	6.5 GHz	6.7 GHz	7.0 GHz	
P208G	Speed	PIFA	025.902OP.0001	Ant.2	Gain	-1.98	2.25	1.06	4.08	4.17	4.18	4.58	3.15	3.36	2.84	
P208G	Speed	PIFA	025.902OQ.0001	Ant.1	Gain	-1.34	1.24	1.02	2.91	3.08	2.57	3.57	3.80	4.42	3.32	
WNC_NB																
						2400 -2483.5 MHz	5150-5250 MHz	5250-5350 MHz	5470-5725 MHz	5725-5850 MHz	5850-5895 MHz	5925-6425 MHz	6425-6525 MHz	6525-6875 MHz	6875-7125 MHz	
Host Platform Name	Antenna- Manufacturer	Antenna-Type	Antenna-PN	Antenna 1/2	Antenna Metrics ²	2.4 GHz	5.2 GHz	5.3 GHz	5.6 GHz	5.8 GHz	5.9 GHz	6.2 GHz	6.5 GHz	6.7 GHz	7.0 GHz	
P208G	WNC	PIFA	025.902OP.0001	Ant.2	Gain	-0.75	3.51	2.98	3.40	3.54	2.47	4.22	4.22	4.19	4.07	
P208G	WNC	PIFA	025.902OQ.0001	Ant.1	Gain	-0.61	3.62	3.30	3.28	3.43	2.90	3.09	2.30	2.33	3.51	
WNC_TB																
						2400 -2483.5 MHz	5150-5250 MHz	5250-5350 MHz	5470-5725 MHz	5725-5850 MHz	5850-5895 MHz	5925-6425 MHz	6425-6525 MHz	6525-6875 MHz	6875-7125 MHz	
Host Platform Name	Antenna- Manufacturer	Antenna-Type	Antenna-PN	Antenna 1/2	Antenna Metrics ²	2.4 GHz	5.2 GHz	5.3 GHz	5.6 GHz	5.8 GHz	5.9 GHz	6.2 GHz	6.5 GHz	6.7 GHz	7.0 GHz	
P208G	WNC	PIFA	025.902OP.0001	Ant.2	Gain	-1.98	2.25	1.06	4.08	4.17	4.18	4.58	3.15	3.36	2.84	
P208G	WNC	PIFA	025.902OQ.0001	Ant.1	Gain	-1.34	1.24	1.02	2.91	3.08	2.57	3.57	3.80	4.42	3.32	



3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																													
FCC ID	E2KEXMG1A																																																																												
Equipment Name	LTE Module																																																																												
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz																																																																												
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 48: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz																																																																												
uplink modulations used	QPSK / 16QAM / 64QAM																																																																												
LTE Voice / Data requirements	Data only																																																																												
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>							Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																													
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																						
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																							
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																						
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																						
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																						
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																						
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																						
256 QAM	≥ 1						≤ 5																																																																						
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																												
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																												
Power reduction applied to satisfy SAR compliance	Yes, Proximity Sensor.																																																																												
LTE Carrier Aggregation Combinations	Intra-Band ULCA combinations and the detail power measurement please referred to section 13.																																																																												
LTE Carrier Aggregation Additional Information	This device supports maximum of 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																																												

**Transmission (H, M, L) channel numbers and frequencies in each LTE band****LTE Band 2**

	Bandwidth 1.4MHz		Bandwidth 3MHz		Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900

LTE Band 4

	Bandwidth 1.4MHz		Bandwidth 3MHz		Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745

LTE Band 5

	Bandwidth 1.4MHz		Bandwidth 3MHz		Bandwidth 5MHz		Bandwidth 10MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844

LTE Band 7

	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560

LTE Band 12

	Bandwidth 1.4MHz		Bandwidth 3MHz		Bandwidth 5MHz		Bandwidth 10MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23115	713.5	23130	711

LTE Band 13

	Bandwidth 5MHz		Bandwidth 10MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23205	779.5	23230	782
M	23230	782		
H	23255	784.5		

LTE Band 14

	Bandwidth 5MHz		Bandwidth 10MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23305	790.5	23330	793
M	23330	793		
H	23355	795.5		

LTE Band 25

	Bandwidth 1.4MHz		Bandwidth 3MHz		Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905

LTE Band 26

	Bandwidth 1.4MHz		Bandwidth 3MHz		Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5

LTE Band 66

	Bandwidth 1.4MHz		Bandwidth 3MHz		Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

LTE Band 71

	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	133147	665.5	133172	668	133197	670.5	133222	673



FCC SAR TEST REPORT

Report No. : FA622715

M	133297	680.5	133297	680.5	133297	680.5	133297	680.5
H	133447	695.5	133422	693	133397	690.5	133372	688
LTE Band 38								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580
M	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610
LTE Band 41								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5
M	40620	2593	40620	2593	40620	2593	40620	2593
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680
LTE Band 48								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	55265	3552.5	55290	3555	55315	3557.5	55340	3560
LM	55810	3607	55815	3607.5	55820	3608	55830	3609
HM	56170	3643	56165	3642.5	56160	3642	56150	3641
H	56715	3697.5	56690	3695	56665	3692.5	56640	3690


4. Proximity Sensor Triggering Test

< Proximity Sensor Triggering Distance (KDB 616217 D04 section 6.2) > :

For the device is fully integrated, touch sensing capacitive sensor. It uses a charge transfer capacitive acquisition method that is capable of near range proximity detection. In this device offers a state of the art capacitive sensing engine with an embedded sampling capacitor and voltage regulator allowing the overall solution cost to be reduced and improving system immunity in noisy environments.

Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed. The details are illustrated as following, and the shortest triggering distances were reported and used for SAR assessment.

In the preliminary triggering distance testing, the tissue-equivalent medium for different frequency bands were used for verification; no other frequency bands tissue-equivalent medium was found to result in shortest triggering distance than that for 1900MHz, and the tissue-equivalent medium for 1900MHz was used for formal proximity sensor triggering testing.

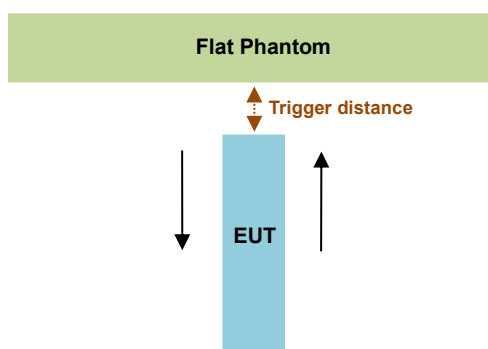


Main Antenna		
The Sensor Trigger Distance (mm)		
Position	Top	
	+45	-45
Minimum	30	21

< Proximity Sensor Triggering Coverage (KDB 616217 D04 section 6.3) > :

Since the antenna and sensor are collocated and all of the peak SAR location is overlapping with the sensor pad for this device, therefore, According to KDB 616217 section 6.3, these procedures do not apply and are not required for this device. due to the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor on this device.

< Tablet Tilt angle influences to proximity sensor triggering (KDB 616217 D04 section 6.4) > :

The influence of table tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at above separation distance. Rotating the tablet around the edge next to the phantom in $\leq 10^\circ$ increments until the tablet is $\pm 45^\circ$ from the vertical position at 0° , and the maximum output power remains in the reduced mode.

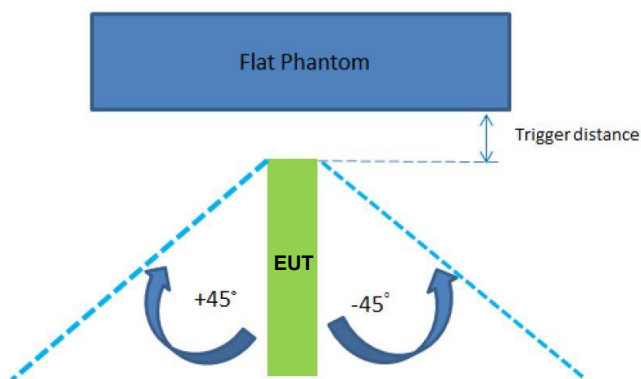



Main Antenna		
The Sensor Trigger Distance (mm)		
Position	Top	
	+45	-45
Minimum	30	21

Proximity sensor power reduction

Exposure Position / wireless mode	Top Edge ⁽¹⁾
WCDMA II	1.5 dB
WCDMA IV	6.5 dB
WCDMA V	6.5 dB
LTE Band 2	3 dB
LTE Band 4	6 dB
LTE Band 5	6 dB
LTE Band 7	8.5 dB
LTE Band 12	3.5 dB
LTE Band 13	6 dB
LTE Band 14	6 dB
LTE Band 25	3 dB
LTE Band 26	6 dB
LTE Band 38	3 dB
LTE Band 41	3 dB
LTE Band 48	7 dB
LTE Band 66	6 dB
LTE Band 71	5.5 dB

Remark:

- ⁽¹⁾: Reduced maximum limit applied by activation of proximity sensor.
- Tests were performed in accordance with KDB 616217 D04 section 6.1, 6.2, 6.3, 6.4 and 6.5 and compliant results are shown as below.
- For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed:
 - Top Edge: [20 mm](#)

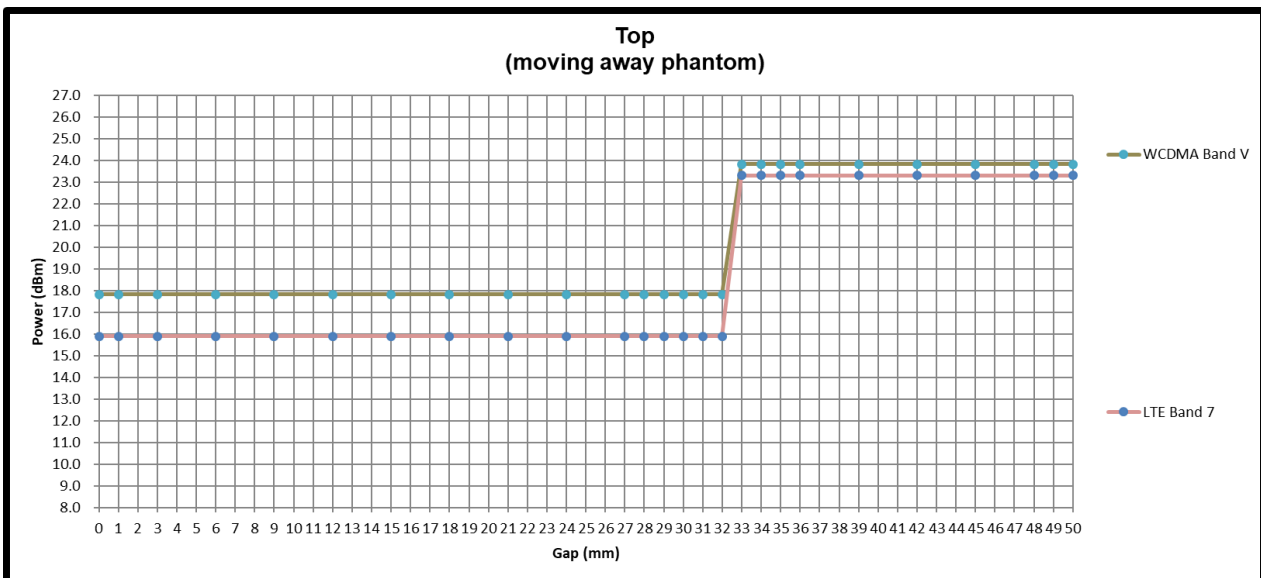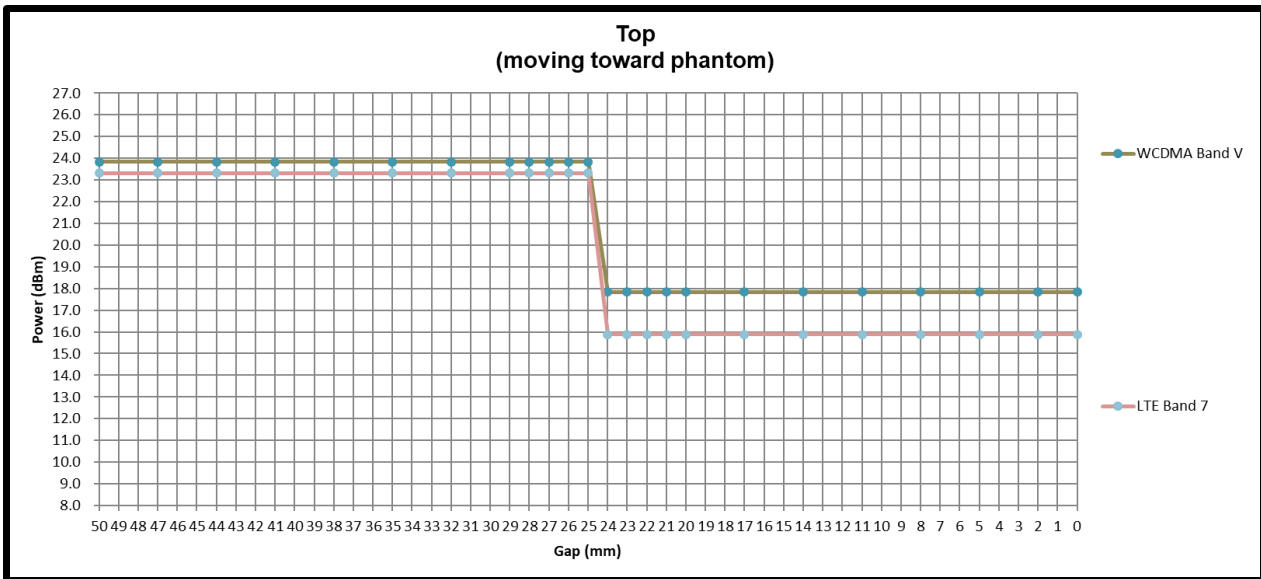Proximity sensor power reduction


5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5.3 RF Exposure limit for above 6GHz

According to ANSI/IEEE C95.1-1992, the criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm² per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

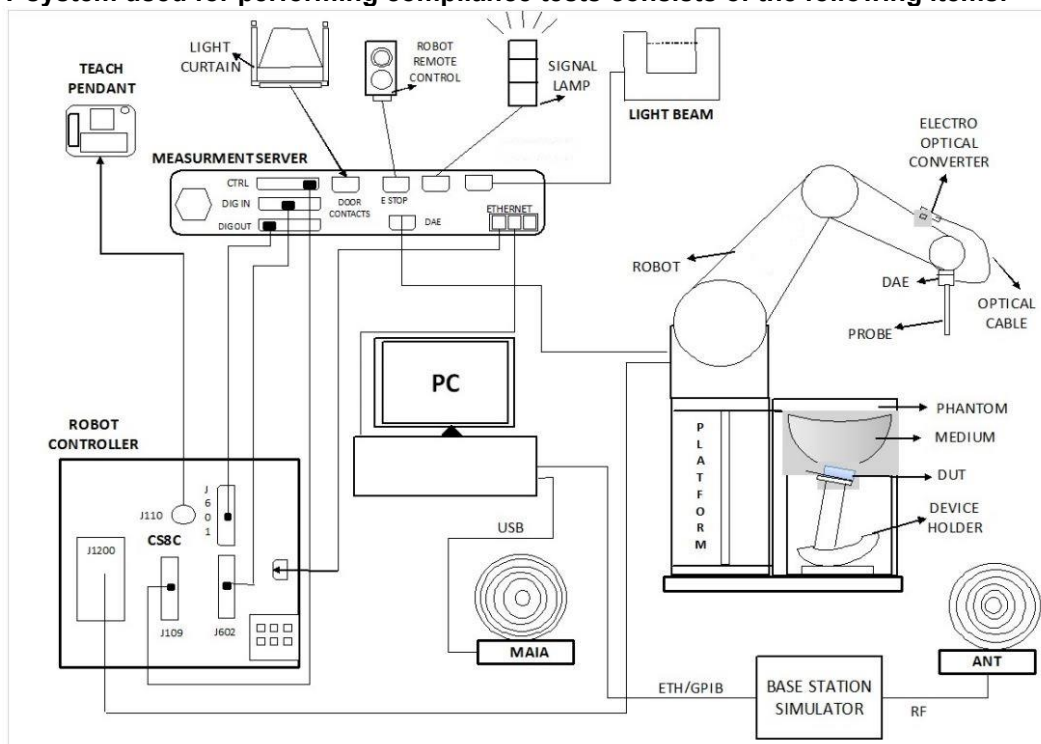

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Laboratory	EMC & Wireless Communications Laboratory			Wensan Laboratory				
Test Site Location	TW1190			TW3786				
	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan			No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan				
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY	SAR18-HY	SAR21-HY	
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY	SAR19-HY	SAR22-HY	
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY	SAR20-HY		

7.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

< ES3DV3 Probe >

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – > 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

< EX3DV4 Probe >

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – > 6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

7.4 Phantom

< SAM Twin Phantom >

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

< ELI Phantom >

Shell Thickness	2 ± 0.2 mm (sagging: < 1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.5 Device Holder

< Mounting Device for Hand-Held Transmitter >

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

< Mounting Device for Laptops and other Body-Worn Transmitters >

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

- (a) Configure the device RF transmitters to be in continuous transmission mode., at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Last Cal.	Due Date
SPEAG	750MHz System Validation Kit ⁽²⁾	D750V3	1012	Aug. 22, 2024	Aug. 20, 2026
SPEAG	835MHz System Validation Kit ⁽²⁾	D835V2	4d060	Feb. 17, 2025	Feb. 15, 2027
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 12, 2025	Nov. 11, 2026
SPEAG	1900MHz System Validation Kit ⁽²⁾	D1900V2	5d093	Mar. 20, 2025	Mar. 18, 2027
SPEAG	2600MHz System Validation Kit	D2600V2	1078	Jun. 11, 2025	Jun. 10, 2026
SPEAG	3500MHz System Validation Kit ⁽²⁾	D3500V2	1036	Mar. 11, 2025	Mar. 09, 2027
SPEAG	3700MHz System Validation Kit ⁽²⁾	D3700V2	1022	Jul. 10, 2024	Jul. 08, 2026
SPEAG	Data Acquisition Electronics	DAE4	853	Sep. 09, 2025	Sep. 08, 2026
SPEAG	Dosimetric E-Field Probe	EX3DV4	7822	Sep. 11, 2025	Sep. 10, 2026
SPEAG	Dielectric Probe Kit	DAK-3.5	1270	May. 19, 2025	May. 18, 2026
Testo	Hygro meter	608-H1	45196600	Nov. 04, 2025	Nov. 03, 2026
Testo	Hygro meter	608-H1	45207528	Nov. 04, 2025	Nov. 03, 2026
Anritsu	Radio Communication Analyzer	MT8821C	6201074414	Aug. 19, 2025	Aug. 18, 2026
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Sep. 24, 2025	Sep. 23, 2026
Keysight	ENA Network Analyzer	E5071C	MY46104758	Oct. 14, 2025	Oct. 13, 2026
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3690	Aug. 14, 2025	Aug. 13, 2026
Anritsu	Power Meter	ML2496A	2119003	Jul. 14, 2025	Jul. 13, 2026
Anritsu	Power Sensor	MA2411B	1911334	Jul. 14, 2025	Jul. 13, 2026
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jul. 09, 2025	Jul. 08, 2026
Mini-Circuits	Power Amplifier	ZVE-3W-183+	072602118	Apr. 08, 2025	Apr. 07, 2026
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

10. System Verification

10.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

The SPEAG Dasy Measurement system implement a SAR error compensation algorithm as documented in IEEE Std 1528-2013 to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, according to KDB 865664 D01 and IEC/IEEE 62209-1528, the tolerance for “Delta (σ)” and “Delta (ϵ_r)” can be relaxed to $\pm 10\%$

< Tissue Dielectric Parameter Check Results >

Frequency (MHz)	Liquid Temp (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	22.7	0.921	44.8	0.89	41.9	3.48	6.92	± 10.0	2026-04-03
835	22.5	0.906	44.1	0.9	41.5	0.67	6.27	± 10.0	2026-04-05
1750	22.6	1.38	42.4	1.37	40.1	0.73	5.74	± 10.0	2026-04-04
1900	22.6	1.46	42.1	1.4	40.0	4.29	5.25	± 10.0	2026-04-04
2600	22.5	2.01	39.7	1.96	39.0	2.55	1.79	± 10.0	2026-04-02
3500	22.5	2.72	37.7	2.91	37.9	-6.53	-0.53	± 10.0	2026-04-05
3700	22.5	2.86	37.3	3.12	37.7	-8.33	-1.06	± 10.0	2026-04-05

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
SAR06-HY	2026-04-03	750	251.19	D750V3 - 1012	EX3DV4 - SN7822	DAE4 Sn853	2.200	8.400	8.758	4.27
SAR06-HY	2026-04-05	835	251.19	D835V2 - 4d060	EX3DV4 - SN7822	DAE4 Sn853	2.360	9.280	9.395	1.24
SAR06-HY	2026-04-04	1750	251.19	D1750V2 - 1068	EX3DV4 - SN7822	DAE4 Sn853	8.910	36.500	35.471	-2.82
SAR06-HY	2026-04-04	1900	251.19	D1900V2 - 5d093	EX3DV4 - SN7822	DAE4 Sn853	10.400	39.300	41.403	5.35
SAR06-HY	2026-04-02	2600	251.19	D2600V2 - 1078	EX3DV4 - SN7822	DAE4 Sn853	14.600	55.300	58.123	5.11
SAR06-HY	2026-04-05	3500	251.19	D3500V2 - 1036	EX3DV4 - SN7822	DAE4 Sn853	17.400	65.600	69.270	5.59
SAR06-HY	2026-04-05	3700	251.19	D3700V2 - 1022	EX3DV4 - SN7822	DAE4 Sn853	17.400	68.100	69.270	1.72

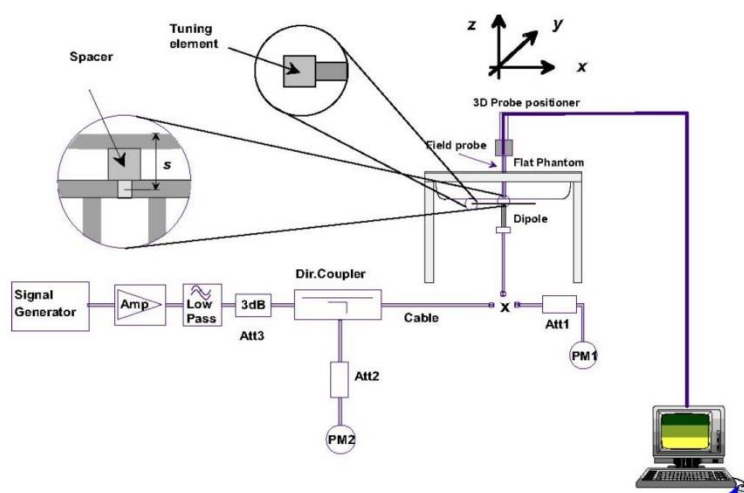


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

12. UMTS/LTE Output Power (Unit: dBm)

< WCDMA Conducted Power >

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion. => 有 HSUPA 留著
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1. => 有 16QAM uplink 留著
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement. => 有 DC-HSDPA 留著

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

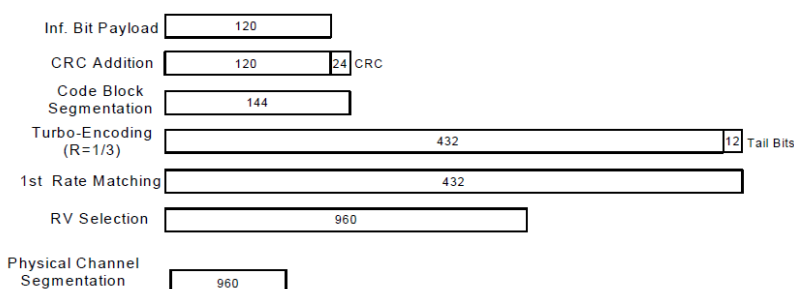
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

< WCDMA Conducted Power >
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

【WCDMA II_P-Sensor Off】

TX Channel		9262	9400	9538	Tune-up Limit (dBm)
Frequency (MHz)		1852.4	1880	1907.6	
3GPP Rel 99	RMC 12.2Kbps	23.50	23.30	23.46	25.00
3GPP Rel 6	HSDPA Subtest-1	22.96	22.70	22.91	24.00
3GPP Rel 6	HSDPA Subtest-2	22.92	22.71	22.89	24.00
3GPP Rel 6	HSDPA Subtest-3	22.43	22.23	22.39	23.50
3GPP Rel 6	HSDPA Subtest-4	22.43	22.21	22.41	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.86	22.68	22.79	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.74	22.65	22.67	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.33	22.20	22.22	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.37	22.23	22.37	23.50
3GPP Rel 6	HSUPA Subtest-1	22.68	22.69	22.78	24.00
3GPP Rel 6	HSUPA Subtest-2	20.57	20.62	20.62	22.00
3GPP Rel 6	HSUPA Subtest-3	21.57	21.51	21.55	23.00
3GPP Rel 6	HSUPA Subtest-4	20.55	20.54	20.54	22.00
3GPP Rel 6	HSUPA Subtest-5	22.65	22.67	22.74	24.00

【WCDMA II_P-Sensor On】

TX Channel		9262	9400	9538	Tune-up Limit (dBm)
Frequency (MHz)		1852.4	1880	1907.6	
3GPP Rel 99	RMC 12.2Kbps	23.00	22.80	22.96	23.50
3GPP Rel 6	HSDPA Subtest-1	21.34	21.28	21.36	22.50
3GPP Rel 6	HSDPA Subtest-2	21.29	21.28	21.37	22.50
3GPP Rel 6	HSDPA Subtest-3	20.76	20.83	20.94	22.00
3GPP Rel 6	HSDPA Subtest-4	20.76	20.84	20.94	22.00
3GPP Rel 8	DC-HSDPA Subtest-1	21.31	21.20	21.29	22.50
3GPP Rel 8	DC-HSDPA Subtest-2	21.20	21.18	21.31	22.50
3GPP Rel 8	DC-HSDPA Subtest-3	20.84	20.71	20.73	22.00
3GPP Rel 8	DC-HSDPA Subtest-4	20.89	20.75	20.82	22.00
3GPP Rel 6	HSUPA Subtest-1	21.31	21.20	21.24	22.50
3GPP Rel 6	HSUPA Subtest-2	19.18	19.16	19.24	20.50
3GPP Rel 6	HSUPA Subtest-3	20.16	20.11	20.17	21.50
3GPP Rel 6	HSUPA Subtest-4	19.13	19.10	19.13	20.50
3GPP Rel 6	HSUPA Subtest-5	21.22	21.20	21.30	22.50

【WCDMA IV_P-Sensor Off】

TX Channel		1312	1413	1513	Tune-up Limit (dBm)
Frequency (MHz)		1712.4	1732.6	1752.6	
3GPP Rel 99	RMC 12.2Kbps	23.50	23.71	23.90	25.00
3GPP Rel 6	HSDPA Subtest-1	22.92	23.16	23.28	24.00
3GPP Rel 6	HSDPA Subtest-2	22.96	23.14	23.36	24.00
3GPP Rel 6	HSDPA Subtest-3	22.41	22.71	22.77	23.50
3GPP Rel 6	HSDPA Subtest-4	22.44	22.66	22.83	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.93	23.30	23.39	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.90	23.19	23.28	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.41	22.82	22.87	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.31	22.80	22.87	23.50
3GPP Rel 6	HSUPA Subtest-1	22.97	22.90	22.95	24.00
3GPP Rel 6	HSUPA Subtest-2	20.98	20.90	21.05	22.00
3GPP Rel 6	HSUPA Subtest-3	21.91	21.87	22.00	23.00
3GPP Rel 6	HSUPA Subtest-4	21.01	20.90	20.93	22.00
3GPP Rel 6	HSUPA Subtest-5	22.93	22.84	22.95	24.00

【WCDMA IV_P-Sensor On】

TX Channel		1312	1413	1513	Tune-up Limit (dBm)
Frequency (MHz)		1712.4	1732.6	1752.6	
3GPP Rel 99	RMC 12.2Kbps	17.50	17.71	17.90	18.50
3GPP Rel 6	HSDPA Subtest-1	16.58	16.92	17.04	17.50
3GPP Rel 6	HSDPA Subtest-2	16.74	16.96	17.04	17.50
3GPP Rel 6	HSDPA Subtest-3	16.10	16.41	16.55	17.00
3GPP Rel 6	HSDPA Subtest-4	16.13	16.44	16.53	17.00
3GPP Rel 8	DC-HSDPA Subtest-1	16.66	16.93	16.99	17.50
3GPP Rel 8	DC-HSDPA Subtest-2	16.68	16.90	17.05	17.50
3GPP Rel 8	DC-HSDPA Subtest-3	16.08	16.41	16.55	17.00
3GPP Rel 8	DC-HSDPA Subtest-4	16.07	16.31	16.41	17.00
3GPP Rel 6	HSUPA Subtest-1	16.68	16.97	17.04	17.50
3GPP Rel 6	HSUPA Subtest-2	14.73	14.98	15.12	15.50
3GPP Rel 6	HSUPA Subtest-3	15.62	15.91	16.06	16.50
3GPP Rel 6	HSUPA Subtest-4	14.70	15.01	15.02	15.50
3GPP Rel 6	HSUPA Subtest-5	16.62	16.93	17.03	17.50

【WCDMA V_P-Sensor Off】

TX Channel		4132	4182	4233	Tune-up Limit (dBm)
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	23.63	23.83	23.82	25.00
3GPP Rel 6	HSDPA Subtest-1	23.49	23.65	23.59	24.00
3GPP Rel 6	HSDPA Subtest-2	23.51	23.65	23.55	24.00
3GPP Rel 6	HSDPA Subtest-3	22.98	23.13	23.04	23.50
3GPP Rel 6	HSDPA Subtest-4	22.91	23.10	23.16	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	23.43	23.60	23.49	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	23.41	23.51	23.46	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.79	23.07	22.95	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.87	23.01	22.89	23.50
3GPP Rel 6	HSUPA Subtest-1	23.43	23.50	23.43	24.00
3GPP Rel 6	HSUPA Subtest-2	21.40	21.54	21.48	22.00
3GPP Rel 6	HSUPA Subtest-3	21.82	22.03	22.00	23.00
3GPP Rel 6	HSUPA Subtest-4	21.43	21.52	21.45	22.00
3GPP Rel 6	HSUPA Subtest-5	23.42	23.56	23.50	24.00

【WCDMA V_P-Sensor On】

TX Channel		4132	4182	4233	Tune-up Limit (dBm)
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	17.63	17.83	17.82	18.50
3GPP Rel 6	HSDPA Subtest-1	16.39	16.59	16.46	17.50
3GPP Rel 6	HSDPA Subtest-2	16.33	16.55	16.43	17.50
3GPP Rel 6	HSDPA Subtest-3	15.82	16.04	15.90	17.00
3GPP Rel 6	HSDPA Subtest-4	15.93	16.16	16.14	17.00
3GPP Rel 8	DC-HSDPA Subtest-1	16.27	16.49	16.38	17.50
3GPP Rel 8	DC-HSDPA Subtest-2	16.23	16.46	16.35	17.50
3GPP Rel 8	DC-HSDPA Subtest-3	15.66	15.95	15.93	17.00
3GPP Rel 8	DC-HSDPA Subtest-4	15.64	15.89	15.87	17.00
3GPP Rel 6	HSUPA Subtest-1	16.14	16.43	16.39	17.50
3GPP Rel 6	HSUPA Subtest-2	14.17	14.48	14.39	15.50
3GPP Rel 6	HSUPA Subtest-3	14.79	15.00	14.93	16.50
3GPP Rel 6	HSUPA Subtest-4	14.26	14.45	14.38	15.50
3GPP Rel 6	HSUPA Subtest-5	16.24	16.50	16.47	17.50

< LTE Conducted Power >**General Note:**

1. A Base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5/B12/B17/B26/B38/B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 2/4/5/17/38 SAR test was covered by Band 25/66/26/12/41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

< TDD LTE SAR Measurement >

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Base station simulator was used for LTE output power measurements and SAR testing.

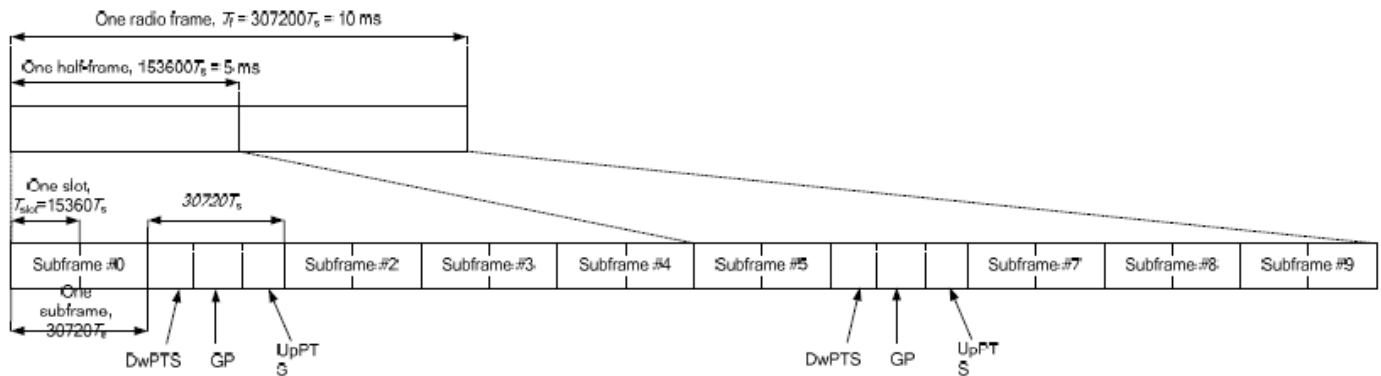


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



【LTE Band 2_P-Sensor Off】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				18700	18900	19100	Tune-up limit (dBm)
Frequency (MHz)				1860	1880	1900	
20	QPSK	1	0	22.75	22.65	22.57	24.50
20	QPSK	1	49	22.72	22.67	22.71	24.50
20	QPSK	1	99	22.62	22.58	22.73	24.50
20	QPSK	50	0	21.89	21.80	21.71	23.50
20	QPSK	50	24	21.89	21.74	21.86	23.50
20	QPSK	50	50	21.82	21.73	21.81	23.50
20	QPSK	100	0	21.80	21.70	21.85	23.50
20	16QAM	1	0	22.00	21.82	21.77	23.50
20	16QAM	1	49	21.95	21.97	21.98	23.50
20	16QAM	1	99	21.77	21.92	22.02	23.50
20	16QAM	50	0	20.86	20.80	20.75	22.50
20	16QAM	50	24	20.86	20.75	20.81	22.50
20	16QAM	50	50	20.77	20.72	20.82	22.50
20	16QAM	100	0	20.81	20.74	20.79	22.50
20	64QAM	1	0	20.90	20.82	20.72	22.50
20	64QAM	1	49	20.83	20.85	20.83	22.50
20	64QAM	1	99	20.81	20.77	20.89	22.50
20	64QAM	50	0	19.85	19.78	19.72	21.50
20	64QAM	50	24	19.84	19.78	19.86	21.50
20	64QAM	50	50	19.78	19.70	19.83	21.50
20	64QAM	100	0	19.78	19.73	19.78	21.50
Channel				18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1902.5	
15	QPSK	1	0	22.66	22.54	22.51	24.50
15	QPSK	1	37	22.61	22.58	22.57	24.50
15	QPSK	1	74	22.50	22.50	22.57	24.50
15	QPSK	36	0	21.81	21.77	21.65	23.50
15	QPSK	36	20	21.81	21.62	21.75	23.50
15	QPSK	36	39	21.71	21.71	21.74	23.50
15	QPSK	75	0	21.66	21.65	21.77	23.50
15	16QAM	1	0	21.98	21.68	21.75	23.50
15	16QAM	1	37	21.92	21.86	21.88	23.50
15	16QAM	1	74	21.72	21.82	21.92	23.50
15	16QAM	36	0	20.82	20.77	20.69	22.50
15	16QAM	36	20	20.82	20.61	20.79	22.50
15	16QAM	36	39	20.62	20.63	20.78	22.50
15	16QAM	75	0	20.69	20.61	20.77	22.50
15	64QAM	1	0	20.84	20.67	20.59	22.50
15	64QAM	1	37	20.77	20.77	20.68	22.50
15	64QAM	1	74	20.70	20.64	20.79	22.50
15	64QAM	36	0	19.73	19.66	19.57	21.50
15	64QAM	36	20	19.76	19.72	19.75	21.50
15	64QAM	36	39	19.71	19.66	19.70	21.50
15	64QAM	75	0	19.75	19.64	19.73	21.50
Channel				18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1905	
10	QPSK	1	0	22.64	22.57	22.50	24.50
10	QPSK	1	25	22.58	22.61	22.57	24.50
10	QPSK	1	49	22.60	22.56	22.56	24.50
10	QPSK	25	0	21.87	21.75	21.56	23.50
10	QPSK	25	12	21.83	21.62	21.82	23.50
10	QPSK	25	25	21.78	21.63	21.69	23.50
10	QPSK	50	0	21.71	21.56	21.81	23.50
10	16QAM	1	0	21.89	21.67	21.63	23.50
10	16QAM	1	25	21.81	21.88	21.97	23.50
10	16QAM	1	49	21.69	21.85	21.98	23.50
10	16QAM	25	0	20.82	20.71	20.68	22.50
10	16QAM	25	12	20.72	20.63	20.77	22.50
10	16QAM	25	25	20.67	20.71	20.75	22.50
10	16QAM	50	0	20.72	20.64	20.70	22.50
10	64QAM	1	0	20.78	20.71	20.58	22.50
10	64QAM	1	25	20.77	20.83	20.77	22.50
10	64QAM	1	49	20.72	20.66	20.76	22.50
10	64QAM	25	0	19.78	19.74	19.66	21.50
10	64QAM	25	12	19.82	19.75	19.80	21.50
10	64QAM	25	25	19.63	19.57	19.78	21.50
10	64QAM	50	0	19.73	19.64	19.74	21.50
Channel				18625	18900	19175	Tune-up limit

Frequency (MHz)				1852.5	1880	1907.5	(dBm)
5	QPSK	1	0	22.73	22.51	22.50	24.50
5	QPSK	1	12	22.63	22.57	22.57	24.50
5	QPSK	1	24	22.59	22.54	22.57	24.50
5	QPSK	12	0	21.77	21.72	21.70	23.50
5	QPSK	12	7	21.77	21.72	21.81	23.50
5	QPSK	12	13	21.75	21.70	21.67	23.50
5	QPSK	25	0	21.75	21.63	21.76	23.50
5	16QAM	1	0	21.87	21.79	21.69	23.50
5	16QAM	1	12	21.83	21.87	21.95	23.50
5	16QAM	1	24	21.75	21.85	21.96	23.50
5	16QAM	12	0	20.84	20.70	20.74	22.50
5	16QAM	12	7	20.80	20.68	20.68	22.50
5	16QAM	12	13	20.64	20.69	20.77	22.50
5	16QAM	25	0	20.73	20.67	20.72	22.50
5	64QAM	1	0	20.76	20.73	20.62	22.50
5	64QAM	1	12	20.82	20.74	20.79	22.50
5	64QAM	1	24	20.67	20.63	20.80	22.50
5	64QAM	12	0	19.71	19.72	19.64	21.50
5	64QAM	12	7	19.71	19.67	19.83	21.50
5	64QAM	12	13	19.74	19.60	19.73	21.50
5	64QAM	25	0	19.74	19.59	19.65	21.50
Channel				18615	18900	19185	Tune-up limit
Frequency (MHz)				1851.5	1880	1908.5	(dBm)
3	QPSK	1	0	22.72	22.60	22.53	24.50
3	QPSK	1	8	22.59	22.60	22.56	24.50
3	QPSK	1	14	22.50	22.50	22.55	24.50
3	QPSK	8	0	21.75	21.72	21.66	23.50
3	QPSK	8	4	21.80	21.66	21.72	23.50
3	QPSK	8	7	21.71	21.64	21.70	23.50
3	QPSK	15	0	21.69	21.55	21.79	23.50
3	16QAM	1	0	21.89	21.71	21.73	23.50
3	16QAM	1	8	21.83	21.94	21.88	23.50
3	16QAM	1	14	21.73	21.87	21.92	23.50
3	16QAM	8	0	20.82	20.74	20.70	22.50
3	16QAM	8	4	20.74	20.71	20.77	22.50
3	16QAM	8	7	20.66	20.63	20.71	22.50
3	16QAM	15	0	20.69	20.71	20.68	22.50
3	64QAM	1	0	20.85	20.77	20.68	22.50
3	64QAM	1	8	20.80	20.72	20.78	22.50
3	64QAM	1	14	20.77	20.68	20.77	22.50
3	64QAM	8	0	19.83	19.76	19.65	21.50
3	64QAM	8	4	19.74	19.66	19.74	21.50
3	64QAM	8	7	19.69	19.65	19.70	21.50
3	64QAM	15	0	19.76	19.66	19.72	21.50
Channel				18607	18900	19193	Tune-up limit
Frequency (MHz)				1850.7	1880	1909.3	(dBm)
1.4	QPSK	1	0	22.67	22.52	22.50	24.50
1.4	QPSK	1	3	22.59	22.59	22.57	24.50
1.4	QPSK	1	5	22.54	22.54	22.55	24.50
1.4	QPSK	3	0	22.74	22.64	22.57	24.50
1.4	QPSK	3	1	22.74	22.65	22.57	24.50
1.4	QPSK	3	3	22.74	22.58	22.57	24.50
1.4	QPSK	6	0	21.71	21.64	21.75	23.50
1.4	16QAM	1	0	21.86	21.68	21.75	23.50
1.4	16QAM	1	3	21.88	21.84	21.96	23.50
1.4	16QAM	1	5	21.72	21.86	21.88	23.50
1.4	16QAM	3	0	21.79	21.78	21.66	23.50
1.4	16QAM	3	1	21.83	21.73	21.66	23.50
1.4	16QAM	3	3	21.63	21.65	21.72	23.50
1.4	16QAM	6	0	20.68	20.73	20.70	22.50
1.4	64QAM	1	0	20.76	20.69	20.60	22.50
1.4	64QAM	1	3	20.69	20.81	20.75	22.50
1.4	64QAM	1	5	20.75	20.64	20.77	22.50
1.4	64QAM	3	0	20.76	20.69	20.57	22.50
1.4	64QAM	3	1	20.80	20.65	20.80	22.50
1.4	64QAM	3	3	20.77	20.67	20.81	22.50
1.4	64QAM	6	0	19.69	19.60	19.73	21.50

【LTE Band 2_P-Sensor On】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				18700	18900	19100	
Frequency (MHz)				1860	1880	1900	
20	QPSK	1	0	20.45	20.50	20.62	21.50
20	QPSK	1	49	20.15	20.32	20.41	21.50
20	QPSK	1	99	20.23	20.37	20.40	21.50
20	QPSK	50	0	20.15	20.23	20.25	21.50
20	QPSK	50	24	20.25	20.39	20.40	21.50
20	QPSK	50	50	20.13	20.27	20.33	21.50
20	QPSK	100	0	20.20	20.32	20.30	21.50
20	16QAM	1	0	20.03	20.17	20.22	21.50
20	16QAM	1	49	20.18	20.31	20.36	21.50
20	16QAM	1	99	20.13	20.24	20.30	21.50
20	16QAM	50	0	20.23	20.36	20.44	21.50
20	16QAM	50	24	20.21	20.30	20.39	21.50
20	16QAM	50	50	20.06	20.22	20.19	21.50
20	16QAM	100	0	20.20	20.35	20.37	21.50
20	64QAM	1	0	20.19	20.36	20.45	21.50
20	64QAM	1	49	20.16	20.22	20.20	21.50
20	64QAM	1	99	19.97	20.08	20.11	21.50
20	64QAM	50	0	19.31	19.37	19.42	20.50
20	64QAM	50	24	19.32	19.40	19.41	20.50
20	64QAM	50	50	19.22	19.40	19.47	20.50
20	64QAM	100	0	19.07	19.26	19.30	20.50
Channel				18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1902.5	
15	QPSK	1	0	20.31	20.41	20.53	21.50
15	QPSK	1	37	20.06	20.25	20.33	21.50
15	QPSK	1	74	20.21	20.23	20.35	21.50
15	QPSK	36	0	20.06	20.11	20.20	21.50
15	QPSK	36	20	20.14	20.30	20.32	21.50
15	QPSK	36	39	20.05	20.19	20.25	21.50
15	QPSK	75	0	20.10	20.18	20.26	21.50
15	16QAM	1	0	19.90	20.14	20.19	21.50
15	16QAM	1	37	20.07	20.16	20.33	21.50
15	16QAM	1	74	19.98	20.16	20.19	21.50
15	16QAM	36	0	20.22	20.23	20.30	21.50
15	16QAM	36	20	20.16	20.19	20.24	21.50
15	16QAM	36	39	20.04	20.14	20.17	21.50
15	16QAM	75	0	20.13	20.26	20.27	21.50
15	64QAM	1	0	20.18	20.27	20.42	21.50
15	64QAM	1	37	20.03	20.13	20.15	21.50
15	64QAM	1	74	19.87	20.00	20.07	21.50
15	64QAM	36	0	19.19	19.27	19.31	20.50
15	64QAM	36	20	19.25	19.25	19.34	20.50
15	64QAM	36	39	19.21	19.26	19.41	20.50
15	64QAM	75	0	19.01	19.21	19.25	20.50
Channel				18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1905	
10	QPSK	1	0	20.33	20.42	20.51	21.50
10	QPSK	1	25	20.09	20.23	20.35	21.50
10	QPSK	1	49	20.08	20.28	20.39	21.50
10	QPSK	25	0	20.06	20.10	20.15	21.50
10	QPSK	25	12	20.15	20.26	20.30	21.50
10	QPSK	25	25	20.00	20.20	20.26	21.50
10	QPSK	50	0	20.13	20.26	20.23	21.50
10	16QAM	1	0	19.92	20.03	20.10	21.50
10	16QAM	1	25	20.14	20.26	20.27	21.50
10	16QAM	1	49	20.10	20.11	20.17	21.50
10	16QAM	25	0	20.16	20.26	20.37	21.50
10	16QAM	25	12	20.10	20.19	20.31	21.50
10	16QAM	25	25	19.92	20.18	20.09	21.50
10	16QAM	50	0	20.09	20.28	20.33	21.50
10	64QAM	1	0	20.08	20.33	20.39	21.50
10	64QAM	1	25	20.12	20.10	20.12	21.50
10	64QAM	1	49	19.92	19.99	20.04	21.50
10	64QAM	25	0	19.29	19.23	19.39	20.50
10	64QAM	25	12	19.20	19.37	19.34	20.50
10	64QAM	25	25	19.20	19.33	19.43	20.50
10	64QAM	50	0	18.93	19.24	19.18	20.50
Channel				18625	18900	19175	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1907.5	

5	QPSK	1	0	20.36	20.41	20.52	21.50
5	QPSK	1	12	20.08	20.21	20.26	21.50
5	QPSK	1	24	20.17	20.31	20.30	21.50
5	QPSK	12	0	20.05	20.11	20.19	21.50
5	QPSK	12	7	20.21	20.32	20.30	21.50
5	QPSK	12	13	20.08	20.13	20.21	21.50
5	QPSK	25	0	20.14	20.23	20.24	21.50
5	16QAM	1	0	19.97	20.06	20.19	21.50
5	16QAM	1	12	20.09	20.22	20.34	21.50
5	16QAM	1	24	20.02	20.20	20.24	21.50
5	16QAM	12	0	20.15	20.33	20.32	21.50
5	16QAM	12	7	20.13	20.17	20.29	21.50
5	16QAM	12	13	19.92	20.09	20.13	21.50
5	16QAM	25	0	20.16	20.21	20.29	21.50
5	64QAM	1	0	20.14	20.24	20.33	21.50
5	64QAM	1	12	20.11	20.15	20.07	21.50
5	64QAM	1	24	19.84	20.03	20.01	21.50
5	64QAM	12	0	19.29	19.22	19.39	20.50
5	64QAM	12	7	19.19	19.35	19.27	20.50
5	64QAM	12	13	19.08	19.36	19.37	20.50
5	64QAM	25	0	19.05	19.16	19.20	20.50
Channel				18615	18900	19185	Tune-up limit
Frequency (MHz)				1851.5	1880	1908.5	(dBm)
3	QPSK	1	0	20.37	20.47	20.52	21.50
3	QPSK	1	8	20.07	20.23	20.36	21.50
3	QPSK	1	14	20.14	20.29	20.31	21.50
3	QPSK	8	0	20.01	20.10	20.12	21.50
3	QPSK	8	4	20.14	20.28	20.35	21.50
3	QPSK	8	7	20.03	20.21	20.23	21.50
3	QPSK	15	0	20.06	20.28	20.27	21.50
3	16QAM	1	0	19.93	20.09	20.14	21.50
3	16QAM	1	8	20.07	20.24	20.29	21.50
3	16QAM	1	14	20.04	20.17	20.19	21.50
3	16QAM	8	0	20.15	20.28	20.40	21.50
3	16QAM	8	4	20.17	20.22	20.30	21.50
3	16QAM	8	7	19.95	20.09	20.15	21.50
3	16QAM	15	0	20.19	20.29	20.24	21.50
3	64QAM	1	0	20.08	20.29	20.35	21.50
3	64QAM	1	8	20.04	20.14	20.15	21.50
3	64QAM	1	14	19.89	20.04	20.10	21.50
3	64QAM	8	0	19.21	19.28	19.31	20.50
3	64QAM	8	4	19.25	19.31	19.32	20.50
3	64QAM	8	7	19.14	19.31	19.33	20.50
3	64QAM	15	0	18.96	19.25	19.22	20.50
Channel				18607	18900	19193	Tune-up limit
Frequency (MHz)				1850.7	1880	1909.3	(dBm)
1.4	QPSK	1	0	20.40	20.36	20.50	21.50
1.4	QPSK	1	3	20.07	20.29	20.39	21.50
1.4	QPSK	1	5	20.11	20.23	20.34	21.50
1.4	QPSK	3	0	20.09	20.16	20.11	21.50
1.4	QPSK	3	1	20.13	20.25	20.36	21.50
1.4	QPSK	3	3	19.99	20.17	20.20	21.50
1.4	QPSK	6	0	19.13	19.19	19.27	20.50
1.4	16QAM	1	0	18.92	19.07	19.07	20.50
1.4	16QAM	1	3	19.13	19.23	19.22	20.50
1.4	16QAM	1	5	19.07	19.18	19.20	20.50
1.4	16QAM	3	0	19.13	19.22	19.37	20.50
1.4	16QAM	3	1	19.06	19.27	19.26	20.50
1.4	16QAM	3	3	18.98	19.10	19.16	20.50
1.4	16QAM	6	0	18.18	18.26	18.30	19.50
1.4	64QAM	1	0	18.15	18.33	18.33	19.50
1.4	64QAM	1	3	18.13	18.14	18.11	19.50
1.4	64QAM	1	5	17.96	18.03	18.09	19.50
1.4	64QAM	3	0	18.26	18.31	18.33	19.50
1.4	64QAM	3	1	18.30	18.28	18.37	19.50
1.4	64QAM	3	3	18.18	18.25	18.42	19.50
1.4	64QAM	6	0	17.04	17.11	17.27	18.50

【LTE Band 4_P-Sensor Off】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20050	20175	20300	
Frequency (MHz)				1720	1732.5	1745	
20	QPSK	1	0	22.54	22.69	22.75	24.50
20	QPSK	1	49	22.73	22.87	22.83	24.50
20	QPSK	1	99	22.82	22.89	22.86	24.50
20	QPSK	50	0	21.85	21.92	21.91	23.50
20	QPSK	50	24	21.90	21.96	22.02	23.50
20	QPSK	50	50	21.93	21.90	21.97	23.50
20	QPSK	100	0	21.83	21.88	21.97	23.50
20	16QAM	1	0	21.68	21.96	22.11	23.50
20	16QAM	1	49	21.96	22.03	22.14	23.50
20	16QAM	1	99	22.08	22.15	22.15	23.50
20	16QAM	50	0	20.76	20.94	20.88	22.50
20	16QAM	50	24	20.83	20.97	20.99	22.50
20	16QAM	50	50	20.91	20.92	20.97	22.50
20	16QAM	100	0	20.75	20.91	20.92	22.50
20	64QAM	1	0	20.63	20.97	20.93	22.50
20	64QAM	1	49	20.89	21.12	21.11	22.50
20	64QAM	1	99	21.15	21.05	21.02	22.50
20	64QAM	50	0	19.77	19.92	19.86	21.50
20	64QAM	50	24	19.86	19.94	20.00	21.50
20	64QAM	50	50	19.93	19.94	19.98	21.50
20	64QAM	100	0	19.80	19.92	19.95	21.50
Channel				20025	20175	20325	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1732.5	1747.5	
15	QPSK	1	0	22.50	22.57	22.61	24.50
15	QPSK	1	37	22.53	22.68	22.68	24.50
15	QPSK	1	74	22.54	22.69	22.75	24.50
15	QPSK	36	0	21.81	21.84	21.88	23.50
15	QPSK	36	20	21.80	21.85	21.98	23.50
15	QPSK	36	39	21.80	21.87	21.95	23.50
15	QPSK	75	0	21.70	21.81	21.83	23.50
15	16QAM	1	0	21.62	21.83	22.09	23.50
15	16QAM	1	37	21.87	21.93	22.07	23.50
15	16QAM	1	74	22.02	22.07	22.03	23.50
15	16QAM	36	0	20.62	20.88	20.83	22.50
15	16QAM	36	20	20.75	20.85	20.93	22.50
15	16QAM	36	39	20.79	20.85	20.90	22.50
15	16QAM	75	0	20.66	20.85	20.80	22.50
15	64QAM	1	0	20.62	20.82	20.79	22.50
15	64QAM	1	37	20.83	21.05	21.07	22.50
15	64QAM	1	74	21.02	21.03	20.99	22.50
15	64QAM	36	0	19.75	19.90	19.84	21.50
15	64QAM	36	20	19.83	19.85	19.90	21.50
15	64QAM	36	39	19.78	19.84	19.86	21.50
15	64QAM	75	0	19.72	19.80	19.92	21.50
Channel				20000	20175	20350	Tune-up limit (dBm)
Frequency (MHz)				1715	1732.5	1750	
10	QPSK	1	0	22.52	22.61	22.62	24.50
10	QPSK	1	25	22.53	22.67	22.73	24.50
10	QPSK	1	49	22.54	22.69	22.73	24.50
10	QPSK	25	0	21.72	21.91	21.83	23.50
10	QPSK	25	12	21.76	21.92	22.00	23.50
10	QPSK	25	25	21.79	21.84	21.96	23.50
10	QPSK	50	0	21.76	21.77	21.96	23.50
10	16QAM	1	0	21.57	21.92	22.07	23.50
10	16QAM	1	25	21.87	21.89	22.03	23.50
10	16QAM	1	49	21.98	22.01	22.06	23.50
10	16QAM	25	0	20.62	20.89	20.83	22.50
10	16QAM	25	12	20.70	20.87	20.87	22.50
10	16QAM	25	25	20.81	20.85	20.91	22.50
10	16QAM	50	0	20.72	20.77	20.84	22.50
10	64QAM	1	0	20.52	20.88	20.83	22.50
10	64QAM	1	25	20.85	20.97	21.03	22.50
10	64QAM	1	49	21.11	21.04	20.91	22.50
10	64QAM	25	0	19.68	19.82	19.84	21.50
10	64QAM	25	12	19.81	19.87	19.92	21.50
10	64QAM	25	25	19.85	19.79	19.83	21.50
10	64QAM	50	0	19.71	19.77	19.91	21.50
Channel				19975	20175	20375	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1732.5	1752.5	

5	QPSK	1	0	22.51	22.67	22.66	24.50
5	QPSK	1	12	22.53	22.68	22.70	24.50
5	QPSK	1	24	22.54	22.68	22.74	24.50
5	QPSK	12	0	21.80	21.91	21.77	23.50
5	QPSK	12	7	21.82	21.82	21.95	23.50
5	QPSK	12	13	21.89	21.79	21.88	23.50
5	QPSK	25	0	21.78	21.82	21.87	23.50
5	16QAM	1	0	21.59	21.88	21.97	23.50
5	16QAM	1	12	21.83	21.90	22.03	23.50
5	16QAM	1	24	22.06	22.01	22.12	23.50
5	16QAM	12	0	20.65	20.92	20.82	22.50
5	16QAM	12	7	20.78	20.95	20.93	22.50
5	16QAM	12	13	20.87	20.80	20.84	22.50
5	16QAM	25	0	20.70	20.88	20.89	22.50
5	64QAM	1	0	20.57	20.94	20.86	22.50
5	64QAM	1	12	20.74	21.05	21.03	22.50
5	64QAM	1	24	21.06	21.01	20.90	22.50
5	64QAM	12	0	19.69	19.81	19.82	21.50
5	64QAM	12	7	19.71	19.81	19.95	21.50
5	64QAM	12	13	19.86	19.82	19.86	21.50
5	64QAM	25	0	19.76	19.78	19.87	21.50
Channel				19965	20175	20385	Tune-up limit
Frequency (MHz)				1711.5	1732.5	1753.5	(dBm)
3	QPSK	1	0	22.50	22.67	22.64	24.50
3	QPSK	1	8	22.53	22.69	22.72	24.50
3	QPSK	1	14	22.54	22.68	22.73	24.50
3	QPSK	8	0	21.74	21.84	21.77	23.50
3	QPSK	8	4	21.79	21.82	21.91	23.50
3	QPSK	8	7	21.88	21.88	21.91	23.50
3	QPSK	15	0	21.68	21.82	21.92	23.50
3	16QAM	1	0	21.61	21.94	22.01	23.50
3	16QAM	1	8	21.87	22.00	22.09	23.50
3	16QAM	1	14	22.00	22.01	22.13	23.50
3	16QAM	8	0	20.74	20.80	20.79	22.50
3	16QAM	8	4	20.77	20.96	20.85	22.50
3	16QAM	8	7	20.81	20.80	20.87	22.50
3	16QAM	15	0	20.66	20.80	20.91	22.50
3	64QAM	1	0	20.61	20.92	20.81	22.50
3	64QAM	1	8	20.80	20.97	21.04	22.50
3	64QAM	1	14	21.09	20.99	20.93	22.50
3	64QAM	8	0	19.67	19.84	19.84	21.50
3	64QAM	8	4	19.76	19.83	19.99	21.50
3	64QAM	8	7	19.85	19.83	19.93	21.50
3	64QAM	15	0	19.70	19.78	19.91	21.50
Channel				19957	20175	20393	Tune-up limit
Frequency (MHz)				1710.7	1732.5	1754.3	(dBm)
1.4	QPSK	1	0	22.51	22.59	22.66	24.50
1.4	QPSK	1	3	22.52	22.69	22.74	24.50
1.4	QPSK	1	5	22.52	22.68	22.73	24.50
1.4	QPSK	3	0	22.54	22.69	22.75	24.50
1.4	QPSK	3	1	22.54	22.67	22.75	24.50
1.4	QPSK	3	3	22.52	22.68	22.73	24.50
1.4	QPSK	6	0	21.71	21.73	21.86	23.50
1.4	16QAM	1	0	21.64	21.89	21.99	23.50
1.4	16QAM	1	3	21.94	21.95	22.01	23.50
1.4	16QAM	1	5	21.99	22.09	22.02	23.50
1.4	16QAM	3	0	21.74	21.80	21.77	23.50
1.4	16QAM	3	1	21.71	21.88	21.96	23.50
1.4	16QAM	3	3	21.89	21.82	21.87	23.50
1.4	16QAM	6	0	20.65	20.85	20.88	22.50
1.4	64QAM	1	0	20.59	20.86	20.88	22.50
1.4	64QAM	1	3	20.81	21.07	21.07	22.50
1.4	64QAM	1	5	21.09	21.03	21.01	22.50
1.4	64QAM	3	0	20.63	20.83	20.79	22.50
1.4	64QAM	3	1	20.77	20.86	20.88	22.50
1.4	64QAM	3	3	20.89	20.84	20.93	22.50
1.4	64QAM	6	0	19.68	19.77	19.84	21.50

【LTE Band 4_P-Sensor On】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20050	20175	20300	
Frequency (MHz)				1720	1732.5	1745	
20	QPSK	1	0	17.21	17.39	17.42	18.50
20	QPSK	1	49	16.91	17.20	17.11	18.50
20	QPSK	1	99	16.89	17.08	17.01	18.50
20	QPSK	50	0	17.00	17.20	17.21	18.50
20	QPSK	50	24	16.91	17.20	17.14	18.50
20	QPSK	50	50	16.88	17.16	17.17	18.50
20	QPSK	100	0	16.94	17.21	17.23	18.50
20	16QAM	1	0	17.01	17.20	17.08	18.50
20	16QAM	1	49	16.96	17.21	17.11	18.50
20	16QAM	1	99	16.98	17.21	17.21	18.50
20	16QAM	50	0	16.94	17.21	17.21	18.50
20	16QAM	50	24	16.89	17.20	17.20	18.50
20	16QAM	50	50	16.92	17.21	17.17	18.50
20	16QAM	100	0	17.00	17.20	17.12	18.50
20	64QAM	1	0	17.02	17.21	17.22	18.50
20	64QAM	1	49	16.95	17.19	17.13	18.50
20	64QAM	1	99	16.99	17.21	17.11	18.50
20	64QAM	50	0	16.99	17.20	17.11	18.50
20	64QAM	50	24	16.89	17.19	17.14	18.50
20	64QAM	50	50	16.95	17.21	17.09	18.50
20	64QAM	100	0	16.88	17.21	17.14	18.50
Channel				20025	20175	20325	Tune-up limit
Frequency (MHz)				1717.5	1732.5	1747.5	
15	QPSK	1	0	17.11	17.26	17.29	18.50
15	QPSK	1	37	16.77	17.09	17.00	18.50
15	QPSK	1	74	16.74	16.95	16.92	18.50
15	QPSK	36	0	16.97	17.18	17.08	18.50
15	QPSK	36	20	16.76	17.08	17.07	18.50
15	QPSK	36	39	16.83	17.06	17.09	18.50
15	QPSK	75	0	16.85	17.12	17.09	18.50
15	16QAM	1	0	16.98	17.08	16.98	18.50
15	16QAM	1	37	16.89	17.07	16.96	18.50
15	16QAM	1	74	16.83	17.17	17.07	18.50
15	16QAM	36	0	16.89	17.17	17.07	18.50
15	16QAM	36	20	16.78	17.14	17.13	18.50
15	16QAM	36	39	16.77	17.09	17.08	18.50
15	16QAM	75	0	16.92	17.12	17.01	18.50
15	64QAM	1	0	16.89	17.19	17.20	18.50
15	64QAM	1	37	16.86	17.17	17.07	18.50
15	64QAM	1	74	16.95	17.17	17.01	18.50
15	64QAM	36	0	16.91	17.11	16.99	18.50
15	64QAM	36	20	16.74	17.05	17.05	18.50
15	64QAM	36	39	16.83	17.10	17.06	18.50
15	64QAM	75	0	16.83	17.14	17.11	18.50
Channel				20000	20175	20350	Tune-up limit
Frequency (MHz)				1715	1732.5	1750	
10	QPSK	1	0	17.17	17.24	17.32	18.50
10	QPSK	1	25	16.85	17.17	17.05	18.50
10	QPSK	1	49	16.87	17.07	16.95	18.50
10	QPSK	25	0	16.96	17.16	17.17	18.50
10	QPSK	25	12	16.86	17.18	17.06	18.50
10	QPSK	25	25	16.84	17.05	17.10	18.50
10	QPSK	50	0	16.89	17.18	17.14	18.50
10	16QAM	1	0	16.88	17.06	16.99	18.50
10	16QAM	1	25	16.94	17.12	17.04	18.50
10	16QAM	1	49	16.97	17.16	17.09	18.50
10	16QAM	25	0	16.90	17.11	17.17	18.50
10	16QAM	25	12	16.87	17.17	17.09	18.50
10	16QAM	25	25	16.84	17.19	17.12	18.50
10	16QAM	50	0	16.93	17.07	16.99	18.50
10	64QAM	1	0	16.96	17.10	17.10	18.50
10	64QAM	1	25	16.90	17.14	17.02	18.50
10	64QAM	1	49	16.88	17.07	17.06	18.50
10	64QAM	25	0	16.84	17.17	16.97	18.50
10	64QAM	25	12	16.74	17.16	17.05	18.50
10	64QAM	25	25	16.92	17.19	17.04	18.50
10	64QAM	50	0	16.83	17.12	17.06	18.50
Channel				19975	20175	20375	Tune-up limit
Frequency (MHz)				1712.5	1732.5	1752.5	



FCC SAR TEST REPORT

Report No. : FA622715

5	QPSK	1	0	17.11	17.31	17.34	18.50
5	QPSK	1	12	16.80	17.09	17.00	18.50
5	QPSK	1	24	16.87	16.97	16.99	18.50
5	QPSK	12	0	16.89	17.14	17.06	18.50
5	QPSK	12	7	16.76	17.12	16.99	18.50
5	QPSK	12	13	16.85	17.12	17.11	18.50
5	QPSK	25	0	16.89	17.19	17.19	18.50
5	16QAM	1	0	16.93	17.07	16.99	18.50
5	16QAM	1	12	16.81	17.06	17.03	18.50
5	16QAM	1	24	16.84	17.15	17.16	18.50
5	16QAM	12	0	16.79	17.09	17.12	18.50
5	16QAM	12	7	16.81	17.14	17.06	18.50
5	16QAM	12	13	16.82	17.13	17.12	18.50
5	16QAM	25	0	16.86	17.16	17.04	18.50
5	64QAM	1	0	16.88	17.19	17.13	18.50
5	64QAM	1	12	16.88	17.08	17.04	18.50
5	64QAM	1	24	16.90	17.16	17.07	18.50
5	64QAM	12	0	16.88	17.05	17.00	18.50
5	64QAM	12	7	16.84	17.11	17.00	18.50
5	64QAM	12	13	16.82	17.16	16.98	18.50
5	64QAM	25	0	16.87	17.13	17.04	18.50
Channel				19965	20175	20385	Tune-up limit
Frequency (MHz)				1711.5	1732.5	1753.5	(dBm)
3	QPSK	1	0	17.09	17.36	17.37	18.50
3	QPSK	1	8	16.82	17.06	17.00	18.50
3	QPSK	1	14	16.82	16.95	16.92	18.50
3	QPSK	8	0	16.94	17.13	17.12	18.50
3	QPSK	8	4	16.87	17.12	17.04	18.50
3	QPSK	8	7	16.76	17.01	17.06	18.50
3	QPSK	15	0	16.85	17.14	17.19	18.50
3	16QAM	1	0	16.98	17.06	16.94	18.50
3	16QAM	1	8	16.95	17.13	16.98	18.50
3	16QAM	1	14	16.90	17.13	17.08	18.50
3	16QAM	8	0	16.87	17.18	17.08	18.50
3	16QAM	8	4	16.76	17.08	17.13	18.50
3	16QAM	8	7	16.77	17.19	17.12	18.50
3	16QAM	15	0	16.86	17.12	17.09	18.50
3	64QAM	1	0	16.91	17.14	17.08	18.50
3	64QAM	1	8	16.84	17.16	17.06	18.50
3	64QAM	1	14	16.97	17.08	17.00	18.50
3	64QAM	8	0	16.86	17.17	17.10	18.50
3	64QAM	8	4	16.86	17.07	17.03	18.50
3	64QAM	8	7	16.91	17.17	16.94	18.50
3	64QAM	15	0	16.86	17.19	17.00	18.50
Channel				19957	20175	20393	Tune-up limit
Frequency (MHz)				1710.7	1732.5	1754.3	(dBm)
1.4	QPSK	1	0	17.07	17.26	17.29	18.50
1.4	QPSK	1	3	16.76	17.16	16.99	18.50
1.4	QPSK	1	5	16.82	17.04	16.99	18.50
1.4	QPSK	3	0	16.98	17.07	17.10	18.50
1.4	QPSK	3	1	16.86	17.16	17.12	18.50
1.4	QPSK	3	3	16.76	17.11	17.02	18.50
1.4	QPSK	6	0	15.80	16.10	16.18	17.50
1.4	16QAM	1	0	16.00	16.18	15.94	17.50
1.4	16QAM	1	3	15.88	16.11	16.06	17.50
1.4	16QAM	1	5	15.91	16.08	16.19	17.50
1.4	16QAM	3	0	15.92	16.07	16.13	17.50
1.4	16QAM	3	1	15.79	16.19	16.18	17.50
1.4	16QAM	3	3	15.79	16.06	16.05	17.50
1.4	16QAM	6	0	14.90	15.10	15.08	16.50
1.4	64QAM	1	0	14.89	15.11	15.18	16.50
1.4	64QAM	1	3	14.83	15.10	15.03	16.50
1.4	64QAM	1	5	14.91	15.16	15.10	16.50
1.4	64QAM	3	0	14.85	15.14	15.07	16.50
1.4	64QAM	3	1	14.83	15.05	15.01	16.50
1.4	64QAM	3	3	14.88	15.18	15.06	16.50
1.4	64QAM	6	0	13.75	14.10	14.03	15.50

**【LTE Band 5_P-Sensor Off】**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20450	20525	20600	Tune-up limit (dBm)
Frequency (MHz)				829	836.5	844	
10	QPSK	1	0	23.77	24.01	24.02	25.50
10	QPSK	1	25	23.59	23.94	23.84	25.50
10	QPSK	1	49	23.60	23.87	23.87	25.50
10	QPSK	25	0	22.72	23.08	22.96	24.50
10	QPSK	25	12	22.76	23.08	22.95	24.50
10	QPSK	25	25	22.65	23.01	22.91	24.50
10	QPSK	50	0	22.73	23.06	22.92	24.50
10	16QAM	1	0	22.92	23.29	23.28	24.50
10	16QAM	1	25	22.92	23.22	23.13	24.50
10	16QAM	1	49	22.69	22.96	22.95	24.50
10	16QAM	25	0	21.75	22.10	22.05	23.50
10	16QAM	25	12	21.80	22.09	22.08	23.50
10	16QAM	25	25	21.63	21.98	21.91	23.50
10	16QAM	50	0	21.75	22.04	21.92	23.50
10	64QAM	1	0	21.95	22.28	22.16	23.50
10	64QAM	1	25	21.96	22.22	22.13	23.50
10	64QAM	1	49	21.80	22.14	22.09	23.50
10	64QAM	25	0	20.81	21.14	21.08	22.50
10	64QAM	25	12	20.88	21.17	21.10	22.50
10	64QAM	25	25	20.78	21.07	20.93	22.50
10	64QAM	50	0	20.92	21.16	21.11	22.50
Channel				20425	20525	20625	Tune-up limit (dBm)
Frequency (MHz)				826.5	836.5	846.5	
5	QPSK	1	0	23.69	23.94	23.98	25.50
5	QPSK	1	12	23.55	23.87	23.78	25.50
5	QPSK	1	24	23.54	23.76	23.79	25.50
5	QPSK	12	0	22.64	22.98	22.95	24.50
5	QPSK	12	7	22.71	23.00	22.87	24.50
5	QPSK	12	13	22.51	22.91	22.89	24.50
5	QPSK	25	0	22.70	22.99	22.78	24.50
5	16QAM	1	0	22.90	23.22	23.25	24.50
5	16QAM	1	12	22.80	23.15	23.11	24.50
5	16QAM	1	24	22.55	22.92	22.93	24.50
5	16QAM	12	0	21.68	21.98	21.96	23.50
5	16QAM	12	7	21.74	22.06	21.94	23.50
5	16QAM	12	13	21.51	21.92	21.85	23.50
5	16QAM	25	0	21.73	21.97	21.88	23.50
5	64QAM	1	0	21.94	22.15	22.04	23.50
5	64QAM	1	12	21.94	22.15	22.11	23.50
5	64QAM	1	24	21.69	22.06	22.03	23.50
5	64QAM	12	0	20.71	21.03	21.01	22.50
5	64QAM	12	7	20.77	21.11	21.04	22.50
5	64QAM	12	13	20.73	21.02	20.89	22.50
5	64QAM	25	0	20.83	21.15	20.98	22.50
Channel				20415	20525	20635	Tune-up limit (dBm)
Frequency (MHz)				825.5	836.5	847.5	
3	QPSK	1	0	23.69	23.98	23.91	25.50
3	QPSK	1	8	23.51	23.91	23.77	25.50
3	QPSK	1	14	23.51	23.76	23.81	25.50
3	QPSK	8	0	22.57	23.02	22.85	24.50
3	QPSK	8	4	22.64	22.96	22.85	24.50
3	QPSK	8	7	22.55	22.94	22.88	24.50
3	QPSK	15	0	22.65	23.00	22.79	24.50
3	16QAM	1	0	22.91	23.25	23.24	24.50
3	16QAM	1	8	22.80	23.10	23.05	24.50
3	16QAM	1	14	22.55	22.83	22.88	24.50
3	16QAM	8	0	21.63	21.98	21.97	23.50
3	16QAM	8	4	21.76	22.07	22.00	23.50
3	16QAM	8	7	21.52	21.88	21.88	23.50
3	16QAM	15	0	21.65	21.89	21.90	23.50
3	64QAM	1	0	21.89	22.19	22.14	23.50
3	64QAM	1	8	21.87	22.20	22.09	23.50
3	64QAM	1	14	21.73	22.07	21.97	23.50
3	64QAM	8	0	20.69	21.03	21.06	22.50
3	64QAM	8	4	20.81	21.07	20.98	22.50
3	64QAM	8	7	20.71	21.06	20.86	22.50
3	64QAM	15	0	20.85	21.08	21.00	22.50
Channel				20407	20525	20643	Tune-up limit (dBm)
Frequency (MHz)				824.7	836.5	848.3	
1.4	QPSK	1	0	23.63	23.86	23.98	25.50



FCC SAR TEST REPORT

Report No. : FA622715

1.4	QPSK	1	3	23.53	23.86	23.79	25.50
1.4	QPSK	1	5	23.52	23.86	23.82	25.50
1.4	QPSK	3	0	23.59	24.00	23.88	25.50
1.4	QPSK	3	1	23.66	23.93	23.91	25.50
1.4	QPSK	3	3	23.60	23.95	23.85	25.50
1.4	QPSK	6	0	22.63	22.98	22.90	24.50
1.4	16QAM	1	0	22.83	23.23	23.18	24.50
1.4	16QAM	1	3	22.87	23.13	23.10	24.50
1.4	16QAM	1	5	22.62	22.81	22.89	24.50
1.4	16QAM	3	0	22.71	22.96	22.93	24.50
1.4	16QAM	3	1	22.68	23.00	22.96	24.50
1.4	16QAM	3	3	22.60	22.88	22.81	24.50
1.4	16QAM	6	0	21.70	21.91	21.89	23.50
1.4	64QAM	1	0	21.85	22.26	22.05	23.50
1.4	64QAM	1	3	21.84	22.17	22.00	23.50
1.4	64QAM	1	5	21.77	22.05	22.03	23.50
1.4	64QAM	3	0	21.67	22.07	21.97	23.50
1.4	64QAM	3	1	21.75	22.10	22.05	23.50
1.4	64QAM	3	3	21.72	21.99	21.78	23.50
1.4	64QAM	6	0	20.77	21.02	20.98	22.50

【LTE Band 5_P-Sensor On】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20450	20525	20600	Tune-up limit (dBm)
Frequency (MHz)				829	836.5	844	
10	QPSK	1	0	19.09	19.20	19.12	19.50
10	QPSK	1	25	19.02	19.18	19.08	19.50
10	QPSK	1	49	19.15	19.17	19.09	19.50
10	QPSK	25	0	19.15	19.27	19.24	19.50
10	QPSK	25	12	19.29	19.20	19.27	19.50
10	QPSK	25	25	19.20	19.18	19.16	19.50
10	QPSK	50	0	19.26	19.28	19.18	19.50
10	16QAM	1	0	19.08	19.18	19.06	19.50
10	16QAM	1	25	19.09	19.23	19.06	19.50
10	16QAM	1	49	19.08	19.41	19.11	19.50
10	16QAM	25	0	19.08	19.40	19.11	19.50
10	16QAM	25	12	19.09	19.30	19.12	19.50
10	16QAM	25	25	19.03	19.20	19.01	19.50
10	16QAM	50	0	19.09	19.24	19.08	19.50
10	64QAM	1	0	19.09	19.41	19.11	19.50
10	64QAM	1	25	19.06	19.21	19.03	19.50
10	64QAM	1	49	18.93	19.10	18.97	19.50
10	64QAM	25	0	19.08	19.31	19.10	19.50
10	64QAM	25	12	19.09	19.38	19.10	19.50
10	64QAM	25	25	19.03	19.25	19.10	19.50
10	64QAM	50	0	19.09	19.31	19.10	19.50
Channel				20425	20525	20625	Tune-up limit (dBm)
Frequency (MHz)				826.5	836.5	846.5	
5	QPSK	1	0	18.97	19.02	19.04	19.50
5	QPSK	1	12	18.91	19.12	19.03	19.50
5	QPSK	1	24	19.03	19.08	19.01	19.50
5	QPSK	12	0	19.05	19.15	19.12	19.50
5	QPSK	12	7	19.09	19.15	19.11	19.50
5	QPSK	12	13	19.09	19.10	19.11	19.50
5	QPSK	25	0	19.08	19.16	19.12	19.50
5	16QAM	1	0	19.02	19.07	18.92	19.50
5	16QAM	1	12	18.96	19.16	18.99	19.50
5	16QAM	1	24	19.03	19.15	19.05	19.50
5	16QAM	12	0	18.99	19.15	19.07	19.50
5	16QAM	12	7	18.95	19.16	19.00	19.50
5	16QAM	12	13	18.93	19.16	18.96	19.50
5	16QAM	25	0	18.97	19.16	19.02	19.50
5	64QAM	1	0	19.00	19.15	19.08	19.50
5	64QAM	1	12	19.03	19.13	18.89	19.50
5	64QAM	1	24	18.81	19.05	18.89	19.50
5	64QAM	12	0	19.02	19.15	19.06	19.50
5	64QAM	12	7	19.02	19.16	18.97	19.50
5	64QAM	12	13	18.94	19.15	19.02	19.50
5	64QAM	25	0	19.07	19.15	18.97	19.50
Channel				20415	20525	20635	Tune-up limit (dBm)
Frequency (MHz)				825.5	836.5	847.5	
3	QPSK	1	0	18.97	19.13	19.03	19.50



FCC SAR TEST REPORT

Report No. : FA622715

3	QPSK	1	8	18.96	19.14	19.04	19.50
3	QPSK	1	14	19.09	19.10	19.01	19.50
3	QPSK	8	0	19.03	19.16	19.09	19.50
3	QPSK	8	4	19.09	19.15	19.11	19.50
3	QPSK	8	7	19.09	19.09	19.02	19.50
3	QPSK	15	0	19.07	19.16	19.10	19.50
3	16QAM	1	0	18.97	19.16	18.97	19.50
3	16QAM	1	8	19.03	19.16	18.96	19.50
3	16QAM	1	14	18.97	19.15	19.09	19.50
3	16QAM	8	0	18.98	19.15	18.99	19.50
3	16QAM	8	4	18.95	19.14	19.06	19.50
3	16QAM	8	7	18.95	19.06	18.87	19.50
3	16QAM	15	0	19.04	19.16	19.06	19.50
3	64QAM	1	0	19.05	19.16	19.09	19.50
3	64QAM	1	8	19.05	19.12	18.92	19.50
3	64QAM	1	14	18.89	18.96	18.83	19.50
3	64QAM	8	0	18.99	19.15	19.03	19.50
3	64QAM	8	4	19.06	19.15	19.02	19.50
3	64QAM	8	7	18.99	19.13	19.02	19.50
3	64QAM	15	0	19.08	19.16	18.96	19.50
Channel				20407	20525	20643	Tune-up limit
Frequency (MHz)				824.7	836.5	848.3	(dBm)
1.4	QPSK	1	0	18.97	19.10	19.03	19.50
1.4	QPSK	1	3	18.88	19.12	18.97	19.50
1.4	QPSK	1	5	19.05	19.14	19.06	19.50
1.4	QPSK	3	0	19.02	19.16	19.12	19.50
1.4	QPSK	3	1	19.09	19.15	19.10	19.50
1.4	QPSK	3	3	19.08	19.15	19.12	19.50
1.4	QPSK	6	0	18.19	18.21	18.14	18.50
1.4	16QAM	1	0	18.00	18.07	17.99	18.50
1.4	16QAM	1	3	17.94	18.18	18.01	18.50
1.4	16QAM	1	5	17.93	18.38	17.99	18.50
1.4	16QAM	3	0	17.96	18.31	18.07	18.50
1.4	16QAM	3	1	18.02	18.21	18.01	18.50
1.4	16QAM	3	3	17.90	18.10	17.96	18.50
1.4	16QAM	6	0	16.95	17.12	16.93	17.50
1.4	64QAM	1	0	17.03	17.34	17.06	17.50
1.4	64QAM	1	3	16.99	17.14	16.96	17.50
1.4	64QAM	1	5	16.89	17.01	16.84	17.50
1.4	64QAM	3	0	16.95	17.27	17.07	17.50
1.4	64QAM	3	1	17.01	17.34	17.08	17.50
1.4	64QAM	3	3	16.96	17.23	17.00	17.50
1.4	64QAM	6	0	16.00	16.17	16.01	16.50

【LTE Band 7_P-Sensor Off】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20850	21100	21350	
Frequency (MHz)				2510	2535	2560	
20	QPSK	1	0	23.31	23.02	22.75	24.50
20	QPSK	1	49	23.29	22.91	22.74	24.50
20	QPSK	1	99	23.05	22.76	22.61	24.50
20	QPSK	50	0	22.46	22.11	21.84	23.50
20	QPSK	50	24	22.45	22.07	21.83	23.50
20	QPSK	50	50	22.31	21.94	21.87	23.50
20	QPSK	100	0	22.31	22.06	21.82	23.50
20	16QAM	1	0	22.53	22.15	21.96	23.50
20	16QAM	1	49	22.48	21.94	21.77	23.50
20	16QAM	1	99	22.29	21.97	21.84	23.50
20	16QAM	50	0	21.41	20.98	20.85	22.50
20	16QAM	50	24	21.44	20.98	20.82	22.50
20	16QAM	50	50	21.26	20.95	20.72	22.50
20	16QAM	100	0	21.26	20.90	20.75	22.50
20	64QAM	1	0	21.40	21.09	20.79	22.50
20	64QAM	1	49	21.41	20.86	20.79	22.50
20	64QAM	1	99	21.24	20.73	20.74	22.50
20	64QAM	50	0	20.42	20.01	19.80	21.50
20	64QAM	50	24	20.44	19.95	19.80	21.50
20	64QAM	50	50	20.28	19.92	19.67	21.50
20	64QAM	100	0	20.28	19.93	19.71	21.50
Channel				20825	21100	21375	Tune-up limit
Frequency (MHz)				2507.5	2535	2562.5	(dBm)
15	QPSK	1	0	23.20	23.00	22.72	24.50



FCC SAR TEST REPORT

Report No. : FA622715

15	QPSK	1	37	23.16	22.88	22.71	24.50
15	QPSK	1	74	23.01	22.66	22.53	24.50
15	QPSK	36	0	22.39	22.03	21.82	23.50
15	QPSK	36	20	22.36	22.02	21.75	23.50
15	QPSK	36	39	22.18	21.89	21.72	23.50
15	QPSK	75	0	22.23	22.00	21.79	23.50
15	16QAM	1	0	22.38	22.10	21.87	23.50
15	16QAM	1	37	22.39	21.93	21.68	23.50
15	16QAM	1	74	22.25	21.89	21.78	23.50
15	16QAM	36	0	21.35	20.91	20.81	22.50
15	16QAM	36	20	21.35	20.86	20.78	22.50
15	16QAM	36	39	21.15	20.89	20.70	22.50
15	16QAM	75	0	21.23	20.89	20.72	22.50
15	64QAM	1	0	21.37	20.99	20.71	22.50
15	64QAM	1	37	21.33	20.74	20.72	22.50
15	64QAM	1	74	21.17	20.62	20.67	22.50
15	64QAM	36	0	20.29	19.95	19.78	21.50
15	64QAM	36	20	20.36	19.93	19.76	21.50
15	64QAM	36	39	20.21	19.79	19.64	21.50
15	64QAM	75	0	20.14	19.89	19.59	21.50
Channel				20800	21100	21400	Tune-up limit
Frequency (MHz)				2505	2535	2565	(dBm)
10	QPSK	1	0	23.27	22.97	22.67	24.50
10	QPSK	1	25	23.20	22.78	22.63	24.50
10	QPSK	1	49	22.95	22.66	22.50	24.50
10	QPSK	25	0	22.38	22.05	21.78	23.50
10	QPSK	25	12	22.35	21.97	21.82	23.50
10	QPSK	25	25	22.25	21.92	21.80	23.50
10	QPSK	50	0	22.25	21.94	21.69	23.50
10	16QAM	1	0	22.38	22.09	21.94	23.50
10	16QAM	1	25	22.35	21.82	21.68	23.50
10	16QAM	1	49	22.25	21.94	21.69	23.50
10	16QAM	25	0	21.37	20.88	20.77	22.50
10	16QAM	25	12	21.41	20.86	20.80	22.50
10	16QAM	25	25	21.24	20.86	20.61	22.50
10	16QAM	50	0	21.24	20.78	20.74	22.50
10	64QAM	1	0	21.25	21.03	20.74	22.50
10	64QAM	1	25	21.38	20.71	20.70	22.50
10	64QAM	1	49	21.16	20.63	20.69	22.50
10	64QAM	25	0	20.28	20.00	19.66	21.50
10	64QAM	25	12	20.40	19.94	19.77	21.50
10	64QAM	25	25	20.25	19.90	19.55	21.50
10	64QAM	50	0	20.20	19.89	19.66	21.50
Channel				20775	21100	21425	Tune-up limit
Frequency (MHz)				2502.5	2535	2567.5	(dBm)
5	QPSK	1	0	23.16	22.96	22.65	24.50
5	QPSK	1	12	23.20	22.78	22.59	24.50
5	QPSK	1	24	22.97	22.72	22.51	24.50
5	QPSK	12	0	22.44	22.02	21.71	23.50
5	QPSK	12	7	22.39	21.99	21.71	23.50
5	QPSK	12	13	22.27	21.91	21.74	23.50
5	QPSK	25	0	22.25	21.98	21.73	23.50
5	16QAM	1	0	22.40	22.02	21.95	23.50
5	16QAM	1	12	22.33	21.87	21.73	23.50
5	16QAM	1	24	22.18	21.90	21.78	23.50
5	16QAM	12	0	21.31	20.85	20.70	22.50
5	16QAM	12	7	21.38	20.89	20.81	22.50
5	16QAM	12	13	21.17	20.90	20.57	22.50
5	16QAM	25	0	21.24	20.86	20.70	22.50
5	64QAM	1	0	21.28	21.01	20.73	22.50
5	64QAM	1	12	21.28	20.83	20.68	22.50
5	64QAM	1	24	21.14	20.65	20.66	22.50
5	64QAM	12	0	20.36	19.87	19.70	21.50
5	64QAM	12	7	20.43	19.87	19.79	21.50
5	64QAM	12	13	20.23	19.82	19.58	21.50
5	64QAM	25	0	20.20	19.83	19.66	21.50



【LTE Band 7_P-Sensor On】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20850	21100	21350	
Frequency (MHz)				2510	2535	2560	
20	QPSK	1	0	15.64	15.47	15.18	16.00
20	QPSK	1	49	15.53	15.35	15.06	16.00
20	QPSK	1	99	15.38	15.18	15.12	16.00
20	QPSK	50	0	15.61	15.41	15.18	16.00
20	QPSK	50	24	15.60	15.40	15.23	16.00
20	QPSK	50	50	15.51	15.33	15.18	16.00
20	QPSK	100	0	15.61	15.37	15.20	16.00
20	16QAM	1	0	15.50	15.79	15.23	16.00
20	16QAM	1	49	15.52	15.89	15.25	16.00
20	16QAM	1	99	15.50	15.38	15.35	16.00
20	16QAM	50	0	15.73	15.44	15.20	16.00
20	16QAM	50	24	15.70	15.40	15.18	16.00
20	16QAM	50	50	15.54	15.29	15.16	16.00
20	16QAM	100	0	15.58	15.36	15.20	16.00
20	64QAM	1	0	15.50	15.40	15.50	16.00
20	64QAM	1	49	15.75	15.53	15.15	16.00
20	64QAM	1	99	15.55	15.14	15.46	16.00
20	64QAM	50	0	15.80	15.35	15.17	16.00
20	64QAM	50	24	15.66	15.29	15.20	16.00
20	64QAM	50	50	15.56	15.33	15.11	16.00
20	64QAM	100	0	15.59	15.39	15.20	16.00
Channel				20825	21100	21375	
Frequency (MHz)				2507.5	2535	2562.5	
15	QPSK	1	0	15.60	15.34	15.11	16.00
15	QPSK	1	37	15.42	15.33	15.02	16.00
15	QPSK	1	74	15.33	15.13	15.03	16.00
15	QPSK	36	0	15.57	15.27	15.04	16.00
15	QPSK	36	20	15.57	15.36	15.18	16.00
15	QPSK	36	39	15.43	15.20	15.06	16.00
15	QPSK	75	0	15.50	15.24	15.09	16.00
15	16QAM	1	0	15.42	15.47	15.10	16.00
15	16QAM	1	37	15.38	15.47	15.18	16.00
15	16QAM	1	74	15.45	15.34	15.18	16.00
15	16QAM	36	0	15.63	15.43	15.18	16.00
15	16QAM	36	20	15.64	15.30	15.05	16.00
15	16QAM	36	39	15.52	15.16	15.09	16.00
15	16QAM	75	0	15.55	15.32	15.12	16.00
15	64QAM	1	0	15.45	15.32	15.17	16.00
15	64QAM	1	37	15.63	15.47	15.04	16.00
15	64QAM	1	74	15.48	15.10	15.18	16.00
15	64QAM	36	0	15.64	15.30	15.13	16.00
15	64QAM	36	20	15.52	15.18	15.09	16.00
15	64QAM	36	39	15.55	15.25	14.98	16.00
15	64QAM	75	0	15.53	15.26	15.08	16.00
Channel				20800	21100	21400	
Frequency (MHz)				2505	2535	2565	
10	QPSK	1	0	15.51	15.38	15.17	16.00
10	QPSK	1	25	15.42	15.20	14.96	16.00
10	QPSK	1	49	15.32	15.13	15.05	16.00
10	QPSK	25	0	15.49	15.32	15.12	16.00
10	QPSK	25	12	15.46	15.27	15.17	16.00
10	QPSK	25	25	15.44	15.28	15.13	16.00
10	QPSK	50	0	15.49	15.23	15.13	16.00
10	16QAM	1	0	15.43	15.47	15.13	16.00
10	16QAM	1	25	15.43	15.46	15.14	16.00
10	16QAM	1	49	15.36	15.30	15.17	16.00
10	16QAM	25	0	15.59	15.39	15.07	16.00
10	16QAM	25	12	15.63	15.26	15.10	16.00
10	16QAM	25	25	15.52	15.22	15.08	16.00
10	16QAM	50	0	15.50	15.24	15.18	16.00
10	64QAM	1	0	15.35	15.26	15.18	16.00
10	64QAM	1	25	15.63	15.42	15.12	16.00
10	64QAM	1	49	15.51	14.99	15.17	16.00
10	64QAM	25	0	15.63	15.31	15.11	16.00
10	64QAM	25	12	15.56	15.21	15.16	16.00
10	64QAM	25	25	15.42	15.21	15.06	16.00
10	64QAM	50	0	15.56	15.32	15.10	16.00
Channel				20775	21100	21425	
Frequency (MHz)				2502.5	2535	2567.5	
5	QPSK	1	0	15.62	15.39	15.17	16.00



FCC SAR TEST REPORT

Report No. : FA622715

5	QPSK	1	12	15.45	15.27	15.03	16.00
5	QPSK	1	24	15.30	15.16	15.02	16.00
5	QPSK	12	0	15.52	15.34	15.15	16.00
5	QPSK	12	7	15.53	15.38	15.13	16.00
5	QPSK	12	13	15.46	15.26	15.06	16.00
5	QPSK	25	0	15.49	15.28	15.10	16.00
5	16QAM	1	0	15.37	15.46	15.17	16.00
5	16QAM	1	12	15.46	15.47	15.17	16.00
5	16QAM	1	24	15.38	15.37	15.16	16.00
5	16QAM	12	0	15.63	15.33	15.18	16.00
5	16QAM	12	7	15.58	15.34	15.10	16.00
5	16QAM	12	13	15.45	15.20	15.04	16.00
5	16QAM	25	0	15.47	15.34	15.13	16.00
5	64QAM	1	0	15.36	15.34	15.18	16.00
5	64QAM	1	12	15.64	15.47	15.06	16.00
5	64QAM	1	24	15.42	15.00	15.17	16.00
5	64QAM	12	0	15.64	15.24	15.07	16.00
5	64QAM	12	7	15.55	15.27	15.17	16.00
5	64QAM	12	13	15.45	15.27	14.98	16.00
5	64QAM	25	0	15.54	15.35	15.12	16.00

【LTE Band 12_P-Sensor Off】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23060	23095	23130	Tune-up limit (dBm)
Frequency (MHz)				704	707.5	711	
10	QPSK	1	0	23.65	23.70	23.72	25.50
10	QPSK	1	25	23.51	23.60	23.56	25.50
10	QPSK	1	49	23.50	23.58	23.50	25.50
10	QPSK	25	0	22.65	22.78	22.74	24.50
10	QPSK	25	12	22.60	22.77	22.72	24.50
10	QPSK	25	25	22.55	22.68	22.68	24.50
10	QPSK	50	0	22.64	22.75	22.73	24.50
10	16QAM	1	0	22.95	23.01	22.88	24.50
10	16QAM	1	25	22.74	22.89	22.90	24.50
10	16QAM	1	49	22.66	22.83	22.70	24.50
10	16QAM	25	0	21.71	21.79	21.79	23.50
10	16QAM	25	12	21.66	21.75	21.63	23.50
10	16QAM	25	25	21.52	21.69	21.60	23.50
10	16QAM	50	0	21.62	21.74	21.74	23.50
10	64QAM	1	0	21.86	21.97	21.92	23.50
10	64QAM	1	25	21.56	21.74	21.68	23.50
10	64QAM	1	49	21.66	21.84	21.75	23.50
10	64QAM	25	0	20.82	20.77	20.67	22.50
10	64QAM	25	12	20.83	20.76	20.67	22.50
10	64QAM	25	25	20.75	20.72	20.69	22.50
10	64QAM	50	0	20.79	20.77	20.75	22.50
Channel				23035	23095	23115	Tune-up limit (dBm)
Frequency (MHz)				701.5	707.5	713.5	
5	QPSK	1	0	23.53	23.61	23.62	25.50
5	QPSK	1	12	23.50	23.50	23.52	25.50
5	QPSK	1	24	23.50	23.53	23.50	25.50
5	QPSK	12	0	22.54	22.77	22.69	24.50
5	QPSK	12	7	22.57	22.71	22.66	24.50
5	QPSK	12	13	22.52	22.59	22.66	24.50
5	QPSK	25	0	22.50	22.60	22.65	24.50
5	16QAM	1	0	22.92	22.93	22.83	24.50
5	16QAM	1	12	22.69	22.77	22.77	24.50
5	16QAM	1	24	22.63	22.74	22.65	24.50
5	16QAM	12	0	21.62	21.71	21.75	23.50
5	16QAM	12	7	21.51	21.63	21.52	23.50
5	16QAM	12	13	21.51	21.61	21.52	23.50
5	16QAM	25	0	21.56	21.61	21.72	23.50
5	64QAM	1	0	21.84	21.95	21.82	23.50
5	64QAM	1	12	21.52	21.71	21.53	23.50
5	64QAM	1	24	21.61	21.75	21.70	23.50
5	64QAM	12	0	20.75	20.69	20.52	22.50
5	64QAM	12	7	20.79	20.65	20.64	22.50
5	64QAM	12	13	20.71	20.58	20.56	22.50
5	64QAM	25	0	20.70	20.73	20.63	22.50
Channel				23025	23095	23165	Tune-up limit (dBm)
Frequency (MHz)				700.5	707.5	714.5	
3	QPSK	1	0	23.59	23.60	23.64	25.50

3	QPSK	1	8	23.50	23.50	23.52	25.50
3	QPSK	1	14	23.50	23.53	23.51	25.50
3	QPSK	8	0	22.61	22.65	22.73	24.50
3	QPSK	8	4	22.53	22.70	22.63	24.50
3	QPSK	8	7	22.50	22.61	22.54	24.50
3	QPSK	15	0	22.60	22.72	22.62	24.50
3	16QAM	1	0	22.81	23.00	22.78	24.50
3	16QAM	1	8	22.66	22.83	22.79	24.50
3	16QAM	1	14	22.62	22.74	22.62	24.50
3	16QAM	8	0	21.67	21.78	21.77	23.50
3	16QAM	8	4	21.58	21.62	21.55	23.50
3	16QAM	8	7	21.50	21.56	21.51	23.50
3	16QAM	15	0	21.60	21.61	21.71	23.50
3	64QAM	1	0	21.81	21.84	21.82	23.50
3	64QAM	1	8	21.52	21.68	21.62	23.50
3	64QAM	1	14	21.56	21.72	21.60	23.50
3	64QAM	8	0	20.74	20.73	20.54	22.50
3	64QAM	8	4	20.70	20.70	20.59	22.50
3	64QAM	8	7	20.72	20.68	20.60	22.50
3	64QAM	15	0	20.66	20.73	20.73	22.50
Channel				23017	23095	23173	Tune-up limit (dBm)
Frequency (MHz)				699.7	707.5	715.3	
1.4	QPSK	1	0	23.56	23.64	23.64	25.50
1.4	QPSK	1	3	23.50	23.58	23.51	25.50
1.4	QPSK	1	5	23.51	23.57	23.51	25.50
1.4	QPSK	3	0	23.54	23.69	23.69	25.50
1.4	QPSK	3	1	23.57	23.69	23.65	25.50
1.4	QPSK	3	3	23.50	23.55	23.63	25.50
1.4	QPSK	6	0	22.55	22.71	22.60	24.50
1.4	16QAM	1	0	22.90	23.00	22.76	24.50
1.4	16QAM	1	3	22.67	22.83	22.75	24.50
1.4	16QAM	1	5	22.62	22.72	22.57	24.50
1.4	16QAM	3	0	22.62	22.65	22.74	24.50
1.4	16QAM	3	1	22.61	22.66	22.61	24.50
1.4	16QAM	3	3	22.51	22.65	22.57	24.50
1.4	16QAM	6	0	21.55	21.67	21.65	23.50
1.4	64QAM	1	0	21.76	21.96	21.86	23.50
1.4	64QAM	1	3	21.50	21.62	21.58	23.50
1.4	64QAM	1	5	21.58	21.77	21.71	23.50
1.4	64QAM	3	0	21.68	21.70	21.63	23.50
1.4	64QAM	3	1	21.68	21.68	21.61	23.50
1.4	64QAM	3	3	21.62	21.69	21.55	23.50
1.4	64QAM	6	0	20.65	20.70	20.72	22.50

【LTE Band 12_P-Sensor On】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23060	23095	23130	
Frequency (MHz)				704	707.5	711	
10	QPSK	1	0	21.11	21.20	21.12	22.00
10	QPSK	1	25	21.21	21.06	21.09	22.00
10	QPSK	1	49	21.02	21.17	21.24	22.00
10	QPSK	25	0	21.30	21.30	21.20	22.00
10	QPSK	25	12	21.23	21.17	21.16	22.00
10	QPSK	25	25	21.18	21.11	21.17	22.00
10	QPSK	50	0	21.17	21.19	21.18	22.00
10	16QAM	1	0	21.30	21.21	21.07	22.00
10	16QAM	1	25	21.33	21.15	21.16	22.00
10	16QAM	1	49	21.06	21.17	21.33	22.00
10	16QAM	25	0	21.32	21.20	21.31	22.00
10	16QAM	25	12	21.25	21.27	21.22	22.00
10	16QAM	25	25	21.27	21.10	21.13	22.00
10	16QAM	50	0	21.21	21.18	21.15	22.00
10	64QAM	1	0	21.24	21.18	21.38	22.00
10	64QAM	1	25	21.38	21.32	21.31	22.00
10	64QAM	1	49	21.38	21.05	21.17	22.00
10	64QAM	25	0	20.66	20.65	20.70	22.00
10	64QAM	25	12	20.75	20.57	20.61	22.00
10	64QAM	25	25	20.75	20.68	20.62	22.00
10	64QAM	50	0	20.68	20.64	20.65	22.00
Channel				23035	23095	23115	Tune-up limit (dBm)
Frequency (MHz)				701.5	707.5	713.5	
5	QPSK	1	0	20.99	21.09	20.99	22.00

5	QPSK	1	12	21.11	21.04	21.04	22.00
5	QPSK	1	24	20.93	21.04	21.12	22.00
5	QPSK	12	0	21.10	21.20	21.10	22.00
5	QPSK	12	7	21.09	21.05	21.12	22.00
5	QPSK	12	13	21.10	20.97	21.03	22.00
5	QPSK	25	0	21.07	21.08	21.06	22.00
5	16QAM	1	0	21.11	21.09	21.01	22.00
5	16QAM	1	12	21.11	21.14	21.05	22.00
5	16QAM	1	24	20.94	21.03	21.12	22.00
5	16QAM	12	0	21.10	21.11	21.12	22.00
5	16QAM	12	7	21.11	21.19	21.08	22.00
5	16QAM	12	13	21.11	20.97	21.04	22.00
5	16QAM	25	0	21.11	21.05	21.11	22.00
5	64QAM	1	0	21.09	21.07	21.12	22.00
5	64QAM	1	12	21.09	21.20	21.11	22.00
5	64QAM	1	24	21.11	21.01	21.05	22.00
5	64QAM	12	0	20.55	20.63	20.65	22.00
5	64QAM	12	7	20.63	20.47	20.52	22.00
5	64QAM	12	13	20.65	20.58	20.52	22.00
5	64QAM	25	0	20.57	20.57	20.52	22.00
Channel				23025	23095	23165	Tune-up limit
Frequency (MHz)				700.5	707.5	714.5	(dBm)
3	QPSK	1	0	21.01	21.12	21.07	22.00
3	QPSK	1	8	21.09	20.99	21.00	22.00
3	QPSK	1	14	20.90	21.10	21.11	22.00
3	QPSK	8	0	21.11	21.19	21.07	22.00
3	QPSK	8	4	21.11	21.07	21.07	22.00
3	QPSK	8	7	21.06	21.08	21.10	22.00
3	QPSK	15	0	21.03	21.06	21.08	22.00
3	16QAM	1	0	21.11	21.15	21.04	22.00
3	16QAM	1	8	21.10	21.08	21.05	22.00
3	16QAM	1	14	21.05	21.08	21.11	22.00
3	16QAM	8	0	21.11	21.11	21.11	22.00
3	16QAM	8	4	21.11	21.14	21.11	22.00
3	16QAM	8	7	21.11	21.04	21.06	22.00
3	16QAM	15	0	21.11	21.15	21.00	22.00
3	64QAM	1	0	21.10	21.10	21.11	22.00
3	64QAM	1	8	21.09	21.18	21.11	22.00
3	64QAM	1	14	21.09	20.98	21.09	22.00
3	64QAM	8	0	20.58	20.56	20.69	22.00
3	64QAM	8	4	20.69	20.49	20.51	22.00
3	64QAM	8	7	20.65	20.61	20.53	22.00
3	64QAM	15	0	20.66	20.54	20.55	22.00
Channel				23017	23095	23173	Tune-up limit
Frequency (MHz)				699.7	707.5	715.3	(dBm)
1.4	QPSK	1	0	21.02	21.12	21.07	22.00
1.4	QPSK	1	3	21.11	21.04	20.96	22.00
1.4	QPSK	1	5	20.99	21.13	21.11	22.00
1.4	QPSK	3	0	21.11	21.20	21.12	22.00
1.4	QPSK	3	1	21.11	21.02	21.10	22.00
1.4	QPSK	3	3	21.08	21.01	21.11	22.00
1.4	QPSK	6	0	20.05	20.06	20.06	21.00
1.4	16QAM	1	0	20.17	20.16	20.01	21.00
1.4	16QAM	1	3	20.25	20.12	20.02	21.00
1.4	16QAM	1	5	19.98	20.06	20.18	21.00
1.4	16QAM	3	0	20.25	20.11	20.20	21.00
1.4	16QAM	3	1	20.19	20.24	20.09	21.00
1.4	16QAM	3	3	20.16	20.07	20.00	21.00
1.4	16QAM	6	0	19.07	19.08	19.02	20.00
1.4	64QAM	1	0	19.19	19.04	19.30	20.00
1.4	64QAM	1	3	19.28	19.26	19.21	20.00
1.4	64QAM	1	5	19.30	19.03	19.03	20.00
1.4	64QAM	3	0	18.61	18.61	18.67	20.00
1.4	64QAM	3	1	18.73	18.44	18.47	20.00
1.4	64QAM	3	3	18.67	18.56	18.54	20.00
1.4	64QAM	6	0	17.54	17.49	17.61	19.00

【LTE Band 13_P-Sensor Off】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel					23230		
Frequency (MHz)					782		
10	QPSK	1	0		23.68		25.50
10	QPSK	1	25		23.67		25.50
10	QPSK	1	49		23.59		25.50
10	QPSK	25	0		22.86		24.50
10	QPSK	25	12		22.83		24.50
10	QPSK	25	25		22.73		24.50
10	QPSK	50	0		22.83		24.50
10	16QAM	1	0		22.84		24.50
10	16QAM	1	25		22.82		24.50
10	16QAM	1	49		22.80		24.50
10	16QAM	25	0		21.84		23.50
10	16QAM	25	12		21.83		23.50
10	16QAM	25	25		21.76		23.50
10	16QAM	50	0		21.84		23.50
10	64QAM	1	0		21.82		23.50
10	64QAM	1	25		21.80		23.50
10	64QAM	1	49		21.80		23.50
10	64QAM	25	0		20.89		22.50
10	64QAM	25	12		20.84		22.50
10	64QAM	25	25		20.75		22.50
10	64QAM	50	0		20.72		22.50
Channel				23205	23230	23255	Tune-up limit
Frequency (MHz)				779.5	782	784.5	(dBm)
5	QPSK	1	0	23.62	23.65	23.59	25.50
5	QPSK	1	12	23.57	23.61	23.52	25.50
5	QPSK	1	24	23.51	23.55	23.50	25.50
5	QPSK	12	0	22.68	22.85	22.70	24.50
5	QPSK	12	7	22.73	22.84	22.74	24.50
5	QPSK	12	13	22.74	22.82	22.66	24.50
5	QPSK	25	0	22.67	22.73	22.56	24.50
5	16QAM	1	0	22.74	22.81	22.69	24.50
5	16QAM	1	12	22.65	22.76	22.65	24.50
5	16QAM	1	24	22.67	22.78	22.58	24.50
5	16QAM	12	0	21.74	21.83	21.65	23.50
5	16QAM	12	7	21.74	21.82	21.65	23.50
5	16QAM	12	13	21.61	21.75	21.57	23.50
5	16QAM	25	0	21.70	21.78	21.59	23.50
5	64QAM	1	0	21.64	21.75	21.61	23.50
5	64QAM	1	12	21.62	21.73	21.59	23.50
5	64QAM	1	24	21.59	21.66	21.52	23.50
5	64QAM	12	0	20.80	20.86	20.71	22.50
5	64QAM	12	7	20.74	20.83	20.75	22.50
5	64QAM	12	13	20.79	20.85	20.76	22.50
5	64QAM	25	0	20.73	20.88	20.71	22.50

【LTE Band 13_P-Sensor On】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel					23230		
Frequency (MHz)					782		
10	QPSK	1	0		18.50		19.50
10	QPSK	1	25		18.23		19.50
10	QPSK	1	49		18.18		19.50
10	QPSK	25	0		18.37		19.50
10	QPSK	25	12		18.30		19.50
10	QPSK	25	25		18.29		19.50
10	QPSK	50	0		18.31		19.50
10	16QAM	1	0		18.50		19.50
10	16QAM	1	25		18.46		19.50
10	16QAM	1	49		18.42		19.50
10	16QAM	25	0		18.39		19.50
10	16QAM	25	12		18.27		19.50
10	16QAM	25	25		18.12		19.50
10	16QAM	50	0		18.33		19.50
10	64QAM	1	0		18.43		19.50
10	64QAM	1	25		18.46		19.50
10	64QAM	1	49		18.53		19.50
10	64QAM	25	0		18.44		19.50
10	64QAM	25	12		18.45		19.50
10	64QAM	25	25		18.25		19.50
10	64QAM	50	0		18.38		19.50
Channel				23205	23230	23255	
Frequency (MHz)				779.5	782	784.5	Tune-up limit (dBm)
5	QPSK	1	0	18.23	18.45	18.35	19.50
5	QPSK	1	12	17.82	17.98	17.77	19.50
5	QPSK	1	24	17.77	17.89	17.67	19.50
5	QPSK	12	0	17.98	18.19	18.01	19.50
5	QPSK	12	7	17.99	18.05	17.91	19.50
5	QPSK	12	13	17.91	18.01	17.90	19.50
5	QPSK	25	0	17.92	18.12	17.92	19.50
5	16QAM	1	0	18.13	18.20	18.08	19.50
5	16QAM	1	12	18.09	18.18	17.99	19.50
5	16QAM	1	24	18.14	18.21	17.98	19.50
5	16QAM	12	0	18.11	18.10	17.95	19.50
5	16QAM	12	7	17.96	18.09	17.88	19.50
5	16QAM	12	13	17.75	17.94	17.75	19.50
5	16QAM	25	0	17.95	18.07	17.91	19.50
5	64QAM	1	0	18.14	18.22	17.97	19.50
5	64QAM	1	12	18.14	18.26	18.15	19.50
5	64QAM	1	24	18.14	18.24	17.99	19.50
5	64QAM	12	0	18.12	18.16	18.05	19.50
5	64QAM	12	7	18.14	18.16	17.97	19.50
5	64QAM	12	13	17.85	18.01	17.85	19.50
5	64QAM	25	0	18.03	18.16	17.94	19.50

【LTE Band 14 P-Sensor Off】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel					23330		
Frequency (MHz)					793		
10	QPSK	1	0		23.83		25.50
10	QPSK	1	25		23.78		25.50
10	QPSK	1	49		23.71		25.50
10	QPSK	25	0		22.96		24.50
10	QPSK	25	12		22.93		24.50
10	QPSK	25	25		22.86		24.50
10	QPSK	50	0		22.92		24.50
10	16QAM	1	0		23.13		24.50
10	16QAM	1	25		22.98		24.50
10	16QAM	1	49		23.02		24.50
10	16QAM	25	0		21.96		23.50
10	16QAM	25	12		21.93		23.50
10	16QAM	25	25		21.88		23.50
10	16QAM	50	0		21.91		23.50
10	64QAM	1	0		21.95		23.50
10	64QAM	1	25		21.90		23.50
10	64QAM	1	49		21.90		23.50
10	64QAM	25	0		20.96		22.50
10	64QAM	25	12		20.92		22.50
10	64QAM	25	25		20.88		22.50
10	64QAM	50	0		20.91		22.50
Channel				23305	23330	23355	
Frequency (MHz)				790.5	793	795.5	Tune-up limit (dBm)
5	QPSK	1	0	23.72	23.75	23.68	25.50
5	QPSK	1	12	23.51	23.68	23.60	25.50
5	QPSK	1	24	23.59	23.66	23.58	25.50
5	QPSK	12	0	22.69	22.85	22.73	24.50
5	QPSK	12	7	22.67	22.82	22.67	24.50
5	QPSK	12	13	22.72	22.80	22.66	24.50
5	QPSK	25	0	22.65	22.76	22.57	24.50
5	16QAM	1	0	22.85	22.91	22.75	24.50
5	16QAM	1	12	22.74	22.85	22.68	24.50
5	16QAM	1	24	22.75	22.81	22.60	24.50
5	16QAM	12	0	21.75	21.88	21.77	23.50
5	16QAM	12	7	21.68	21.76	21.67	23.50
5	16QAM	12	13	21.74	21.83	21.75	23.50
5	16QAM	25	0	21.66	21.82	21.63	23.50
5	64QAM	1	0	21.81	21.85	21.68	23.50
5	64QAM	1	12	21.76	21.83	21.68	23.50
5	64QAM	1	24	21.68	21.80	21.61	23.50
5	64QAM	12	0	20.67	20.83	20.71	22.50
5	64QAM	12	7	20.73	20.87	20.75	22.50
5	64QAM	12	13	20.76	20.84	20.73	22.50
5	64QAM	25	0	20.67	20.82	20.64	22.50

【LTE Band 14 P-Sensor On】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel					23330		
Frequency (MHz)					793		
10	QPSK	1	0		19.49		19.50
10	QPSK	1	25		19.30		19.50
10	QPSK	1	49		19.26		19.50
10	QPSK	25	0		19.47		19.50
10	QPSK	25	12		19.46		19.50
10	QPSK	25	25		19.40		19.50
10	QPSK	50	0		19.40		19.50
10	16QAM	1	0		19.45		19.50
10	16QAM	1	25		19.44		19.50
10	16QAM	1	49		19.45		19.50
10	16QAM	25	0		19.49		19.50
10	16QAM	25	12		19.42		19.50
10	16QAM	25	25		19.38		19.50
10	16QAM	50	0		19.49		19.50
10	64QAM	1	0		19.44		19.50
10	64QAM	1	25		19.39		19.50
10	64QAM	1	49		19.43		19.50
10	64QAM	25	0		19.49		19.50
10	64QAM	25	12		19.41		19.50
10	64QAM	25	25		19.39		19.50
10	64QAM	50	0		19.40		19.50
Channel				23305	23330	23355	
Frequency (MHz)				790.5	793	795.5	Tune-up limit (dBm)
5	QPSK	1	0	19.30	19.41	19.20	19.50
5	QPSK	1	12	19.04	18.98	18.64	19.50
5	QPSK	1	24	19.00	18.86	18.46	19.50
5	QPSK	12	0	19.17	19.05	18.61	19.50
5	QPSK	12	7	19.19	19.09	18.78	19.50
5	QPSK	12	13	19.09	18.96	18.61	19.50
5	QPSK	25	0	19.15	19.06	18.70	19.50
5	16QAM	1	0	19.21	19.08	18.72	19.50
5	16QAM	1	12	19.28	19.20	18.88	19.50
5	16QAM	1	24	19.29	19.12	18.70	19.50
5	16QAM	12	0	19.14	19.07	18.72	19.50
5	16QAM	12	7	19.17	18.99	18.67	19.50
5	16QAM	12	13	19.03	19.04	18.64	19.50
5	16QAM	25	0	19.26	19.08	18.75	19.50
5	64QAM	1	0	19.30	19.20	18.77	19.50
5	64QAM	1	12	19.29	19.18	18.76	19.50
5	64QAM	1	24	19.14	19.05	18.70	19.50
5	64QAM	12	0	19.14	19.07	18.64	19.50
5	64QAM	12	7	19.21	19.11	18.76	19.50
5	64QAM	12	13	19.17	18.97	18.61	19.50
5	64QAM	25	0	19.16	18.98	18.60	19.50

【LTE Band 25_P-Sensor Off】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26140	26340	26590	
Frequency (MHz)				1860	1880	1905	
20	QPSK	1	0	22.73	22.75	22.82	24.50
20	QPSK	1	49	22.74	22.78	22.80	24.50
20	QPSK	1	99	22.64	22.72	22.75	24.50
20	QPSK	50	0	21.85	21.84	22.01	23.50
20	QPSK	50	24	22.00	21.89	21.93	23.50
20	QPSK	50	50	21.87	21.80	21.86	23.50
20	QPSK	100	0	21.89	21.85	21.88	23.50
20	16QAM	1	0	22.04	22.04	21.88	23.50
20	16QAM	1	49	21.93	22.04	21.98	23.50
20	16QAM	1	99	21.86	22.01	21.85	23.50
20	16QAM	50	0	20.94	20.91	20.77	22.50
20	16QAM	50	24	20.94	20.86	20.94	22.50
20	16QAM	50	50	20.87	20.75	20.85	22.50
20	16QAM	100	0	20.84	20.83	20.83	22.50
20	64QAM	1	0	21.01	20.92	20.71	22.50
20	64QAM	1	49	20.98	20.93	21.03	22.50
20	64QAM	1	99	20.88	20.86	20.91	22.50
20	64QAM	50	0	19.93	19.88	19.78	21.50
20	64QAM	50	24	19.96	19.88	19.93	21.50
20	64QAM	50	50	19.86	19.80	19.90	21.50
20	64QAM	100	0	19.85	19.81	19.89	21.50
Channel				26115	26340	26615	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1907.5	
15	QPSK	1	0	22.62	22.71	22.72	24.50
15	QPSK	1	37	22.61	22.74	22.78	24.50
15	QPSK	1	74	22.57	22.68	22.69	24.50
15	QPSK	36	0	21.73	21.70	21.91	23.50
15	QPSK	36	20	21.96	21.74	21.89	23.50
15	QPSK	36	39	21.80	21.73	21.74	23.50
15	QPSK	75	0	21.83	21.72	21.82	23.50
15	16QAM	1	0	21.90	21.90	21.86	23.50
15	16QAM	1	37	21.86	22.03	21.84	23.50
15	16QAM	1	74	21.79	21.91	21.77	23.50
15	16QAM	36	0	20.81	20.82	20.67	22.50
15	16QAM	36	20	20.90	20.74	20.80	22.50
15	16QAM	36	39	20.79	20.67	20.76	22.50
15	16QAM	75	0	20.82	20.70	20.75	22.50
15	64QAM	1	0	20.86	20.86	20.58	22.50
15	64QAM	1	37	20.92	20.91	20.90	22.50
15	64QAM	1	74	20.75	20.74	20.84	22.50
15	64QAM	36	0	19.83	19.78	19.76	21.50
15	64QAM	36	20	19.90	19.79	19.84	21.50
15	64QAM	36	39	19.80	19.68	19.82	21.50
15	64QAM	75	0	19.75	19.72	19.75	21.50
Channel				26090	26340	26640	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1910	
10	QPSK	1	0	22.63	22.63	22.70	24.50
10	QPSK	1	25	22.69	22.75	22.70	24.50
10	QPSK	1	49	22.62	22.67	22.65	24.50
10	QPSK	25	0	21.73	21.77	21.98	23.50
10	QPSK	25	12	21.96	21.77	21.90	23.50
10	QPSK	25	25	21.79	21.69	21.85	23.50
10	QPSK	50	0	21.84	21.83	21.75	23.50
10	16QAM	1	0	21.99	22.03	21.78	23.50
10	16QAM	1	25	21.87	21.92	21.89	23.50
10	16QAM	1	49	21.81	21.91	21.73	23.50
10	16QAM	25	0	20.93	20.77	20.69	22.50
10	16QAM	25	12	20.79	20.75	20.79	22.50
10	16QAM	25	25	20.76	20.72	20.73	22.50
10	16QAM	50	0	20.72	20.69	20.81	22.50
10	64QAM	1	0	20.86	20.91	20.59	22.50
10	64QAM	1	25	20.92	20.79	20.89	22.50
10	64QAM	1	49	20.86	20.73	20.81	22.50
10	64QAM	25	0	19.89	19.73	19.69	21.50
10	64QAM	25	12	19.92	19.74	19.85	21.50
10	64QAM	25	25	19.80	19.68	19.84	21.50
10	64QAM	50	0	19.74	19.76	19.83	21.50
Channel				26065	26340	26665	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1912.5	



FCC SAR TEST REPORT

Report No. : FA622715

5	QPSK	1	0	22.66	22.64	22.77	24.50
5	QPSK	1	12	22.61	22.64	22.65	24.50
5	QPSK	1	24	22.60	22.63	22.71	24.50
5	QPSK	12	0	21.83	21.78	21.90	23.50
5	QPSK	12	7	21.91	21.86	21.91	23.50
5	QPSK	12	13	21.80	21.70	21.77	23.50
5	QPSK	25	0	21.87	21.83	21.83	23.50
5	16QAM	1	0	21.95	22.00	21.77	23.50
5	16QAM	1	12	21.90	22.03	21.96	23.50
5	16QAM	1	24	21.82	21.99	21.78	23.50
5	16QAM	12	0	20.82	20.85	20.63	22.50
5	16QAM	12	7	20.90	20.84	20.92	22.50
5	16QAM	12	13	20.84	20.67	20.81	22.50
5	16QAM	25	0	20.79	20.73	20.77	22.50
5	64QAM	1	0	20.99	20.90	20.56	22.50
5	64QAM	1	12	20.96	20.79	20.92	22.50
5	64QAM	1	24	20.77	20.73	20.85	22.50
5	64QAM	12	0	19.85	19.86	19.70	21.50
5	64QAM	12	7	19.91	19.83	19.81	21.50
5	64QAM	12	13	19.84	19.73	19.77	21.50
5	64QAM	25	0	19.82	19.73	19.87	21.50
Channel				26055	26340	26675	Tune-up limit
Frequency (MHz)				1851.5	1880	1913.5	(dBm)
3	QPSK	1	0	22.70	22.69	22.73	24.50
3	QPSK	1	8	22.66	22.65	22.75	24.50
3	QPSK	1	14	22.61	22.63	22.64	24.50
3	QPSK	8	0	21.74	21.76	21.88	23.50
3	QPSK	8	4	21.98	21.81	21.89	23.50
3	QPSK	8	7	21.81	21.65	21.71	23.50
3	QPSK	15	0	21.82	21.84	21.80	23.50
3	16QAM	1	0	21.94	21.95	21.79	23.50
3	16QAM	1	8	21.84	22.02	21.93	23.50
3	16QAM	1	14	21.75	21.90	21.83	23.50
3	16QAM	8	0	20.93	20.82	20.67	22.50
3	16QAM	8	4	20.91	20.81	20.81	22.50
3	16QAM	8	7	20.73	20.74	20.79	22.50
3	16QAM	15	0	20.77	20.82	20.77	22.50
3	64QAM	1	0	20.87	20.85	20.59	22.50
3	64QAM	1	8	20.86	20.83	20.92	22.50
3	64QAM	1	14	20.83	20.83	20.76	22.50
3	64QAM	8	0	19.84	19.77	19.76	21.50
3	64QAM	8	4	19.85	19.78	19.81	21.50
3	64QAM	8	7	19.78	19.75	19.88	21.50
3	64QAM	15	0	19.73	19.69	19.82	21.50
Channel				26047	26340	26683	Tune-up limit
Frequency (MHz)				1850.7	1880	1914.3	(dBm)
1.4	QPSK	1	0	22.71	22.68	22.69	24.50
1.4	QPSK	1	3	22.60	22.74	22.77	24.50
1.4	QPSK	1	5	22.50	22.67	22.61	24.50
1.4	QPSK	3	0	22.72	22.75	22.82	24.50
1.4	QPSK	3	1	22.73	22.74	22.81	24.50
1.4	QPSK	3	3	22.72	22.75	22.72	24.50
1.4	QPSK	6	0	21.80	21.84	21.80	23.50
1.4	16QAM	1	0	22.00	21.99	21.78	23.50
1.4	16QAM	1	3	21.82	21.99	21.91	23.50
1.4	16QAM	1	5	21.77	21.88	21.83	23.50
1.4	16QAM	3	0	21.80	21.89	21.65	23.50
1.4	16QAM	3	1	21.83	21.83	21.87	23.50
1.4	16QAM	3	3	21.78	21.68	21.76	23.50
1.4	16QAM	6	0	20.80	20.70	20.82	22.50
1.4	64QAM	1	0	20.92	20.84	20.66	22.50
1.4	64QAM	1	3	20.86	20.85	20.99	22.50
1.4	64QAM	1	5	20.74	20.82	20.83	22.50
1.4	64QAM	3	0	20.84	20.83	20.69	22.50
1.4	64QAM	3	1	20.88	20.79	20.82	22.50
1.4	64QAM	3	3	20.80	20.78	20.80	22.50
1.4	64QAM	6	0	19.80	19.67	19.78	21.50

【LTE Band 25_P-Sensor On】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26140	26340	26590	
Frequency (MHz)				1860	1880	1905	
20	QPSK	1	0	20.59	20.63	20.80	21.50
20	QPSK	1	49	20.65	20.73	20.69	21.50
20	QPSK	1	99	20.67	20.74	20.60	21.50
20	QPSK	50	0	20.74	20.70	20.78	21.50
20	QPSK	50	24	20.76	20.77	20.75	21.50
20	QPSK	50	50	20.71	20.75	20.73	21.50
20	QPSK	100	0	20.75	20.79	20.80	21.50
20	16QAM	1	0	20.41	20.64	20.79	21.50
20	16QAM	1	49	20.77	20.80	20.58	21.50
20	16QAM	1	99	20.73	20.69	20.68	21.50
20	16QAM	50	0	20.59	20.83	20.86	21.50
20	16QAM	50	24	20.72	20.80	20.87	21.50
20	16QAM	50	50	20.72	20.68	20.82	21.50
20	16QAM	100	0	20.79	20.74	20.78	21.50
20	64QAM	1	0	20.68	20.83	20.78	21.50
20	64QAM	1	49	20.71	20.72	20.39	21.50
20	64QAM	1	99	20.70	20.44	20.91	21.50
20	64QAM	50	0	19.67	19.78	19.90	21.50
20	64QAM	50	24	19.79	19.82	19.86	21.50
20	64QAM	50	50	19.70	19.76	19.83	21.50
20	64QAM	100	0	19.76	19.68	19.83	21.50
Channel				26115	26340	26615	Tune-up limit
Frequency (MHz)				1857.5	1880	1907.5	
15	QPSK	1	0	20.50	20.59	20.79	21.50
15	QPSK	1	37	20.56	20.63	20.64	21.50
15	QPSK	1	74	20.55	20.61	20.53	21.50
15	QPSK	36	0	20.59	20.57	20.74	21.50
15	QPSK	36	20	20.59	20.62	20.69	21.50
15	QPSK	36	39	20.57	20.62	20.68	21.50
15	QPSK	75	0	20.59	20.61	20.68	21.50
15	16QAM	1	0	20.37	20.54	20.64	21.50
15	16QAM	1	37	20.58	20.63	20.44	21.50
15	16QAM	1	74	20.58	20.56	20.60	21.50
15	16QAM	36	0	20.56	20.63	20.75	21.50
15	16QAM	36	20	20.59	20.61	20.76	21.50
15	16QAM	36	39	20.57	20.57	20.74	21.50
15	16QAM	75	0	20.58	20.63	20.70	21.50
15	64QAM	1	0	20.58	20.63	20.71	21.50
15	64QAM	1	37	20.56	20.63	20.37	21.50
15	64QAM	1	74	20.58	20.34	20.80	21.50
15	64QAM	36	0	19.65	19.71	19.75	21.50
15	64QAM	36	20	19.69	19.78	19.85	21.50
15	64QAM	36	39	19.56	19.64	19.73	21.50
15	64QAM	75	0	19.64	19.61	19.74	21.50
Channel				26090	26340	26640	Tune-up limit
Frequency (MHz)				1855	1880	1910	
10	QPSK	1	0	20.52	20.60	20.74	21.50
10	QPSK	1	25	20.51	20.63	20.63	21.50
10	QPSK	1	49	20.54	20.63	20.54	21.50
10	QPSK	25	0	20.58	20.60	20.70	21.50
10	QPSK	25	12	20.59	20.63	20.65	21.50
10	QPSK	25	25	20.59	20.60	20.68	21.50
10	QPSK	50	0	20.59	20.62	20.72	21.50
10	16QAM	1	0	20.31	20.54	20.73	21.50
10	16QAM	1	25	20.59	20.62	20.46	21.50
10	16QAM	1	49	20.59	20.57	20.57	21.50
10	16QAM	25	0	20.56	20.63	20.74	21.50
10	16QAM	25	12	20.59	20.61	20.76	21.50
10	16QAM	25	25	20.59	20.56	20.80	21.50
10	16QAM	50	0	20.58	20.62	20.71	21.50
10	64QAM	1	0	20.53	20.62	20.64	21.50
10	64QAM	1	25	20.58	20.58	20.26	21.50
10	64QAM	1	49	20.57	20.33	20.78	21.50
10	64QAM	25	0	19.52	19.65	19.81	21.50
10	64QAM	25	12	19.76	19.76	19.83	21.50
10	64QAM	25	25	19.63	19.64	19.75	21.50
10	64QAM	50	0	19.62	19.59	19.80	21.50
Channel				26065	26340	26665	Tune-up limit
Frequency (MHz)				1852.5	1880	1912.5	

5	QPSK	1	0	20.48	20.57	20.74	21.50
5	QPSK	1	12	20.58	20.62	20.57	21.50
5	QPSK	1	24	20.55	20.63	20.54	21.50
5	QPSK	12	0	20.59	20.62	20.74	21.50
5	QPSK	12	7	20.58	20.62	20.63	21.50
5	QPSK	12	13	20.58	20.60	20.72	21.50
5	QPSK	25	0	20.59	20.62	20.79	21.50
5	16QAM	1	0	20.32	20.62	20.68	21.50
5	16QAM	1	12	20.59	20.63	20.56	21.50
5	16QAM	1	24	20.59	20.58	20.63	21.50
5	16QAM	12	0	20.54	20.61	20.80	21.50
5	16QAM	12	7	20.59	20.63	20.80	21.50
5	16QAM	12	13	20.59	20.63	20.78	21.50
5	16QAM	25	0	20.59	20.62	20.64	21.50
5	64QAM	1	0	20.58	20.61	20.71	21.50
5	64QAM	1	12	20.59	20.62	20.28	21.50
5	64QAM	1	24	20.59	20.31	20.77	21.50
5	64QAM	12	0	19.58	19.70	19.84	21.50
5	64QAM	12	7	19.67	19.68	19.77	21.50
5	64QAM	12	13	19.59	19.74	19.71	21.50
5	64QAM	25	0	19.71	19.54	19.79	21.50
Channel				26055	26340	26675	Tune-up limit
Frequency (MHz)				1851.5	1880	1913.5	(dBm)
3	QPSK	1	0	20.52	20.53	20.70	21.50
3	QPSK	1	8	20.57	20.63	20.65	21.50
3	QPSK	1	14	20.59	20.63	20.50	21.50
3	QPSK	8	0	20.58	20.63	20.74	21.50
3	QPSK	8	4	20.59	20.62	20.64	21.50
3	QPSK	8	7	20.59	20.61	20.71	21.50
3	QPSK	15	0	20.58	20.61	20.69	21.50
3	16QAM	1	0	20.31	20.55	20.78	21.50
3	16QAM	1	8	20.57	20.63	20.43	21.50
3	16QAM	1	14	20.58	20.54	20.61	21.50
3	16QAM	8	0	20.50	20.61	20.76	21.50
3	16QAM	8	4	20.59	20.63	20.78	21.50
3	16QAM	8	7	20.59	20.61	20.79	21.50
3	16QAM	15	0	20.59	20.63	20.67	21.50
3	64QAM	1	0	20.58	20.63	20.73	21.50
3	64QAM	1	8	20.57	20.62	20.34	21.50
3	64QAM	1	14	20.59	20.32	20.80	21.50
3	64QAM	8	0	19.57	19.75	19.82	21.50
3	64QAM	8	4	19.74	19.71	19.75	21.50
3	64QAM	8	7	19.57	19.73	19.75	21.50
3	64QAM	15	0	19.65	19.66	19.74	21.50
Channel				26047	26340	26683	Tune-up limit
Frequency (MHz)				1850.7	1880	1914.3	(dBm)
1.4	QPSK	1	0	20.49	20.59	20.71	21.50
1.4	QPSK	1	3	20.54	20.62	20.58	21.50
1.4	QPSK	1	5	20.58	20.62	20.52	21.50
1.4	QPSK	3	0	20.59	20.59	20.67	21.50
1.4	QPSK	3	1	20.57	20.62	20.69	21.50
1.4	QPSK	3	3	20.56	20.63	20.67	21.50
1.4	QPSK	6	0	19.62	19.77	19.65	20.50
1.4	16QAM	1	0	19.37	19.56	19.74	20.50
1.4	16QAM	1	3	19.75	19.67	19.44	20.50
1.4	16QAM	1	5	19.69	19.55	19.61	20.50
1.4	16QAM	3	0	19.45	19.73	19.83	20.50
1.4	16QAM	3	1	19.64	19.74	19.75	20.50
1.4	16QAM	3	3	19.60	19.53	19.72	20.50
1.4	16QAM	6	0	18.75	18.72	18.65	19.50
1.4	64QAM	1	0	18.61	18.71	18.66	19.50
1.4	64QAM	1	3	18.68	18.67	18.28	19.50
1.4	64QAM	1	5	18.59	18.40	18.89	19.50
1.4	64QAM	3	0	17.54	17.72	17.75	19.50
1.4	64QAM	3	1	17.76	17.77	17.82	19.50
1.4	64QAM	3	3	17.58	17.64	17.69	19.50
1.4	64QAM	6	0	16.64	16.66	16.75	18.50

**【LTE Band 26_FCC (814~849MHz)_P-Sensor Off】**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26765	26865	26965	Tune-up limit (dBm)
Frequency (MHz)				821.5	831.5	841.5	
15	QPSK	1	0	23.68	23.96	24.04	25.50
15	QPSK	1	37	23.52	23.88	23.89	25.50
15	QPSK	1	74	23.51	23.83	23.83	25.50
15	QPSK	36	0	22.71	23.03	23.00	24.50
15	QPSK	36	20	22.61	22.96	22.98	24.50
15	QPSK	36	39	22.57	22.97	22.98	24.50
15	QPSK	75	0	22.54	22.95	22.92	24.50
15	16QAM	1	0	22.85	23.23	23.27	24.50
15	16QAM	1	37	22.86	23.14	23.15	24.50
15	16QAM	1	74	22.74	23.07	23.00	24.50
15	16QAM	36	0	21.67	22.06	22.02	23.50
15	16QAM	36	20	21.65	22.01	22.01	23.50
15	16QAM	36	39	21.63	21.97	22.00	23.50
15	16QAM	75	0	21.63	22.00	22.04	23.50
15	64QAM	1	0	21.80	22.16	22.09	23.50
15	64QAM	1	37	21.75	22.14	22.18	23.50
15	64QAM	1	74	21.76	22.04	22.02	23.50
15	64QAM	36	0	20.72	21.01	20.96	22.50
15	64QAM	36	20	20.80	21.09	21.07	22.50
15	64QAM	36	39	20.65	20.98	21.03	22.50
15	64QAM	75	0	20.73	21.02	21.05	22.50
Channel				26740	26865	26990	Tune-up limit (dBm)
Frequency (MHz)				819	831.5	844	
10	QPSK	1	0	23.53	23.85	23.98	25.50
10	QPSK	1	25	23.50	23.83	23.75	25.50
10	QPSK	1	49	23.52	23.74	23.78	25.50
10	QPSK	25	0	22.65	22.89	22.93	24.50
10	QPSK	25	12	22.51	22.88	22.92	24.50
10	QPSK	25	25	22.55	22.94	22.88	24.50
10	QPSK	50	0	22.53	22.90	22.78	24.50
10	16QAM	1	0	22.82	23.13	23.13	24.50
10	16QAM	1	25	22.82	23.05	23.03	24.50
10	16QAM	1	49	22.68	22.96	22.99	24.50
10	16QAM	25	0	21.61	21.97	21.87	23.50
10	16QAM	25	12	21.53	21.95	21.88	23.50
10	16QAM	25	25	21.51	21.88	21.86	23.50
10	16QAM	50	0	21.58	21.93	21.93	23.50
10	64QAM	1	0	21.72	22.04	21.94	23.50
10	64QAM	1	25	21.64	22.09	22.11	23.50
10	64QAM	1	49	21.68	21.96	21.92	23.50
10	64QAM	25	0	20.70	20.97	20.89	22.50
10	64QAM	25	12	20.66	21.04	20.98	22.50
10	64QAM	25	25	20.53	20.83	20.99	22.50
10	64QAM	50	0	20.68	20.88	20.97	22.50
Channel				26715	26865	27015	Tune-up limit (dBm)
Frequency (MHz)				816.5	831.5	846.5	
5	QPSK	1	0	23.58	23.87	23.92	25.50
5	QPSK	1	12	23.51	23.78	23.79	25.50
5	QPSK	1	24	23.51	23.69	23.71	25.50
5	QPSK	12	0	22.64	22.97	22.93	24.50
5	QPSK	12	7	22.51	22.82	22.94	24.50
5	QPSK	12	13	22.50	22.93	22.88	24.50
5	QPSK	25	0	22.52	22.93	22.89	24.50
5	16QAM	1	0	22.75	23.16	23.20	24.50
5	16QAM	1	12	22.73	23.07	23.10	24.50
5	16QAM	1	24	22.72	23.05	22.89	24.50
5	16QAM	12	0	21.56	22.05	21.99	23.50
5	16QAM	12	7	21.57	21.95	21.94	23.50
5	16QAM	12	13	21.50	21.93	21.92	23.50
5	16QAM	25	0	21.51	21.86	21.99	23.50
5	64QAM	1	0	21.76	22.12	22.07	23.50
5	64QAM	1	12	21.68	22.01	22.17	23.50
5	64QAM	1	24	21.67	21.90	21.99	23.50
5	64QAM	12	0	20.61	20.86	20.83	22.50
5	64QAM	12	7	20.72	21.04	20.94	22.50
5	64QAM	12	13	20.52	20.91	20.95	22.50
5	64QAM	25	0	20.60	20.96	21.00	22.50
Channel				26705	26865	27025	Tune-up limit (dBm)
Frequency (MHz)				815.5	831.5	847.5	
3	QPSK	1	0	23.67	23.88	23.90	25.50
3	QPSK	1	8	23.50	23.74	23.85	25.50

3	QPSK	1	14	23.51	23.70	23.79	25.50
3	QPSK	8	0	22.68	22.99	22.87	24.50
3	QPSK	8	4	22.50	22.84	22.97	24.50
3	QPSK	8	7	22.51	22.85	22.89	24.50
3	QPSK	15	0	22.51	22.85	22.82	24.50
3	16QAM	1	0	22.76	23.09	23.19	24.50
3	16QAM	1	8	22.83	23.02	23.06	24.50
3	16QAM	1	14	22.61	22.96	22.86	24.50
3	16QAM	8	0	21.55	21.94	21.87	23.50
3	16QAM	8	4	21.51	21.94	21.97	23.50
3	16QAM	8	7	21.61	21.93	21.89	23.50
3	16QAM	15	0	21.59	21.87	21.97	23.50
3	64QAM	1	0	21.76	22.03	21.96	23.50
3	64QAM	1	8	21.70	22.02	22.06	23.50
3	64QAM	1	14	21.69	21.92	21.93	23.50
3	64QAM	8	0	20.58	20.96	20.92	22.50
3	64QAM	8	4	20.66	21.00	21.03	22.50
3	64QAM	8	7	20.55	20.92	20.90	22.50
3	64QAM	15	0	20.68	20.89	21.02	22.50
Channel				26697	26865	27033	Tune-up limit
Frequency (MHz)				814.7	831.5	848.3	(dBm)
1.4	QPSK	1	0	23.63	23.92	23.91	25.50
1.4	QPSK	1	3	23.51	23.82	23.82	25.50
1.4	QPSK	1	5	23.51	23.69	23.82	25.50
1.4	QPSK	3	0	23.68	23.96	23.95	25.50
1.4	QPSK	3	1	23.50	23.95	23.84	25.50
1.4	QPSK	3	3	23.55	23.88	23.91	25.50
1.4	QPSK	6	0	22.50	22.89	22.83	24.50
1.4	16QAM	1	0	22.83	23.19	23.12	24.50
1.4	16QAM	1	3	22.75	23.00	23.01	24.50
1.4	16QAM	1	5	22.72	22.95	22.95	24.50
1.4	16QAM	3	0	22.63	23.02	22.92	24.50
1.4	16QAM	3	1	22.58	22.90	22.96	24.50
1.4	16QAM	3	3	22.57	22.86	22.96	24.50
1.4	16QAM	6	0	21.52	21.90	21.93	23.50
1.4	64QAM	1	0	21.74	22.07	22.01	23.50
1.4	64QAM	1	3	21.70	22.00	22.11	23.50
1.4	64QAM	1	5	21.62	21.92	21.97	23.50
1.4	64QAM	3	0	21.67	21.89	21.91	23.50
1.4	64QAM	3	1	21.78	22.04	21.97	23.50
1.4	64QAM	3	3	21.52	21.97	22.01	23.50
1.4	64QAM	6	0	20.72	20.95	21.01	22.50



【LTE Band 26_FCC (814~849MHz)_P-Sensor On】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26765	26865	26965	
Frequency (MHz)				821.5	831.5	841.5	
15	QPSK	1	0	18.81	19.09	19.06	19.50
15	QPSK	1	37	18.83	19.09	19.09	19.50
15	QPSK	1	74	19.04	19.02	18.89	19.50
15	QPSK	36	0	18.98	19.10	19.08	19.50
15	QPSK	36	20	19.09	19.10	19.06	19.50
15	QPSK	36	39	19.12	19.09	19.03	19.50
15	QPSK	75	0	19.05	19.15	19.03	19.50
15	16QAM	1	0	19.12	19.11	19.47	19.50
15	16QAM	1	37	19.20	19.49	19.05	19.50
15	16QAM	1	74	19.43	19.43	19.25	19.50
15	16QAM	36	0	18.99	19.07	19.05	19.50
15	16QAM	36	20	19.00	19.19	19.08	19.50
15	16QAM	36	39	19.11	19.07	19.04	19.50
15	16QAM	75	0	19.15	19.18	19.07	19.50
15	64QAM	1	0	18.90	19.22	19.11	19.50
15	64QAM	1	37	19.05	19.47	19.35	19.50
15	64QAM	1	74	19.00	19.25	19.12	19.50
15	64QAM	36	0	19.12	19.08	19.15	19.50
15	64QAM	36	20	19.11	19.19	19.01	19.50
15	64QAM	36	39	19.11	19.08	19.09	19.50
15	64QAM	75	0	19.07	19.14	19.03	19.50
Channel				26740	26865	26990	Tune-up limit (dBm)
Frequency (MHz)				819	831.5	844	
10	QPSK	1	0	18.69	19.06	19.01	19.50
10	QPSK	1	25	18.81	18.99	19.06	19.50
10	QPSK	1	49	18.81	18.91	18.87	19.50
10	QPSK	25	0	18.81	19.05	18.96	19.50
10	QPSK	25	12	18.80	19.00	18.92	19.50
10	QPSK	25	25	18.80	19.03	18.94	19.50
10	QPSK	50	0	18.81	19.01	18.92	19.50
10	16QAM	1	0	18.81	18.99	19.04	19.50
10	16QAM	1	25	18.80	19.09	18.95	19.50
10	16QAM	1	49	18.81	19.07	19.05	19.50
10	16QAM	25	0	18.81	18.98	18.90	19.50
10	16QAM	25	12	18.81	19.08	18.99	19.50
10	16QAM	25	25	18.81	19.05	19.01	19.50
10	16QAM	50	0	18.81	19.08	18.98	19.50
10	64QAM	1	0	18.80	19.08	19.00	19.50
10	64QAM	1	25	18.81	19.08	19.04	19.50
10	64QAM	1	49	18.81	19.09	18.98	19.50
10	64QAM	25	0	18.81	18.94	19.02	19.50
10	64QAM	25	12	18.81	19.08	18.96	19.50
10	64QAM	25	25	18.80	18.96	19.05	19.50
10	64QAM	50	0	18.81	18.99	18.90	19.50
Channel				26715	26865	27015	Tune-up limit (dBm)
Frequency (MHz)				816.5	831.5	846.5	
5	QPSK	1	0	18.70	19.05	19.00	19.50
5	QPSK	1	12	18.81	18.95	19.04	19.50
5	QPSK	1	24	18.81	18.92	18.77	19.50
5	QPSK	12	0	18.80	19.07	18.93	19.50
5	QPSK	12	7	18.80	19.00	19.04	19.50
5	QPSK	12	13	18.80	19.08	18.89	19.50
5	QPSK	25	0	18.80	19.06	18.90	19.50
5	16QAM	1	0	18.81	19.08	19.06	19.50
5	16QAM	1	12	18.81	19.07	18.98	19.50
5	16QAM	1	24	18.80	19.09	19.06	19.50
5	16QAM	12	0	18.81	19.02	18.97	19.50
5	16QAM	12	7	18.81	19.08	18.95	19.50
5	16QAM	12	13	18.79	19.01	18.90	19.50
5	16QAM	25	0	18.81	19.06	18.99	19.50
5	64QAM	1	0	18.78	19.09	19.06	19.50
5	64QAM	1	12	18.81	19.08	19.06	19.50
5	64QAM	1	24	18.81	19.08	19.06	19.50
5	64QAM	12	0	18.81	19.06	19.05	19.50
5	64QAM	12	7	18.79	19.09	18.88	19.50
5	64QAM	12	13	18.81	19.04	19.01	19.50
5	64QAM	25	0	18.81	19.07	18.89	19.50
Channel				26705	26865	27025	Tune-up limit (dBm)
Frequency (MHz)				815.5	831.5	847.5	
3	QPSK	1	0	18.69	19.04	19.00	19.50

3	QPSK	1	8	18.76	19.01	18.98	19.50
3	QPSK	1	14	18.81	18.95	18.88	19.50
3	QPSK	8	0	18.80	18.97	18.94	19.50
3	QPSK	8	4	18.81	18.96	19.04	19.50
3	QPSK	8	7	18.81	19.01	19.00	19.50
3	QPSK	15	0	18.80	19.09	18.96	19.50
3	16QAM	1	0	18.80	18.98	19.06	19.50
3	16QAM	1	8	18.81	19.09	18.94	19.50
3	16QAM	1	14	18.80	19.07	19.06	19.50
3	16QAM	8	0	18.80	18.98	18.99	19.50
3	16QAM	8	4	18.80	19.08	19.04	19.50
3	16QAM	8	7	18.81	19.01	18.89	19.50
3	16QAM	15	0	18.80	19.08	18.95	19.50
3	64QAM	1	0	18.79	19.08	19.04	19.50
3	64QAM	1	8	18.81	19.08	19.06	19.50
3	64QAM	1	14	18.81	19.08	19.05	19.50
3	64QAM	8	0	18.79	19.01	19.04	19.50
3	64QAM	8	4	18.81	19.07	18.97	19.50
3	64QAM	8	7	18.81	19.02	19.05	19.50
3	64QAM	15	0	18.80	19.03	18.96	19.50
Channel				26697	26865	27033	Tune-up limit (dBm)
Frequency (MHz)				814.7	831.5	848.3	
1.4	QPSK	1	0	18.67	19.07	18.99	19.50
1.4	QPSK	1	3	18.69	19.04	18.97	19.50
1.4	QPSK	1	5	18.80	18.96	18.74	19.50
1.4	QPSK	3	0	18.80	19.06	19.05	19.50
1.4	QPSK	3	1	18.81	19.03	19.05	19.50
1.4	QPSK	3	3	18.80	18.95	18.93	19.50
1.4	QPSK	6	0	17.96	18.08	17.94	18.50
1.4	16QAM	1	0	18.06	18.04	18.35	18.50
1.4	16QAM	1	3	18.12	18.40	17.91	18.50
1.4	16QAM	1	5	18.43	18.48	18.20	18.50
1.4	16QAM	3	0	17.89	17.94	17.99	18.50
1.4	16QAM	3	1	17.98	18.05	18.06	18.50
1.4	16QAM	3	3	18.04	17.96	17.91	18.50
1.4	16QAM	6	0	17.13	17.12	16.95	17.50
1.4	64QAM	1	0	16.76	17.12	16.98	17.50
1.4	64QAM	1	3	16.96	17.50	17.32	17.50
1.4	64QAM	1	5	16.98	17.21	17.11	17.50
1.4	64QAM	3	0	17.05	17.01	17.03	17.50
1.4	64QAM	3	1	17.02	17.14	16.95	17.50
1.4	64QAM	3	3	17.01	17.03	17.02	17.50
1.4	64QAM	6	0	15.96	16.01	15.93	16.50

【LTE Band 38_P-Sensor Off】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				37850	38000	38150	
Frequency (MHz)				2580	2595	2610	
20	QPSK	1	0	22.78	22.94	23.05	24.50
20	QPSK	1	49	22.88	22.92	23.14	24.50
20	QPSK	1	99	22.81	22.90	23.10	24.50
20	QPSK	50	0	22.04	22.11	22.19	23.50
20	QPSK	50	24	21.97	22.10	22.19	23.50
20	QPSK	50	50	21.99	22.09	22.28	23.50
20	QPSK	100	0	21.93	22.05	22.18	23.50
20	16QAM	1	0	21.85	22.00	22.14	23.50
20	16QAM	1	49	21.86	22.01	22.20	23.50
20	16QAM	1	99	21.84	22.02	22.13	23.50
20	16QAM	50	0	21.00	21.07	21.17	22.50
20	16QAM	50	24	20.95	21.11	21.20	22.50
20	16QAM	50	50	20.96	21.11	21.26	22.50
20	16QAM	100	0	20.92	21.08	21.16	22.50
20	64QAM	1	0	20.52	20.61	20.75	22.50
20	64QAM	1	49	20.57	20.60	20.83	22.50
20	64QAM	1	99	20.53	20.60	20.75	22.50
20	64QAM	50	0	20.00	20.04	20.15	21.50
20	64QAM	50	24	19.92	20.04	20.15	21.50
20	64QAM	50	50	19.93	20.03	20.20	21.50
20	64QAM	100	0	19.90	20.04	20.12	21.50
Channel				37825	38000	38175	Tune-up limit (dBm)
Frequency (MHz)				2577.5	2595	2612.5	
15	QPSK	1	0	22.76	22.79	22.95	24.50



FCC SAR TEST REPORT

Report No. : FA622715

15	QPSK	1	37	22.77	22.77	23.00	24.50
15	QPSK	1	74	22.78	22.83	23.05	24.50
15	QPSK	36	0	22.02	21.96	22.08	23.50
15	QPSK	36	20	21.92	22.01	22.04	23.50
15	QPSK	36	39	21.96	22.02	22.14	23.50
15	QPSK	75	0	21.88	21.96	22.12	23.50
15	16QAM	1	0	21.71	21.90	22.02	23.50
15	16QAM	1	37	21.79	21.94	22.13	23.50
15	16QAM	1	74	21.70	21.96	21.99	23.50
15	16QAM	36	0	20.96	21.01	21.13	22.50
15	16QAM	36	20	20.88	20.96	21.14	22.50
15	16QAM	36	39	20.91	20.98	21.20	22.50
15	16QAM	75	0	20.85	20.94	21.12	22.50
15	64QAM	1	0	20.50	20.50	20.66	22.50
15	64QAM	1	37	20.51	20.50	20.75	22.50
15	64QAM	1	74	20.51	20.50	20.68	22.50
15	64QAM	36	0	19.92	19.92	20.11	21.50
15	64QAM	36	20	19.81	19.98	20.04	21.50
15	64QAM	36	39	19.87	19.99	20.08	21.50
15	64QAM	75	0	19.85	20.02	20.08	21.50
Channel				37800	38000	38200	Tune-up limit
Frequency (MHz)				2575	2595	2615	(dBm)
10	QPSK	1	0	22.70	22.88	23.02	24.50
10	QPSK	1	25	22.76	22.78	23.05	24.50
10	QPSK	1	49	22.70	22.75	23.03	24.50
10	QPSK	25	0	22.00	22.01	22.17	23.50
10	QPSK	25	12	21.87	21.96	22.07	23.50
10	QPSK	25	25	21.86	22.00	22.14	23.50
10	QPSK	50	0	21.91	21.98	22.09	23.50
10	16QAM	1	0	21.79	21.85	22.04	23.50
10	16QAM	1	25	21.71	21.94	22.05	23.50
10	16QAM	1	49	21.74	21.96	22.08	23.50
10	16QAM	25	0	20.95	21.04	21.07	22.50
10	16QAM	25	12	20.85	21.02	21.08	22.50
10	16QAM	25	25	20.89	21.01	21.13	22.50
10	16QAM	50	0	20.78	20.95	21.02	22.50
10	64QAM	1	0	20.51	20.53	20.64	22.50
10	64QAM	1	25	20.56	20.52	20.68	22.50
10	64QAM	1	49	20.51	20.58	20.61	22.50
10	64QAM	25	0	19.88	19.96	20.04	21.50
10	64QAM	25	12	19.88	19.91	20.04	21.50
10	64QAM	25	25	19.79	20.01	20.14	21.50
10	64QAM	50	0	19.78	19.96	20.01	21.50
Channel				37775	38000	38225	Tune-up limit
Frequency (MHz)				2572.5	2595	2617.5	(dBm)
5	QPSK	1	0	22.74	22.89	23.02	24.50
5	QPSK	1	12	22.77	22.83	23.05	24.50
5	QPSK	1	24	22.78	22.85	22.95	24.50
5	QPSK	12	0	22.00	22.02	22.14	23.50
5	QPSK	12	7	21.84	21.96	22.09	23.50
5	QPSK	12	13	21.96	22.01	22.15	23.50
5	QPSK	25	0	21.81	21.99	22.15	23.50
5	16QAM	1	0	21.76	21.87	22.05	23.50
5	16QAM	1	12	21.72	21.91	22.14	23.50
5	16QAM	1	24	21.70	21.97	22.09	23.50
5	16QAM	12	0	20.97	21.03	21.09	22.50
5	16QAM	12	7	20.84	21.00	21.17	22.50
5	16QAM	12	13	20.92	21.05	21.17	22.50
5	16QAM	25	0	20.86	21.06	21.03	22.50
5	64QAM	1	0	20.51	20.50	20.71	22.50
5	64QAM	1	12	20.50	20.55	20.70	22.50
5	64QAM	1	24	20.50	20.53	20.71	22.50
5	64QAM	12	0	19.93	19.95	20.11	21.50
5	64QAM	12	7	19.87	19.94	20.01	21.50
5	64QAM	12	13	19.84	19.90	20.12	21.50
5	64QAM	25	0	19.87	20.01	20.07	21.50



【LTE Band 38_P-Sensor On】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				37850	38000	38150	Tune-up limit (dBm)
Frequency (MHz)				2580	2595	2610	
20	QPSK	1	0	20.60	19.97	20.31	21.50
20	QPSK	1	49	20.55	20.24	20.38	21.50
20	QPSK	1	99	20.36	19.95	20.37	21.50
20	QPSK	50	0	20.57	20.28	20.29	21.50
20	QPSK	50	24	20.67	20.10	20.25	21.50
20	QPSK	50	50	20.57	20.29	20.48	21.50
20	QPSK	100	0	20.73	20.17	20.36	21.50
20	16QAM	1	0	20.63	20.22	20.32	21.50
20	16QAM	1	49	20.67	19.92	20.26	21.50
20	16QAM	1	99	20.48	19.95	20.37	21.50
20	16QAM	50	0	20.73	20.21	20.29	21.50
20	16QAM	50	24	20.74	20.18	20.45	21.50
20	16QAM	50	50	20.70	20.10	20.44	21.50
20	16QAM	100	0	20.73	19.98	20.37	21.50
20	64QAM	1	0	19.82	19.74	19.89	21.50
20	64QAM	1	49	19.79	19.77	19.89	21.50
20	64QAM	1	99	19.72	19.55	20.02	21.50
20	64QAM	50	0	19.61	19.62	19.75	20.50
20	64QAM	50	24	19.74	19.44	19.81	20.50
20	64QAM	50	50	19.71	19.61	19.75	20.50
20	64QAM	100	0	19.75	19.55	19.71	20.50
Channel				37825	38000	38175	Tune-up limit (dBm)
Frequency (MHz)				2577.5	2595	2612.5	
15	QPSK	1	0	20.47	19.84	20.19	21.50
15	QPSK	1	37	20.50	19.95	20.31	21.50
15	QPSK	1	74	20.31	19.94	20.30	21.50
15	QPSK	36	0	20.44	19.95	20.20	21.50
15	QPSK	36	20	20.53	19.95	20.17	21.50
15	QPSK	36	39	20.50	19.97	20.30	21.50
15	QPSK	75	0	20.60	19.96	20.31	21.50
15	16QAM	1	0	20.60	19.96	20.18	21.50
15	16QAM	1	37	20.53	19.88	20.24	21.50
15	16QAM	1	74	20.40	19.94	20.30	21.50
15	16QAM	36	0	20.58	19.95	20.15	21.50
15	16QAM	36	20	20.60	19.96	20.31	21.50
15	16QAM	36	39	20.60	19.97	20.31	21.50
15	16QAM	75	0	20.60	19.92	20.27	21.50
15	64QAM	1	0	19.69	19.66	19.87	21.50
15	64QAM	1	37	19.77	19.72	19.83	21.50
15	64QAM	1	74	19.58	19.50	19.94	21.50
15	64QAM	36	0	19.53	19.50	19.64	20.50
15	64QAM	36	20	19.68	19.41	19.78	20.50
15	64QAM	36	39	19.56	19.57	19.72	20.50
15	64QAM	75	0	19.70	19.48	19.58	20.50
Channel				37800	38000	38200	Tune-up limit (dBm)
Frequency (MHz)				2575	2595	2615	
10	QPSK	1	0	20.50	19.91	20.26	21.50
10	QPSK	1	25	20.45	19.97	20.23	21.50
10	QPSK	1	49	20.33	19.86	20.25	21.50
10	QPSK	25	0	20.43	19.97	20.20	21.50
10	QPSK	25	12	20.59	19.96	20.24	21.50
10	QPSK	25	25	20.51	19.95	20.31	21.50
10	QPSK	50	0	20.59	19.96	20.30	21.50
10	16QAM	1	0	20.52	19.97	20.27	21.50
10	16QAM	1	25	20.58	19.80	20.20	21.50
10	16QAM	1	49	20.41	19.89	20.31	21.50
10	16QAM	25	0	20.60	19.95	20.19	21.50
10	16QAM	25	12	20.60	19.96	20.31	21.50
10	16QAM	25	25	20.59	19.97	20.29	21.50
10	16QAM	50	0	20.60	19.87	20.31	21.50
10	64QAM	1	0	19.67	19.60	19.77	21.50
10	64QAM	1	25	19.68	19.66	19.82	21.50
10	64QAM	1	49	19.62	19.50	19.97	21.50
10	64QAM	25	0	19.60	19.53	19.61	20.50
10	64QAM	25	12	19.60	19.34	19.78	20.50
10	64QAM	25	25	19.65	19.50	19.67	20.50
10	64QAM	50	0	19.74	19.52	19.68	20.50
Channel				37775	38000	38225	Tune-up limit (dBm)
Frequency (MHz)				2572.5	2595	2617.5	
5	QPSK	1	0	20.47	19.91	20.24	21.50

5	QPSK	1	12	20.53	19.97	20.31	21.50
5	QPSK	1	24	20.29	19.85	20.22	21.50
5	QPSK	12	0	20.53	19.97	20.17	21.50
5	QPSK	12	7	20.59	19.95	20.18	21.50
5	QPSK	12	13	20.54	19.95	20.31	21.50
5	QPSK	25	0	20.60	19.97	20.30	21.50
5	16QAM	1	0	20.59	19.97	20.25	21.50
5	16QAM	1	12	20.60	19.78	20.14	21.50
5	16QAM	1	24	20.37	19.87	20.27	21.50
5	16QAM	12	0	20.59	19.97	20.16	21.50
5	16QAM	12	7	20.60	19.97	20.31	21.50
5	16QAM	12	13	20.59	19.97	20.31	21.50
5	16QAM	25	0	20.59	19.90	20.27	21.50
5	64QAM	1	0	19.79	19.72	19.82	21.50
5	64QAM	1	12	19.69	19.67	19.80	21.50
5	64QAM	1	24	19.69	19.50	19.89	21.50
5	64QAM	12	0	19.50	19.57	19.61	20.50
5	64QAM	12	7	19.67	19.36	19.79	20.50
5	64QAM	12	13	19.65	19.57	19.66	20.50
5	64QAM	25	0	19.66	19.46	19.68	20.50

【LTE Band 41__FCC (2496~2690MHz)_P-Sensor Off】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				39750	40185	40620	41055	41490	
Frequency (MHz)				2506	2549.5	2593	2636.5	2680	
20	QPSK	1	0	23.19	22.59	22.90	23.22	23.29	24.50
20	QPSK	1	49	23.14	22.52	22.91	23.13	23.26	24.50
20	QPSK	1	99	23.03	22.51	22.97	23.07	23.27	24.50
20	QPSK	50	0	22.37	21.93	22.05	22.24	22.41	23.50
20	QPSK	50	24	22.33	21.88	22.06	22.21	22.50	23.50
20	QPSK	50	50	22.26	21.79	22.07	22.14	22.49	23.50
20	QPSK	100	0	22.29	21.84	22.03	22.15	22.44	23.50
20	16QAM	1	0	22.25	21.64	22.03	22.33	22.37	23.50
20	16QAM	1	49	22.19	21.51	22.05	22.25	22.29	23.50
20	16QAM	1	99	22.10	21.54	22.08	22.19	22.29	23.50
20	16QAM	50	0	21.32	20.77	21.05	21.24	21.42	22.50
20	16QAM	50	24	21.31	20.73	21.08	21.23	21.41	22.50
20	16QAM	50	50	21.25	20.69	21.07	21.16	21.43	22.50
20	16QAM	100	0	21.27	20.72	21.05	21.20	21.37	22.50
20	64QAM	1	0	20.86	20.57	20.62	20.92	21.02	22.50
20	64QAM	1	49	20.81	20.58	20.64	20.83	20.97	22.50
20	64QAM	1	99	20.71	20.56	20.64	20.79	20.99	22.50
20	64QAM	50	0	20.28	19.72	20.03	20.23	20.41	21.50
20	64QAM	50	24	20.26	19.72	20.03	20.20	20.43	21.50
20	64QAM	50	50	20.22	19.66	20.02	20.15	20.40	21.50
20	64QAM	100	0	20.25	19.70	20.02	20.17	20.40	21.50
Channel				39725	40173	40620	41068	41515	
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5	
15	QPSK	1	0	23.09	22.50	22.84	23.21	23.20	24.50
15	QPSK	1	37	23.05	22.52	22.83	23.12	23.13	24.50
15	QPSK	1	74	22.92	22.51	22.86	22.99	23.15	24.50
15	QPSK	36	0	22.30	21.91	22.02	22.14	22.39	23.50
15	QPSK	36	20	22.28	21.80	21.96	22.08	22.41	23.50
15	QPSK	36	39	22.22	21.74	22.02	22.01	22.46	23.50
15	QPSK	75	0	22.21	21.71	21.89	22.05	22.42	23.50
15	16QAM	1	0	22.15	21.58	22.01	22.20	22.34	23.50
15	16QAM	1	37	22.09	21.50	21.92	22.12	22.25	23.50
15	16QAM	1	74	22.07	21.52	21.96	22.10	22.26	23.50
15	16QAM	36	0	21.24	20.75	20.95	21.22	21.32	22.50
15	16QAM	36	20	21.25	20.65	20.96	21.11	21.35	22.50
15	16QAM	36	39	21.13	20.60	20.99	21.09	21.32	22.50
15	16QAM	75	0	21.14	20.63	20.94	21.16	21.26	22.50
15	64QAM	1	0	20.84	20.54	20.52	20.87	20.99	22.50
15	64QAM	1	37	20.78	20.56	20.51	20.76	20.90	22.50
15	64QAM	1	74	20.60	20.52	20.52	20.71	20.96	22.50
15	64QAM	36	0	20.16	19.61	20.00	20.18	20.27	21.50
15	64QAM	36	20	20.15	19.60	20.00	20.13	20.30	21.50
15	64QAM	36	39	20.08	19.55	19.94	20.11	20.32	21.50
15	64QAM	75	0	20.24	19.59	19.90	20.11	20.32	21.50
Channel				39700	40160	40620	41080	41540	
Frequency (MHz)				2501	2547	2593	2639	2685	



FCC SAR TEST REPORT

Report No. : FA622715

10	QPSK	1	0	23.09	22.52	22.86	23.08	23.23	24.50
10	QPSK	1	25	23.11	22.50	22.83	23.04	23.19	24.50
10	QPSK	1	49	23.00	22.50	22.86	23.00	23.13	24.50
10	QPSK	25	0	22.35	21.91	21.92	22.21	22.37	23.50
10	QPSK	25	12	22.30	21.84	21.93	22.18	22.37	23.50
10	QPSK	25	25	22.18	21.72	21.99	22.03	22.40	23.50
10	QPSK	50	0	22.18	21.78	21.96	22.07	22.32	23.50
10	16QAM	1	0	22.19	21.52	21.95	22.22	22.34	23.50
10	16QAM	1	25	22.09	21.50	21.98	22.21	22.16	23.50
10	16QAM	1	49	21.95	21.51	22.06	22.08	22.22	23.50
10	16QAM	25	0	21.30	20.67	20.91	21.12	21.37	22.50
10	16QAM	25	12	21.24	20.71	20.98	21.21	21.35	22.50
10	16QAM	25	25	21.23	20.58	21.05	21.11	21.36	22.50
10	16QAM	50	0	21.19	20.59	20.92	21.09	21.30	22.50
10	64QAM	1	0	20.74	20.55	20.59	20.83	20.98	22.50
10	64QAM	1	25	20.70	20.50	20.56	20.69	20.82	22.50
10	64QAM	1	49	20.65	20.55	20.61	20.70	20.86	22.50
10	64QAM	25	0	20.22	19.70	19.98	20.10	20.36	21.50
10	64QAM	25	12	20.16	19.71	19.88	20.08	20.35	21.50
10	64QAM	25	25	20.15	19.62	19.89	20.06	20.30	21.50
10	64QAM	50	0	20.15	19.58	19.92	20.03	20.39	21.50
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)
Frequency (MHz)				2498.5	2545.8	2593	2640.3	2687.5	
5	QPSK	1	0	23.18	22.51	22.81	23.20	23.18	24.50
5	QPSK	1	12	23.05	22.51	22.79	23.09	23.18	24.50
5	QPSK	1	24	22.92	22.51	22.89	23.00	23.23	24.50
5	QPSK	12	0	22.34	21.85	21.96	22.10	22.39	23.50
5	QPSK	12	7	22.21	21.75	21.98	22.15	22.41	23.50
5	QPSK	12	13	22.22	21.67	21.96	22.10	22.36	23.50
5	QPSK	25	0	22.17	21.81	22.01	22.01	22.40	23.50
5	16QAM	1	0	22.24	21.60	22.02	22.23	22.32	23.50
5	16QAM	1	12	22.04	21.50	21.94	22.21	22.21	23.50
5	16QAM	1	24	22.07	21.53	21.95	22.13	22.20	23.50
5	16QAM	12	0	21.20	20.67	20.95	21.09	21.33	22.50
5	16QAM	12	7	21.27	20.69	21.03	21.20	21.29	22.50
5	16QAM	12	13	21.20	20.64	20.98	21.02	21.41	22.50
5	16QAM	25	0	21.22	20.70	20.90	21.10	21.25	22.50
5	64QAM	1	0	20.79	20.50	20.54	20.89	20.95	22.50
5	64QAM	1	12	20.76	20.51	20.50	20.76	20.90	22.50
5	64QAM	1	24	20.67	20.50	20.54	20.66	20.92	22.50
5	64QAM	12	0	20.19	19.62	19.97	20.10	20.27	21.50
5	64QAM	12	7	20.23	19.71	19.99	20.16	20.37	21.50
5	64QAM	12	13	20.13	19.57	19.97	20.14	20.26	21.50
5	64QAM	25	0	20.11	19.59	19.89	20.08	20.30	21.50

【LTE Band 41_FCC (2496~2690MHz)_P-Sensor On】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				39750	40185	40620	41055	41490	Tune-up limit (dBm)
Frequency (MHz)				2506	2549.5	2593	2636.5	2680	
20	QPSK	1	0	20.62	20.04	20.33	20.62	20.80	21.50
20	QPSK	1	49	20.60	20.27	20.38	20.21	20.72	21.50
20	QPSK	1	99	20.60	19.98	20.43	20.35	20.78	21.50
20	QPSK	50	0	20.77	20.34	20.33	20.57	20.76	21.50
20	QPSK	50	24	20.77	20.18	20.30	20.49	20.78	21.50
20	QPSK	50	50	20.55	20.29	20.51	20.57	20.78	21.50
20	QPSK	100	0	20.79	20.25	20.39	20.59	20.81	21.50
20	16QAM	1	0	20.74	20.22	20.41	20.58	20.85	21.50
20	16QAM	1	49	20.68	19.94	20.33	20.50	20.77	21.50
20	16QAM	1	99	20.57	20.00	20.41	20.42	20.80	21.50
20	16QAM	50	0	20.69	20.23	20.39	20.63	20.82	21.50
20	16QAM	50	24	20.81	20.21	20.51	20.63	20.71	21.50
20	16QAM	50	50	20.77	20.19	20.50	20.44	20.79	21.50
20	16QAM	100	0	20.81	20.06	20.46	20.69	20.67	21.50
20	64QAM	1	0	20.24	19.83	19.92	20.23	20.35	21.50
20	64QAM	1	49	20.25	19.77	19.96	20.14	20.40	21.50
20	64QAM	1	99	20.11	19.61	20.03	20.02	20.35	21.50
20	64QAM	50	0	20.13	19.70	19.81	20.05	20.26	21.50
20	64QAM	50	24	20.26	19.50	19.82	20.13	20.33	21.50
20	64QAM	50	50	20.28	19.70	19.78	20.03	20.23	21.50
20	64QAM	100	0	20.05	19.55	19.78	19.98	20.28	21.50
Channel				39725	40173	40620	41068	41515	Tune-up limit
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5	

									(dBm)
15	QPSK	1	0	20.53	19.96	20.18	20.55	20.77	21.50
15	QPSK	1	37	20.60	20.04	20.28	20.17	20.68	21.50
15	QPSK	1	74	20.45	19.88	20.32	20.34	20.76	21.50
15	QPSK	36	0	20.61	20.03	20.23	20.48	20.63	21.50
15	QPSK	36	20	20.60	20.04	20.17	20.40	20.65	21.50
15	QPSK	36	39	20.46	20.04	20.31	20.53	20.63	21.50
15	QPSK	75	0	20.62	20.04	20.27	20.51	20.78	21.50
15	16QAM	1	0	20.62	20.04	20.31	20.44	20.77	21.50
15	16QAM	1	37	20.56	19.93	20.23	20.38	20.64	21.50
15	16QAM	1	74	20.48	19.92	20.27	20.27	20.72	21.50
15	16QAM	36	0	20.62	20.03	20.26	20.54	20.69	21.50
15	16QAM	36	20	20.62	20.04	20.33	20.55	20.68	21.50
15	16QAM	36	39	20.62	20.04	20.33	20.38	20.71	21.50
15	16QAM	75	0	20.62	20.02	20.32	20.61	20.54	21.50
15	64QAM	1	0	20.13	19.77	19.85	20.10	20.31	21.50
15	64QAM	1	37	20.15	19.72	19.89	20.04	20.25	21.50
15	64QAM	1	74	19.98	19.60	19.92	19.90	20.33	21.50
15	64QAM	36	0	20.07	19.60	19.74	20.00	20.11	21.50
15	64QAM	36	20	20.19	19.55	19.70	20.05	20.27	21.50
15	64QAM	36	39	20.21	19.69	19.70	19.94	20.16	21.50
15	64QAM	75	0	19.94	19.55	19.65	19.87	20.26	21.50
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)
Frequency (MHz)				2501	2547	2593	2639	2685	
10	QPSK	1	0	20.50	19.95	20.25	20.48	20.75	21.50
10	QPSK	1	25	20.62	20.03	20.24	20.14	20.61	21.50
10	QPSK	1	49	20.51	19.87	20.33	20.26	20.74	21.50
10	QPSK	25	0	20.62	20.04	20.30	20.45	20.72	21.50
10	QPSK	25	12	20.62	20.03	20.16	20.36	20.72	21.50
10	QPSK	25	25	20.48	20.02	20.33	20.51	20.70	21.50
10	QPSK	50	0	20.61	20.03	20.31	20.45	20.71	21.50
10	16QAM	1	0	20.62	20.04	20.31	20.49	20.76	21.50
10	16QAM	1	25	20.61	19.83	20.29	20.36	20.73	21.50
10	16QAM	1	49	20.43	19.95	20.32	20.36	20.66	21.50
10	16QAM	25	0	20.61	20.03	20.25	20.53	20.80	21.50
10	16QAM	25	12	20.61	20.04	20.33	20.49	20.63	21.50
10	16QAM	25	25	20.62	20.04	20.33	20.42	20.72	21.50
10	16QAM	50	0	20.62	19.95	20.33	20.55	20.59	21.50
10	64QAM	1	0	20.12	19.82	19.90	20.12	20.24	21.50
10	64QAM	1	25	20.16	19.75	19.91	20.09	20.25	21.50
10	64QAM	1	49	20.03	19.51	19.99	19.92	20.23	21.50
10	64QAM	25	0	20.04	19.68	19.79	19.97	20.16	21.50
10	64QAM	25	12	20.18	19.55	19.72	20.03	20.24	21.50
10	64QAM	25	25	20.14	19.66	19.67	19.89	20.16	21.50
10	64QAM	50	0	20.01	19.52	19.72	19.94	20.22	21.50
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)
Frequency (MHz)				2498.5	2545.8	2593	2640.3	2687.5	
5	QPSK	1	0	20.52	19.95	20.26	20.56	20.69	21.50
5	QPSK	1	12	20.51	20.02	20.31	20.08	20.66	21.50
5	QPSK	1	24	20.48	19.90	20.31	20.33	20.69	21.50
5	QPSK	12	0	20.61	20.02	20.25	20.49	20.66	21.50
5	QPSK	12	7	20.61	20.03	20.17	20.37	20.72	21.50
5	QPSK	12	13	20.44	20.02	20.33	20.48	20.77	21.50
5	QPSK	25	0	20.61	20.04	20.26	20.49	20.78	21.50
5	16QAM	1	0	20.61	20.03	20.32	20.48	20.76	21.50
5	16QAM	1	12	20.61	19.80	20.30	20.41	20.68	21.50
5	16QAM	1	24	20.48	19.95	20.32	20.30	20.71	21.50
5	16QAM	12	0	20.61	20.04	20.30	20.50	20.68	21.50
5	16QAM	12	7	20.62	20.04	20.33	20.54	20.57	21.50
5	16QAM	12	13	20.62	20.03	20.33	20.35	20.71	21.50
5	16QAM	25	0	20.62	19.94	20.33	20.61	20.66	21.50
5	64QAM	1	0	20.17	19.70	19.81	20.10	20.33	21.50
5	64QAM	1	12	20.24	19.71	19.89	20.01	20.31	21.50
5	64QAM	1	24	20.02	19.58	19.89	19.97	20.23	21.50
5	64QAM	12	0	20.09	19.57	19.69	20.03	20.21	21.50
5	64QAM	12	7	20.19	19.53	19.70	20.10	20.21	21.50
5	64QAM	12	13	20.26	19.57	19.63	20.01	20.17	21.50
5	64QAM	25	0	20.01	19.53	19.72	19.88	20.17	21.50



FCC SAR TEST REPORT

Report No. : FA622715

【LTE Band 48_FCC_Part 96 IC_RSS-192 (3550~3700MHz)_P-Sensor Off】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				55340	55830	56150	56640	
Frequency (MHz)				3560	3609	3641	3690	
20	QPSK	1	0	21.50	21.00	21.08	21.85	22.00
20	QPSK	1	49	21.58	21.02	21.32	21.79	22.00
20	QPSK	1	99	21.53	21.03	21.47	21.84	22.00
20	QPSK	50	0	21.27	20.65	20.73	21.41	22.00
20	QPSK	50	24	21.19	20.55	20.92	21.30	22.00
20	QPSK	50	50	21.21	20.60	20.98	21.40	22.00
20	QPSK	100	0	21.13	20.52	20.80	21.28	22.00
20	16QAM	1	0	21.02	20.61	20.60	21.31	22.00
20	16QAM	1	49	21.10	20.59	20.76	21.38	22.00
20	16QAM	1	99	21.06	20.62	21.02	21.43	22.00
20	16QAM	50	0	20.72	20.12	20.23	20.82	21.00
20	16QAM	50	24	20.67	20.08	20.39	20.83	21.00
20	16QAM	50	50	20.67	20.09	20.48	20.93	21.00
20	16QAM	100	0	20.61	19.92	20.30	20.83	21.00
20	64QAM	1	0	20.17	19.61	19.75	20.42	21.00
20	64QAM	1	49	20.24	19.61	19.99	20.50	21.00
20	64QAM	1	99	20.24	19.62	20.20	20.54	21.00
20	64QAM	50	0	19.71	19.02	19.23	19.78	20.00
20	64QAM	50	24	19.64	18.95	19.41	19.83	20.00
20	64QAM	50	50	19.66	18.99	19.49	19.88	20.00
20	64QAM	100	0	19.59	18.92	19.29	19.81	20.00
Channel				55315	55820	56160	56665	Tune-up limit (dBm)
Frequency (MHz)				3557.5	3608	3642	3692.5	
15	QPSK	1	0	21.47	20.90	21.06	21.73	22.00
15	QPSK	1	37	21.50	20.94	21.08	21.66	22.00
15	QPSK	1	74	21.39	20.97	21.07	21.74	22.00
15	QPSK	36	0	21.17	20.54	20.66	21.28	22.00
15	QPSK	36	20	21.15	20.44	20.88	21.23	22.00
15	QPSK	36	39	21.14	20.49	20.86	21.29	22.00
15	QPSK	75	0	21.08	20.45	20.79	21.15	22.00
15	16QAM	1	0	21.00	20.52	20.54	21.26	22.00
15	16QAM	1	37	21.04	20.49	20.61	21.34	22.00
15	16QAM	1	74	20.94	20.56	20.97	21.29	22.00
15	16QAM	36	0	20.65	19.99	20.10	20.77	21.00
15	16QAM	36	20	20.52	20.04	20.28	20.78	21.00
15	16QAM	36	39	20.59	19.94	20.35	20.82	21.00
15	16QAM	75	0	20.59	19.86	20.22	20.76	21.00
15	64QAM	1	0	20.03	19.53	19.62	20.38	21.00
15	64QAM	1	37	20.19	19.49	19.96	20.42	21.00
15	64QAM	1	74	20.12	19.58	20.17	20.47	21.00
15	64QAM	36	0	19.56	18.99	19.17	19.71	20.00
15	64QAM	36	20	19.53	18.90	19.36	19.80	20.00
15	64QAM	36	39	19.52	18.87	19.46	19.77	20.00
15	64QAM	75	0	19.57	18.87	19.14	19.79	20.00
Channel				55290	55815	56165	56690	Tune-up limit (dBm)
Frequency (MHz)				3555	3607.5	3642.5	3695	
10	QPSK	1	0	21.43	20.91	21.00	21.82	22.00
10	QPSK	1	25	21.50	21.00	21.08	21.74	22.00
10	QPSK	1	49	21.41	21.00	21.08	21.71	22.00
10	QPSK	25	0	21.22	20.55	20.72	21.40	22.00
10	QPSK	25	12	21.06	20.48	20.87	21.21	22.00
10	QPSK	25	25	21.19	20.51	20.90	21.35	22.00
10	QPSK	50	0	21.01	20.37	20.75	21.25	22.00
10	16QAM	1	0	20.95	20.51	20.59	21.24	22.00
10	16QAM	1	25	20.98	20.44	20.72	21.34	22.00
10	16QAM	1	49	21.03	20.51	20.89	21.30	22.00
10	16QAM	25	0	20.70	20.04	20.12	20.80	21.00
10	16QAM	25	12	20.62	19.97	20.28	20.69	21.00
10	16QAM	25	25	20.56	20.06	20.34	20.85	21.00
10	16QAM	50	0	20.56	19.80	20.28	20.74	21.00
10	64QAM	1	0	20.04	19.49	19.70	20.37	21.00
10	64QAM	1	25	20.16	19.56	19.93	20.47	21.00
10	64QAM	1	49	20.13	19.57	20.06	20.47	21.00
10	64QAM	25	0	19.65	18.96	19.16	19.72	20.00
10	64QAM	25	12	19.51	18.84	19.31	19.77	20.00
10	64QAM	25	25	19.57	18.85	19.43	19.78	20.00
10	64QAM	50	0	19.44	18.77	19.18	19.72	20.00
Channel				55265	55810	56170	56715	Tune-up limit (dBm)
Frequency (MHz)				3552.5	3607	3643	3697.5	

5	QPSK	1	0	21.35	20.95	21.05	21.75	22.00
5	QPSK	1	12	21.46	20.99	21.07	21.75	22.00
5	QPSK	1	24	21.39	20.98	21.08	21.71	22.00
5	QPSK	12	0	21.19	20.57	20.58	21.39	22.00
5	QPSK	12	7	21.06	20.52	20.79	21.20	22.00
5	QPSK	12	13	21.19	20.56	20.94	21.33	22.00
5	QPSK	25	0	21.11	20.48	20.79	21.15	22.00
5	16QAM	1	0	20.96	20.48	20.46	21.19	22.00
5	16QAM	1	12	21.02	20.45	20.67	21.36	22.00
5	16QAM	1	24	21.02	20.54	20.89	21.29	22.00
5	16QAM	12	0	20.61	20.02	20.22	20.76	21.00
5	16QAM	12	7	20.54	19.94	20.36	20.74	21.00
5	16QAM	12	13	20.55	19.97	20.41	20.86	21.00
5	16QAM	25	0	20.55	19.77	20.22	20.82	21.00
5	64QAM	1	0	20.12	19.59	19.73	20.35	21.00
5	64QAM	1	12	20.11	19.47	19.95	20.43	21.00
5	64QAM	1	24	20.17	19.59	20.10	20.43	21.00
5	64QAM	12	0	19.65	18.91	19.14	19.69	20.00
5	64QAM	12	7	19.50	18.82	19.39	19.73	20.00
5	64QAM	12	13	19.53	18.91	19.34	19.82	20.00
5	64QAM	25	0	19.53	18.80	19.17	19.74	20.00

【LTE Band 48_FCC_Part 96 IC_RSS-192 (3550~3700MHz)_P-Sensor On】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				55340	55830	56150	56640	15.00
Frequency (MHz)				3560	3609	3641	3690	
20	QPSK	1	0	14.60	14.08	14.05	14.87	15.00
20	QPSK	1	49	14.61	14.10	14.32	14.70	15.00
20	QPSK	1	99	14.55	14.15	14.37	14.86	15.00
20	QPSK	50	0	14.69	14.12	14.17	14.85	15.00
20	QPSK	50	24	14.63	14.02	14.33	14.72	15.00
20	QPSK	50	50	14.63	14.01	14.38	14.80	15.00
20	QPSK	100	0	14.60	14.01	14.22	14.70	15.00
20	16QAM	1	0	14.72	14.08	14.21	14.75	15.00
20	16QAM	1	49	14.72	14.24	14.35	14.93	15.00
20	16QAM	1	99	14.75	14.19	14.60	14.89	15.00
20	16QAM	50	0	14.76	14.13	14.16	14.83	15.00
20	16QAM	50	24	14.59	14.03	14.43	14.80	15.00
20	16QAM	50	50	14.68	14.11	14.47	14.96	15.00
20	16QAM	100	0	14.66	14.02	14.31	14.78	15.00
20	64QAM	1	0	14.26	14.03	14.02	14.49	15.00
20	64QAM	1	49	14.34	14.05	14.03	14.50	15.00
20	64QAM	1	99	14.37	14.08	14.16	14.54	15.00
20	64QAM	50	0	14.66	14.13	14.22	14.78	15.00
20	64QAM	50	24	14.69	14.10	14.38	14.85	15.00
20	64QAM	50	50	14.68	14.07	14.42	14.88	15.00
20	64QAM	100	0	14.66	14.09	14.25	14.83	15.00
Channel				55315	55820	56160	56665	15.00
Frequency (MHz)				3557.5	3608	3642	3692.5	
15	QPSK	1	0	14.57	13.93	13.93	14.84	15.00
15	QPSK	1	37	14.51	14.07	14.05	14.61	15.00
15	QPSK	1	74	14.52	14.06	14.05	14.80	15.00
15	QPSK	36	0	14.60	14.07	14.03	14.74	15.00
15	QPSK	36	20	14.57	14.01	14.05	14.68	15.00
15	QPSK	36	39	14.52	13.95	14.04	14.71	15.00
15	QPSK	75	0	14.51	13.93	14.05	14.59	15.00
15	16QAM	1	0	14.58	13.94	14.03	14.72	15.00
15	16QAM	1	37	14.59	14.08	14.05	14.83	15.00
15	16QAM	1	74	14.60	14.07	14.04	14.84	15.00
15	16QAM	36	0	14.59	13.99	14.05	14.80	15.00
15	16QAM	36	20	14.50	13.88	14.05	14.68	15.00
15	16QAM	36	39	14.60	14.07	14.05	14.83	15.00
15	16QAM	75	0	14.59	13.91	14.05	14.74	15.00
15	64QAM	1	0	14.12	14.02	13.96	14.44	15.00
15	64QAM	1	37	14.24	14.04	13.94	14.38	15.00
15	64QAM	1	74	14.25	14.06	14.04	14.42	15.00
15	64QAM	36	0	14.55	14.04	14.04	14.70	15.00
15	64QAM	36	20	14.60	14.03	14.04	14.79	15.00
15	64QAM	36	39	14.53	13.99	14.04	14.75	15.00
15	64QAM	75	0	14.52	14.04	14.04	14.78	15.00
Channel				55290	55815	56165	56690	15.00
Frequency (MHz)				3555	3607.5	3642.5	3695	

10	QPSK	1	0	14.57	14.01	14.02	14.72	15.00
10	QPSK	1	25	14.59	13.98	14.05	14.64	15.00
10	QPSK	1	49	14.53	14.08	14.05	14.83	15.00
10	QPSK	25	0	14.55	14.07	14.04	14.84	15.00
10	QPSK	25	12	14.60	14.00	14.05	14.67	15.00
10	QPSK	25	25	14.49	13.89	14.05	14.77	15.00
10	QPSK	50	0	14.54	13.92	14.05	14.68	15.00
10	16QAM	1	0	14.59	13.96	14.05	14.64	15.00
10	16QAM	1	25	14.60	14.08	14.04	14.80	15.00
10	16QAM	1	49	14.60	14.08	14.05	14.79	15.00
10	16QAM	25	0	14.60	14.04	14.03	14.73	15.00
10	16QAM	25	12	14.48	13.90	14.05	14.67	15.00
10	16QAM	25	25	14.60	13.99	14.03	14.87	15.00
10	16QAM	50	0	14.53	13.92	14.04	14.69	15.00
10	64QAM	1	0	14.23	13.97	13.90	14.42	15.00
10	64QAM	1	25	14.30	13.96	13.97	14.47	15.00
10	64QAM	1	49	14.35	14.03	14.04	14.52	15.00
10	64QAM	25	0	14.52	14.08	14.05	14.76	15.00
10	64QAM	25	12	14.60	13.96	14.04	14.81	15.00
10	64QAM	25	25	14.59	14.02	14.04	14.87	15.00
10	64QAM	50	0	14.53	14.08	14.03	14.78	15.00
Channel				55265	55810	56170	56715	Tune-up limit (dBm)
Frequency (MHz)				3552.5	3607	3643	3697.5	
5	QPSK	1	0	14.58	14.03	13.97	14.83	15.00
5	QPSK	1	12	14.54	14.07	14.05	14.69	15.00
5	QPSK	1	24	14.41	14.08	14.04	14.84	15.00
5	QPSK	12	0	14.60	14.02	14.05	14.78	15.00
5	QPSK	12	7	14.60	13.98	14.04	14.62	15.00
5	QPSK	12	13	14.52	13.97	14.05	14.66	15.00
5	QPSK	25	0	14.53	13.88	14.04	14.63	15.00
5	16QAM	1	0	14.60	13.97	14.03	14.70	15.00
5	16QAM	1	12	14.60	14.08	14.03	14.81	15.00
5	16QAM	1	24	14.60	14.06	14.05	14.76	15.00
5	16QAM	12	0	14.58	14.04	14.05	14.79	15.00
5	16QAM	12	7	14.46	13.92	14.05	14.75	15.00
5	16QAM	12	13	14.60	14.08	14.05	14.87	15.00
5	16QAM	25	0	14.58	14.01	14.04	14.71	15.00
5	64QAM	1	0	14.18	13.90	13.90	14.45	15.00
5	64QAM	1	12	14.28	13.92	13.92	14.38	15.00
5	64QAM	1	24	14.34	14.03	14.04	14.51	15.00
5	64QAM	12	0	14.60	14.08	14.04	14.70	15.00
5	64QAM	12	7	14.55	13.97	14.04	14.77	15.00
5	64QAM	12	13	14.59	14.00	14.05	14.73	15.00
5	64QAM	25	0	14.59	13.95	14.03	14.79	15.00



【LTE Band 66_P-Sensor Off】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				132072	132322	132572	Tune-up limit (dBm)
Frequency (MHz)				1720	1745	1770	
20	QPSK	1	0	22.67	22.90	22.74	24.50
20	QPSK	1	49	22.76	23.08	22.74	24.50
20	QPSK	1	99	22.86	22.96	22.66	24.50
20	QPSK	50	0	21.82	22.10	21.87	23.50
20	QPSK	50	24	21.96	22.15	21.89	23.50
20	QPSK	50	50	21.95	22.12	21.85	23.50
20	QPSK	100	0	21.94	22.11	21.85	23.50
20	16QAM	1	0	21.90	22.29	22.02	23.50
20	16QAM	1	49	22.00	22.35	22.00	23.50
20	16QAM	1	99	22.33	22.19	22.01	23.50
20	16QAM	50	0	20.86	21.18	20.86	22.50
20	16QAM	50	24	20.98	21.18	20.86	22.50
20	16QAM	50	50	20.95	21.14	20.80	22.50
20	16QAM	100	0	20.91	21.12	20.79	22.50
20	64QAM	1	0	20.87	21.20	20.91	22.50
20	64QAM	1	49	21.02	21.39	20.90	22.50
20	64QAM	1	99	21.13	21.27	20.92	22.50
20	64QAM	50	0	19.81	20.15	19.82	21.50
20	64QAM	50	24	20.00	20.18	19.82	21.50
20	64QAM	50	50	19.96	20.12	19.83	21.50
20	64QAM	100	0	19.94	20.11	19.82	21.50
Channel				132047	132322	132597	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1745	1772.5	
15	QPSK	1	0	22.61	22.82	22.61	24.50
15	QPSK	1	37	22.65	22.90	22.69	24.50
15	QPSK	1	74	22.67	22.90	22.57	24.50
15	QPSK	36	0	21.70	22.04	21.85	23.50
15	QPSK	36	20	21.83	22.09	21.77	23.50
15	QPSK	36	39	21.81	22.06	21.83	23.50
15	QPSK	75	0	21.89	22.08	21.82	23.50
15	16QAM	1	0	21.83	22.16	21.96	23.50
15	16QAM	1	37	21.98	22.26	21.91	23.50
15	16QAM	1	74	22.30	22.14	21.88	23.50
15	16QAM	36	0	20.75	21.11	20.78	22.50
15	16QAM	36	20	20.94	21.12	20.73	22.50
15	16QAM	36	39	20.82	21.00	20.76	22.50
15	16QAM	75	0	20.86	20.99	20.72	22.50
15	64QAM	1	0	20.78	21.17	20.85	22.50
15	64QAM	1	37	21.00	21.36	20.81	22.50
15	64QAM	1	74	21.11	21.23	20.83	22.50
15	64QAM	36	0	19.79	20.12	19.77	21.50
15	64QAM	36	20	19.96	20.14	19.76	21.50
15	64QAM	36	39	19.91	19.97	19.75	21.50
15	64QAM	75	0	19.80	20.07	19.77	21.50
Channel				132022	132322	132622	Tune-up limit (dBm)
Frequency (MHz)				1715	1745	1775	
10	QPSK	1	0	22.65	22.82	22.60	24.50
10	QPSK	1	25	22.67	22.88	22.60	24.50
10	QPSK	1	49	22.67	22.86	22.59	24.50
10	QPSK	25	0	21.67	21.97	21.74	23.50
10	QPSK	25	12	21.91	22.06	21.88	23.50
10	QPSK	25	25	21.88	22.05	21.71	23.50
10	QPSK	50	0	21.84	22.08	21.78	23.50
10	16QAM	1	0	21.84	22.19	21.92	23.50
10	16QAM	1	25	21.89	22.29	21.95	23.50
10	16QAM	1	49	22.22	22.17	21.98	23.50
10	16QAM	25	0	20.81	21.10	20.75	22.50
10	16QAM	25	12	20.97	21.15	20.79	22.50
10	16QAM	25	25	20.90	21.04	20.66	22.50
10	16QAM	50	0	20.80	20.97	20.77	22.50
10	64QAM	1	0	20.79	21.15	20.87	22.50
10	64QAM	1	25	20.92	21.38	20.77	22.50
10	64QAM	1	49	21.06	21.15	20.78	22.50
10	64QAM	25	0	19.79	20.04	19.76	21.50
10	64QAM	25	12	19.92	20.07	19.78	21.50
10	64QAM	25	25	19.90	20.01	19.78	21.50
10	64QAM	50	0	19.84	20.01	19.75	21.50
Channel				131997	132322	132647	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1745	1777.5	
5	QPSK	1	0	22.53	22.85	22.69	24.50



FCC SAR TEST REPORT

Report No. : FA622715

5	QPSK	1	12	22.65	22.89	22.66	24.50
5	QPSK	1	24	22.67	22.87	22.54	24.50
5	QPSK	12	0	21.79	22.01	21.82	23.50
5	QPSK	12	7	21.87	22.01	21.76	23.50
5	QPSK	12	13	21.93	22.09	21.80	23.50
5	QPSK	25	0	21.79	22.08	21.79	23.50
5	16QAM	1	0	21.77	22.19	21.91	23.50
5	16QAM	1	12	21.98	22.28	21.86	23.50
5	16QAM	1	24	22.29	22.17	21.87	23.50
5	16QAM	12	0	20.74	21.08	20.78	22.50
5	16QAM	12	7	20.96	21.10	20.80	22.50
5	16QAM	12	13	20.86	21.00	20.71	22.50
5	16QAM	25	0	20.84	21.04	20.72	22.50
5	64QAM	1	0	20.74	21.11	20.85	22.50
5	64QAM	1	12	20.91	21.30	20.82	22.50
5	64QAM	1	24	21.01	21.20	20.86	22.50
5	64QAM	12	0	19.70	20.05	19.73	21.50
5	64QAM	12	7	19.94	20.11	19.77	21.50
5	64QAM	12	13	19.82	20.04	19.70	21.50
5	64QAM	25	0	19.80	20.04	19.79	21.50
Channel				131987	132322	132657	Tune-up limit
Frequency (MHz)				1711.5	1745	1778.5	(dBm)
3	QPSK	1	0	22.57	22.77	22.59	24.50
3	QPSK	1	8	22.65	22.90	22.73	24.50
3	QPSK	1	14	22.66	22.85	22.62	24.50
3	QPSK	8	0	21.71	21.99	21.80	23.50
3	QPSK	8	4	21.89	22.12	21.82	23.50
3	QPSK	8	7	21.91	22.02	21.80	23.50
3	QPSK	15	0	21.85	22.10	21.81	23.50
3	16QAM	1	0	21.88	22.27	21.91	23.50
3	16QAM	1	8	21.90	22.32	21.89	23.50
3	16QAM	1	14	22.20	22.14	21.96	23.50
3	16QAM	8	0	20.84	21.13	20.78	22.50
3	16QAM	8	4	20.87	21.15	20.74	22.50
3	16QAM	8	7	20.83	21.00	20.77	22.50
3	16QAM	15	0	20.77	21.09	20.76	22.50
3	64QAM	1	0	20.72	21.18	20.78	22.50
3	64QAM	1	8	20.88	21.29	20.88	22.50
3	64QAM	1	14	21.08	21.23	20.82	22.50
3	64QAM	8	0	19.68	20.06	19.78	21.50
3	64QAM	8	4	19.93	20.08	19.78	21.50
3	64QAM	8	7	19.84	20.03	19.70	21.50
3	64QAM	15	0	19.92	19.99	19.76	21.50
Channel				131979	132322	132665	Tune-up limit
Frequency (MHz)				1710.7	1745	1779.3	(dBm)
1.4	QPSK	1	0	22.58	22.85	22.69	24.50
1.4	QPSK	1	3	22.67	22.90	22.64	24.50
1.4	QPSK	1	5	22.66	22.89	22.63	24.50
1.4	QPSK	3	0	22.67	22.90	22.74	24.50
1.4	QPSK	3	1	22.66	22.89	22.73	24.50
1.4	QPSK	3	3	22.67	22.89	22.74	24.50
1.4	QPSK	6	0	21.79	22.03	21.76	23.50
1.4	16QAM	1	0	21.88	22.19	21.93	23.50
1.4	16QAM	1	3	21.94	22.23	21.85	23.50
1.4	16QAM	1	5	22.20	22.09	21.95	23.50
1.4	16QAM	3	0	21.85	22.07	21.74	23.50
1.4	16QAM	3	1	21.86	22.09	21.77	23.50
1.4	16QAM	3	3	21.84	22.11	21.77	23.50
1.4	16QAM	6	0	20.82	21.08	20.64	22.50
1.4	64QAM	1	0	20.72	21.12	20.78	22.50
1.4	64QAM	1	3	20.91	21.36	20.88	22.50
1.4	64QAM	1	5	21.00	21.17	20.84	22.50
1.4	64QAM	3	0	20.67	21.06	20.67	22.50
1.4	64QAM	3	1	20.96	21.08	20.79	22.50
1.4	64QAM	3	3	20.85	21.09	20.73	22.50
1.4	64QAM	6	0	19.88	19.97	19.79	21.50

【LTE Band 66_P-Sensor On】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				132072	132322	132572	Tune-up limit (dBm)
Frequency (MHz)				1720	1745	1770	
20	QPSK	1	0	17.51	17.69	17.72	18.50
20	QPSK	1	49	17.51	17.84	17.63	18.50
20	QPSK	1	99	17.68	17.70	17.54	18.50
20	QPSK	50	0	17.66	17.80	17.71	18.50
20	QPSK	50	24	17.73	17.83	17.70	18.50
20	QPSK	50	50	17.67	17.78	17.62	18.50
20	QPSK	100	0	17.67	17.82	17.69	18.50
20	16QAM	1	0	17.68	17.94	18.00	18.50
20	16QAM	1	49	17.75	18.13	18.36	18.50
20	16QAM	1	99	18.10	18.23	18.10	18.50
20	16QAM	50	0	17.65	17.87	17.67	18.50
20	16QAM	50	24	17.73	17.87	17.74	18.50
20	16QAM	50	50	17.74	17.84	17.67	18.50
20	16QAM	100	0	17.73	17.82	17.70	18.50
20	64QAM	1	0	18.06	18.17	17.62	18.50
20	64QAM	1	49	17.78	18.05	17.66	18.50
20	64QAM	1	99	17.95	18.05	17.58	18.50
20	64QAM	50	0	17.66	17.84	17.74	18.50
20	64QAM	50	24	17.73	17.91	17.69	18.50
20	64QAM	50	50	17.67	17.85	17.71	18.50
20	64QAM	100	0	17.69	17.90	17.69	18.50
Channel				132047	132322	132597	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1745	1772.5	
15	QPSK	1	0	17.39	17.67	17.66	18.50
15	QPSK	1	37	17.49	17.68	17.49	18.50
15	QPSK	1	74	17.50	17.66	17.50	18.50
15	QPSK	36	0	17.51	17.69	17.60	18.50
15	QPSK	36	20	17.50	17.67	17.68	18.50
15	QPSK	36	39	17.50	17.64	17.58	18.50
15	QPSK	75	0	17.50	17.69	17.57	18.50
15	16QAM	1	0	17.50	17.69	17.71	18.50
15	16QAM	1	37	17.50	17.69	17.72	18.50
15	16QAM	1	74	17.51	17.68	17.72	18.50
15	16QAM	36	0	17.51	17.69	17.65	18.50
15	16QAM	36	20	17.51	17.69	17.72	18.50
15	16QAM	36	39	17.50	17.67	17.57	18.50
15	16QAM	75	0	17.51	17.68	17.65	18.50
15	64QAM	1	0	17.49	17.68	17.50	18.50
15	64QAM	1	37	17.50	17.69	17.62	18.50
15	64QAM	1	74	17.50	17.69	17.48	18.50
15	64QAM	36	0	17.50	17.68	17.67	18.50
15	64QAM	36	20	17.50	17.68	17.62	18.50
15	64QAM	36	39	17.50	17.69	17.65	18.50
15	64QAM	75	0	17.50	17.69	17.63	18.50
Channel				132022	132322	132622	Tune-up limit (dBm)
Frequency (MHz)				1715	1745	1775	
10	QPSK	1	0	17.44	17.63	17.58	18.50
10	QPSK	1	25	17.44	17.69	17.50	18.50
10	QPSK	1	49	17.51	17.57	17.46	18.50
10	QPSK	25	0	17.51	17.67	17.59	18.50
10	QPSK	25	12	17.51	17.69	17.63	18.50
10	QPSK	25	25	17.50	17.69	17.52	18.50
10	QPSK	50	0	17.51	17.69	17.61	18.50
10	16QAM	1	0	17.50	17.69	17.72	18.50
10	16QAM	1	25	17.51	17.69	17.72	18.50
10	16QAM	1	49	17.50	17.68	17.72	18.50
10	16QAM	25	0	17.50	17.69	17.59	18.50
10	16QAM	25	12	17.51	17.69	17.63	18.50
10	16QAM	25	25	17.50	17.68	17.63	18.50
10	16QAM	50	0	17.50	17.68	17.60	18.50
10	64QAM	1	0	17.50	17.69	17.47	18.50
10	64QAM	1	25	17.50	17.68	17.53	18.50
10	64QAM	1	49	17.49	17.69	17.54	18.50
10	64QAM	25	0	17.51	17.69	17.63	18.50
10	64QAM	25	12	17.51	17.68	17.59	18.50
10	64QAM	25	25	17.51	17.69	17.61	18.50
10	64QAM	50	0	17.50	17.67	17.64	18.50
Channel				131997	132322	132647	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1745	1777.5	



FCC SAR TEST REPORT

Report No. : FA622715

5	QPSK	1	0	17.48	17.63	17.62	18.50
5	QPSK	1	12	17.46	17.69	17.57	18.50
5	QPSK	1	24	17.51	17.65	17.41	18.50
5	QPSK	12	0	17.51	17.69	17.58	18.50
5	QPSK	12	7	17.51	17.68	17.68	18.50
5	QPSK	12	13	17.51	17.67	17.47	18.50
5	QPSK	25	0	17.50	17.69	17.67	18.50
5	16QAM	1	0	17.51	17.68	17.70	18.50
5	16QAM	1	12	17.51	17.69	17.71	18.50
5	16QAM	1	24	17.50	17.67	17.71	18.50
5	16QAM	12	0	17.50	17.69	17.54	18.50
5	16QAM	12	7	17.50	17.69	17.64	18.50
5	16QAM	12	13	17.51	17.69	17.59	18.50
5	16QAM	25	0	17.49	17.69	17.69	18.50
5	64QAM	1	0	17.50	17.69	17.57	18.50
5	64QAM	1	12	17.51	17.69	17.58	18.50
5	64QAM	1	24	17.51	17.69	17.49	18.50
5	64QAM	12	0	17.49	17.68	17.64	18.50
5	64QAM	12	7	17.51	17.68	17.68	18.50
5	64QAM	12	13	17.49	17.68	17.62	18.50
5	64QAM	25	0	17.50	17.69	17.59	18.50
Channel				131987	132322	132657	Tune-up limit
Frequency (MHz)				1711.5	1745	1778.5	(dBm)
3	QPSK	1	0	17.47	17.65	17.68	18.50
3	QPSK	1	8	17.37	17.68	17.51	18.50
3	QPSK	1	14	17.50	17.63	17.40	18.50
3	QPSK	8	0	17.50	17.69	17.56	18.50
3	QPSK	8	4	17.49	17.68	17.57	18.50
3	QPSK	8	7	17.51	17.68	17.51	18.50
3	QPSK	15	0	17.51	17.69	17.63	18.50
3	16QAM	1	0	17.51	17.69	17.72	18.50
3	16QAM	1	8	17.51	17.68	17.72	18.50
3	16QAM	1	14	17.51	17.69	17.72	18.50
3	16QAM	8	0	17.50	17.69	17.64	18.50
3	16QAM	8	4	17.50	17.69	17.72	18.50
3	16QAM	8	7	17.51	17.68	17.64	18.50
3	16QAM	15	0	17.51	17.69	17.61	18.50
3	64QAM	1	0	17.51	17.68	17.49	18.50
3	64QAM	1	8	17.51	17.69	17.55	18.50
3	64QAM	1	14	17.51	17.69	17.56	18.50
3	64QAM	8	0	17.51	17.68	17.67	18.50
3	64QAM	8	4	17.51	17.69	17.60	18.50
3	64QAM	8	7	17.51	17.68	17.64	18.50
3	64QAM	15	0	17.51	17.68	17.64	18.50
Channel				131979	132322	132665	Tune-up limit
Frequency (MHz)				1710.7	1745	1779.3	(dBm)
1.4	QPSK	1	0	17.40	17.61	17.70	18.50
1.4	QPSK	1	3	17.49	17.68	17.53	18.50
1.4	QPSK	1	5	17.51	17.61	17.43	18.50
1.4	QPSK	3	0	17.49	17.67	17.69	18.50
1.4	QPSK	3	1	17.51	17.69	17.60	18.50
1.4	QPSK	3	3	17.50	17.69	17.59	18.50
1.4	QPSK	6	0	16.63	16.77	16.62	17.50
1.4	16QAM	1	0	16.67	16.92	16.95	17.50
1.4	16QAM	1	3	16.62	17.11	17.29	17.50
1.4	16QAM	1	5	16.99	17.21	17.08	17.50
1.4	16QAM	3	0	16.53	16.82	16.54	17.50
1.4	16QAM	3	1	16.58	16.83	16.61	17.50
1.4	16QAM	3	3	16.69	16.80	16.52	17.50
1.4	16QAM	6	0	15.59	15.69	15.58	16.50
1.4	64QAM	1	0	15.93	16.03	15.51	16.50
1.4	64QAM	1	3	15.73	15.90	15.61	16.50
1.4	64QAM	1	5	15.91	15.92	15.52	16.50
1.4	64QAM	3	0	15.64	15.82	15.62	16.50
1.4	64QAM	3	1	15.70	15.77	15.62	16.50
1.4	64QAM	3	3	15.62	15.82	15.63	16.50
1.4	64QAM	6	0	14.66	14.80	14.56	15.50

【LTE Band 71_P-Sensor Off】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				133222	133297	133372	
Frequency (MHz)				673	680.5	688	
20	QPSK	1	0	23.88	24.06	23.87	25.50
20	QPSK	1	49	23.61	23.89	23.56	25.50
20	QPSK	1	99	23.51	23.79	23.52	25.50
20	QPSK	50	0	22.81	23.03	22.80	24.50
20	QPSK	50	24	22.55	22.82	22.59	24.50
20	QPSK	50	50	22.50	22.69	22.51	24.50
20	QPSK	100	0	22.58	22.82	22.50	24.50
20	16QAM	1	0	22.99	23.25	22.98	24.50
20	16QAM	1	49	22.85	23.06	22.76	24.50
20	16QAM	1	99	22.67	22.98	22.78	24.50
20	16QAM	50	0	21.68	21.94	21.67	23.50
20	16QAM	50	24	21.61	21.86	21.60	23.50
20	16QAM	50	50	21.54	21.74	21.51	23.50
20	16QAM	100	0	21.61	21.86	21.64	23.50
20	64QAM	1	0	21.87	22.12	21.93	23.50
20	64QAM	1	49	21.72	21.97	21.66	23.50
20	64QAM	1	99	21.62	21.90	21.66	23.50
20	64QAM	50	0	20.69	20.92	20.73	22.50
20	64QAM	50	24	20.62	20.86	20.64	22.50
20	64QAM	50	50	20.51	20.70	20.50	22.50
20	64QAM	100	0	20.66	20.83	20.59	22.50
Channel				133197	133297	133397	Tune-up limit (dBm)
Frequency (MHz)				670.5	680.5	690.5	
15	QPSK	1	0	23.84	23.96	23.74	25.50
15	QPSK	1	37	23.55	23.77	23.50	25.50
15	QPSK	1	74	23.51	23.69	23.52	25.50
15	QPSK	36	0	22.76	23.01	22.69	24.50
15	QPSK	36	20	22.53	22.76	22.52	24.50
15	QPSK	36	39	22.51	22.66	22.50	24.50
15	QPSK	75	0	22.57	22.68	22.51	24.50
15	16QAM	1	0	22.90	23.16	22.94	24.50
15	16QAM	1	37	22.76	22.98	22.70	24.50
15	16QAM	1	74	22.59	22.84	22.71	24.50
15	16QAM	36	0	21.65	21.83	21.55	23.50
15	16QAM	36	20	21.50	21.72	21.58	23.50
15	16QAM	36	39	21.52	21.67	21.50	23.50
15	16QAM	75	0	21.59	21.74	21.59	23.50
15	64QAM	1	0	21.83	22.10	21.86	23.50
15	64QAM	1	37	21.65	21.96	21.58	23.50
15	64QAM	1	74	21.59	21.88	21.52	23.50
15	64QAM	36	0	20.60	20.78	20.66	22.50
15	64QAM	36	20	20.50	20.82	20.52	22.50
15	64QAM	36	39	20.50	20.62	20.51	22.50
15	64QAM	75	0	20.54	20.68	20.54	22.50
Channel				133172	133297	133422	Tune-up limit (dBm)
Frequency (MHz)				668	680.5	693	
10	QPSK	1	0	23.79	24.02	23.82	25.50
10	QPSK	1	25	23.60	23.78	23.50	25.50
10	QPSK	1	49	23.50	23.77	23.51	25.50
10	QPSK	25	0	22.79	23.00	22.71	24.50
10	QPSK	25	12	22.50	22.70	22.54	24.50
10	QPSK	25	25	22.50	22.65	22.51	24.50
10	QPSK	50	0	22.53	22.78	22.51	24.50
10	16QAM	1	0	22.98	23.19	22.87	24.50
10	16QAM	1	25	22.80	23.00	22.64	24.50
10	16QAM	1	49	22.57	22.95	22.69	24.50
10	16QAM	25	0	21.59	21.87	21.58	23.50
10	16QAM	25	12	21.51	21.83	21.57	23.50
10	16QAM	25	25	21.50	21.63	21.52	23.50
10	16QAM	50	0	21.51	21.75	21.50	23.50
10	64QAM	1	0	21.80	22.04	21.84	23.50
10	64QAM	1	25	21.66	21.94	21.55	23.50
10	64QAM	1	49	21.50	21.88	21.57	23.50
10	64QAM	25	0	20.62	20.80	20.62	22.50
10	64QAM	25	12	20.53	20.83	20.59	22.50
10	64QAM	25	25	20.50	20.56	20.50	22.50
10	64QAM	50	0	20.61	20.71	20.51	22.50
Channel				133147	133297	133447	Tune-up limit (dBm)
Frequency (MHz)				665.5	680.5	695.5	

5	QPSK	1	0	23.78	24.02	23.81	25.50
5	QPSK	1	12	23.53	23.85	23.51	25.50
5	QPSK	1	24	23.51	23.68	23.50	25.50
5	QPSK	12	0	22.71	22.94	22.74	24.50
5	QPSK	12	7	22.53	22.67	22.56	24.50
5	QPSK	12	13	22.51	22.56	22.51	24.50
5	QPSK	25	0	22.50	22.80	22.50	24.50
5	16QAM	1	0	22.93	23.21	22.86	24.50
5	16QAM	1	12	22.76	23.01	22.66	24.50
5	16QAM	1	24	22.54	22.96	22.72	24.50
5	16QAM	12	0	21.54	21.82	21.66	23.50
5	16QAM	12	7	21.50	21.80	21.56	23.50
5	16QAM	12	13	21.53	21.63	21.51	23.50
5	16QAM	25	0	21.52	21.78	21.56	23.50
5	64QAM	1	0	21.82	22.08	21.84	23.50
5	64QAM	1	12	21.62	21.92	21.64	23.50
5	64QAM	1	24	21.52	21.89	21.62	23.50
5	64QAM	12	0	20.59	20.81	20.64	22.50
5	64QAM	12	7	20.52	20.74	20.52	22.50
5	64QAM	12	13	20.51	20.67	20.50	22.50
5	64QAM	25	0	20.53	20.81	20.51	22.50

【LTE Band 71_P-Sensor On】

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				133222	133297	133372	Tune-up limit (dBm)
Frequency (MHz)				673	680.5	688	
20	QPSK	1	0	19.74	19.67	19.73	20.00
20	QPSK	1	49	19.54	19.55	19.63	20.00
20	QPSK	1	99	19.49	19.40	19.45	20.00
20	QPSK	50	0	19.80	19.75	19.60	20.00
20	QPSK	50	24	19.62	19.65	19.62	20.00
20	QPSK	50	50	19.61	19.43	19.50	20.00
20	QPSK	100	0	19.76	19.59	19.59	20.00
20	16QAM	1	0	19.60	19.91	19.97	20.00
20	16QAM	1	49	19.93	19.71	19.58	20.00
20	16QAM	1	99	19.36	19.89	19.90	20.00
20	16QAM	50	0	19.72	19.72	19.60	20.00
20	16QAM	50	24	19.67	19.59	19.66	20.00
20	16QAM	50	50	19.68	19.58	19.42	20.00
20	16QAM	100	0	19.76	19.76	19.60	20.00
20	64QAM	1	0	19.84	19.84	19.76	20.00
20	64QAM	1	49	19.89	19.81	19.89	20.00
20	64QAM	1	99	19.78	19.67	19.77	20.00
20	64QAM	50	0	19.81	19.76	19.60	20.00
20	64QAM	50	24	19.65	19.65	19.63	20.00
20	64QAM	50	50	19.68	19.52	19.51	20.00
20	64QAM	100	0	19.69	19.59	19.57	20.00
Channel				133197	133297	133397	Tune-up limit (dBm)
Frequency (MHz)				670.5	680.5	690.5	
15	QPSK	1	0	19.64	19.56	19.63	20.00
15	QPSK	1	37	19.47	19.48	19.52	20.00
15	QPSK	1	74	19.35	19.28	19.43	20.00
15	QPSK	36	0	19.66	19.62	19.56	20.00
15	QPSK	36	20	19.59	19.54	19.50	20.00
15	QPSK	36	39	19.50	19.41	19.40	20.00
15	QPSK	75	0	19.71	19.49	19.55	20.00
15	16QAM	1	0	19.47	19.65	19.73	20.00
15	16QAM	1	37	19.73	19.60	19.44	20.00
15	16QAM	1	74	19.28	19.65	19.73	20.00
15	16QAM	36	0	19.70	19.57	19.50	20.00
15	16QAM	36	20	19.54	19.55	19.54	20.00
15	16QAM	36	39	19.54	19.51	19.40	20.00
15	16QAM	75	0	19.62	19.67	19.50	20.00
15	64QAM	1	0	19.74	19.66	19.66	20.00
15	64QAM	1	37	19.74	19.67	19.73	20.00
15	64QAM	1	74	19.70	19.66	19.65	20.00
15	64QAM	36	0	19.72	19.63	19.51	20.00
15	64QAM	36	20	19.57	19.61	19.61	20.00
15	64QAM	36	39	19.60	19.49	19.39	20.00
15	64QAM	75	0	19.57	19.45	19.51	20.00
Channel				133172	133297	133422	Tune-up limit (dBm)
Frequency (MHz)				668	680.5	693	

10	QPSK	1	0	19.66	19.62	19.59	20.00
10	QPSK	1	25	19.49	19.42	19.53	20.00
10	QPSK	1	49	19.47	19.28	19.37	20.00
10	QPSK	25	0	19.74	19.62	19.55	20.00
10	QPSK	25	12	19.56	19.55	19.57	20.00
10	QPSK	25	25	19.53	19.33	19.47	20.00
10	QPSK	50	0	19.68	19.49	19.58	20.00
10	16QAM	1	0	19.53	19.67	19.72	20.00
10	16QAM	1	25	19.72	19.64	19.55	20.00
10	16QAM	1	49	19.35	19.66	19.73	20.00
10	16QAM	25	0	19.63	19.66	19.56	20.00
10	16QAM	25	12	19.61	19.56	19.51	20.00
10	16QAM	25	25	19.65	19.45	19.29	20.00
10	16QAM	50	0	19.73	19.64	19.50	20.00
10	64QAM	1	0	19.73	19.67	19.69	20.00
10	64QAM	1	25	19.73	19.67	19.72	20.00
10	64QAM	1	49	19.74	19.58	19.68	20.00
10	64QAM	25	0	19.74	19.64	19.54	20.00
10	64QAM	25	12	19.51	19.54	19.55	20.00
10	64QAM	25	25	19.59	19.38	19.44	20.00
10	64QAM	50	0	19.56	19.52	19.50	20.00
Channel				133147	133297	133447	Tune-up limit
Frequency (MHz)				665.5	680.5	695.5	(dBm)
5	QPSK	1	0	19.61	19.58	19.70	20.00
5	QPSK	1	12	19.41	19.43	19.60	20.00
5	QPSK	1	24	19.43	19.25	19.39	20.00
5	QPSK	12	0	19.73	19.67	19.45	20.00
5	QPSK	12	7	19.56	19.57	19.57	20.00
5	QPSK	12	13	19.54	19.31	19.40	20.00
5	QPSK	25	0	19.63	19.55	19.45	20.00
5	16QAM	1	0	19.46	19.66	19.73	20.00
5	16QAM	1	12	19.74	19.63	19.48	20.00
5	16QAM	1	24	19.32	19.67	19.71	20.00
5	16QAM	12	0	19.68	19.67	19.54	20.00
5	16QAM	12	7	19.60	19.56	19.52	20.00
5	16QAM	12	13	19.56	19.55	19.35	20.00
5	16QAM	25	0	19.64	19.67	19.50	20.00
5	64QAM	1	0	19.72	19.67	19.63	20.00
5	64QAM	1	12	19.74	19.67	19.72	20.00
5	64QAM	1	24	19.64	19.58	19.73	20.00
5	64QAM	12	0	19.72	19.67	19.59	20.00
5	64QAM	12	7	19.51	19.58	19.59	20.00
5	64QAM	12	13	19.57	19.48	19.49	20.00
5	64QAM	25	0	19.64	19.55	19.45	20.00

13. UL/DL Carrier aggregation

< LTE DL Carrier Aggregation >

General Note:

1. According to 202410 TCB workshop, the downlink (DL) pertains to receiver functionality, thus it is not related to RF exposure compliance limits related to cumulative effects of different transmitters.
2. According to 202410 TCB workshop, equipment authorization applications shall refer to the worst-case UL powers resulting from all the possible modes of operations. Accordingly, CA-DL cases do not need to be analyzed separately, unless pertinent to establishing UL power setting.
3. This device supports LTE carrier aggregation in the downlink. All uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded

< LTE UL carrier aggregation >

General Note:

1. The device supports uplink carrier aggregation with a maximum of two component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
2. According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
3. Additional SAR measurement for UL CA whit other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.

2CC Uplink Carrier Aggregation	
Number	Combination
1	5B
2	7C
3	66B
4	66C
5	38C
6	41C
7	48C

【CA_5B_P-Sensor Off (Full Power)】

CA_5B_P-Sensor Off (Full Power)								
Combination 10MHz+10MHz (50RB+50RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB Offset	RB Size	RB Offset		
20450	20549	QPSK	1	0	0	0	23.65	25.50
20475	20574	QPSK	1	49	1	0	23.68	25.50
20600	20501	QPSK	1	0	1	49	23.50	25.50

【CA_5B_P-Sensor On (Down Power)】

CA_5B_P-Sensor On (Down Power)								
Combination 10MHz+10MHz (50RB+50RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB Offset	RB Size	RB Offset		
20450	20549	QPSK	1	0	0	0	18.28	19.50
20475	20574	QPSK	1	49	1	0	18.32	19.50
20600	20501	QPSK	1	0	1	49	18.29	19.50

【CA_7C_P-Sensor Off (Full Power)】

CA_7C_P-Sensor Off (Full Power)								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB Offset	RB Size	RB Offset		
20850	21048	QPSK	1	0	0	0	22.99	24.50
21100	20902	QPSK	1	0	1	99	22.83	24.50
21350	21152	QPSK	1	0	1	99	22.78	24.50

【CA_7C_P-Sensor On (Down Power)】

CA_7C_P-Sensor On (Down Power)								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB Offset	RB Size	RB Offset		
20850	21048	QPSK	1	0	0	0	15.33	16.00
21100	20902	QPSK	1	0	1	99	15.25	16.00
21350	21152	QPSK	1	0	1	99	15.11	16.00

【CA_38C_P-Sensor Off (Full Power)】

CA_38C_P-Sensor Off (Full Power)								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB Offset	RB Size	RB Offset		
37850	38048	QPSK	1	0	0	0	22.52	24.50
37901	38000	QPSK	1	0	0	0	22.63	24.50
38150	37952	QPSK	1	0	0	0	22.45	24.50

【 CA_38C_P-Sensor On (Down Power)】

CA_38C_P-Sensor On (Down Power)								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB Offset	RB Size	RB Offset		
37850	38048	QPSK	1	0	0	0	20.13	21.50
37901	38000	QPSK	1	0	0	0	20.20	21.50
38150	37952	QPSK	1	0	0	0	20.18	21.50

【CA_41C HPUE_P-Sensor Off (Full Power)】

CA_41C HPUE_P-Sensor Off (Full Power)								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB Offset	RB Size	RB Offset		
39750	39948	QPSK	1	0	0	0	23.00	24.50
40185	39987	QPSK	1	0	0	0	22.52	24.50
40620	40422	QPSK	1	0	0	0	22.89	24.50
41055	40857	QPSK	1	0	0	0	22.10	24.50
41490	41292	QPSK	1	0	0	0	23.00	24.50

【CA_41C HPUE_P-Sensor On (Down Power)】

CA_41C HPUE_P-Sensor On (Down Power)								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB Offset	RB Size	RB Offset		
39750	39948	QPSK	1	0	0	0	20.43	21.50
40185	39987	QPSK	1	0	0	0	20.35	21.50
40620	40422	QPSK	1	0	0	0	20.40	21.50
41055	40857	QPSK	1	0	0	0	20.51	21.50
41490	41292	QPSK	1	0	0	0	20.58	21.50

【CA_48C_P-Sensor Off (Full Power)】

CA_48C_P-Sensor Off (Full Power)								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB Offset	RB Size	RB Offset		
55340	55538	QPSK	1	0	0	0	21.32	22.00
55632	55830	QPSK	1	0	0	0	21.00	22.00
55952	56150	QPSK	1	0	0	0	21.02	22.00
56642	56640	QPSK	1	0	0	0	21.68	22.00

【CA_48C_P-Sensor On (Down Power)】

CA_48C_P-Sensor On (Down Power)								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB Offset	RB Size	RB Offset		
55340	55538	QPSK	1	0	0	0	14.33	15.00
55632	55830	QPSK	1	0	0	0	14.00	15.00
55952	56150	QPSK	1	0	0	0	14.00	15.00
56642	56640	QPSK	1	0	0	0	14.58	15.00

【CA_66B_P-Sensor Off (Full Power)】

CA_66B_P-Sensor Off (Full Power)								
Combination 15MHz+5MHz (75RB+25RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB Offset	RB Size	RB Offset		
132047	132140	QPSK	1	0	0	0	22.52	24.50
132229	132322	QPSK	1	0	0	0	22.63	24.50
132504	132597	QPSK	1	0	0	0	22.60	24.50

【CA_66C_P-Sensor Off (Full Power)】

CA_66C_P-Sensor Off (Full Power)								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB Offset	RB Size	RB Offset		
132072	132270	QPSK	1	0	0	0	22.51	24.50
132322	132124	QPSK	1	0	1	99	22.68	24.50
132572	132374	QPSK	1	0	1	99	22.43	24.50

【 CA_66B_P-Sensor On (Down Power)】

CA_66B_P-Sensor On (Down Power)								
Combination 15MHz+5MHz (75RB+25RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB Offset	RB Size	RB Offset		
132047	132140	QPSK	1	0	0	0	17.33	18.50
132229	132322	QPSK	1	0	0	0	17.62	18.50
132504	132597	QPSK	1	0	0	0	17.53	18.50

【 CA_66C_P-Sensor On (Down Power)】

CA_66C_P-Sensor On (Down Power)								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB Offset	RB Size	RB Offset		
132072	132270	QPSK	1	0	0	0	17.42	18.50
132322	132124	QPSK	1	0	1	99	17.70	18.50
132572	132374	QPSK	1	0	1	99	17.61	18.50

14. Antenna Location


<Tablet Mode>



The separation distance for antenna to edge :

Antenna	To Top (mm)	To Right (mm)	To Left (mm)	To Bottom (mm)
WWAN Main	5	5.2	182.8	205.7

<Laptop Mode>

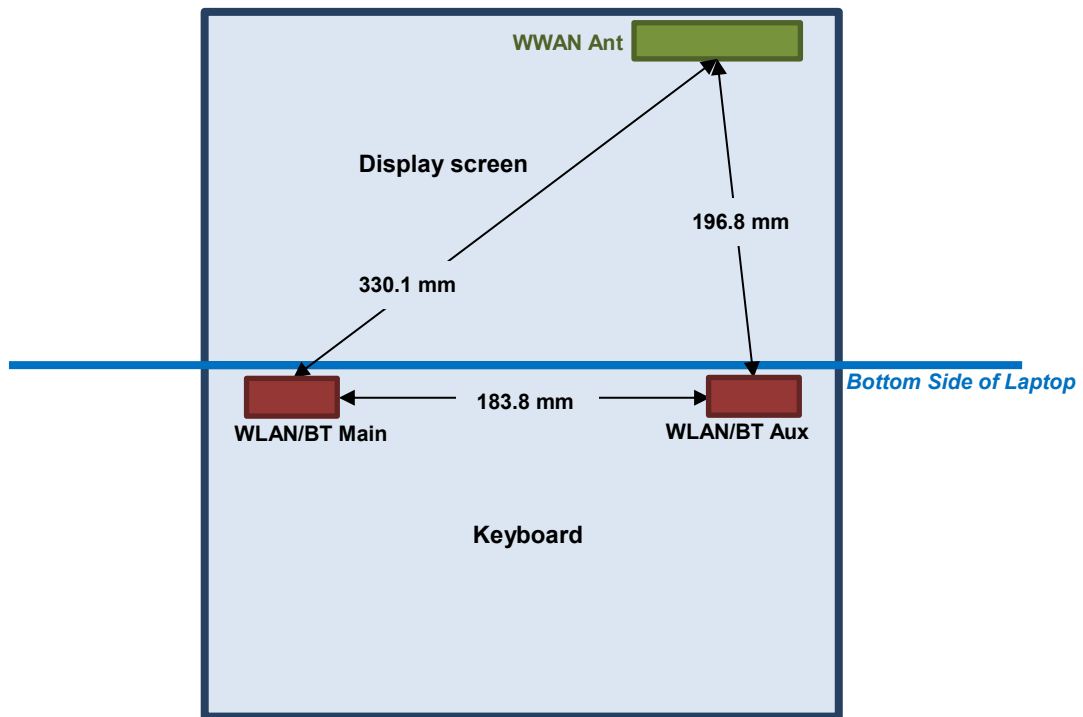

The separation distance for antenna to edge :

Antenna	To Bottom Side (mm)
WWAN Main	208.6

< SAR test exclusion table >
General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

<Laptop mode>

Exposure Position	Wireless Interface	WCDMA Band V	WCDMA Band IV	WCDMA Band II	LTE Band 71	LTE Band 12	LTE Band 13	LTE Band 14	LTE Band 5	LTE Band 26	LTE Band 4	LTE Band 66	LTE Band 2	LTE Band 25	LTE Band 7	LTE Band 38	LTE Band 41	LTE Band 48
	Calculated Frequency (MHz)	846	1750	1907	695	715	784	795	848	848	1754	1779	1909	1914	2567	2617	2687	3697
	Maximum power (dBm)	25.0	25.0	25.0	25.5	25.5	25.5	25.5	25.5	25.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	22.0
	Maximum rated power(mW)	316.23	316.23	316.23	354.81	354.81	354.81	354.81	354.81	354.81	281.84	281.84	281.84	281.84	281.84	281.84	281.84	158.49
Bottom Side	Separation distance(mm)	208.6																
	exclusion threshold	1058.0	1699.0	1695.0	915.0	933.0	998.0	1009.0	1060.0	1060.0	1699.0	1698.0	1695.0	1694.0	1680.0	1679.0	1678.0	1664.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No

<Tablet mode>

Exposure Position	Wireless Interface	WCDMA Band V	WCDMA Band IV	WCDMA Band II	LTE Band 71	LTE Band 12	LTE Band 13	LTE Band 14	LTE Band 5	LTE Band 26	LTE Band 4	LTE Band 66	LTE Band 2	LTE Band 25	LTE Band 7	LTE Band 38	LTE Band 41	LTE Band 48
	Calculated Frequency (MHz)	846	1750	1907	695	715	784	795	848	848	1754	1779	1909	1914	2567	2617	2687	3697
	Maximum power (dBm)	25.0	25.0	25.0	25.5	25.5	25.5	25.5	25.5	25.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	22.0
	Maximum rated power(mW)	316.23	316.23	316.23	354.81	354.81	354.81	354.81	354.81	354.81	281.84	281.84	281.84	281.84	281.84	281.84	281.84	158.49
Back	Separation distance(mm)	16.2																
	exclusion threshold	18.0	25.9	27.0	18.3	18.6	19.5	19.6	20.2	20.2	23.1	23.3	24.1	24.1	28.0	28.2	28.6	18.9
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Top	Separation distance(mm)	5.0																
	exclusion threshold	58.2	83.7	87.3	59.2	60.0	62.8	63.3	65.4	65.4	74.7	75.2	77.9	78.0	90.3	91.2	92.4	61.0
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Right	Separation distance(mm)	5.2																
	exclusion threshold	55.9	80.5	84.0	56.9	57.7	60.4	60.8	62.8	62.8	71.8	72.3	74.9	75.0	86.8	87.7	88.9	58.6
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Bottom	Separation distance(mm)	205.7																
	exclusion threshold	1041.0	1671.0	1666.0	902.0	920.0	983.0	994.0	1043.0	1043.0	1671.0	1670.0	1666.0	1666.0	1651.0	1650.0	1649.0	1635.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Left	Separation distance(mm)	182.8																
	exclusion threshold	912.0	1441.0	1437.0	795.0	810.0	863.0	872.0	914.0	914.0	1441.0	1440.0	1436.0	1436.0	1422.0	1421.0	1419.0	1406.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - c. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5/B12/B17/B26/B38/B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 2/4/5/17/38 SAR test was covered by Band 25/66/26/12/41; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

**15.1 Body SAR**

【WCDMA SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Top	20mm	P-Sensor Off	9262	1852.4	Speed	23.50	25.00	1.413	0.00	0.100	0.141
	WCDMA II	RMC 12.2Kbps	Back	0mm	P-Sensor Off	9262	1852.4	Speed	23.50	25.00	1.413	0.19	0.080	0.113
	WCDMA II	RMC 12.2Kbps	Right	0mm	P-Sensor Off	9262	1852.4	Speed	23.50	25.00	1.413	0.18	0.171	0.242
	WCDMA II	RMC 12.2Kbps	Top	0mm	P-Sensor On	9262	1852.4	Speed	23.00	23.50	1.122	-0.07	0.921	1.033
	WCDMA II	RMC 12.2Kbps	Top	0mm	P-Sensor On	9400	1880	Speed	22.80	23.50	1.175	-0.17	0.882	1.036
	WCDMA II	RMC 12.2Kbps	Top	0mm	P-Sensor On	9538	1907.6	Speed	22.96	23.50	1.132	0.03	0.949	1.074
	WCDMA II	RMC 12.2Kbps	Top	0mm	P-Sensor On	9538	1907.6	WNC	22.96	23.50	1.132	0.09	0.926	1.048
01	WCDMA II	RMC 12.2Kbps	Top	0mm	P-Sensor On	9262	1852.4	WNC	23.00	23.50	1.122	0.03	1.000	1.122
	WCDMA II	RMC 12.2Kbps	Top	0mm	P-Sensor On	9400	1880	WNC	22.80	23.50	1.175	0.08	0.817	0.960
	WCDMA IV	RMC 12.2Kbps	Top	20mm	P-Sensor Off	1513	1752.6	Speed	23.90	25.00	1.288	0.02	0.110	0.142
	WCDMA IV	RMC 12.2Kbps	Back	0mm	P-Sensor Off	1513	1752.6	Speed	23.90	25.00	1.288	-0.08	0.040	0.052
	WCDMA IV	RMC 12.2Kbps	Right	0mm	P-Sensor Off	1513	1752.6	Speed	23.90	25.00	1.288	-0.18	0.059	0.076
02	WCDMA IV	RMC 12.2Kbps	Top	0mm	P-Sensor On	1513	1752.6	Speed	17.90	18.50	1.148	0.02	0.988	1.134
	WCDMA IV	RMC 12.2Kbps	Top	0mm	P-Sensor On	1312	1712.4	Speed	17.50	18.50	1.259	0.00	0.829	1.044
	WCDMA IV	RMC 12.2Kbps	Top	0mm	P-Sensor On	1413	1732.6	Speed	17.71	18.50	1.199	-0.14	0.898	1.077
	WCDMA IV	RMC 12.2Kbps	Top	0mm	P-Sensor On	1513	1752.6	WNC	17.90	18.50	1.148	-0.00	0.799	0.917
	WCDMA IV	RMC 12.2Kbps	Top	0mm	P-Sensor On	1312	1712.4	WNC	17.50	18.50	1.259	0.19	0.606	0.763
	WCDMA IV	RMC 12.2Kbps	Top	0mm	P-Sensor On	1413	1732.6	WNC	17.71	18.50	1.199	-0.12	0.760	0.911
	WCDMA V	RMC 12.2Kbps	Top	20mm	P-Sensor Off	4182	836.4	Speed	23.83	25.00	1.309	0.05	0.099	0.130
	WCDMA V	RMC 12.2Kbps	Back	0mm	P-Sensor Off	4182	836.4	Speed	23.83	25.00	1.309	0.01	0.044	0.058
	WCDMA V	RMC 12.2Kbps	Right	0mm	P-Sensor Off	4182	836.4	Speed	23.83	25.00	1.309	-0.03	0.042	0.055
	WCDMA V	RMC 12.2Kbps	Top	0mm	P-Sensor On	4182	836.4	Speed	17.83	18.50	1.167	0.16	0.971	1.133
	WCDMA V	RMC 12.2Kbps	Top	0mm	P-Sensor On	4132	826.4	Speed	17.63	18.50	1.222	-0.13	0.930	1.136
03	WCDMA V	RMC 12.2Kbps	Top	0mm	P-Sensor On	4233	846.6	Speed	17.82	18.50	1.169	0.02	0.987	1.154
	WCDMA V	RMC 12.2Kbps	Top	0mm	P-Sensor On	4233	846.6	WNC	17.82	18.50	1.169	0.06	0.891	1.042
	WCDMA V	RMC 12.2Kbps	Top	0mm	P-Sensor On	4132	826.4	WNC	17.63	18.50	1.222	-0.13	0.934	1.141
	WCDMA V	RMC 12.2Kbps	Top	0mm	P-Sensor On	4182	836.4	WNC	17.83	18.50	1.167	-0.12	0.896	1.046

【LTE SAR】

Plot No	Band	BW	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Top	20mm	P-Sensor Off	20850	2510	Speed	23.31	24.50	1.315			-0.10	0.089	0.117
	LTE Band 7	20M	QPSK	50	0	Top	20mm	P-Sensor Off	20850	2510	Speed	22.46	23.50	1.271			-0.05	0.069	0.088
	LTE Band 7	20M	QPSK	1	0	Back	0mm	P-Sensor Off	20850	2510	Speed	23.31	24.50	1.315			0.16	0.039	0.051
	LTE Band 7	20M	QPSK	50	0	Back	0mm	P-Sensor Off	20850	2510	Speed	22.46	23.50	1.271			0.10	0.030	0.038
	LTE Band 7	20M	QPSK	1	0	Right	0mm	P-Sensor Off	20850	2510	Speed	23.31	24.50	1.315			0.05	0.034	0.045
	LTE Band 7	20M	QPSK	50	0	Right	0mm	P-Sensor Off	20850	2510	Speed	22.46	23.50	1.271			0.02	0.028	0.036
	LTE Band 7	20M	QPSK	1	0	Top	0mm	P-Sensor On	20850	2510	Speed	15.64	16.00	1.086			-0.01	0.756	0.821
	LTE Band 7	20M	QPSK	1	0	Top	0mm	P-Sensor On	21100	2535	Speed	15.47	16.00	1.13			-0.06	0.902	1.019
04	LTE Band 7	20M	QPSK	1	0	Top	0mm	P-Sensor On	21350	2560	Speed	15.18	16.00	1.208			0.05	0.935	1.129
	LTE Band 7	20M	QPSK	50	0	Top	0mm	P-Sensor On	20850	2510	Speed	15.61	16.00	1.094			-0.18	0.718	0.785
	LTE Band 7	20M	QPSK	100	0	Top	0mm	P-Sensor On	20850	2510	Speed	15.61	16.00	1.094			-0.07	0.706	0.772
	LTE Band 7C	20M+20M	QPSK	1	0	Top	0mm	P-Sensor On	20850+21048	2510	Speed	15.30	16.00	1.175			0.02	0.689	0.810
	LTE Band 7	20M	QPSK	1	0	Top	0mm	P-Sensor On	21350	2560	WNC	15.18	16.00	1.208			-0.14	0.642	0.776
	LTE Band 7	20M	QPSK	1	0	Top	0mm	P-Sensor On	20850	2510	WNC	15.64	16.00	1.086			0.06	0.538	0.584
	LTE Band 7	20M	QPSK	1	0	Top	0mm	P-Sensor On	21100	2535	WNC	15.47	16.00	1.13			0.17	0.672	0.759
	LTE Band 12	10M	QPSK	1	0	Top	20mm	P-Sensor Off	23095	707.5	Speed	23.70	25.50	1.514			0.05	0.069	0.104
	LTE Band 12	10M	QPSK	25	0	Top	20mm	P-Sensor Off	23095	707.5	Speed	22.78	24.50	1.486			0.02	0.046	0.068
	LTE Band 12	10M	QPSK	1	0	Back	0mm	P-Sensor Off	23095	707.5	Speed	23.70	25.50	1.514			-0.14	0.036	0.055
	LTE Band 12	10M	QPSK	25	0	Back	0mm	P-Sensor Off	23095	707.5	Speed	22.78	24.50	1.486			0.13	0.030	0.045
	LTE Band 12	10M	QPSK	1	0	Right	0mm	P-Sensor Off	23095	707.5	Speed	23.70	25.50	1.514			0.11	0.107	0.162
	LTE Band 12	10M	QPSK	25	0	Right	0mm	P-Sensor Off	23095	707.5	Speed	22.78	24.50	1.486			0.11	0.084	0.125
	LTE Band 12	10M	QPSK	1	0	Top	0mm	P-Sensor On	23095	707.5	Speed	21.20	22.00	1.202			0.14	0.861	1.035
	LTE Band 12	10M	QPSK	25	0	Top	0mm	P-Sensor On	23095	707.5	Speed	21.30	22.00	1.175			-0.16	0.829	0.974
	LTE Band 12	10M	QPSK	50	0	Top	0mm	P-Sensor On	23095	707.5	Speed	21.19	22.00	1.205			0.08	0.815	0.982
05	LTE Band 12	10M	QPSK	1	0	Top	0mm	P-Sensor On	23095	707.5	WNC	21.20	22.00	1.202			0.04	0.898	1.079
	LTE Band 13	10M	QPSK	1	0	Top	20mm	P-Sensor Off	23230	782	Speed	23.68	25.50	1.521			0.03	0.120	0.183
	LTE Band 13	10M	QPSK	25	0	Top	20mm	P-Sensor Off	23230	782	Speed	22.86	24.50	1.459			0.12	0.100	0.146
	LTE Band 13	10M	QPSK	1	0	Back	0mm	P-Sensor Off	23230	782	Speed	23.68	25.50	1.521			-0.10	0.032	0.049
	LTE Band 13	10M	QPSK	25	0	Back	0mm	P-Sensor Off	23230	782	Speed	22.86	24.50	1.459			-0.18	0.030	0.044
	LTE Band 13	10M	QPSK	1	0	Right	0mm	P-Sensor Off	23230	782	Speed	23.68	25.50	1.521			-0.01	0.089	0.135
	LTE Band 13	10M	QPSK	25	0	Right	0mm	P-Sensor Off	23230	782	Speed	22.86	24.50	1.459			-0.15	0.083	0.121
06	LTE Band 13	10M	QPSK	1	0	Top	0mm	P-Sensor On	23230	782	Speed	18.50	19.50	1.259			0.03	0.925	1.165
	LTE Band 13	10M	QPSK	25	0	Top	0mm	P-Sensor On	23230	782	Speed	18.37	19.50	1.297			-0.08	0.871	1.130
	LTE Band 13	10M	QPSK	50	0	Top	0mm	P-Sensor On	23230	782	Speed	18.31	19.50	1.315			0.08	0.862	1.134



FCC SAR TEST REPORT

Report No. : FA622715

	LTE Band 13	10M	QPSK	1	0	Top	0mm	P-Sensor On	23230	782	WNC	18.50	19.50	1.259			-0.16	0.922	1.161
	LTE Band 14	10M	QPSK	1	0	Top	20mm	P-Sensor Off	23330	793	Speed	23.83	25.50	1.469			0.02	0.138	0.203
	LTE Band 14	10M	QPSK	25	0	Top	20mm	P-Sensor Off	23330	793	Speed	22.96	24.50	1.426			0.01	0.120	0.171
	LTE Band 14	10M	QPSK	1	0	Back	0mm	P-Sensor Off	23330	793	Speed	23.83	25.50	1.469			-0.16	0.039	0.057
	LTE Band 14	10M	QPSK	25	0	Back	0mm	P-Sensor Off	23330	793	Speed	22.96	24.50	1.426			-0.09	0.040	0.057
	LTE Band 14	10M	QPSK	1	0	Right	0mm	P-Sensor Off	23330	793	Speed	23.83	25.50	1.469			-0.14	0.125	0.184
	LTE Band 14	10M	QPSK	25	0	Right	0mm	P-Sensor Off	23330	793	Speed	22.96	24.50	1.426			0.07	0.130	0.185
	LTE Band 14	10M	QPSK	1	0	Top	0mm	P-Sensor On	23330	793	Speed	19.49	19.50	1.002			0.01	1.090	1.092
	LTE Band 14	10M	QPSK	25	0	Top	0mm	P-Sensor On	23330	793	Speed	19.47	19.50	1.007			-0.17	1.060	1.067
	LTE Band 14	10M	QPSK	50	0	Top	0mm	P-Sensor On	23330	793	Speed	19.40	19.50	1.023			-0.01	1.040	1.064
07	LTE Band 14	10M	QPSK	1	0	Top	0mm	P-Sensor On	23330	793	WNC	19.49	19.50	1.002			0.08	1.100	1.102
	LTE Band 25	20M	QPSK	1	0	Top	20mm	P-Sensor Off	26590	1905	Speed	22.82	24.50	1.472			-0.01	0.100	0.147
	LTE Band 25	20M	QPSK	50	0	Top	20mm	P-Sensor Off	26590	1905	Speed	22.01	23.50	1.409			0.11	0.082	0.116
	LTE Band 25	20M	QPSK	1	0	Back	0mm	P-Sensor Off	26590	1905	Speed	22.82	24.50	1.472			-0.15	0.102	0.150
	LTE Band 25	20M	QPSK	50	0	Back	0mm	P-Sensor Off	26590	1905	Speed	22.01	23.50	1.409			0.02	0.102	0.144
	LTE Band 25	20M	QPSK	1	0	Right	0mm	P-Sensor Off	26590	1905	Speed	22.82	24.50	1.472			-0.16	0.239	0.352
	LTE Band 25	20M	QPSK	50	0	Right	0mm	P-Sensor Off	26590	1905	Speed	22.01	23.50	1.409			0.12	0.259	0.365
	LTE Band 25	20M	QPSK	1	0	Top	0mm	P-Sensor On	26590	1905	Speed	20.80	21.50	1.175			0.01	0.985	1.157
	LTE Band 25	20M	QPSK	1	99	Top	0mm	P-Sensor On	26140	1860	Speed	20.67	21.50	1.211			-0.02	0.949	1.149
	LTE Band 25	20M	QPSK	1	99	Top	0mm	P-Sensor On	26340	1880	Speed	20.74	21.50	1.191			0.19	0.965	1.149
	LTE Band 25	20M	QPSK	50	0	Top	0mm	P-Sensor On	26590	1905	Speed	20.78	21.50	1.18			-0.11	0.818	0.965
	LTE Band 25	20M	QPSK	50	24	Top	0mm	P-Sensor On	26140	1860	Speed	20.76	21.50	1.186			0.13	0.908	1.077
	LTE Band 25	20M	QPSK	50	24	Top	0mm	P-Sensor On	26340	1880	Speed	20.77	21.50	1.183			-0.04	0.890	1.053
	LTE Band 25	20M	QPSK	100	0	Top	0mm	P-Sensor On	26590	1905	Speed	20.80	21.50	1.175			0.03	0.799	0.939
08	LTE Band 25	20M	QPSK	1	0	Top	0mm	P-Sensor On	26590	1905	WNC	20.80	21.50	1.175			0.04	1.010	1.187
	LTE Band 25	20M	QPSK	1	99	Top	0mm	P-Sensor On	26140	1860	WNC	20.67	21.50	1.211			-0.18	0.892	1.080
	LTE Band 25	20M	QPSK	1	99	Top	0mm	P-Sensor On	26340	1880	WNC	20.74	21.50	1.191			0.00	0.912	1.086
	LTE Band 26	15M	QPSK	1	0	Top	20mm	P-Sensor Off	26865	831.5	Speed	23.96	25.50	1.426			-0.05	0.125	0.178
	LTE Band 26	15M	QPSK	36	0	Top	20mm	P-Sensor Off	26865	831.5	Speed	23.03	24.50	1.403			-0.01	0.101	0.142
	LTE Band 26	15M	QPSK	1	0	Back	0mm	P-Sensor Off	26865	831.5	Speed	23.96	25.50	1.426			-0.04	0.024	0.034
	LTE Band 26	15M	QPSK	36	0	Back	0mm	P-Sensor Off	26865	831.5	Speed	23.03	24.50	1.403			0.00	0.023	0.032
	LTE Band 26	15M	QPSK	1	0	Right	0mm	P-Sensor Off	26865	831.5	Speed	23.96	25.50	1.426			-0.11	0.066	0.094
	LTE Band 26	15M	QPSK	36	0	Right	0mm	P-Sensor Off	26865	831.5	Speed	23.03	24.50	1.403			0.17	0.069	0.097
09	LTE Band 26	15M	QPSK	1	0	Top	0mm	P-Sensor On	26865	831.5	Speed	19.09	19.50	1.099			-0.08	0.957	1.052
	LTE Band 26	15M	QPSK	36	0	Top	0mm	P-Sensor On	26865	831.5	Speed	19.10	19.50	1.096			0.05	0.921	1.009
	LTE Band 26	15M	QPSK	75	0	Top	0mm	P-Sensor On	26865	831.5	Speed	19.15	19.50	1.084			-0.08	0.919	0.996
	LTE Band 5B	10M+10M	QPSK	1	49	Top	0mm	P-Sensor On	20475+20574	831.5	Speed	18.32	19.50	1.312			0.01	0.683	0.896
	LTE Band 26	15M	QPSK	1	0	Top	0mm	P-Sensor On	26865	831.5	WNC	19.09	19.50	1.099			-0.12	0.918	1.009
	LTE Band 66	20M	QPSK	1	49	Top	20mm	P-Sensor Off	132322	1745	Speed	23.08	24.50	1.387			0.01	0.100	0.139
	LTE Band 66	20M	QPSK	50	24	Top	20mm	P-Sensor Off	132322	1745	Speed	22.15	23.50	1.365			0.12	0.085	0.116
	LTE Band 66	20M	QPSK	1	49	Back	0mm	P-Sensor Off	132322	1745	Speed	23.08	24.50	1.387			0.18	0.053	0.074
	LTE Band 66	20M	QPSK	50	24	Back	0mm	P-Sensor Off	132322	1745	Speed	22.15	23.50	1.365			0.17	0.053	0.072
	LTE Band 66	20M	QPSK	1	49	Right	0mm	P-Sensor Off	132322	1745	Speed	23.08	24.50	1.387			0.02	0.097	0.135
	LTE Band 66	20M	QPSK	50	24	Right	0mm	P-Sensor Off	132322	1745	Speed	22.15	23.50	1.365			0.15	0.095	0.130
10	LTE Band 66	20M	QPSK	1	49	Top	0mm	P-Sensor On	132322	1745	Speed	17.84	18.50	1.164			0.03	0.964	1.122
	LTE Band 66	20M	QPSK	1	99	Top	0mm	P-Sensor On	132072	1720	Speed	17.68	18.50	1.208			-0.06	0.829	1.001
	LTE Band 66	20M	QPSK	1	0	Top	0mm	P-Sensor On	132572	1770	Speed	17.72	18.50	1.197			0.12	0.825	0.988
	LTE Band 66	20M	QPSK	50	24	Top	0mm	P-Sensor On	132322	1745	Speed	17.83	18.50	1.167			-0.16	0.895	1.044
	LTE Band 66	20M	QPSK	50	24	Top	0mm	P-Sensor On	132072	1720	Speed	17.73	18.50	1.194			0.17	0.730	0.872
	LTE Band 66	20M	QPSK	50	0	Top	0mm	P-Sensor On	132572	1770	Speed	17.71	18.50	1.199			-0.04	0.731	0.876
	LTE Band 66	20M	QPSK	100	0	Top	0mm	P-Sensor On	132322	1745	Speed	17.82	18.50	1.169			0.14	0.709	0.829
	LTE Band 66B	15M+15M	QPSK	1	0	Top	0mm	P-Sensor On	132229+132322	1735.7	Speed	17.62	18.50	1.225			0.02	0.740	0.907
	LTE Band 66C	20M+20M	QPSK	1	0	Top	0mm	P-Sensor On	132322+132124	1745	Speed	17.70	18.50	1.202			0.08	0.743	0.893
	LTE Band 66	20M	QPSK	1	49	Top	0mm	P-Sensor On	132322	1745	WNC	17.84	18.50	1.164			-0.04	0.927	1.079
	LTE Band 66	20M	QPSK	1	99	Top	0mm	P-Sensor On	132072	1720	WNC	17.68	18.50	1.208			-0.18	0.757	0.914
	LTE Band 66	20M	QPSK	1	0	Top	0mm	P-Sensor On	132572	1770	WNC	17.72	18.50	1.197			0.15	0.889	1.064
	LTE Band 71	20M	QPSK	1	0	Top	20mm	P-Sensor Off	133297	680.5	Speed	24.06	25.50	1.393			0.02	0.089	0.124
	LTE Band 71	20M	QPSK	50	0	Top	20mm	P-Sensor Off	133297	680.5	Speed	23.03	24.50	1.403			0.02	0.067	0.094
	LTE Band 71	20M	QPSK	1	0	Back	0mm	P-Sensor Off	133297	680.5	Speed	24.06	25.50	1.393			0.10	0.054	0.075
	LTE Band 71	20M	QPSK	50	0	Back	0mm	P-Sensor Off	133297	680.5	Speed	23.03	24.50	1.403			-0.02	0.051	0.072
	LTE Band 71	20M	QPSK	1	0	Right	0mm	P-Sensor Off	133297	680.5	Speed	24.06	25.50	1.393			0.09	0.156	0.217
	LTE Band 71	20M	QPSK	50	0	Right	0mm	P-Sensor Off	133297	680.5	Speed	23.03	24.50	1.403			0.05	0.167	0.234
11	LTE Band 71	20M	QPSK	1	0	Top	0mm	P-Sensor On	133297	680.5	Speed	19.67	20.00	1.079			0.09	1.000	1.079
	LTE Band 71	20M	QPSK	50	0	Top	0mm	P-Sensor On	133297	680.5	Speed	19.75	20.00	1.059			-0.16	0.923	0.977
	LTE Band 71	20M	QPSK	100	0	Top	0mm	P-Sensor On	133297	680.5	Speed	19.59	20.00	1.099			-0.18	0.908	0.998
	LTE Band 71	20M	QPSK	1	0	Top	0mm	P-Sensor On	133297	680.5	WNC	19.67	20.00	1.079			-0.07	0.843	0.910
	LTE Band 41	20M	QPSK	1	0	Top	20mm	P-Sensor Off	41490	2680	Speed	23.29	24.50	1.321	62.9	1.006	0.00	0.028	0.037
	LTE Band 41	20M	QPSK	50	24	Top	20mm	P-Sensor Off	41490	2680	Speed	22.50	23.50	1.259	62.9	1.006	0.01	0.021	0.027
	LTE Band 41	20M	QPSK	1	0	Back	0mm	P-Sensor Off	41490	2680	Speed	23.29	24.50	1.321	62.9	1.006	0.03	0.019	0.025
	LTE Band 41	20M	QPSK	50	24	Back	0mm	P-Sensor Off	41490	2680	Speed	22.50	23.50	1.259	62.9	1.006	-0.00	0.020	0.025
	LTE Band 41	20M	QPSK	1	0	Right	0mm	P-Sensor Off	41490	2680	Speed	23.29	24.50	1.321	62.9	1.006	0.01	0.039	0.052
	LTE Band 41	20M	QPSK	50	24	Right	0mm	P-Sensor Off	41490	2680	Speed	22.50	23.50	1.259	62.9	1.006	-0.05	0.038	0.048
	LTE Band 41	20M	QPSK	1	0	Top	0mm	P-Sensor On	41490	2680	Speed	20.80	21.50	1.175	62.9	1.006	-0.01	0.444	0.525



FCC SAR TEST REPORT

Report No. : FA622715

	LTE Band 41	20M	QPSK	50	24	Top	0mm	P-Sensor On	41490	2680	Speed	20.78	21.50	1.18	62.9	1.006	-0.16	0.421	0.500
	LTE Band 41C	20M+20M	QPSK	1	0	Top	0mm	P-Sensor On	41490+41292	2680	Speed	20.58	21.50	1.236	62.9	1.006	0.02	0.325	0.404
	LTE Band 41	20M	QPSK	1	0	Top	0mm	P-Sensor On	41490	2680	WNC	20.80	21.50	1.175	62.9	1.006	-0.05	0.611	0.722
12	LTE Band 41	20M	QPSK	1	0	Top	0mm	P-Sensor On	39750	2506	WNC	20.62	21.50	1.225	62.9	1.006	0.05	0.834	1.028
	LTE Band 41	20M	QPSK	1	49	Top	0mm	P-Sensor On	40185	2549.5	WNC	20.27	21.50	1.327	62.9	1.006	0.14	0.716	0.956
	LTE Band 41	20M	QPSK	1	99	Top	0mm	P-Sensor On	40620	2593	WNC	20.43	21.50	1.279	62.9	1.006	0.05	0.779	1.002
	LTE Band 41	20M	QPSK	1	0	Top	0mm	P-Sensor On	41055	2636.5	WNC	20.62	21.50	1.225	62.9	1.006	0.16	0.701	0.864
	LTE Band 41	20M	QPSK	100	0	Top	0mm	P-Sensor On	41490	2680	WNC	20.81	21.50	1.172	62.9	1.006	0.02	0.456	0.538
	LTE Band 48	20M	QPSK	1	0	Top	20mm	P-Sensor Off	56640	3690	Speed	21.85	22.00	1.035	62.9	1.006	0.00	0.063	0.066
	LTE Band 48	20M	QPSK	50	0	Top	20mm	P-Sensor Off	56640	3690	Speed	21.41	22.00	1.146	62.9	1.006	0.08	0.052	0.060
	LTE Band 48	20M	QPSK	1	0	Back	0mm	P-Sensor Off	56640	3690	Speed	21.85	22.00	1.035	62.9	1.006	0.16	0.019	0.020
	LTE Band 48	20M	QPSK	50	0	Back	0mm	P-Sensor Off	56640	3690	Speed	21.41	22.00	1.146	62.9	1.006	0.11	0.020	0.023
	LTE Band 48	20M	QPSK	1	0	Right	0mm	P-Sensor Off	56640	3690	Speed	21.85	22.00	1.035	62.9	1.006	-0.14	0.056	0.058
	LTE Band 48	20M	QPSK	50	0	Right	0mm	P-Sensor Off	56640	3690	Speed	21.41	22.00	1.146	62.9	1.006	-0.08	0.057	0.066
	LTE Band 48	20M	QPSK	1	0	Top	0mm	P-Sensor On	56640	3690	Speed	14.87	15.00	1.03	62.9	1.006	0.02	0.594	0.615
	LTE Band 48	20M	QPSK	1	49	Top	0mm	P-Sensor On	55340	3560	Speed	14.61	15.00	1.094	62.9	1.006	0.06	0.692	0.762
	LTE Band 48	20M	QPSK	1	99	Top	0mm	P-Sensor On	55830	3609	Speed	14.15	15.00	1.216	62.9	1.006	0.11	0.667	0.816
	LTE Band 48	20M	QPSK	1	99	Top	0mm	P-Sensor On	56150	3641	Speed	14.37	15.00	1.156	62.9	1.006	0.13	0.607	0.706
	LTE Band 48	20M	QPSK	50	0	Top	0mm	P-Sensor On	56640	3690	Speed	14.85	15.00	1.035	62.9	1.006	0.17	0.755	0.786
	LTE Band 48	20M	QPSK	50	0	Top	0mm	P-Sensor On	55340	3560	Speed	14.69	15.00	1.074	62.9	1.006	-0.13	0.694	0.750
	LTE Band 48	20M	QPSK	50	0	Top	0mm	P-Sensor On	55830	3609	Speed	14.12	15.00	1.225	62.9	1.006	0.15	0.648	0.799
	LTE Band 48	20M	QPSK	50	50	Top	0mm	P-Sensor On	56150	3641	Speed	14.38	15.00	1.153	62.9	1.006	0.10	0.699	0.811
	LTE Band 48	20M	QPSK	100	0	Top	0mm	P-Sensor On	56640	3690	Speed	14.70	15.00	1.072	62.9	1.006	0.11	0.593	0.640
	LTE Band 48C	20M+20M	QPSK	1	0	Top	0mm	P-Sensor On	56640	3690	Speed	14.58	15.00	1.102	62.9	1.006	-0.02	0.430	0.477
	LTE Band 48	20M	QPSK	1	99	Top	0mm	P-Sensor On	55830	3609	WNC	14.15	15.00	1.216	62.9	1.006	0.04	0.648	0.793
13	LTE Band 48	20M	QPSK	1	49	Top	0mm	P-Sensor On	55340	3560	WNC	14.61	15.00	1.094	62.9	1.006	0.06	0.932	1.026
	LTE Band 48	20M	QPSK	1	0	Top	0mm	P-Sensor On	56640	3690	WNC	14.87	15.00	1.03	62.9	1.006	-0.14	0.711	0.737
	LTE Band 48	20M	QPSK	1	99	Top	0mm	P-Sensor On	56150	3641	WNC	14.37	15.00	1.156	62.9	1.006	-0.12	0.696	0.809

**15.2 Repeated SAR Measurement**

No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Ratio
1st	LTE Band 14	10M_QPSK_1_0	Top	0.0	P-Sensor On	23330	793	WNC	19.49	19.50	1.002			0.08	1.100	1.102	-
2nd	LTE Band 14	10M_QPSK_1_0	Top	0.0	P-Sensor On	23330	793	WNC	19.49	19.50	1.002			0.11	1.050	1.052	1.05
1st	WCDMA V	RMC 12.2Kbps	Top	0.0	P-Sensor On	4233	846.6	Speed	17.82	18.50	1.169			0.02	0.987	1.154	-
2nd	WCDMA V	RMC 12.2Kbps	Top	0.0	P-Sensor On	4233	846.6	Speed	17.82	18.50	1.169			0.05	0.965	1.128	1.02
1st	WCDMA IV	RMC 12.2Kbps	Top	0.0	P-Sensor On	1513	1752.6	Speed	17.90	18.50	1.148			0.02	0.988	1.134	-
2nd	WCDMA IV	RMC 12.2Kbps	Top	0.0	P-Sensor On	1513	1752.6	Speed	17.90	18.50	1.148			0.13	0.968	1.111	1.02
1st	LTE Band 25	20M_QPSK_1_0	Top	0.0	P-Sensor On	26590	1905	WNC	20.80	21.50	1.175			0.04	1.010	1.187	-
2nd	LTE Band 25	20M_QPSK_1_0	Top	0.0	P-Sensor On	26590	1905	WNC	20.80	21.50	1.175			0.10	1.000	1.175	1.01
1st	LTE Band 7	20M_QPSK_1_0	Top	0.0	P-Sensor On	21350	2560	Speed	15.18	16.00	1.208			0.05	0.935	1.129	-
2nd	LTE Band 7	20M_QPSK_1_0	Top	0.0	P-Sensor On	21350	2560	Speed	15.18	16.00	1.208			-0.15	0.933	1.127	1.00
1st	LTE Band 48	20M_QPSK_1_49	Top	0.0	P-Sensor On	55340	3560	WNC	14.61	15.00	1.094	62.9	1.006	0.06	0.932	1.026	-
2nd	LTE Band 48	20M_QPSK_1_49	Top	0.0	P-Sensor On	55340	3560	WNC	14.61	15.00	1.094	62.9	1.006	-0.17	0.928	1.021	1.00

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

<WWAN+ AX211NGW>

NO.	Simultaneous Transmission Configurations	Body
1.	WWAN + 2.4GHz WLAN Main + 2.4GHz WLAN Aux	Yes
2.	WWAN + 5/6GHz WLAN Main + 5/6GHz WLAN Aux + Bluetooth Aux	Yes
3.	WWAN + 2.4GHz WLAN Main + Bluetooth Aux	Yes

<WWAN+ BE211NGW>

NO.	Simultaneous Transmission Configurations	Body
4.	WWAN + 2.4GHz WLAN Main + 2.4GHz WLAN Aux	Yes
5.	WWAN + 5/6GHz WLAN Main + 5/6GHz WLAN Aux + Bluetooth Main + Bluetooth Aux	Yes
6.	WWAN + 2.4GHz WLAN Main + Bluetooth Aux	Yes
7.	WWAN + 2.4GHz WLAN Aux + Bluetooth Main	Yes

<WWAN+ MT7922A22M>

NO.	Simultaneous Transmission Configurations	Body
8.	WWAN + 2.4GHz WLAN Main + 2.4GHz WLAN Aux	Yes
9.	WWAN + 5/6GHz WLAN Main + 5/6GHz WLAN Aux + Bluetooth Aux	Yes

<WWAN+ MT7925B22M>

NO.	Simultaneous Transmission Configurations	Body
10.	WWAN + 2.4GHz WLAN Main + 2.4GHz WLAN Aux	Yes
11.	WWAN + 2.4GHz WLAN Main + 5/6GHz WLAN Aux	Yes
12.	WWAN + 2.4GHz WLAN Aux + 5/6GHz WLAN Main	Yes
13.	WWAN + 5/6GHz WLAN Main + 5/6GHz WLAN Aux + Bluetooth Aux	Yes

General Note:

1. The Scaled SAR summation is calculated based on the same configuration and test position.
2. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1g 1.6W/kg or 10g 4.0W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$ for 1g SAR, ≤ 0.1 for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR 1.6W/kg or 10g SAR 4.0W/kg.
 - v) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - vi) The SPLSR calculated results please refer to section 16.2.

16.1 Body Conditions

WWAN+WLAN AX211NGW

Exposure Position	0	1	2	3	4	5	0+1+2 Summed 1g SAR (W/kg)	0+1+5 Summed 1g SAR (W/kg)	0+3+4+5 Summed 1g SAR (W/kg)	0+3+4+5 SPLSR	0+3+4+5 Case No.
	Maximum WWAN	2.4GHz WLAN Main	2.4GHz WLAN Aux	5/6GHz WLAN Main	5/6GHz WLAN Aux	Bluetooth Aux					
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
Back at 0mm	0.150	0.700	0.060	0.910	1.100	0.030	0.910	0.880	2.190	0.02	Case 1
Right at 0mm	0.365		0.490		0.790	0.060	0.855	0.425	1.215		
Top at 0mm	1.187						1.187	1.187	1.187		

WWAN+WLAN BE211NGW

Exposure Position	0	1	2	3	4	5	6	0+1+2 Summed 1g SAR (W/kg)	0+1+6 Summed 1g SAR (W/kg)	0+2+5 Summed 1g SAR (W/kg)	0+3+4+5+6 Summed 1g SAR (W/kg)	0+1+2 SPLSR	0+1+2 Case No.	0+3+4+5+6 SPLSR	0+3+4+5+6 Case No.
	Maximum WWAN	2.4GHz WLAN Main	2.4GHz WLAN Aux	5/6GHz WLAN Main	5/6GHz WLAN Aux	Bluetooth Main	Bluetooth Aux								
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)								
Back at 0mm	0.150	0.980	0.950	1.160	1.070	0.420	0.320	2.080	1.450	1.520	3.120	0.01	Case 2	0.03	Case 3
Right at 0mm	0.365		0.800		0.790		0.210	1.165	0.575	1.165	1.365				
Top at 0mm	1.187							1.187	1.187	1.187	1.187				

WWAN+WLAN MT7922A22M

Exposure Position	0	1	2	3	4	5	0+1+2 Summed 1g SAR (W/kg)	0+3+4+5 Summed 1g SAR (W/kg)	0+1+2 SPLSR	0+1+2 Case No.	0+3+4+5 SPLSR	0+3+4+5 Case No.
	Maximum WWAN	2.4GHz WLAN Main	2.4GHz WLAN Aux	5/6GHz WLAN Main	5/6GHz WLAN Aux	Bluetooth Aux						
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)						
Back at 0mm	0.150	1.139	1.049	1.114	1.189	0.398	2.338	2.851	0.02	Case 4	0.02	Case 5
Right at 0mm	0.365						0.365	0.365				
Top at 0mm	1.187						1.187	1.187				

WWAN+WLAN MT7925B22M

Exposure Position	0	1	2	3	4	5	0+1+2 Summed 1g SAR (W/kg)	0+1+4 Summed 1g SAR (W/kg)	0+2+3 Summed 1g SAR (W/kg)	0+3+4+5 Summed 1g SAR (W/kg)	0+1+2 SPLSR	0+1+2 Case No.	0+1+4 SPLSR	0+1+4 Case No.	0+2+3 SPLSR	0+2+3 Case No.	0+3+4+5 SPLSR	0+3+4+5 Case No.
	Maximum WWAN	2.4GHz WLAN Main	2.4GHz WLAN Aux	5/6GHz WLAN Main	5/6GHz WLAN Aux	Bluetooth Aux												
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)												
Back at 0mm	0.150	1.193	1.005	1.184	1.094	0.458	2.348	2.437	2.339	2.886	0.02	Case 6	0.02	Case 7	0.02	Case 8	0.02	Case 9
Right at 0mm	0.365						0.365	0.365	0.365	0.365								
Top at 0mm	1.187						1.187	1.187	1.187	1.187								

16.2 SPLSR Evaluation and Analysis

General Note:

- According to antenna location, the minimum distance between each transmit antenna is using for SPLSR analysis
- $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary

	Band	Position	SAR (W/kg)	Gap (mm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 1	Maximum WWAN	Back	0.150	0	330.1	1.06	0.00	Not required
	5/6GHz WLAN Main		0.910	0				
	Maximum WWAN	Back	0.150	0	196.8	1.28	0.01	Not required
	5/6GHz WLAN+BT Aux		1.130	0				
	5/6GHz WLAN Main	Back	0.910	0	183.8	2.04	0.02	Not required
	5/6GHz WLAN+BT Aux		1.130	0				
Case 2	Maximum WWAN	Back	0.150	0	330.1	1.13	0.00	Not required
	2.4GHz WLAN Main		0.980	0				
	Maximum WWAN	Back	0.150	0	196.8	1.10	0.01	Not required
	2.4GHz WLAN Aux		0.950	0				
	2.4GHz WLAN Main	Back	0.980	0	183.8	1.93	0.01	Not required
	2.4GHz WLAN Aux		0.950	0				
Case 3	Maximum WWAN	Back	0.150	0	330.1	1.73	0.01	Not required
	5/6GHz WLAN+BT Main		1.580	0				
	Maximum WWAN	Back	0.150	0	196.8	1.54	0.01	Not required
	5/6GHz WLAN+BT Aux		1.390	0				
	5/6GHz WLAN+BT Main	Back	1.580	0	183.8	2.97	0.03	Not required
	5/6GHz WLAN+BT Aux		1.390	0				
Case 4	Maximum WWAN	Back	0.150	0	330.1	1.29	0.00	Not required
	2.4GHz WLAN Main		1.139	0				
	Maximum WWAN	Back	0.150	0	196.8	1.20	0.01	Not required
	2.4GHz WLAN Aux		1.049	0				
	2.4GHz WLAN Main	Back	1.139	0	183.8	2.19	0.02	Not required
	2.4GHz WLAN Aux		1.049	0				
Case 5	Maximum WWAN	Back	0.150	0	330.1	1.26	0.00	Not required
	5/6GHz WLAN Main		1.114	0				
	Maximum WWAN	Back	0.150	0	196.8	1.74	0.01	Not required
	5/6GHz WLAN+BT Aux		1.587	0				
	5/6GHz WLAN Main	Back	1.114	0	183.8	2.70	0.02	Not required
	5/6GHz WLAN+BT Aux		1.587	0				

	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 6	Maximum WWAN	Back	0.150	0	330.1	1.34	0.00	Not required
	2.4GHz WLAN Main		1.193	0				
	Maximum WWAN	Back	0.150	0	196.8	1.16	0.01	Not required
	2.4GHz WLAN Aux		1.005	0				
	2.4GHz WLAN Main	Back	1.193	0	183.8	2.20	0.02	Not required
	2.4GHz WLAN Aux		1.005	0				
Case 7	Band	Position	SAR (W/kg)	Gap (mm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Maximum WWAN	Back	0.150	0	330.1	1.34	0.00	Not required
	2.4GHz WLAN Main		1.193	0				
	Maximum WWAN	Back	0.150	0	196.8	1.24	0.01	Not required
	5/6GHz WLAN Aux		1.094	0				
	2.4GHz WLAN Main	Back	1.193	0	183.8	2.29	0.02	Not required
	5/6GHz WLAN Aux		1.094	0				
Case 8	Band	Position	SAR (W/kg)	Gap (mm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Maximum WWAN	Back	0.150	0	330.1	1.16	0.00	Not required
	2.4GHz WLAN Aux		1.005	0				
	Maximum WWAN	Back	0.150	0	196.8	1.33	0.01	Not required
	5/6GHz WLAN Main		1.184	0				
	2.4GHz WLAN Aux	Back	1.005	0	183.8	2.19	0.02	Not required
	5/6GHz WLAN Main		1.184	0				
Case 9	Band	Position	SAR (W/kg)	Gap (mm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Maximum WWAN	Back	0.150	0	330.1	1.33	0.00	Not required
	5/6GHz WLAN Main		1.184	0				
	Maximum WWAN	Back	0.150	0	196.8	1.70	0.01	Not required
	5/6GHz WLAN+BT Aux		1.552	0				
	5/6GHz WLAN Main	Back	1.184	0	183.8	2.74	0.02	Not required
	5/6GHz WLAN+BT Aux		1.552	0				

Test Engineer : Dennis Hsieh

17. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [5] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [6] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [7] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [8] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [9] SPEAG DASY System Handbook
- [10] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [11] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.