

#01_WCDMA II_RMC 12.2Kbps_Top_0mm_Ch9262

Communication System: UMTS-FDD; Frequency: 1852.400 MHz

Medium: HSL_600-7200_260404 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.24, 7.11, 7.35); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.900 W/kg; SAR (10g) = 0.486 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 1.00 W/kg; SAR (8g) = 0.564 W/kg; SAR (10g) = 0.517 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 86.7 %

TSL Correction: Positive only

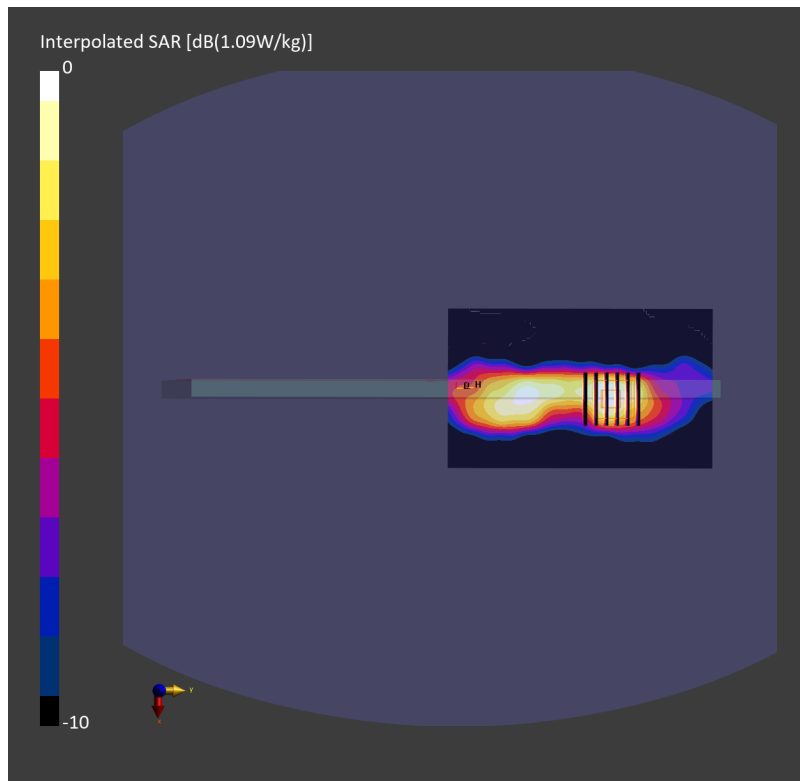

#02_WCDMA IV_RMC 12.2Kbps_Top_0mm_Ch1513

Communication System: UMTS-FDD; Frequency: 1752.600 MHz

Medium: HSL_600-7200_260404 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.41, 7.28, 7.53); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.552 W/kg; SAR (10g) = 0.323 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 33.4 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 0.988 W/kg; SAR (8g) = 0.466 W/kg; SAR (10g) = 0.422 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 73.6 %

TSL Correction: Positive only

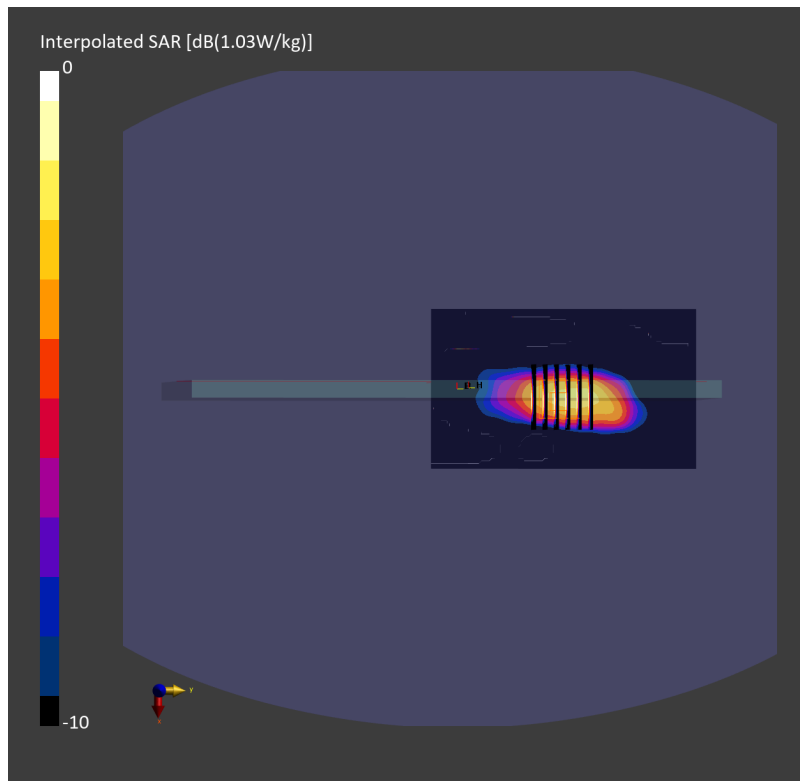

#03_WCDMA V_RMC 12.2Kbps_Top_0mm_Ch4233

Communication System: UMTS-FDD; Frequency: 846.600 MHz

Medium: HSL_600-7200_260405 Medium parameters used: $f = 846.600$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 44.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.03, 8.87, 9.17); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.637 W/kg; SAR (10g) = 0.387 W/kg;

TSL Correction: Positive only

Zoom Scan (45.9 mm x 45.9 mm x 31.2 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.987 W/kg; SAR (8g) = 0.508 W/kg; SAR (10g) = 0.464 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 75.7 %

TSL Correction: Positive only

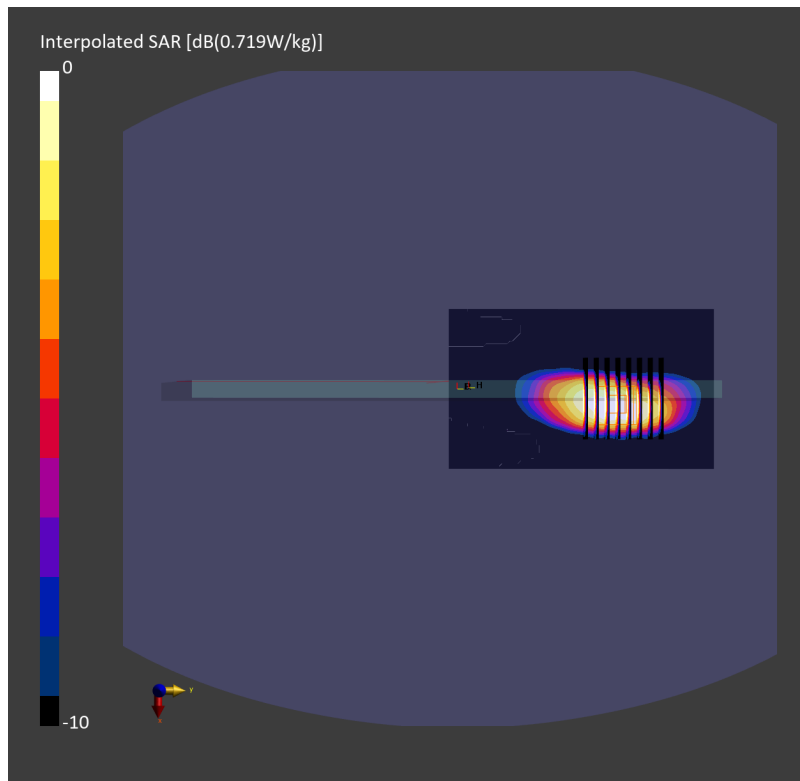

#04_LTE Band 7_20M_QPSK_1_0_Top_0mm_Ch21350

Communication System: LTE-FDD; Frequency: 2560.000 MHz

Medium: HSL_600-7200_260402 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.46, 6.35, 6.56); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (100.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.919 W/kg; SAR (10g) = 0.384 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.05 dB

SAR (1g) = 0.935 W/kg; SAR (8g) = 0.425 W/kg; SAR (10g) = 0.381 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 77.7 %

TSL Correction: Positive only

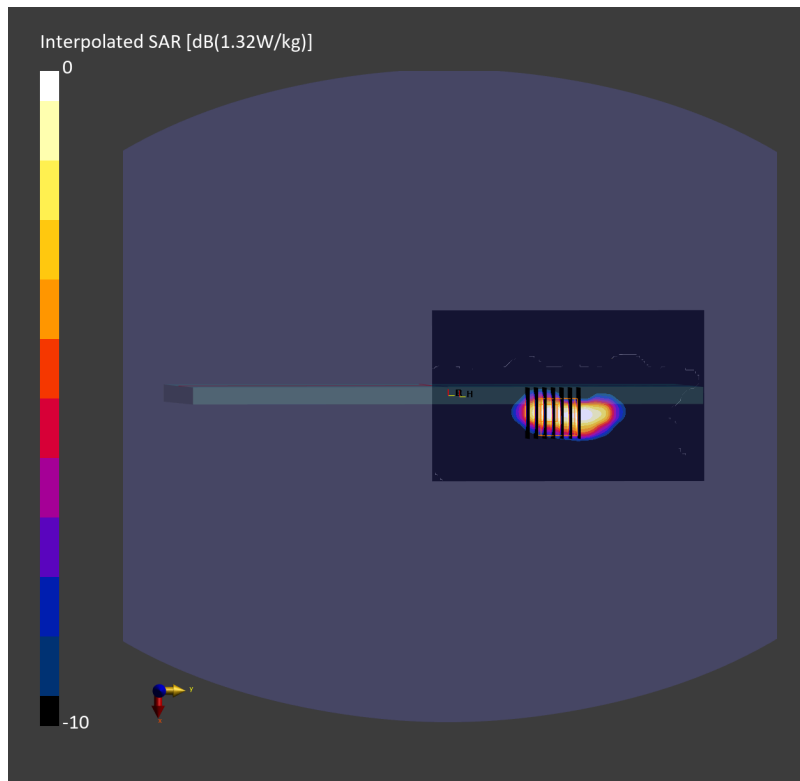

#05_LTE Band 12_10M_QPSK_1_0_Top_0mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260403 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 44.9$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.551 W/kg; SAR (10g) = 0.353 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 36.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 0.898 W/kg; SAR (8g) = 0.451 W/kg; SAR (10g) = 0.411 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.0 %

TSL Correction: Positive only

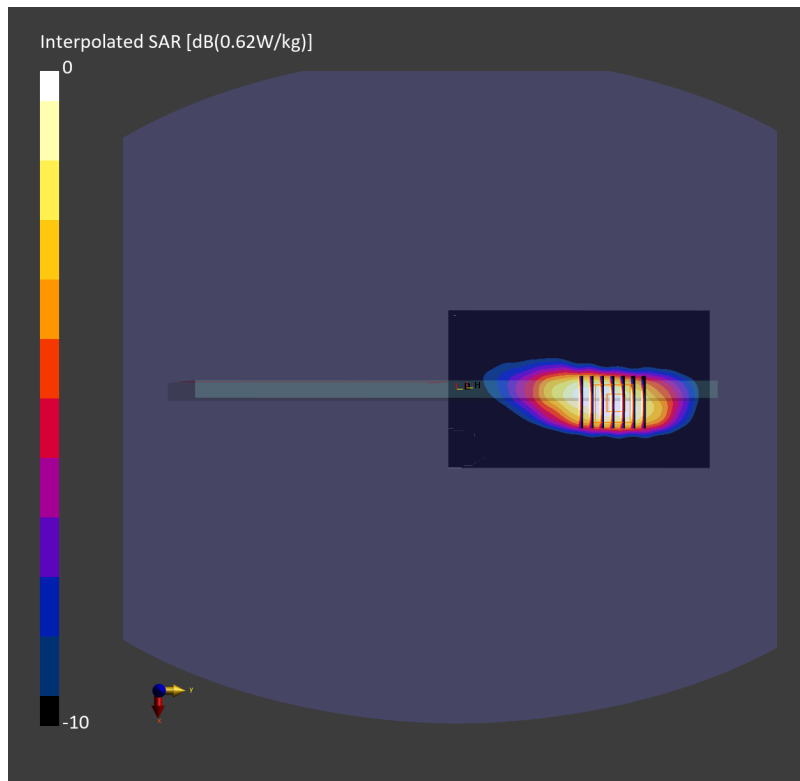

#06_LTE Band 13_10M_QPSK_1_0_Top_0mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260403 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 44.7$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.591 W/kg; SAR (10g) = 0.368 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.925 W/kg; SAR (8g) = 0.473 W/kg; SAR (10g) = 0.431 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 75.6 %

TSL Correction: Positive only

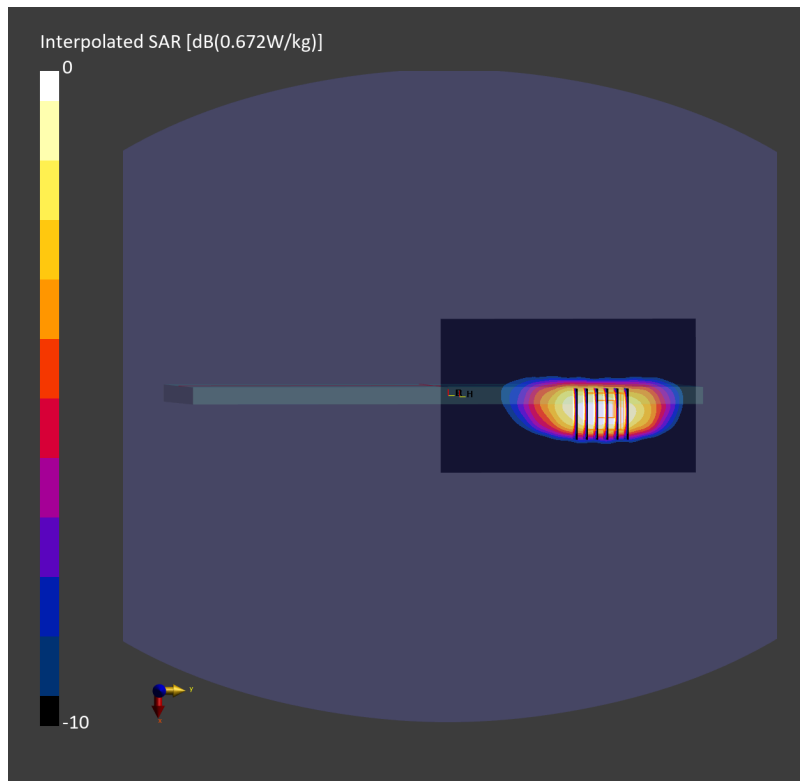

#07_LTE Band 14_10M_QPSK_1_0_Top_0mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260403 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 44.7$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.663 W/kg; SAR (10g) = 0.415 W/kg;

TSL Correction: Positive only

Zoom Scan (33.6 mm x 33.6 mm x 33.4 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm


Power Drift = 0.08 dB

SAR (1g) = 1.10 W/kg; SAR (8g) = 0.558 W/kg; SAR (10g) = 0.508 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 76.6 %

TSL Correction: Positive only

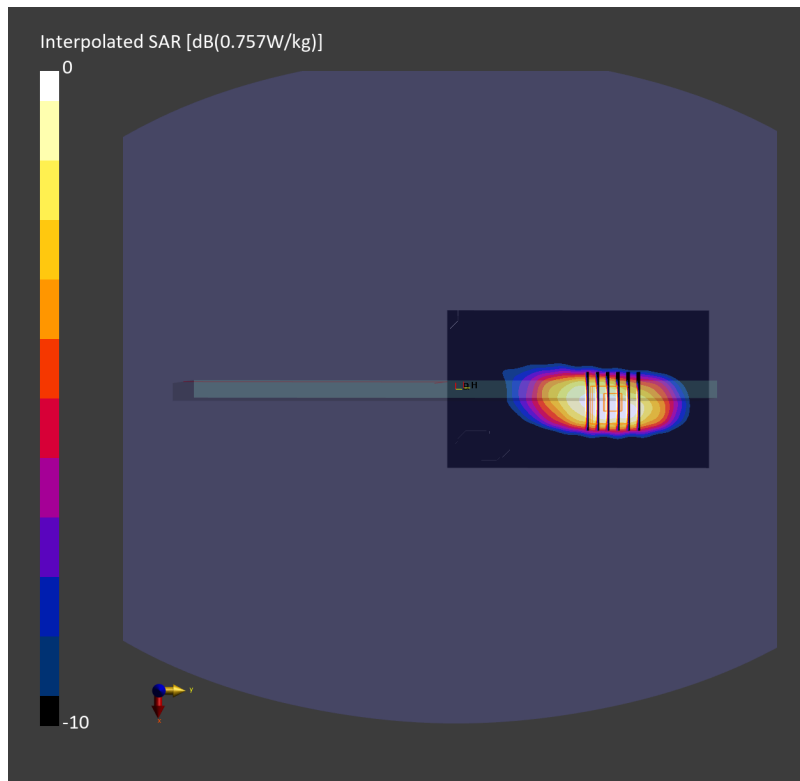

#08_LTE Band 25_20M_QPSK_1_0_Top_0mm_Ch26590

Communication System: LTE-FDD; Frequency: 1905.000 MHz

Medium: HSL_600-7200_260404 Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.24, 7.11, 7.35); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.495 W/kg; SAR (10g) = 0.274 W/kg;

TSL Correction: No correction

Zoom Scan (30.0 mm x 42.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 1.01 W/kg; SAR (8g) = 0.449 W/kg; SAR (10g) = 0.398 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 90.5 %

TSL Correction: No correction

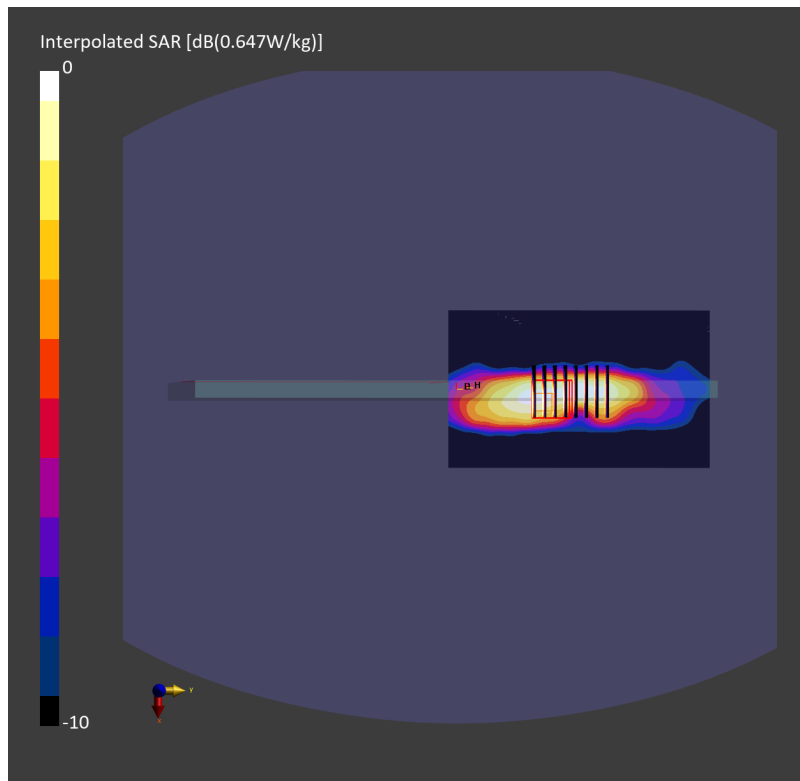

#09_LTE Band 26_15M_QPSK_1_0_Top_0mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260405 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 44.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.03, 8.87, 9.17); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.591 W/kg; SAR (10g) = 0.372 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = -0.08 dB

SAR (1g) = 0.957 W/kg; SAR (8g) = 0.493 W/kg; SAR (10g) = 0.450 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 75.4 %

TSL Correction: Positive only

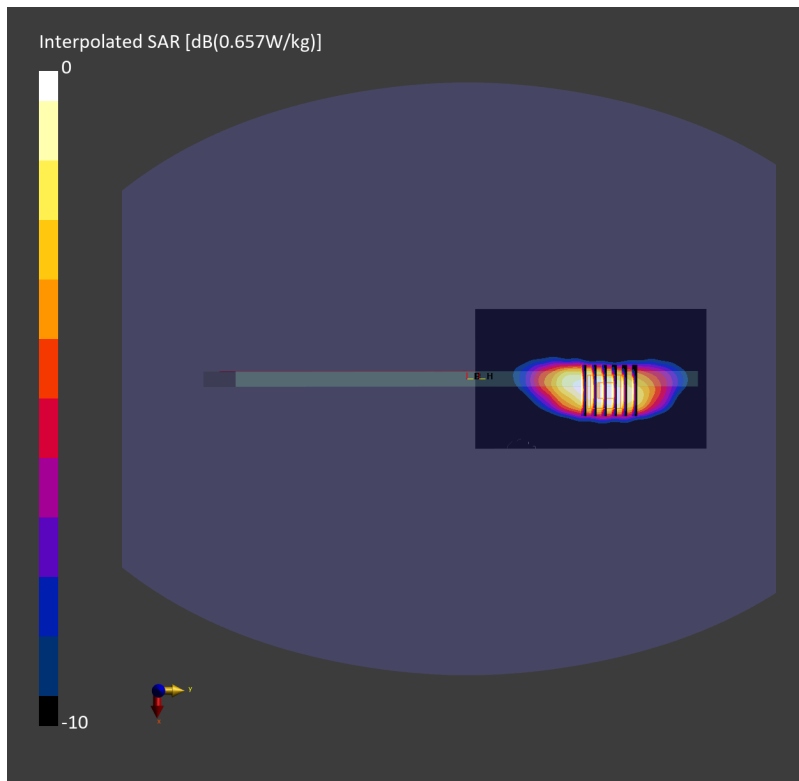

#10_LTE Band 66_20M_QPSK_1_49_Top_0mm_Ch132322

Communication System: LTE-FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260404 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.41, 7.28, 7.53); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.570 W/kg; SAR (10g) = 0.327 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 42.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.964 W/kg; SAR (8g) = 0.458 W/kg; SAR (10g) = 0.414 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 75.4 %

TSL Correction: Positive only

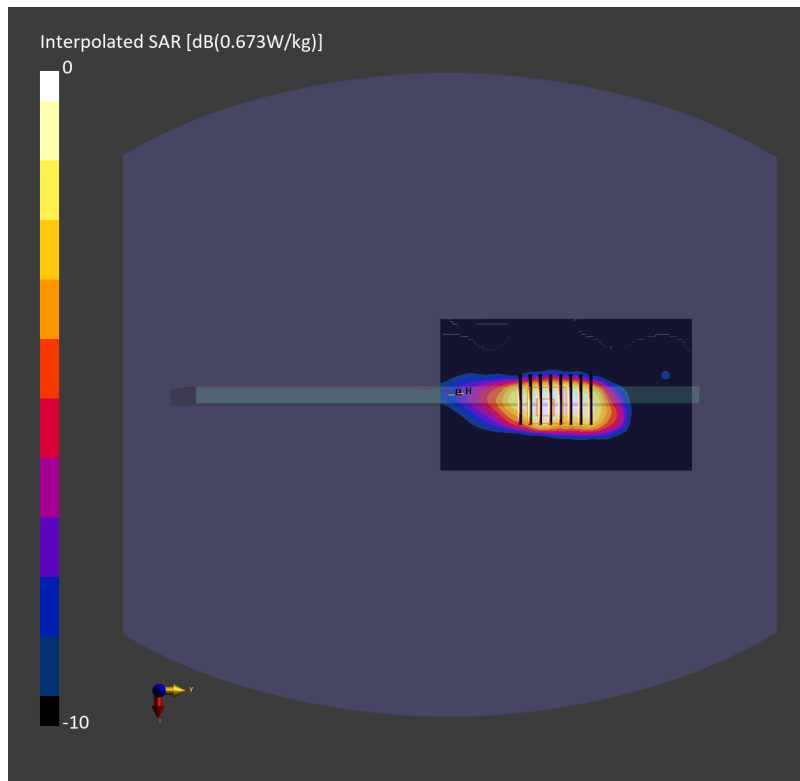

#11_LTE Band 71_20M_QPSK_1_0_Top_0mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260403 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 45.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.643 W/kg; SAR (10g) = 0.409 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.09 dB

SAR (1g) = 1.00 W/kg; SAR (8g) = 0.502 W/kg; SAR (10g) = 0.458 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 72.5 %

TSL Correction: Positive only

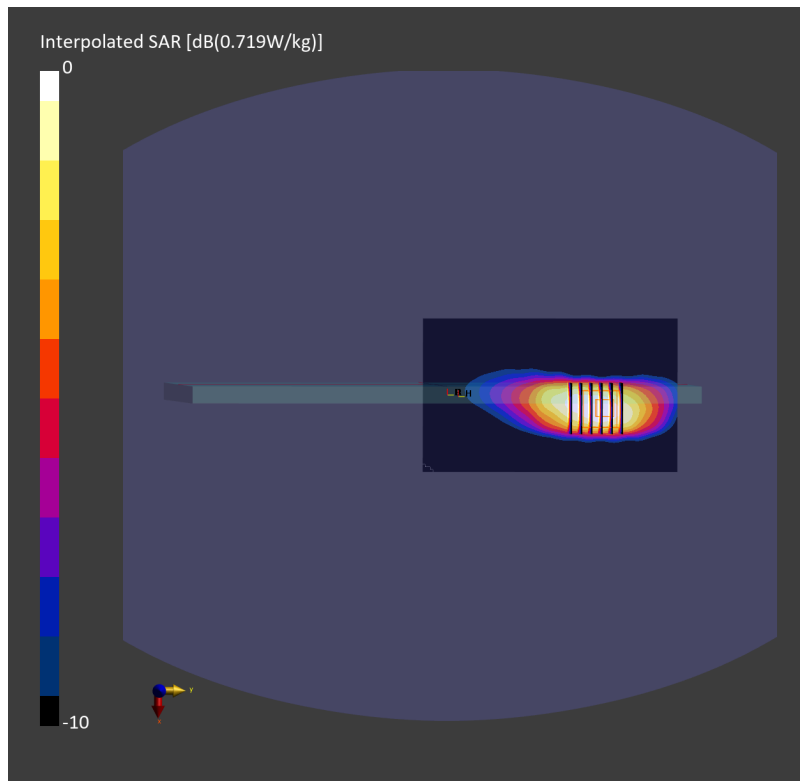

#12_LTE Band 41_20M_QPSK_1_0_Top_0mm_Ch39750

Communication System: LTE-TDD; Frequency: 2506.000 MHz

Medium: HSL_600-7200_260402 Medium parameters used: $f = 2506.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.46, 6.35, 6.56); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (100.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.857 W/kg; SAR (10g) = 0.344 W/kg;

TSL Correction: Positive only

Zoom Scan (32.9 mm x 32.9 mm x 31.2 mm): Measurement Grid: 4.7 mm x 4.7 mm x 1.5 mm


Power Drift = 0.05 dB

SAR (1g) = 0.834 W/kg; SAR (8g) = 0.362 W/kg; SAR (10g) = 0.322 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 76.2 %

TSL Correction: Positive only

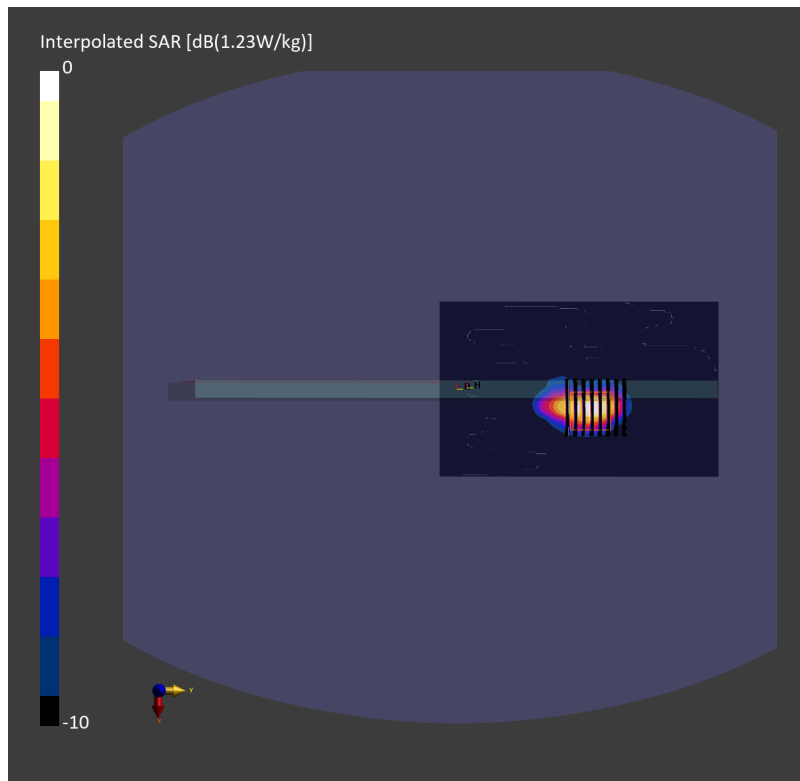

#13_LTE Band 48_20M_QPSK_1_49_Top_0mm_Ch55340

Communication System: LTE-TDD; Frequency: 3560.000 MHz

Medium: HSL_600-7200_260405 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.76$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.07, 5.97, 6.17); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (100.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.755 W/kg; SAR (10g) = 0.227 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.932 W/kg; SAR (8g) = 0.303 W/kg; SAR (10g) = 0.260 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 71.8 %

TSL Correction: Positive only

