

#01_WCDMA II_RMC 12.2Kbps_Top_0mm_Ch9262

Communication System: UMTS-FDD; Frequency: 1852.400 MHz

Medium: HSL_600-7200_260401 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.24, 7.11, 7.35); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.764 W/kg; SAR (10g) = 0.425 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.09 dB

SAR (1g) = 0.881 W/kg; SAR (8g) = 0.499 W/kg; SAR (10g) = 0.458 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 69.2 %

TSL Correction: Positive only

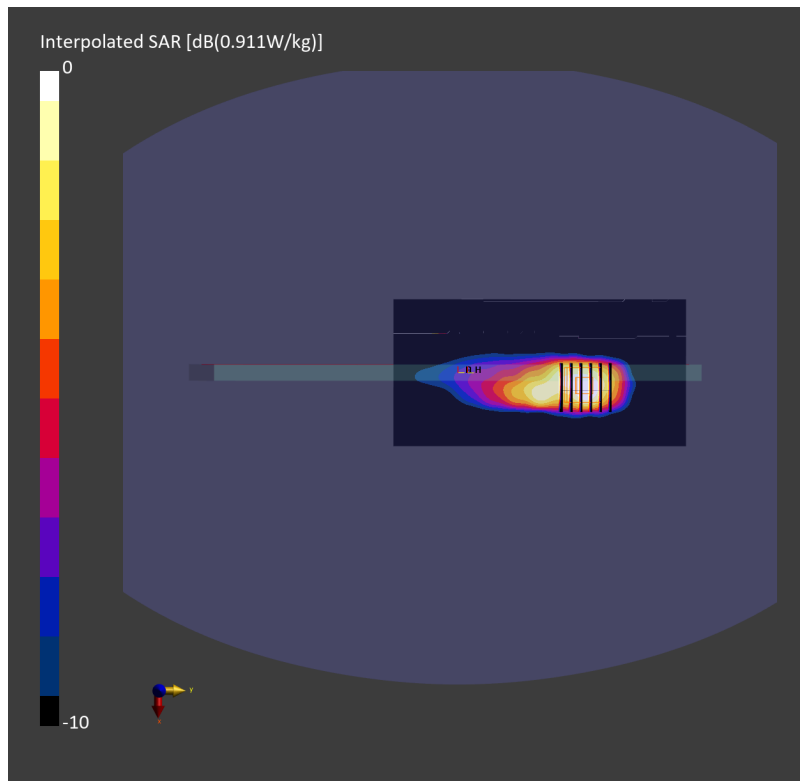

#02_WCDMA IV_RMC 12.2Kbps_Top_0mm_Ch1513

Communication System: UMTS-FDD; Frequency: 1752.600 MHz

Medium: HSL_600-7200_260401 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.41, 7.28, 7.53); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.730 W/kg; SAR (10g) = 0.364 W/kg;

TSL Correction: Positive only

Zoom Scan (34.3 mm x 34.3 mm x 33.4 mm): Measurement Grid: 4.9 mm x 4.9 mm x 1.4 mm


Power Drift = 0.05 dB

SAR (1g) = 1.02 W/kg; SAR (8g) = 0.479 W/kg; SAR (10g) = 0.432 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 74.2 %

TSL Correction: Positive only

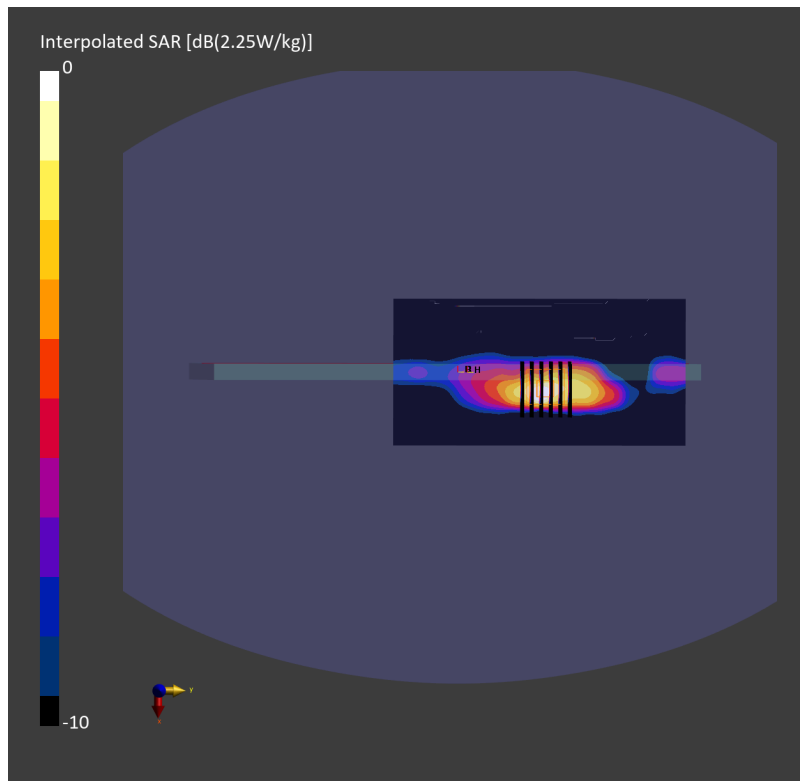

#03_WCDMA V_RMC 12.2Kbps_Top_0mm_Ch4132

Communication System: UMTS-FDD; Frequency: 826.400 MHz

Medium: HSL_600-7200_260328 Medium parameters used: $f = 826.400$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 43.9$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.03, 8.87, 9.17); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.779 W/kg; SAR (10g) = 0.433 W/kg;

TSL Correction: Positive only

Zoom Scan (31.8 mm x 31.8 mm x 31.2 mm): Measurement Grid: 5.3 mm x 5.3 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.969 W/kg; SAR (8g) = 0.504 W/kg; SAR (10g) = 0.461 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 76.7 %

TSL Correction: Positive only

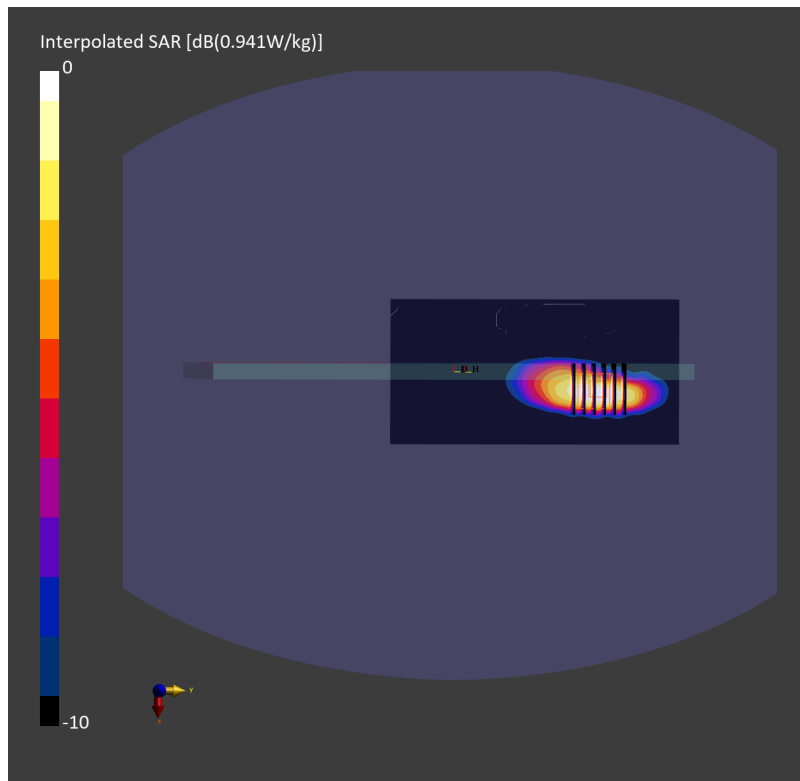

#04_LTE Band 7_20M_QPSK_1_0_Top_0mm_Ch20850

Communication System: LTE-FDD; Frequency: 2510.000 MHz

Medium: HSL_600-7200_260406 Medium parameters used: $f = 2510.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.46, 6.35, 6.56); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.893 W/kg; SAR (10g) = 0.430 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.18 dB

SAR (1g) = 1.05 W/kg; SAR (8g) = 0.483 W/kg; SAR (10g) = 0.434 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 77.0 %

TSL Correction: Positive only

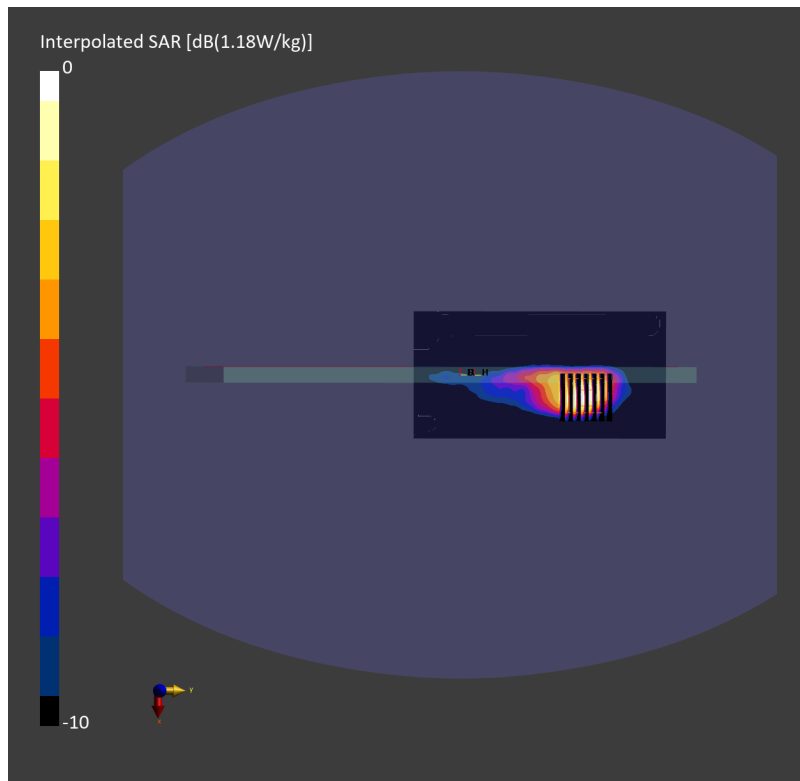

#05_LTE Band 12_10M_QPSK_1_0_Top_0mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260327 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.900$ S/m; $\epsilon_r = 45.1$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.839 W/kg; SAR (10g) = 0.476 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 41.4 mm x 33.4 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 1.11 W/kg; SAR (8g) = 0.556 W/kg; SAR (10g) = 0.508 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

TSL Correction: Positive only

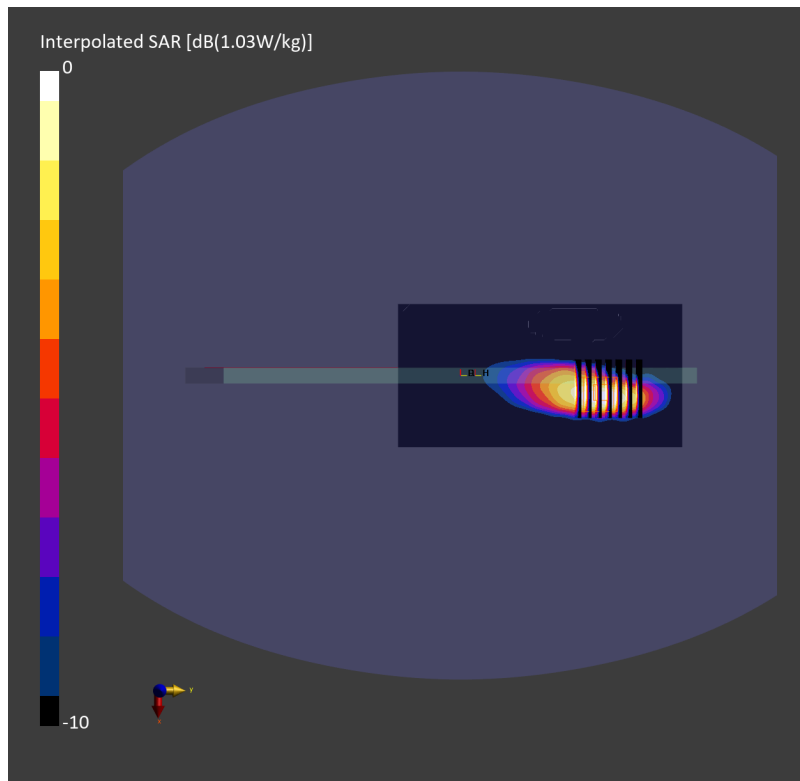

#06_LTE Band 13_10M_QPSK_1_0_Top_0mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260327 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 44.8$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.822 W/kg; SAR (10g) = 0.460 W/kg;

TSL Correction: Positive only

Zoom Scan (35.7 mm x 35.7 mm x 31.2 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 1.03 W/kg; SAR (8g) = 0.531 W/kg; SAR (10g) = 0.485 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 75.3 %

TSL Correction: Positive only

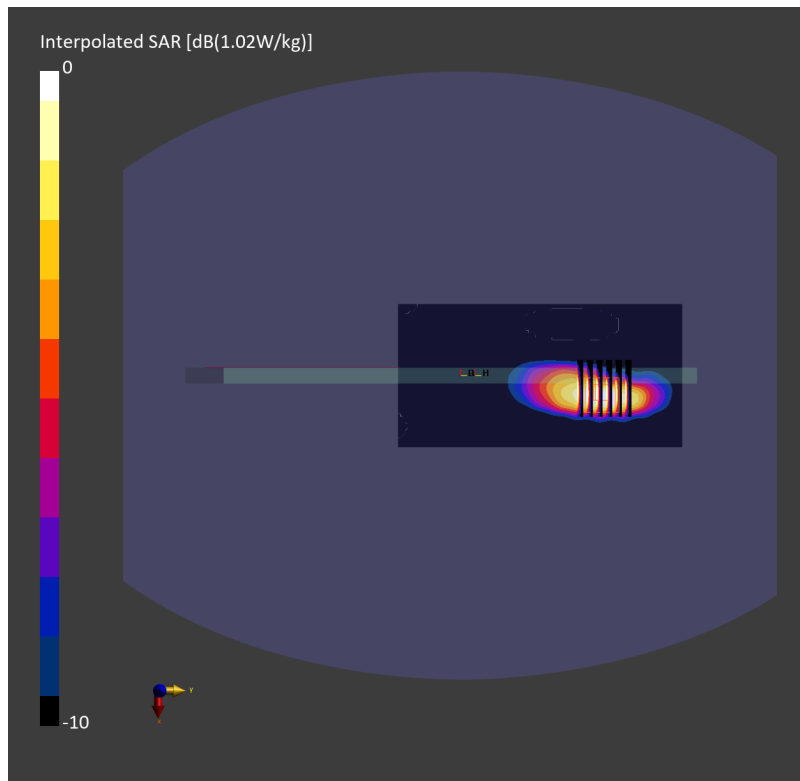

#07_LTE Band 14_10M_QPSK_1_0_Top_0mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260327 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 44.8$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.790 W/kg; SAR (10g) = 0.445 W/kg;

TSL Correction: Positive only

Zoom Scan (35.7 mm x 35.7 mm x 31.2 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.993 W/kg; SAR (8g) = 0.515 W/kg; SAR (10g) = 0.471 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 75.2 %

TSL Correction: Positive only

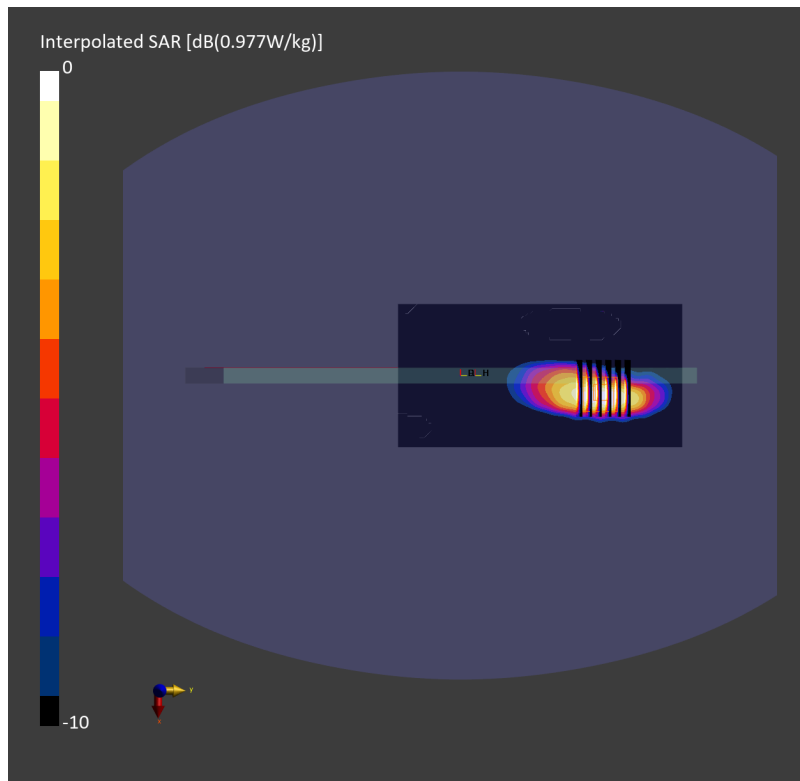

#08_LTE Band 25_20M_QPSK_1_0_Top_0mm_Ch26340

Communication System: LTE-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260329 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.24, 7.11, 7.35); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.625 W/kg; SAR (10g) = 0.330 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 33.4 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.05 dB

SAR (1g) = 0.947 W/kg; SAR (8g) = 0.446 W/kg; SAR (10g) = 0.400 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 75.3 %

TSL Correction: Positive only

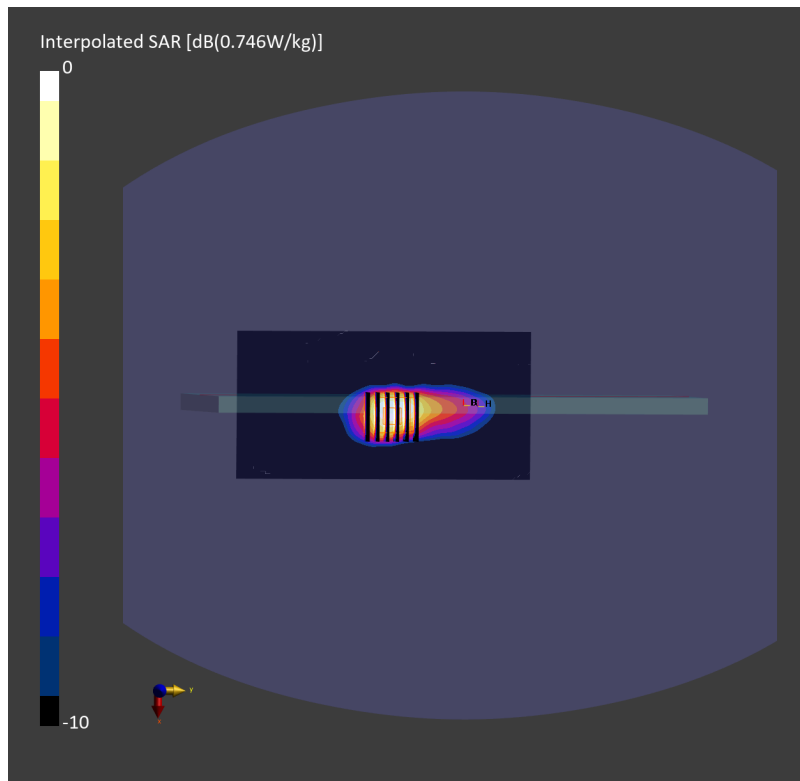

#09_LTE Band 26_15M_QPSK_1_0_Top_0mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260328 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 43.9$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.03, 8.87, 9.17); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.889 W/kg; SAR (10g) = 0.497 W/kg;

TSL Correction: Positive only

Zoom Scan (31.2 mm x 31.2 mm x 31.2 mm): Measurement Grid: 5.2 mm x 5.2 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 1.10 W/kg; SAR (8g) = 0.578 W/kg; SAR (10g) = 0.528 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 76.8 %

TSL Correction: Positive only

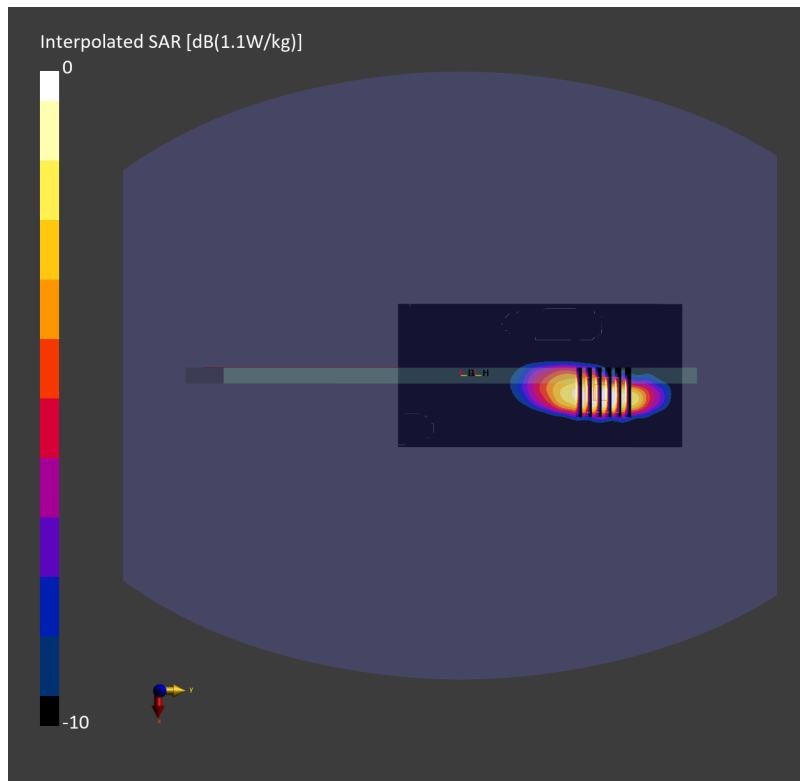

#10_LTE Band 30_10M_QPSK_1_0_Top_0mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260405 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.82, 6.71, 6.93); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.924 W/kg; SAR (10g) = 0.447 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.15 dB

SAR (1g) = 1.05 W/kg; SAR (8g) = 0.499 W/kg; SAR (10g) = 0.449 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

TSL Correction: Positive only

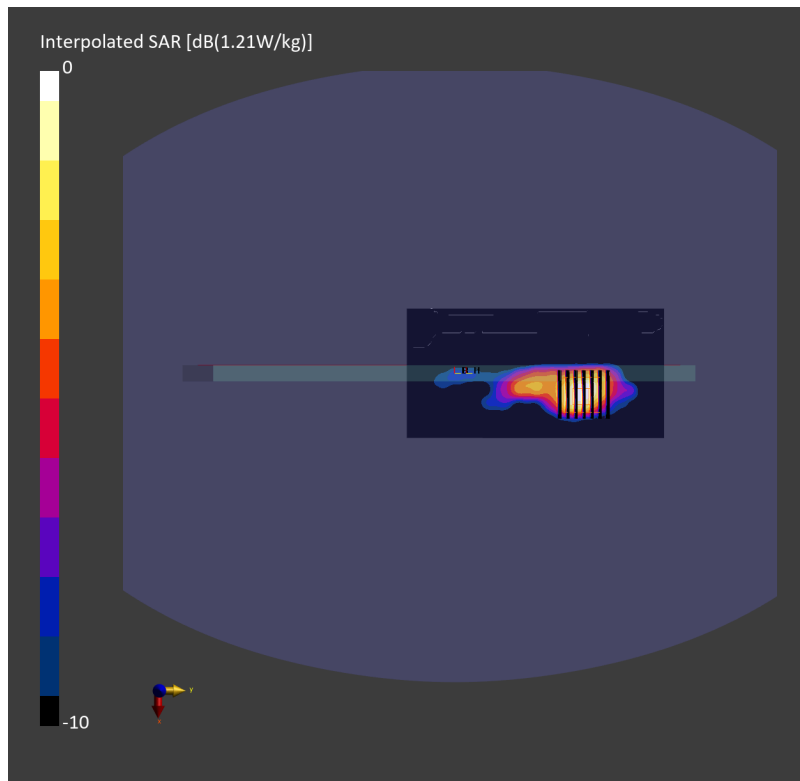

#11_LTE Band 66_20M_QPSK_1_0_Top_0mm_Ch132572

Communication System: LTE-FDD; Frequency: 1770.000 MHz

Medium: HSL_600-7200_260329 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.41, 7.28, 7.53); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.751 W/kg; SAR (10g) = 0.375 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 33.4 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = -0.00 dB

SAR (1g) = 1.07 W/kg; SAR (8g) = 0.497 W/kg; SAR (10g) = 0.448 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 73.5 %

TSL Correction: Positive only

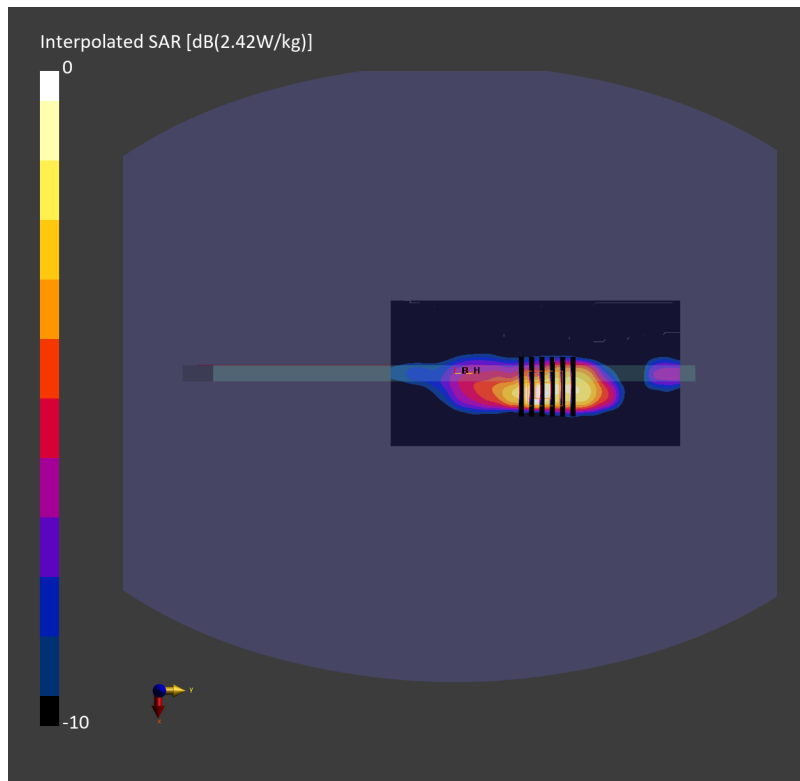

#12_LTE Band 71_20M_QPSK_1_0_Top_0mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260327 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.890$ S/m; $\epsilon_r = 45.2$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.757 W/kg; SAR (10g) = 0.465 W/kg;

TSL Correction: Positive only

Zoom Scan (46.0 mm x 46.0 mm x 33.4 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = 0.00 dB

SAR (1g) = 1.00 W/kg; SAR (8g) = 0.511 W/kg; SAR (10g) = 0.468 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 73.0 %

TSL Correction: Positive only

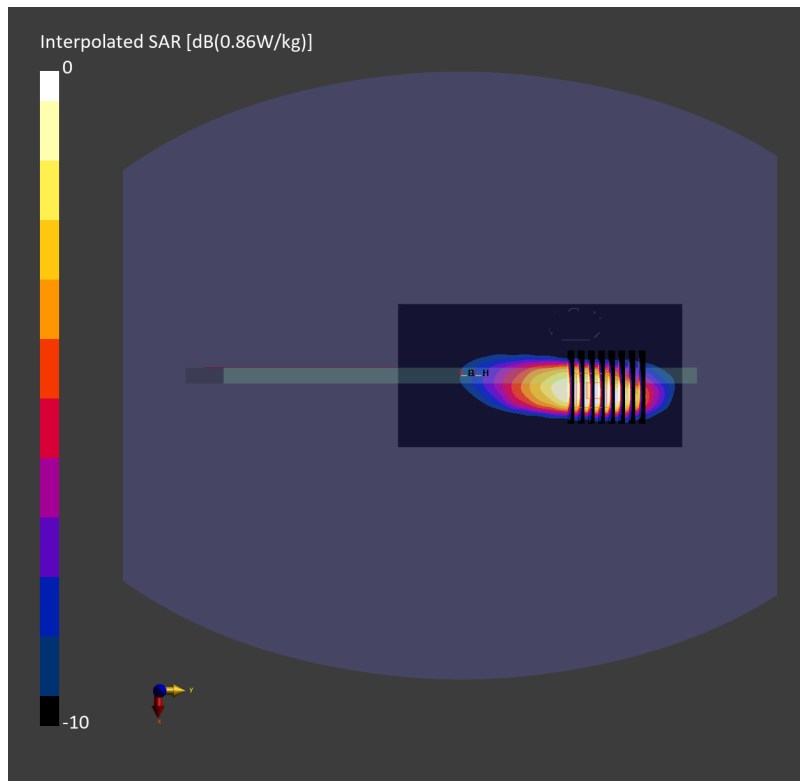

#13_LTE Band 41_20M_QPSK_1_0_Top_0mm_Ch40185

Communication System: LTE-TDD; Frequency: 2549.500 MHz

Medium: HSL_600-7200_260407 Medium parameters used: $f = 2549.500$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.46, 6.35, 6.56); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.884 W/kg; SAR (10g) = 0.376 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.953 W/kg; SAR (8g) = 0.420 W/kg; SAR (10g) = 0.374 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 77.8 %

TSL Correction: Positive only

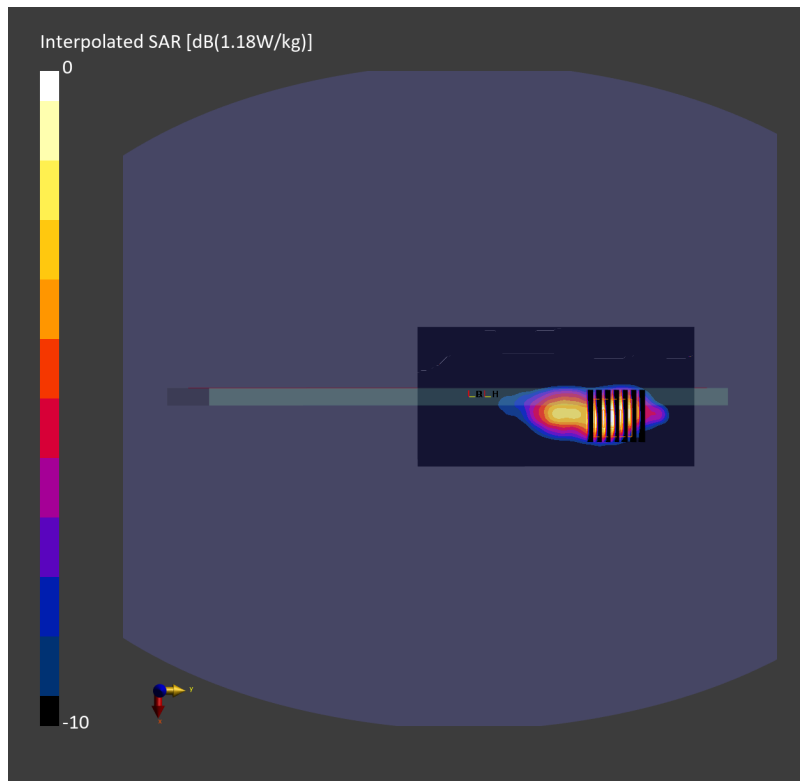

#14_LTE Band 48_20M_QPSK_1_0_Top_0mm_Ch56640

Communication System: LTE-TDD; Frequency: 3690.000 MHz

Medium: HSL_600-7200_260411 Medium parameters used: $f = 3690.000$ MHz; $\sigma = 2.88$ S/m; $\epsilon_r = 38.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.01, 5.91, 6.11); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.363 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.03 dB

SAR (1g) = 1.02 W/kg; SAR (8g) = 0.364 W/kg; SAR (10g) = 0.313 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 75.4 %

TSL Correction: Positive only

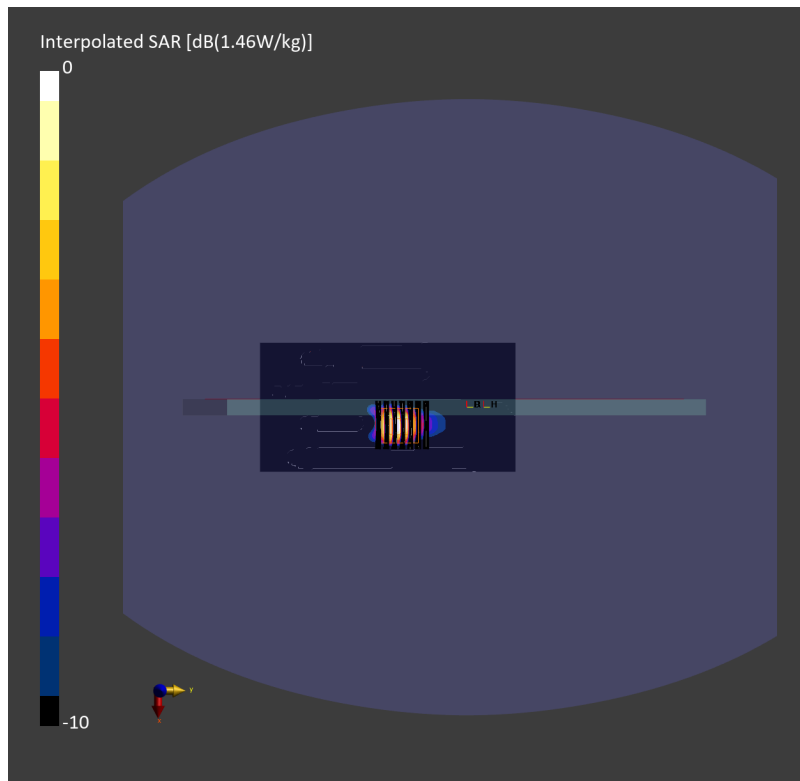

#15_FR1 n5_25M_BPSK_64_33_Top_0mm_Ch167300

Communication System: 5G NR; Frequency: 836.500 MHz

Medium: HSL_600-7200_260328 Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 43.8$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.03, 8.87, 9.17); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10940-AAC

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.687 W/kg; SAR (10g) = 0.413 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 0.920 W/kg; SAR (8g) = 0.490 W/kg; SAR (10g) = 0.450 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 75.0 %

TSL Correction: Positive only

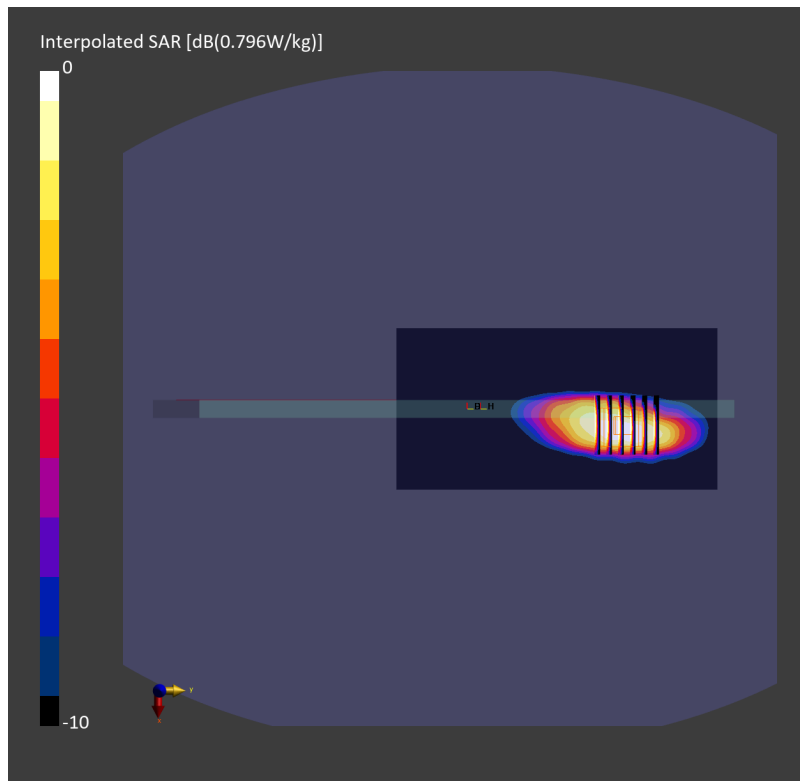

#16_FR1 n7_50M_BPSK_135_68_Top_0mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260406 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.46, 6.35, 6.56); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.956 W/kg; SAR (10g) = 0.423 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.08 dB

SAR (1g) = 0.994 W/kg; SAR (8g) = 0.449 W/kg; SAR (10g) = 0.401 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 73.7 %

TSL Correction: Positive only

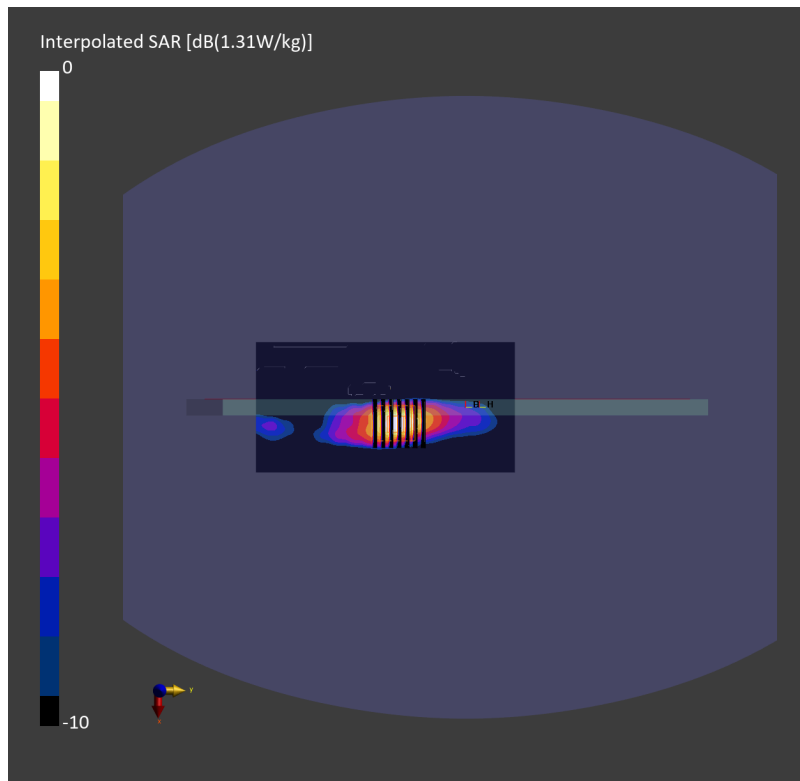

#17_FR1 n25_45M_BPSK_120_60_Top_0mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260402 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.24, 7.11, 7.35); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.695 W/kg; SAR (10g) = 0.358 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 33.4 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = 0.06 dB

SAR (1g) = 0.978 W/kg; SAR (8g) = 0.483 W/kg; SAR (10g) = 0.436 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 83.2 %

TSL Correction: Positive only

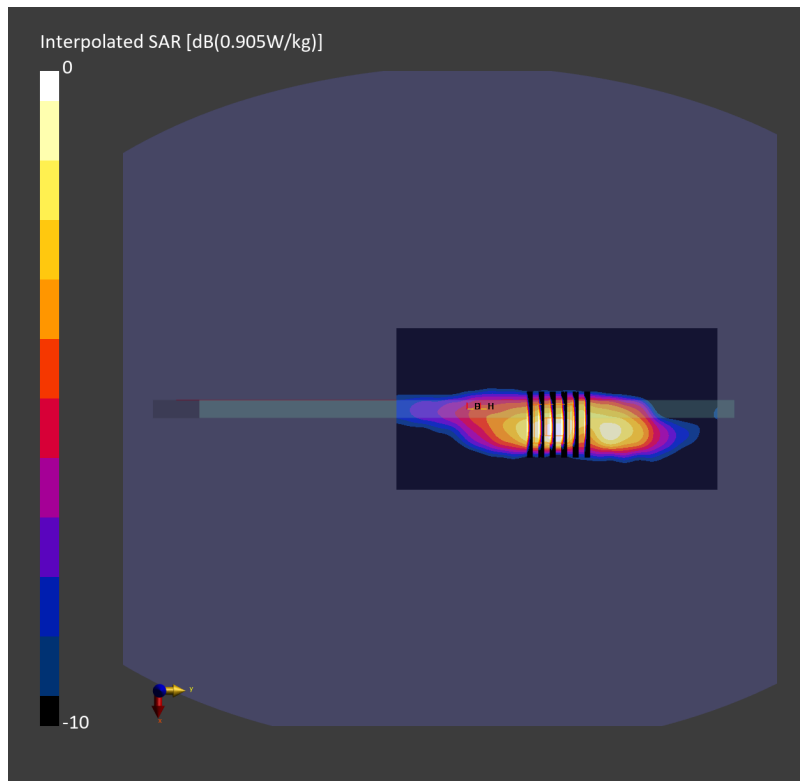

#18_FR1 n30_10M_BPSK_25_14_Top_0mm_Ch462000

Communication System: 5G NR; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260405 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.82, 6.71, 6.93); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.947 W/kg; SAR (10g) = 0.452 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.05 dB

SAR (1g) = 1.01 W/kg; SAR (8g) = 0.486 W/kg; SAR (10g) = 0.438 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 73.4 %

TSL Correction: Positive only

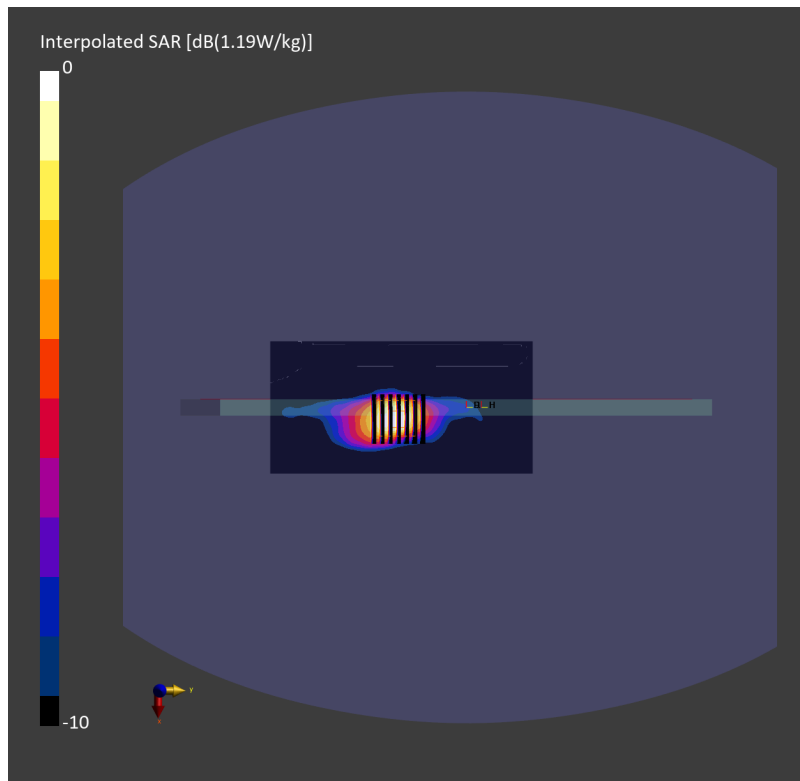

#19_FR1 n66_45M_BPSK_120_60_Top_0mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260402 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 41.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.41, 7.28, 7.53); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.724 W/kg; SAR (10g) = 0.373 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.974 W/kg; SAR (8g) = 0.460 W/kg; SAR (10g) = 0.412 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 74.7 %

TSL Correction: Positive only

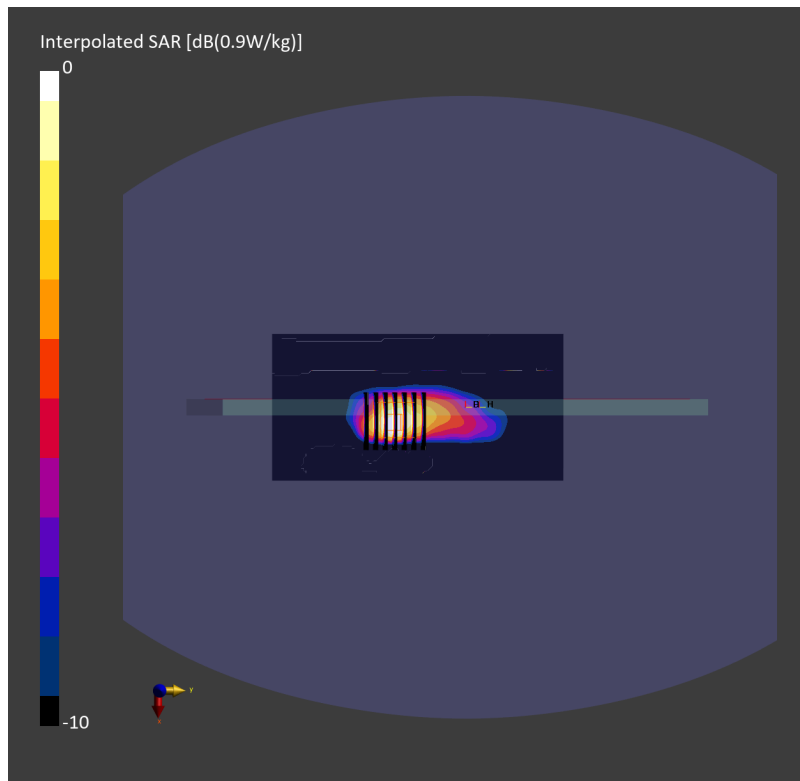

#20_FR1 n71_20M_BPSK_50_28_Top_0mm_Ch136100

Communication System: 5G NR; Frequency: 680.500 MHz

Medium: HSL_600-7200_260328 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.838$ S/m; $\epsilon_r = 44.3$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.799 W/kg; SAR (10g) = 0.472 W/kg;

TSL Correction: Positive only

Zoom Scan (31.8 mm x 31.8 mm x 31.2 mm): Measurement Grid: 5.3 mm x 5.3 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.890 W/kg; SAR (8g) = 0.458 W/kg; SAR (10g) = 0.420 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 63.8 %

TSL Correction: Positive only

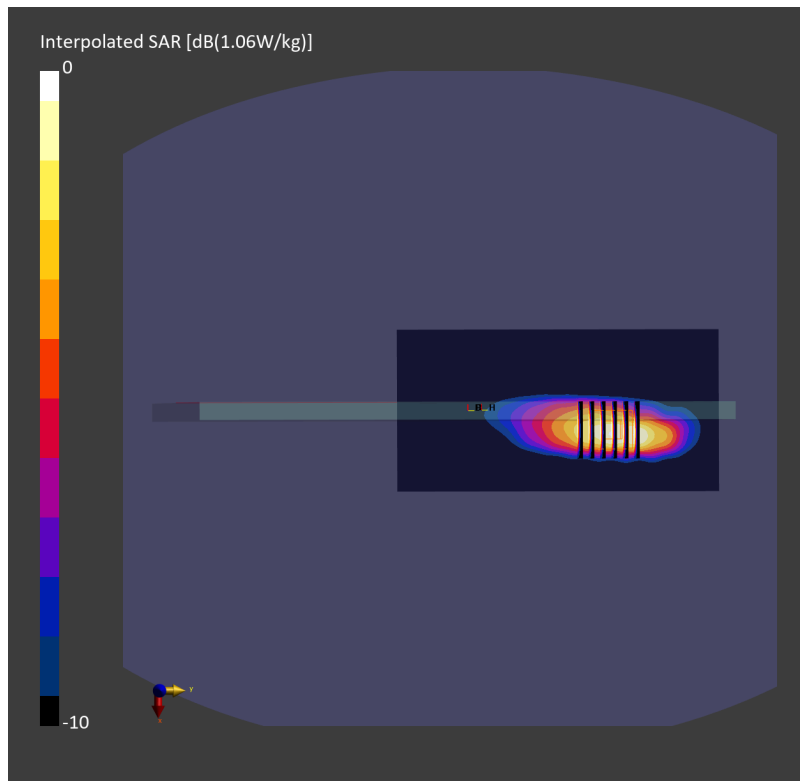

#21_FR1 n41 HPUE_100M_BPSK_135_69_Top_0mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260409 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.46, 6.35, 6.56); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.00 W/kg; SAR (10g) = 0.416 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 1.05 W/kg; SAR (8g) = 0.464 W/kg; SAR (10g) = 0.413 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 74.2 %

TSL Correction: Positive only

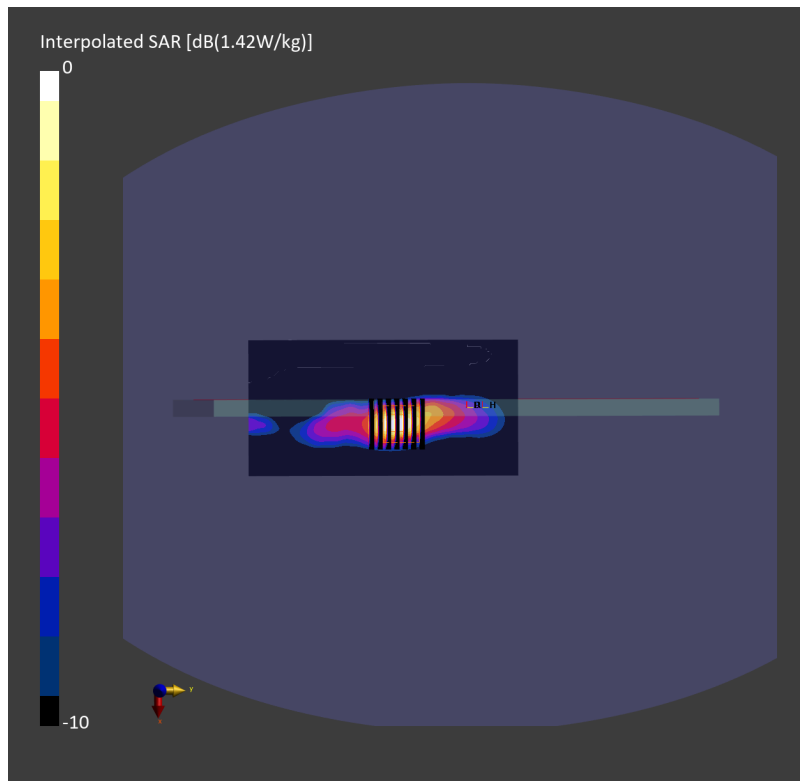

#22_FR1 n48_100M_BPSK_135_69_Top_0mm_Ch641666

Communication System: 5G NR; Frequency: 3624.99 MHz

Medium: HSL_600-7200_260418 Medium parameters used: $f = 3624.99$ MHz; $\sigma = 2.88$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.01, 5.91, 6.11); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.992 W/kg; SAR (10g) = 0.326 W/kg;

TSL Correction: Positive only

Zoom Scan (29.4 mm x 29.4 mm x 29.1 mm): Measurement Grid: 4.9 mm x 4.9 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 1.12 W/kg; SAR (8g) = 0.402 W/kg; SAR (10g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 74.2 %

TSL Correction: Positive only

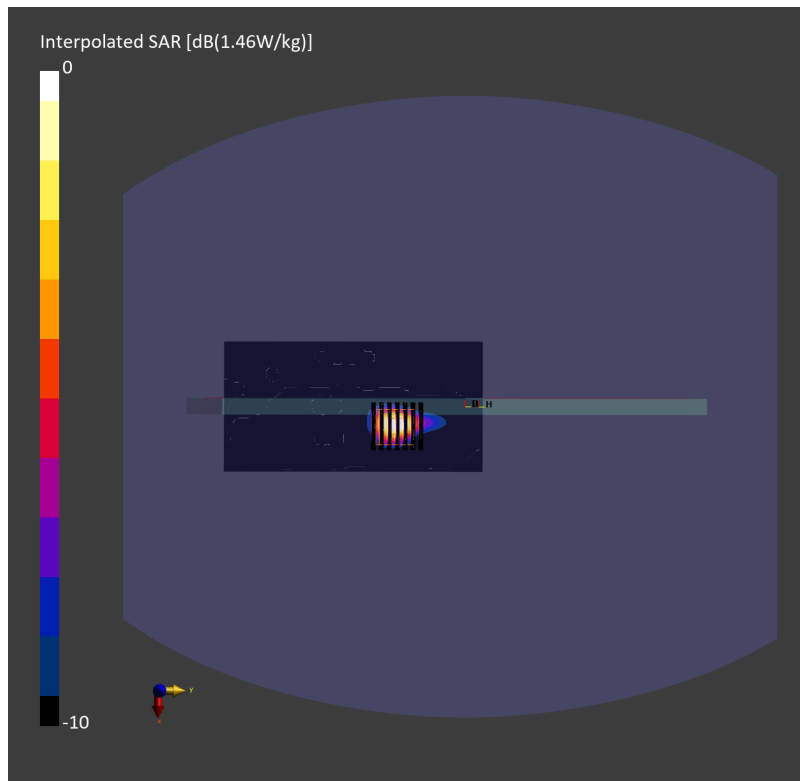

#23_FR1 n77 HPUE_100M_BPSK_135_69_Top_0mm_Ch656000

Communication System: 5G NR; Frequency: 3840.000 MHz

Medium: HSL_600-7200_260414 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.04$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(5.94, 5.83, 6.03); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.740 W/kg; SAR (10g) = 0.220 W/kg;

TSL Correction: Positive only

Zoom Scan (28.0 mm x 28.0 mm x 33.4 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.09 dB

SAR (1g) = 0.926 W/kg; SAR (8g) = 0.281 W/kg; SAR (10g) = 0.235 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 73.0 %

TSL Correction: Positive only

