

EMI TEST REPORT

Test Report No. : 22DE0013-YW

Applicant: OMRON Corporation

Type of Equipment: Read/Write Antenna

Model No.: V690-HMG01

FCC ID: E4E 6CY CIDV6900101

Test standard: FCC Part 15 Subpart C. 245

Test Result: Complied

1. This test report shall not be reproduced in full or partial, without the written approval of A-Pex International Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the EMC profile.
4. The test results in this report are traceable to the national or international standards.
5. This test report does not constitute an endorsement by NIST/NVLAP or U.S. Government.

Date of test: November 11, 12 and 13 2001


Issued date: December 7, 2001

Tested by:

Naoki Sakamoto
EMC section

Approved by:

Kazutoyo Nakanishi
Section Manager of EMC section

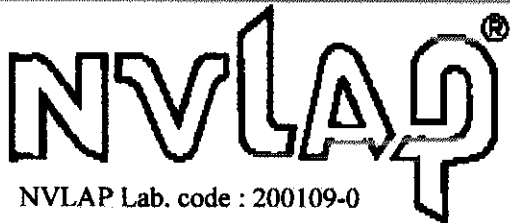

This laboratory is accredited by the NIST/NVLAP, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

MF060b(22.05.01)

CONTENTS

	PAGE
SECTION 1: Client information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, methods & procedures	4
SECTION 4: Operation of E.U.T. during testing	5
SECTION 5: Summary of test results	6
SECTION 6: Test instruments	7
SECTION 7: Radiated emission	8
APPENDIX 1: Photographs of test setup	9
APPENDIX 2: Data of EMI test	10

SECTION 1: Client information

Company name : OMRON Corporation
Address : Shimokaiinji, Nagaokakyo-City, Kyoto, 617-8510 Japan
Telephone Number : +81-75-957-9849
Facsimile Number : +81-75-951-5124
Contact Person : Kazunori Morikawa

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Read/Write Antenna
Model No. : V690-HMG01
Serial No. : PHASE5-0001
Condition of EUT : Production prototype
Country of Manufacture : Japan
Receipt Date of Sample : November 9, 2001

2.2 Product Description

Model: V690-HMG01, which is referred to as the EUT in this report, is a Read/Write Antenna.
Specifications is as follows;

Frequency : 2437.5MHz – 2460.0MHz(10 Channels)
Modulation : ASK
Output power : 5mW(2m Mode)
Antenna Gain : 14.5dBi(Max)
Antenna type : Integral
*FccPart15.203 Antenna requirement
V690-HMG01 complies with this requirement
CPU : 14.7456MHz
PLL : 10.0MHz
Power Supply : DC24V

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN
Telephone:int +81 596 39 1485
Facsimile: int +81 596 39 0232

SECTION 3: Test specification, methods & procedures

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
Title : FCC 47CFR Part15 Radio Frequency Device
Subpart C Intentional Radiators
§ 15.245 Operation within the Band 2435 – 2465MHz

3.2 Methods & Procedures

No.	Item	Test Procedure	Specification	Remarks
1	Electric Field Strength of Fundamental Emission	ANSI C63.4:1992	§ 15.245(a)	-
2	Electric Field Strength of Spurious Emission	ANSI C63.4:1992	§ 15.245(b) / § 15.209	-

3.3 Additions or deviations to standards

No addition, deviation nor exclusion have been made from standards.

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN
Telephone:int +81 596 39 1485
Facsimile: int +81 596 39 0232

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to typical use.


The operating mode/system were as follows:

Operation : Transmitting mode(2m Mode)
Low Channel(0) : 2437.5MHz
Mid Channel (5) : 2450.0MHz
High Channel (9) : 2460.0MHz
Standby mode


Justification: The system was configured in typical fashion (as a customer would normally use it) for testing.

4.2 Configuration and peripherals

Front View

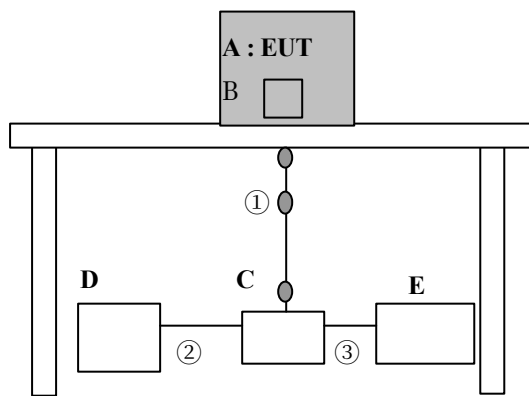

Top View

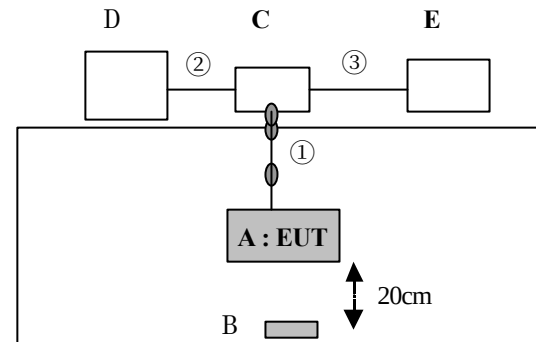

* Ferrite Core ○

*Cabling was taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	FCC ID	Remark
A	Read/Write Antenna	V690-HMG01	PHASE5-0001	OMRON	E4E 6CY CIDV6900101	EUT
B	ID TAG	V690-D8KR01	12Z000003524	OMRON	N/A	EUT
C	Switching box	N/A	N/A	OMRON	N/A	-
D	Switching Power Supply	S82K-05024	08300(LotNo)	OMRON	N/A	
E	Personal Computer	AL-N2T 515J5	AB0123456789	Panasonic	DOC	-

List of cables used

No.	Name	Length (m)	Shield	Backshell Material
①	Antenna Cable	6.2	Y	Polyvinyl chloride
②	DC Power Cable	0.6	N	Polyvinyl chloride
③	D-Sub Cable	1.3	N	Polyvinyl chloride

A-pex International Co., Ltd.

YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

SECTION 5: Summary of test results

5.1 Test results

No.	Item	Test Procedure	Specification	Worst margin		Result
1	Electric Field Strength of Fundamental Emission	ANSI C63.4:1992	§ 15.245(a)	Ch5(2450MHz) 0.4dB, Horizontal		Complied
2	Electric Field Strength of Spurious Emission	ANSI C63.4:1992	§ 15.245(b) / § 15.209	30MHz-1GHz	Ch5(64.9MHz) 2.0dB, Vertical	Complied
				1GHz-26GHz (PK)	Ch0(4.8750GHz) 14.4dB, Vertical	
				1GHz-26GHz (AV)	Ch0,5,9 (4.8750GHz) (4.9000GHz) (4.9201GHz) 0.6dB, Vertical)	

A-PEX INTERNATIONAL hereby confirms that E.U.T., in the configuration tested, complies with the specifications FCC Part15 Subpart C.245

5.2 Uncertainty

Radiated Emission Test

The measurement uncertainty (with a 95% confidence level) for this test was $\pm 3.3\text{dB}$.

■ The data listed in this test report may exceed the test limit because it does not have enough margin (more than 3.3dB).

□ The data listed in this test report has enough margin, more than 3.3dB.

5.3 Test equipment used

See SECTION 6: Test instruments

5.4 Test Location

A-PEX International Co.,Ltd. Yokowa No.2 test site
108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 Japan
Telephone number : +81-596-39-1485
Facsimile number : +81-596-39-0232

This site has been fully described in a report submitted to FCC office, and listed on October 26, 2000 (Registration number: 90411).

*NVLAP Lab. Code : 200109-0

5.5 Test Configuration Photographs

See Appendix 1.

5.6 Data of EMI Test

See Appendix 2.

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN
Telephone: int +81 596 39 1485
Facsimile: int +81 596 39 0232

SECTION 6: Test instruments

Instrument	Mfr.	Model No.	Control No.	Test Item	Calibration Date / Interval
Pre Amplifier	Anritsu	MH648A	AF-02	RE	2001/ 3/31 1 year
Pre Amplifier	Hewlett Packard	8449B	AF-04	RE	2001/11/ 3 1 year
Biconical Antenna	Schwarzbeck	BBA9106	BA-05	RE	2001/ 5/ 1 1 year
Horn Antenna	A.H.Systems	SAS-200/571	HA-01	RE	2001/ 5/20 1 years
Horn Antenna	Schwarzbeck	BBHA9170	HA-03	RE	2000/11/23 1 years
Logperiodic Antenna	Schwarzbeck	UHALP9108-A	LA-07	RE	2001/ 9/27 1 year
Spectrum Analyzer	Hewlett Packard	8567A	SA-03	RE	2001/ 3/31 1 year
Spectrum Analyzer	Hewlett Packard	8567A	SA-05	RE	2001/ 3/31 1 year
Test Receiver	Rohde & Schwarz	ESVS10	TR-04	RE	2001/ 4/24 1 year

* Test Item ; RE: Radiated emission

*All measurement equipment are traceable to national or international standard.

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone:int +81 596 39 1485

Facsimile: int +81 596 39 0232

SECTION 7: Radiated emission

7.1 Operating environment

The test was carried out in an open site.

Temperature : See data

Humidity : See data

7.2 Test configuration

EUT was placed on a table of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.

The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

A drawing of the set up is shown in the photos of Appendix 1.

7.3 Test conditions

Frequency range : 30MHz-26GHz

Test distance : 3m

EUT position : Table top(Center)

7.4 Test procedure

The Radiated Electric Field Strength intensity has been measured on an open test site with a ground plane and at a distance of 3m. Pre check measurements were performed within a screened room for ambient noise at high-level, especially from 272MHz to 288MHz.

The measuring antenna height was varied between 1 to 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

The EUT was put into operation at Transmitting mode and Standby mode

The radiated emission measurements were made with the following detector function of the test receiver and Spectrum Analyzer.

	30MHz-1GHz	1GHz-26GHz	1GHz-26GHz
Detector Type	: T/R QP Detect	: S/A PK Detect	: S/A AV Detect
IF Bandwidth	: 120kHz	: RBW and VBW 1MHz	: RBW 1MHz, VBW10Hz

7.6 Results

Summary of the test results: Pass

Date: November 11,12 and 13, 2001

Tested by: N. Sakamoto

A-pex International Co., Ltd.



YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

APPENDIX 1: Photographs of test setup(Radiated Emission)

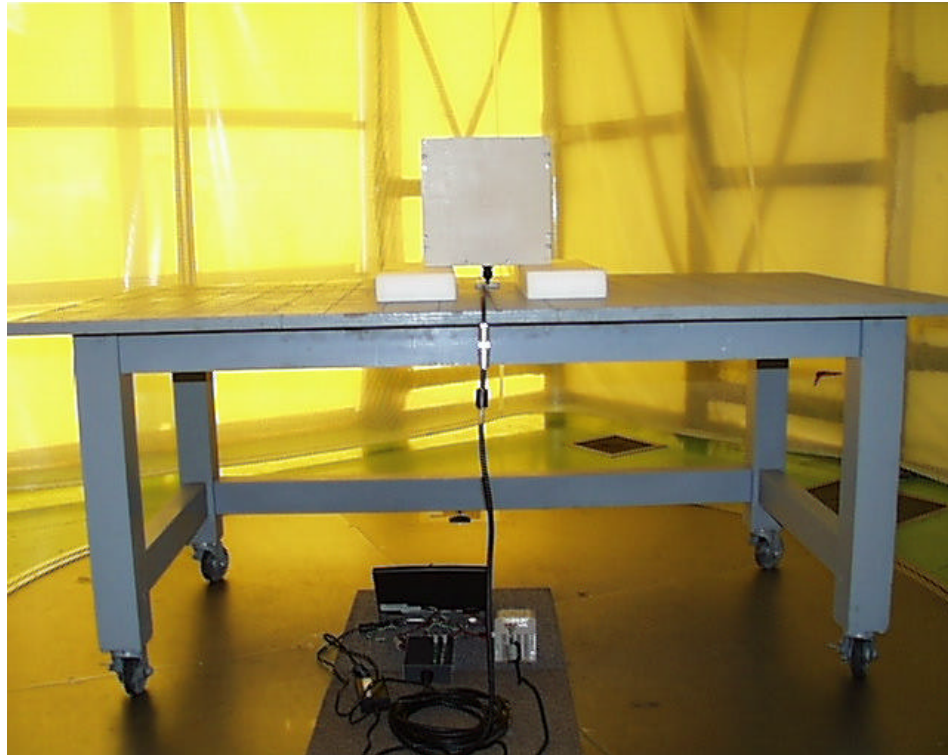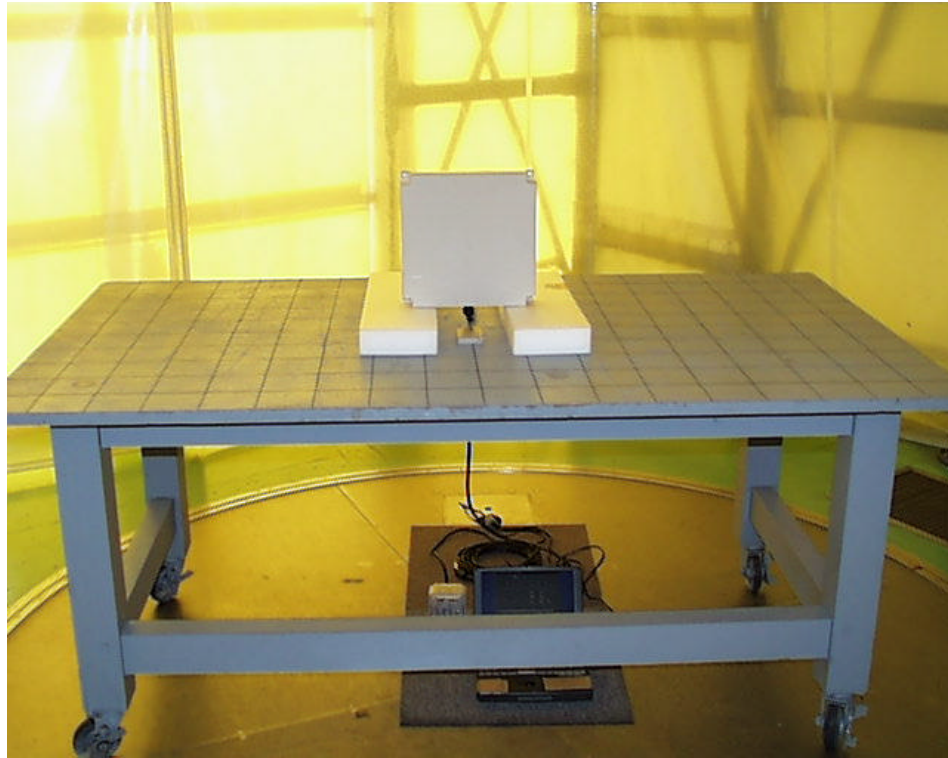

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

APPENDIX 2: Data of EMI test

This section contains the following data

Page 11 - 17: 15.247(a)Radiated Fundamental emission test

Page 18 - 24: 15.247(b)Radiated Spurious emission test

Page 25 - 27: 6dB Band Width

DATA OF FUNDAMENTAL EMISSIONS

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.2 OPEN SITE

COMPANY : OMRON Corporation	REPORT NO : 22DE0013-YW
EQUIPMENT : Read/Write Antenna	REGULATION : Fcc Part15SubpartC 245(a) / 209
MODEL : V690-HMG01	TEST DISTANCE : 3m
FCC ID : E4E 6CY CIDV6900101	DATE : 2001/11/13
POWER : DC24V	Temp./Humi. : 22°C/54%
Mode : Transmitting	

ENGINEER : Naoki Sakamoto

PK DETECT(S/A : RBW 1MHz and VBW 1MHz)

Ch No.	FREQ [GHz]	S/A READING		ANT Factor	AMP GAIN	CABLE LOSS	ATTEN	RESULT		Limit	MARGIN	
		HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
0	2.4375	106.0	104.9	31.4	34.5	4.6	6.0	113.5	112.4	114.0	0.5	1.6
5	2.4500	106.0	105.0	31.5	34.5	4.6	6.0	113.6	112.6	114.0	0.4	1.4
9	2.4600	105.8	104.6	31.5	34.5	4.7	6.0	113.5	112.3	114.0	0.5	1.7


Sample Calculation :

RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + ATTEN.

OMRON/Model:V690-HMG01/FCC ID:E4E 6CY CIDV6900101
FCC15.245(a)/Ch0/HOR/ReportNo:22DE0013-YW
REF 114 dBuV ATT 20 dB

MAKER
2.4375 GHz
106.00 dBuV

5dB/

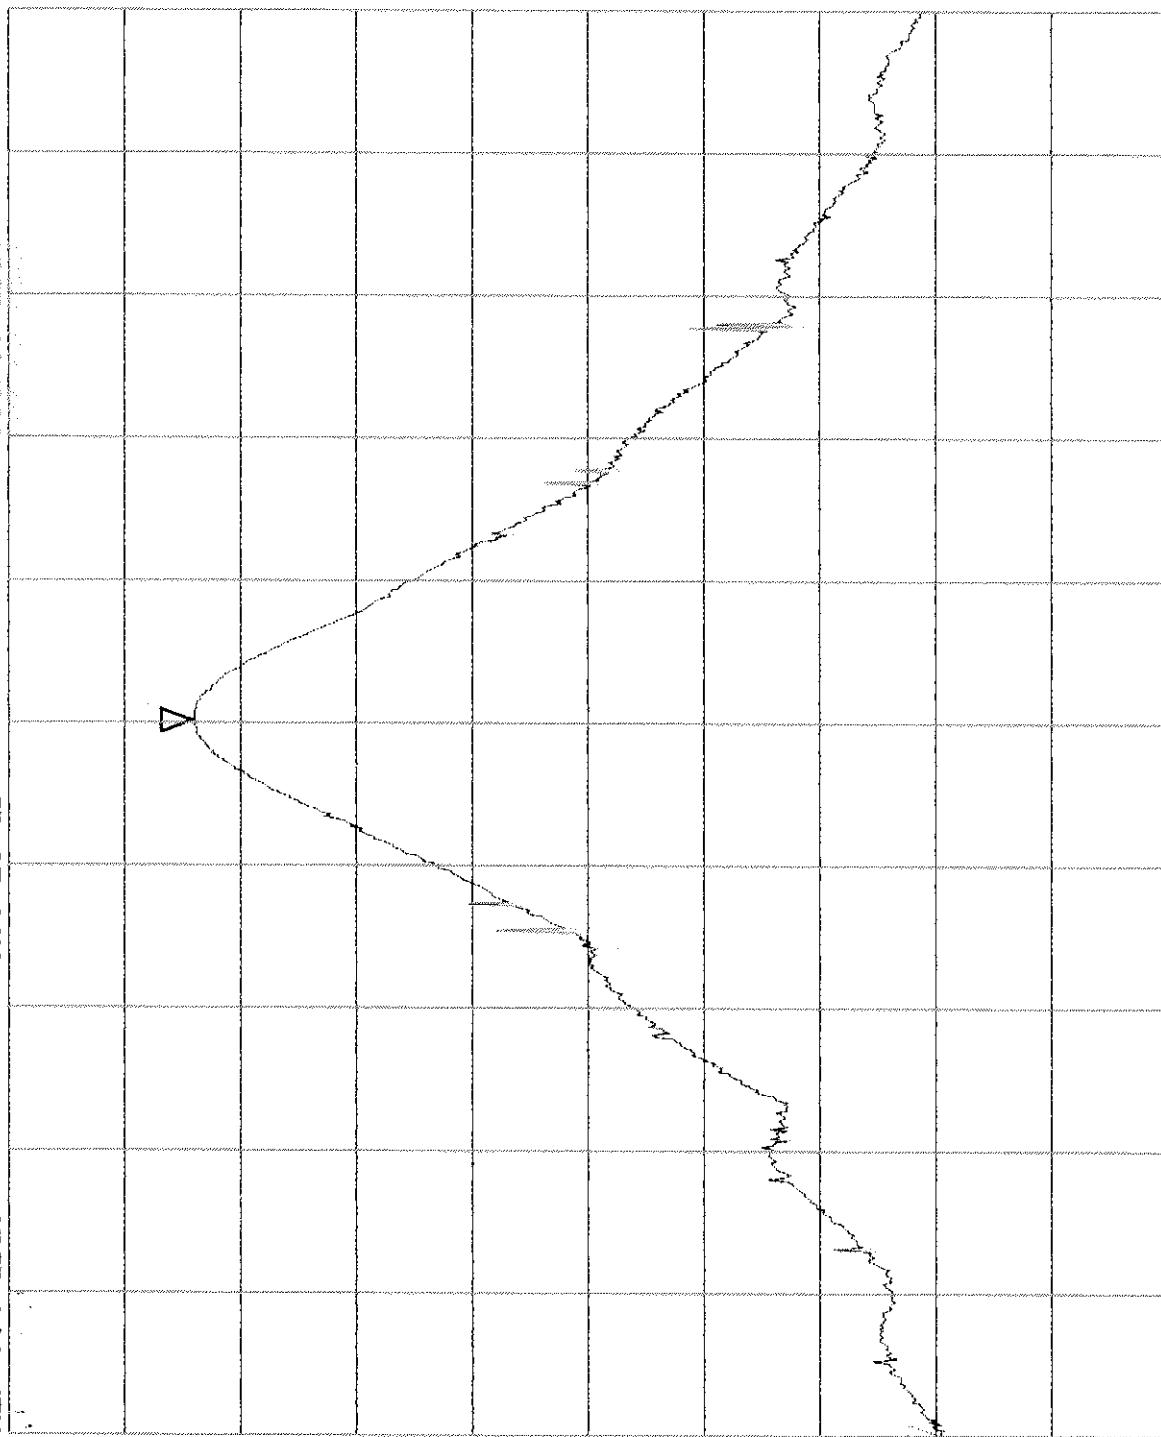

START 2.432490GHz
RBW 1MHz


VBW 1MHz

STOP 2.442490GHz
SWP 50ms

OMRON/Model:V690-HMG01/FCC ID:E4E 6CY CIDV6900101
FCC15.245(a)/Ch0/VER/ReportNo:22DE0013-YW
REF 114 dBuV ATT 20 dB

MAKER
2.4376 GHz
104.88 dBuV

5dB/

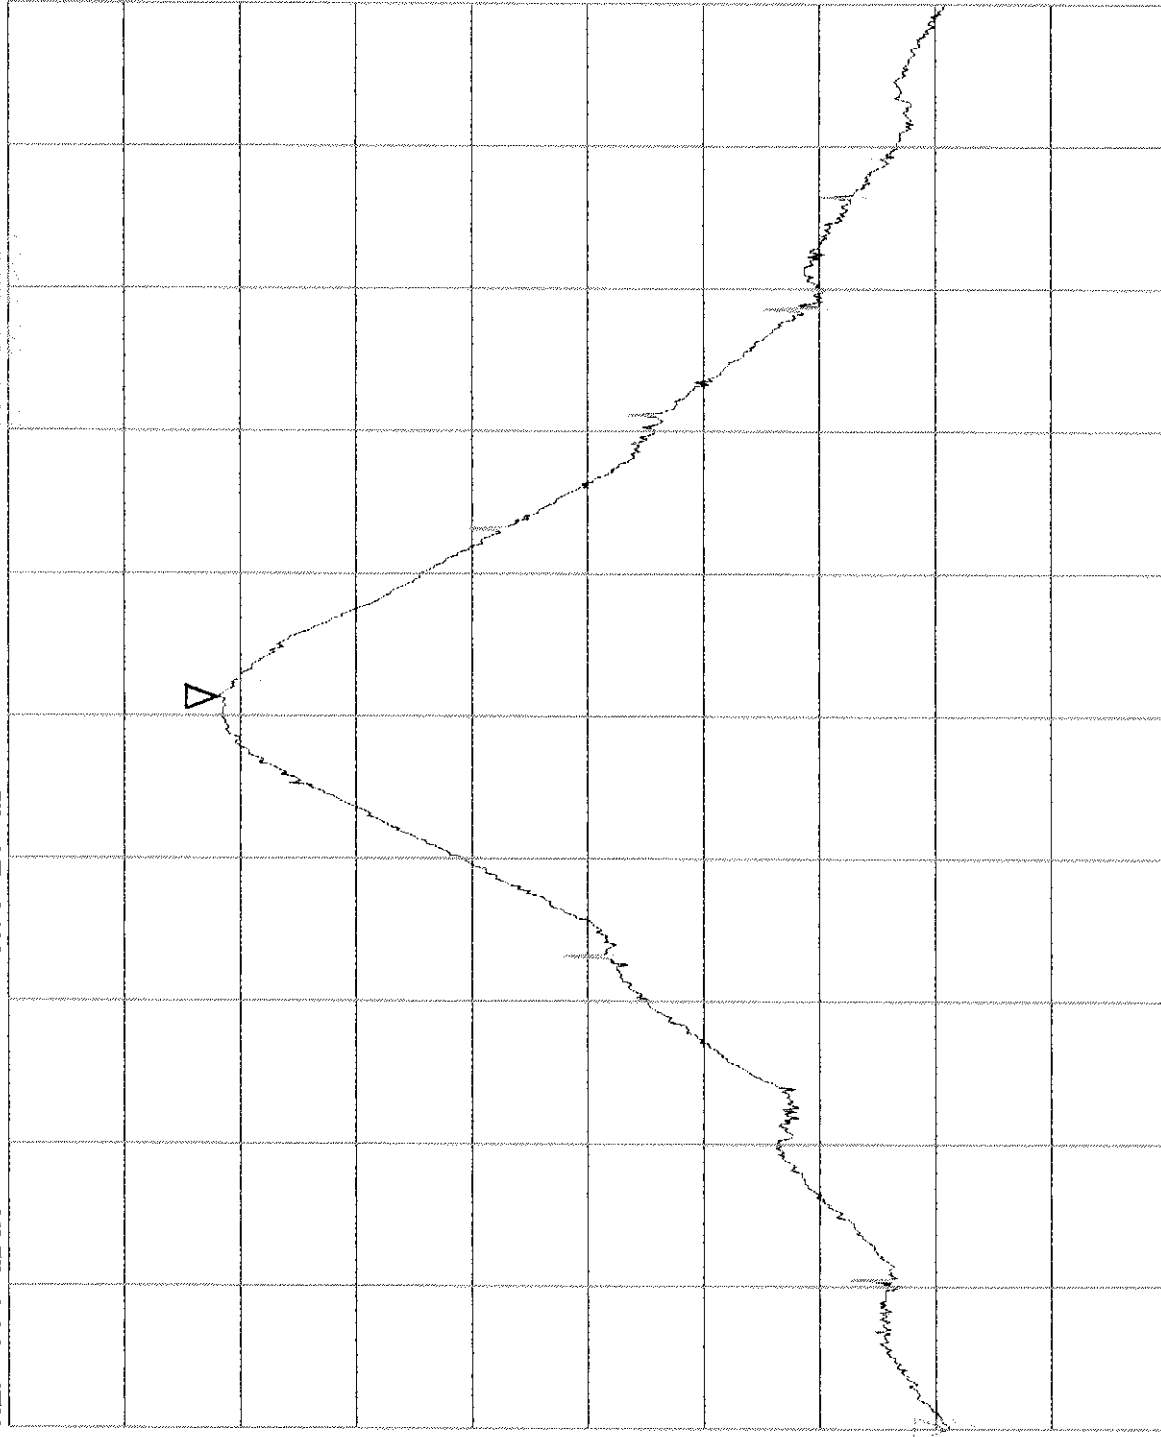

START 2.432490GHz
RBW 1MHz


VBW 1MHz

STOP 2.442490GHz
SWP 50ms

OMRON/Model: V690-HMG01/FCC ID: E4E 6CY CIDV6900101
FCC15.245(a)/Ch5/HOR/ReportNo: 22DE0013-YW
REF 114 dBuV ATT 20 dB

MAKER
2.4500 GHz
106.00 dBuV

5dB/

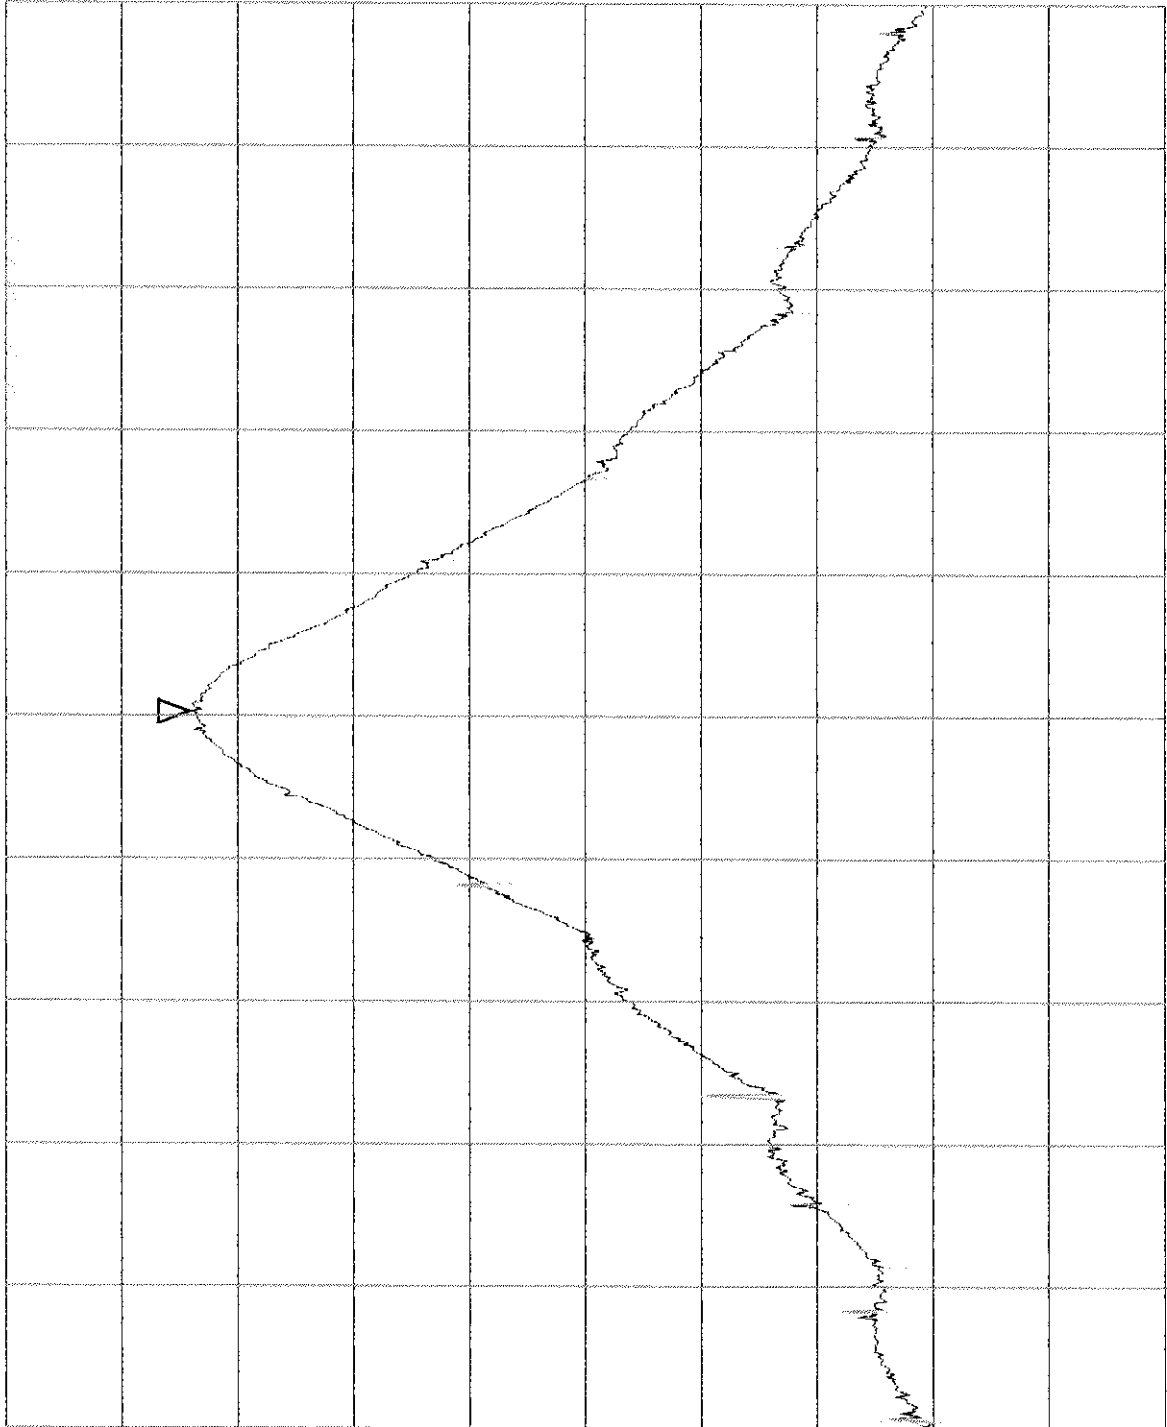

START 2.445000GHz
RBW 1MHz


STOP 2.455000GHz
SWP 50ms

VBW 1MHz

OMRON/Model: V690-HMG01/FCC ID: E4E 6CY CIDV6900101
FCC15.245(a)/Ch5/VER/ReportNo: 22DE0013-YW
REF 114 dBuV ATT 20 dB

MAKER
2.4500 GHz
105.00 dBuV

5dB/

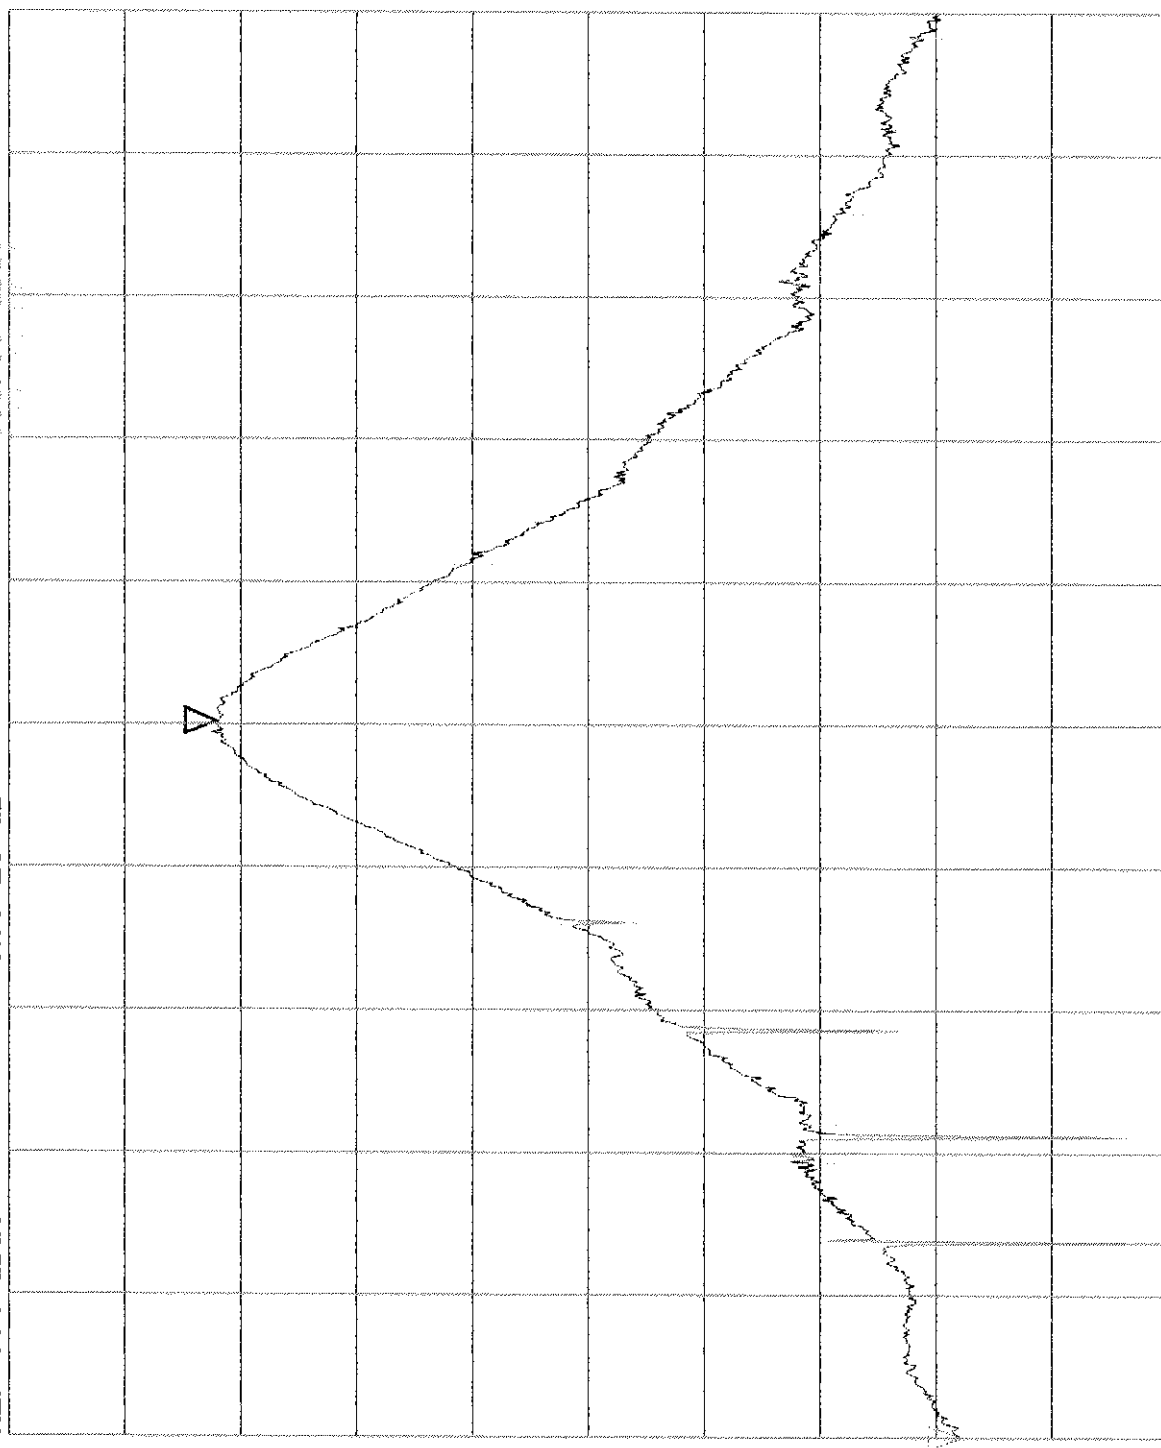

START 2.445000GHz
RBW 1MHz


VBW 1MHz

STOP 2.455000GHz
SWP 50ms

OMRON/Model: V690-HMG01/FCC ID: E4E 6CY CIDV6900101
FCC15.245(a)/Ch9/HOR/ReportNo: 22DE0013-YW
REF 114 dBuV ATT 20 dB

NAKER
2.4600 GHz
105.75 dBuV

5dB/

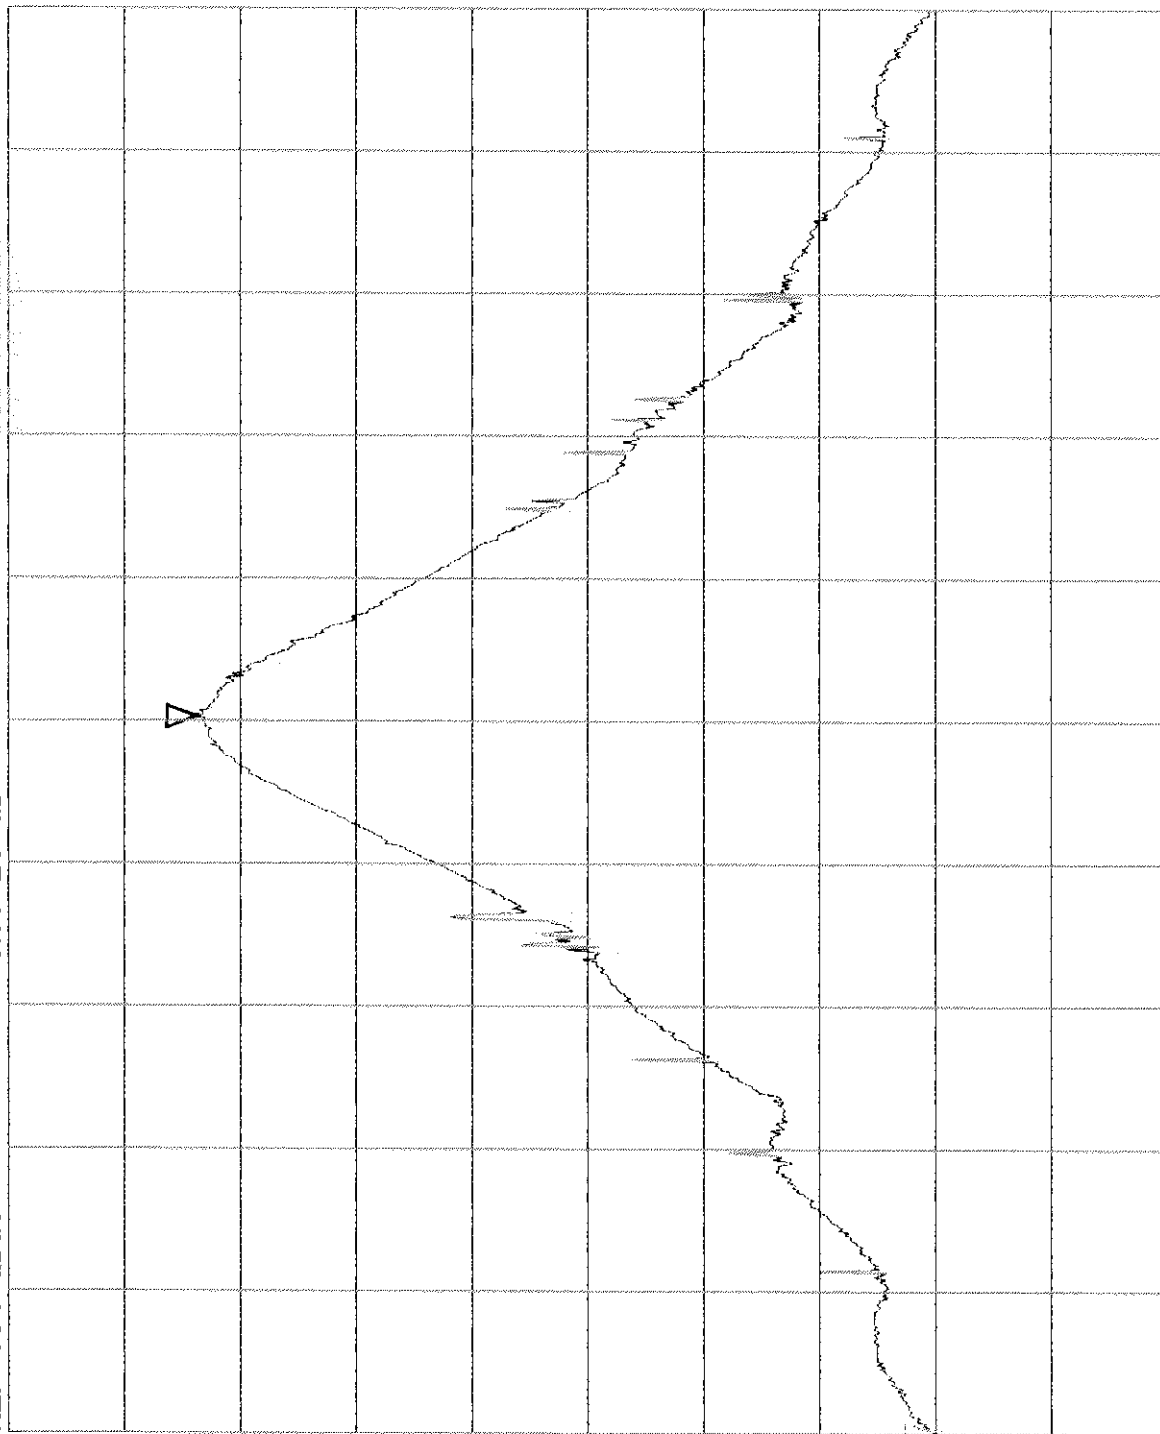

START 2.455000GHz
RBW 1MHz


VBW 1MHz

STOP 2.465000GHz
SWP 50ms

OMRON/Model:V690-HMG01/FCC ID:E4E 6CY CIDV6900101
FCC15.245(a)/Ch9/VER/ReportNo:22DE0013-YW
REF 114 dBuV ATT 20 dB

NAKER
2.4600 GHz
104.65 dBuV

5dB/

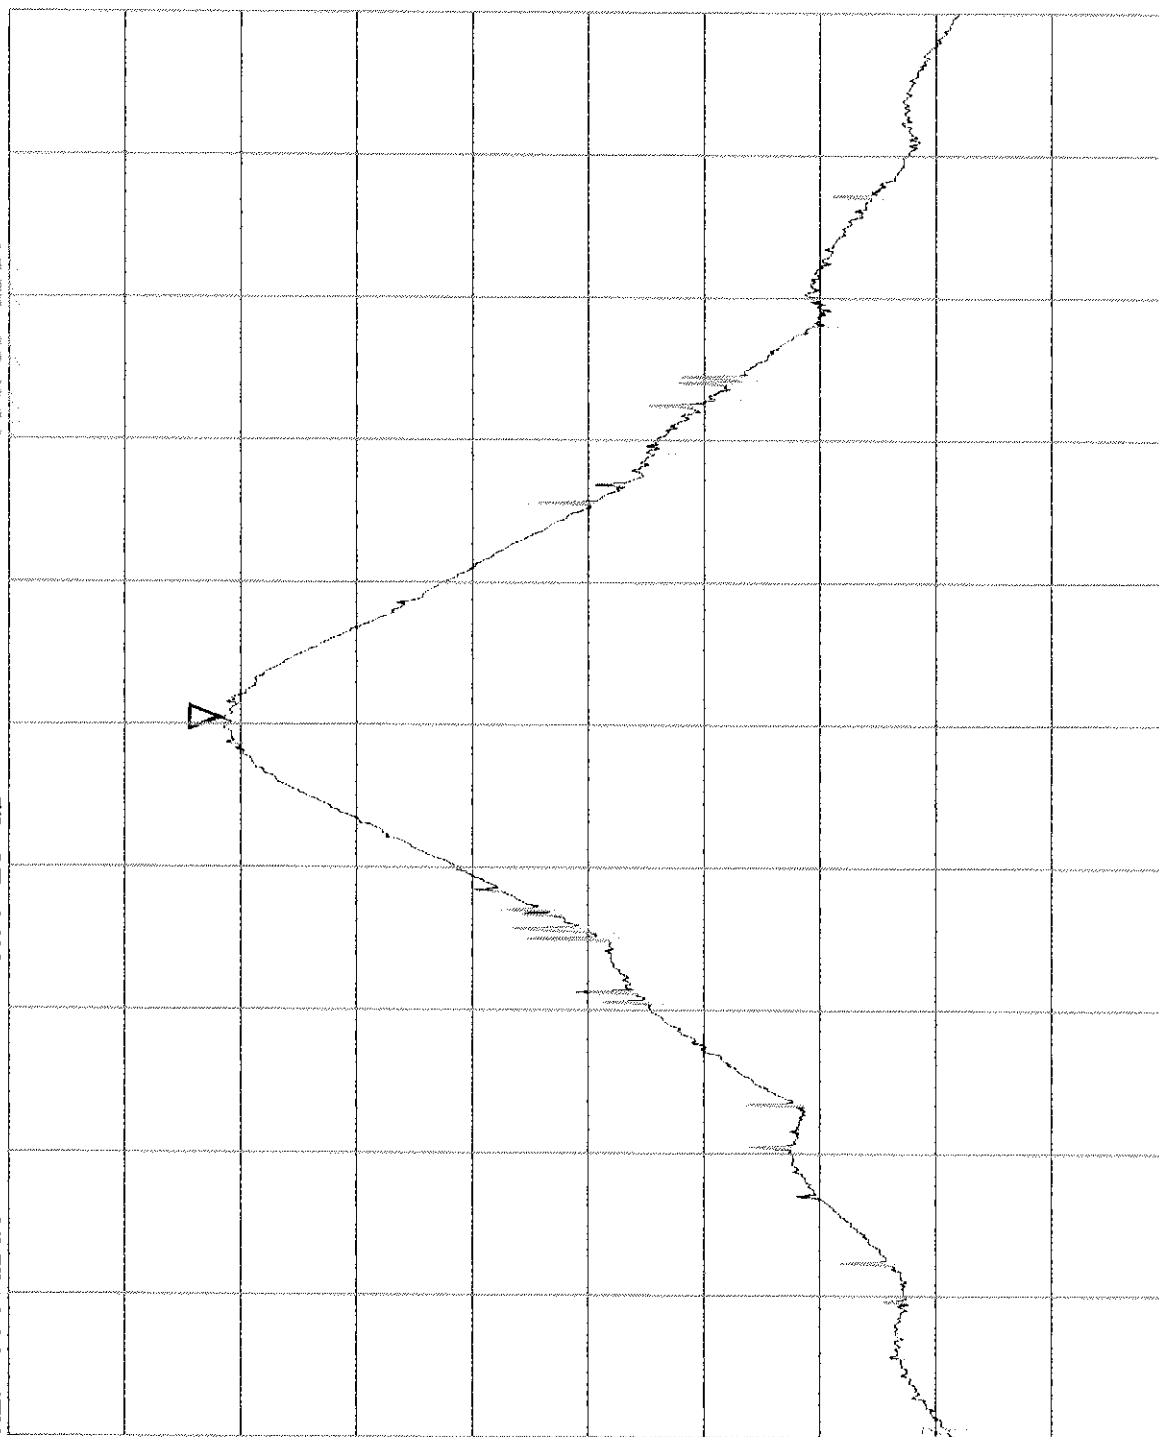

START 2.455000GHz
RBW 1MHz

VBW 1MHz

STOP 2.465000GHz
SWP 50ms

P17

DATA OF RADIATION TEST

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.2 OPEN TEST SITE
Report No. : 22DE0013-YW

Applicant : OMRON Corporation
Kind of Equipment : Read/Write Antenna
Model No. : V690-HMG01
Serial No. : PHASE5-0001
Power : DC24V
Mode : Transmitting (OCh)
Remarks : FCC ID : E4E 6CY CIDV6900101
Date : 11/11/2001
Test Distance : 3 m
Temperature : 17 °C
Humidity : 48 %
Regulation : Fcc 15C § 15.209 (a)

Engineer : Naoki Sakamoto

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	43.65	BB	26.1	37.2	13.4	29.8	1.5	6.0	17.2	28.3	40.0	22.8	11.7
2.	64.92	BB	46.3	53.0	6.9	29.8	1.8	5.8	31.0	37.7	40.0	9.0	2.3
3.	98.36	BB	32.9	33.7	9.8	29.7	2.2	5.9	21.1	21.9	43.5	22.4	21.6
4.	240.03	BB	30.5	36.5	16.8	29.7	3.5	5.8	26.9	32.9	46.0	19.1	13.1
5.	442.35	BB	31.0	27.5	18.7	29.9	5.1	5.8	30.7	27.2	46.0	15.3	18.8
6.	457.08	BB	31.6	28.4	19.0	29.9	5.2	5.8	31.7	28.5	46.0	14.3	17.5
7.	908.82	BB	30.8	29.4	24.5	29.1	8.0	6.0	40.2	38.8	46.0	5.8	7.2

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

All other spurious emissions are more than 20dB below the limits.
ANT. TYPE: 30-300MHz Biconical, 300-1000MHz Logperiodic

DATA OF RADIATION TEST

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.2 OPEN TEST SITE
Report No. : 22DE0013-YW

Applicant : OMRON Corporation
Kind of Equipment : Read/Write Antenna
Model No. : V690-HMG01
Serial No. : PHASE5-0001
Power : DC24V
Mode : Transmitting(5Ch)
Remarks : FCC ID : E4E 6CY CIDV6900101
Date : 11/12/2001
Test Distance : 3 m
Temperature : 23 °C
Humidity : 50 %
Regulation : Fcc 15C § 15.209(a)

Engineer : Naoki Sakamoto

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	43.65	BB	27.6	36.3	13.4	29.8	1.5	6.0	18.7	27.4	40.0	21.3	12.6
2.	64.92	BB	46.0	53.3	6.9	29.8	1.8	5.8	30.7	38.0	40.0	9.3	2.0
3.	98.36	BB	32.1	33.8	9.8	29.7	2.2	5.9	20.3	22.0	43.5	23.2	21.5
4.	240.03	BB	30.2	40.5	16.8	29.7	3.5	5.8	26.6	36.9	46.0	19.4	9.1
5.	442.35	BB	30.9	25.3	18.7	29.9	5.1	5.8	30.6	25.0	46.0	15.4	21.0
6.	457.08	BB	31.7	26.2	19.0	29.9	5.2	5.8	31.8	26.3	46.0	14.2	19.7
7.	908.82	BB	28.8	28.7	24.5	29.1	8.0	6.0	38.2	38.1	46.0	7.8	7.9

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.

All other spurious emissions are more than 20dB below the limits.
ANT. TYPE:30-300MHz Biconical , 300-1000MHz Logperiodic

DATA OF RADIATION TEST

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.2 OPEN TEST SITE
Report No. : 22DE0013-YW

Applicant : OMRON Corporation
Kind of Equipment : Read/Write Antenna
Model No. : V690-HMG01
Serial No. : PHASE5-0001
Power : DC24V
Mode : Transmitting(9Ch)
Remarks : FCC ID : E4E 6CY CIDV6900101
Date : 11/12/2001
Test Distance : 3 m
Temperature : 23 °C
Humidity : 50 %
Regulation : Fcc 15C § 15.209(a)

Engineer : Naoki Sakamoto

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	64.87	BB	45.4	53.0	6.9	29.8	1.8	5.8	30.1	37.7	40.0	9.9	2.3
2.	98.31	BB	31.7	32.8	9.7	29.7	2.2	5.9	19.8	20.9	43.5	23.7	22.6
3.	240.03	BB	27.3	35.8	16.8	29.7	3.5	5.8	23.7	32.2	46.0	22.3	13.8
4.	41.66	BB	28.9	36.8	14.1	29.8	1.4	6.0	20.6	28.5	40.0	19.4	11.5
5.	442.34	BB	28.8	24.1	18.7	29.9	5.1	5.8	28.5	23.8	46.0	17.5	22.2
6.	457.07	BB	31.8	27.0	19.0	29.9	5.2	5.8	31.9	27.1	46.0	14.1	18.9
7.	908.90	BB	27.0	30.4	24.5	29.1	8.0	6.0	36.4	39.8	46.0	9.6	6.2

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

All other spurious emissions are more than 20dB below the limits.
ANT. TYPE:30-300MHz Biconical , 300-1000MHz Logperiodic

DATA OF RADIATION TEST

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.2 OPEN TEST SITE
Report No. : 22DE0013-YW

Applicant : OMRON Corporation
Kind of Equipment : Read/Write Antenna
Model No. : V690-HMG01
Serial No. : PHASE5-0001
Power : DC24V
Mode : Standby
Remarks : FCC ID : E4E 6CY CIDV6900101
Date : 11/12/2001
Test Distance : 3 m
Temperature : 23 °C
Humidity : 50 %
Regulation : Fcc 15C § 15. 209 (a)

Engineer : Naoki Sakamoto

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			IIR	VER					IIR	VER		IIR	VER
			[dB μ V]						[dB μ V/m]			[dB]	
1.	41.66	BB	28.7	36.6	14.1	29.8	1.4	6.0	20.4	28.3	40.0	19.6	11.7
2.	64.87	BB	45.7	53.0	6.9	29.8	1.8	5.8	30.4	37.7	40.0	9.6	2.3
3.	98.31	BB	31.6	31.3	9.7	29.7	2.2	5.9	19.7	19.4	43.5	23.8	24.1
4.	240.03	BB	24.5	27.1	16.8	29.7	3.5	5.8	20.9	23.5	46.0	25.1	22.5
5.	442.34	BB	27.5	24.2	18.7	29.9	5.1	5.8	27.2	23.9	46.0	18.8	22.1
6.	457.07	BB	32.8	25.8	19.0	29.9	5.2	5.8	32.9	25.9	46.0	13.1	20.1

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.

All other spurious emissions are more than 20dB below the limits.
ANT. TYPE: 30-300MHz Biconical , 300-1000MHz Logperiodic

DATA OF SUPURIOUS EMISSIONS(1GHz to 26GHz)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.2 OPEN SITE

COMPANY : OMRON Corporation	REPORT NO : 22DE0013-YW
EQUIPMENT : Read/Write Antenna	REGULATION : Fcc Part15SubpartC 245(b) / 209
MODEL : V690-HMG01	TEST DISTANCE : 3m
FCC ID : E4E 6CY CIDV6900101	DATE : 2001/11/13
POWER : DC24V	Temp./Humi. : 22°C/54%
Mode : Transmitting(0Ch)	

ENGINEER : Naoki.Sakamoto

PK DETECT(S/A : RBW 1MHz and VBW 1MHz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN or HPF [dB]	RESULT		Limit PK [dB μ V/m]	MARGIN	
		HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1	2.3900	40.6	40.5	31.3	34.5	4.5	6.0	47.9	47.8	74.0	26.1	26.2
2	4.8750	45.9	49.3	35.6	34.5	8.0	1.2	56.2	59.6	74.0	17.8	14.4
3	7.3212	35.8	36.1	39.2	34.9	10.1	0.9	51.1	51.4	74.0	22.9	22.6
4	9.7500	36.4	36.3	39.2	35.0	11.4	1.1	53.1	53.0	74.0	20.9	21.0
5	12.1876	*	*	43.5	34.4	12.1	1.5	-	-	74.0	-	-
6	14.6251	*	*	42.2	33.1	13.5	1.1	-	-	74.0	-	-
7	17.0626	*	*	43.8	33.4	14.8	1.1	-	-	74.0	-	-
8	19.5001	*	*	38.0	33.4	15.8	1.0	-	-	74.0	-	-
9	21.9376	*	*	37.8	33.0	16.5	0.8	-	-	74.0	-	-
10	24.3752	*	*	39.6	33.2	16.8	0.7	-	-	74.0	-	-

AV DETECT(S/A : RBW 1MHz and VBW 10Hz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN or HPF [dB]	RESULT		Limit AV [dB μ V/m]	MARGIN	
		HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1	2.3900	29.2	29.1	31.3	34.5	4.5	6.0	36.5	36.4	54.0	17.5	17.6
2	4.8750	39.6	43.1	35.6	34.5	8.0	1.2	49.9	53.4	54.0	4.1	0.6
3	7.3212	25.5	25.8	39.2	34.9	10.1	0.9	40.8	41.1	54.0	13.2	12.9
4	9.7500	25.9	26.2	39.2	35.0	11.4	1.1	42.6	42.9	54.0	11.4	11.1
5	12.1876	*	*	43.5	34.4	12.1	1.5	-	-	54.0	-	-
6	14.6251	*	*	42.2	33.1	13.5	1.1	-	-	54.0	-	-
7	17.0626	*	*	43.8	33.4	14.8	1.1	-	-	54.0	-	-
8	19.5001	*	*	38.0	33.4	15.8	1.0	-	-	54.0	-	-
9	21.9376	*	*	37.8	33.0	16.5	0.8	-	-	54.0	-	-
10	24.3752	*	*	39.6	33.2	16.8	0.7	-	-	54.0	-	-

Sample Calculation :

RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + ATTEN. Or HPF(High Pass Filter)

Except for the above table : All other spurious emissions are more than 20dB below the limit.

*Emissions did not detect.

Data No 1 : Atten.

Data No 2 10 : High Pass Filter

DATA OF SUPURIOUS EMISSIONS(1GHz to 26GHz)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.2 OPEN SITE

COMPANY : OMRON Corporation
EQUIPMENT : Read/Write Antenna
MODEL : V690-HMG01
FCC ID : E4E 6CY CIDV6900101
POWER : DC24V
Mode : Transmitting(5Ch)

REPORT NO : 22DE0013-YW
REGULATION : Fcc Part15SubpartC 245(b) / 209
TEST DISTANCE : 3m
DATE : 2001/11/13
Temp./Humi. : 22°C/54%

ENGINEER : Naoki.Sakamoto

PK DETECT(S/A : RBW 1MHz and VBW 1MHz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	HPF [dB]	RESULT		Limit PK [dB μ V/m]	MARGIN	
		HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1	4.9000	46.2	48.5	35.7	34.5	8.0	1.2	56.6	58.9	74.0	17.4	15.1
2	7.3500	36.1	36.6	39.2	34.9	10.1	0.9	51.4	51.9	74.0	22.6	22.1
3	9.8000	36.4	36.5	39.2	34.9	11.4	1.1	53.2	53.3	74.0	20.8	20.7
4	12.2500	*	*	43.4	34.3	12.3	1.5	-	-	74.0	-	-
5	14.7000	*	*	42.6	33.1	13.6	1.1	-	-	74.0	-	-
6	17.1500	*	*	43.8	33.2	14.8	1.1	-	-	74.0	-	-
7	19.6000	*	*	38.0	33.4	15.9	1.4	-	-	74.0	-	-
8	22.0500	*	*	37.8	33.0	16.5	0.6	-	-	74.0	-	-
9	24.5000	*	*	39.5	33.2	16.8	0.5	-	-	74.0	-	-

AV DETECT(S/A : RBW 1MHz and VBW 10Hz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	HPF [dB]	RESULT		Limit AV [dB μ V/m]	MARGIN	
		HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1	4.9000	40.0	43.0	35.7	34.5	8.0	1.2	50.4	53.4	54.0	3.6	0.6
2	7.3500	25.8	25.9	39.2	34.9	10.1	0.9	41.1	41.2	54.0	12.9	12.8
3	9.8000	26.1	26.0	39.2	34.9	11.4	1.1	42.9	42.8	54.0	11.1	11.2
4	12.2500	*	*	43.4	34.3	12.3	1.5	-	-	54.0	-	-
5	14.7000	*	*	42.6	33.1	13.6	1.1	-	-	54.0	-	-
6	17.1500	*	*	43.8	33.2	14.8	1.1	-	-	54.0	-	-
7	19.6000	*	*	38.0	33.4	15.9	1.4	-	-	54.0	-	-
8	22.0500	*	*	37.8	33.0	16.5	0.6	-	-	54.0	-	-
9	24.5000	*	*	39.5	33.2	16.8	0.5	-	-	54.0	-	-

Sample Calculation :

RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + HPF(High Pass Filter)

Except for the above table : All other spurious emissions are more than 20dB below the limit.

*Emissions did not detect.

DATA OF SUPURIOUS EMISSIONS(1GHz to 26GHz)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.2 OPEN SITE

COMPANY	: OMRON Corporation	REPORT NO	: 22DE0013-YW
EQUIPMENT	: Read/Write Antenna	REGULATION	: Fcc Part15SubpartC 245(b) / 209
MODEL	: V690-HMG01	TEST DISTANCE	: 3m
FCC ID	: E4E 6CY CIDV6900101	DATE	: 2001/11/13
POWER	: DC24V	Temp./Humi.	: 22°C/54%
Mode	: Transmitting(9Ch)		

ENGINEER : Naoki.Sakamoto

PK DETECT(S/A : RBW 1MHz and VBW 1MHz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN or HPF [dB]	RESULT		Limit PK [dB μ V/m]	MARGIN	
		HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1	2.4835	49.2	47.6	31.6	34.5	4.7	6.0	57.0	55.4	74.0	17.0	18.6
2	4.9201	45.5	48.3	35.8	34.5	8.0	1.2	56.0	58.8	74.0	18.0	15.2
3	7.3802	36.0	36.5	39.2	34.9	10.1	0.9	51.3	51.8	74.0	22.7	22.2
4	9.8403	35.9	36.1	39.2	34.9	11.4	1.1	52.7	52.9	74.0	21.3	21.1
5	12.3003	*	*	43.3	34.2	12.3	1.5	-	-	74.0	-	-
6	14.7604	*	*	42.9	33.0	13.7	1.2	-	-	74.0	-	-
7	17.2205	*	*	43.9	33.1	14.8	0.8	-	-	74.0	-	-
8	19.6805	*	*	38.0	33.4	16.0	1.6	-	-	74.0	-	-
9	22.1406	*	*	38.3	33.0	16.5	0.7	-	-	74.0	-	-
10	24.6007	*	*	39.4	33.2	16.8	0.6	-	-	74.0	-	-

AV DETECT(S/A : RBW 1MHz and VBW 10Hz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN or HPF [dB]	RESULT		Limit AV [dB μ V/m]	MARGIN	
		HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1	2.4835	38.1	36.8	31.6	34.5	4.7	6.0	45.9	44.6	54.0	8.1	9.4
2	4.9201	39.3	42.9	35.8	34.5	8.0	1.2	49.8	53.4	54.0	4.2	0.6
3	7.3802	26.0	25.9	39.2	34.9	10.1	0.9	41.3	41.2	54.0	12.7	12.8
4	9.8403	26.1	26.0	39.2	34.9	11.4	1.1	42.9	42.8	54.0	11.1	11.2
5	12.3003	*	*	43.3	34.2	12.3	1.5	-	-	54.0	-	-
6	14.7604	*	*	42.9	33.0	13.7	1.2	-	-	54.0	-	-
7	17.2205	*	*	43.9	33.1	14.8	0.8	-	-	54.0	-	-
8	19.6805	*	*	38.0	33.4	16.0	1.6	-	-	54.0	-	-
9	22.1406	*	*	38.3	33.0	16.5	0.7	-	-	54.0	-	-
10	24.6007	*	*	39.4	33.2	16.8	0.6	-	-	54.0	-	-

Sample Calculation :

RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + ATTEN. Or HPF(High Pass Filter)

Except for the above table : All other spurious emissions are more than 20dB below the limit.


*Emissions did not detect.

Data No 1 : Atten.

Data No 2-10 : High Pass Filter

OMRON/Model:V690-HMG01/FCC ID:E4E 6CY CIDV6900101
6dB Bandwidth/Ch0/HOR/ReportNo:22DE0013-YW
REF 114 dBuV ATT 20 dB
MAKER 2.4368 GHz 99.88 dBuV
Δ MAKER 1.3857 MHz .00 dBuV

5dB/

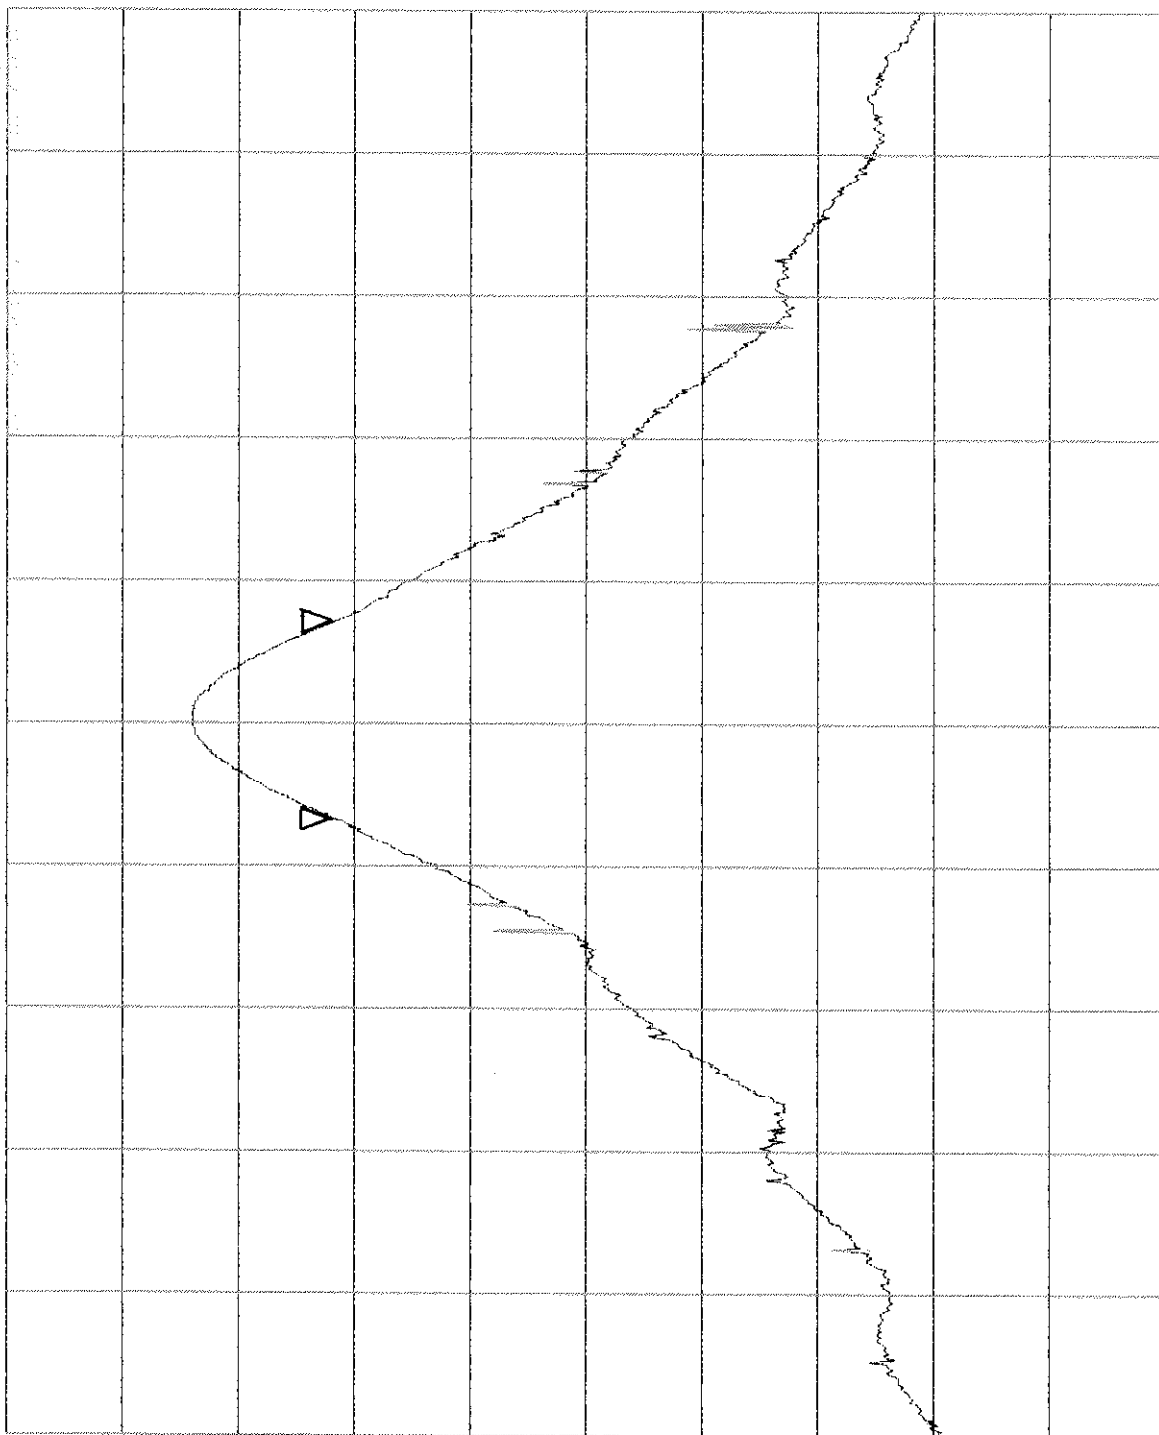


START 2.432490GHz RBW 1MHz
STOP 2.442490GHz SWP 50ms
VBW 1MHz
P25

OMRON/Model: V690-HMG01/FCC ID: E4E 6CY CIDV6900101
6dB Bandwidth/Ch5/HOR/ReportNo: 22DE0013-YW
REF 114 dBuV ATT 20 dB

MAKER
2.4493 GHz
100.00 dBuV

Δ MAKER
1.3286 MHz
.00 dBuV

5dB/

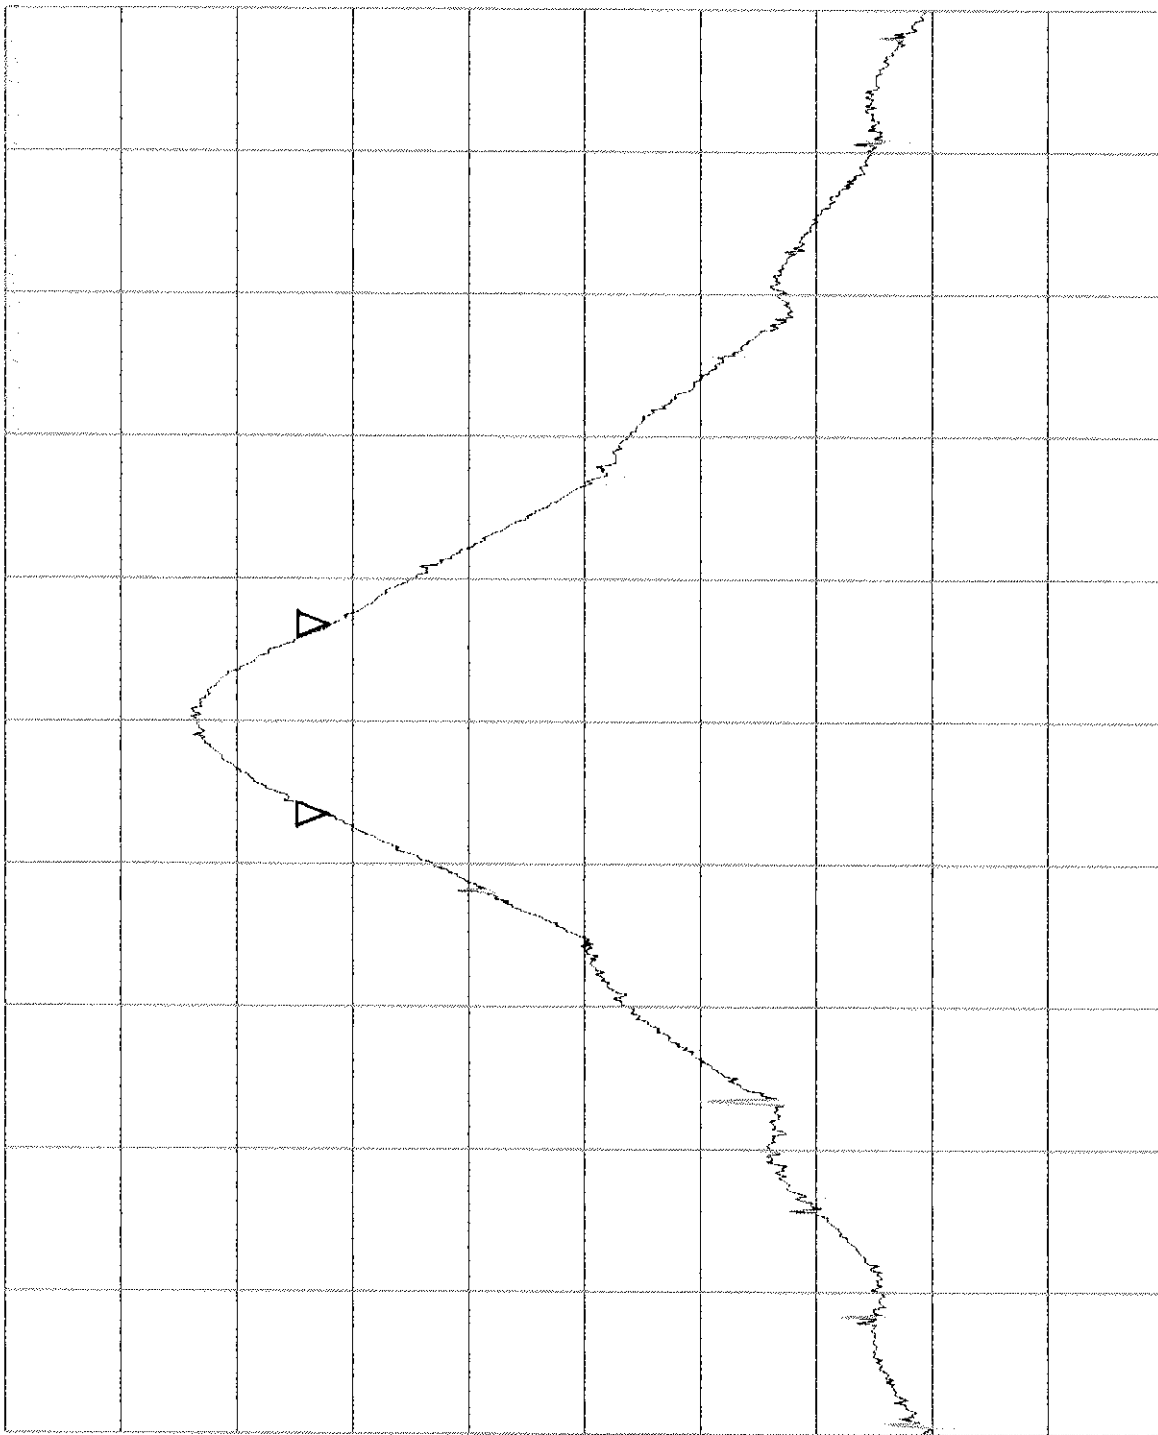


START 2.445000GHz
RBW 1MHz

STOP 2.455000GHz
SWP 50ms

OMRON/Model: V690-HMG01/FCC ID: E4E 6CY CIDV6900101
6dB Bandwidth/Ch9/HOR/ReportNo: 22DE0013-YW
REF 114 dBuV
ATT 20 dB

NAKER
2.4607 GHz
100.00 dBuV
ΔMAKER
-1.3429 MHz
-25 dBuV

5dB/

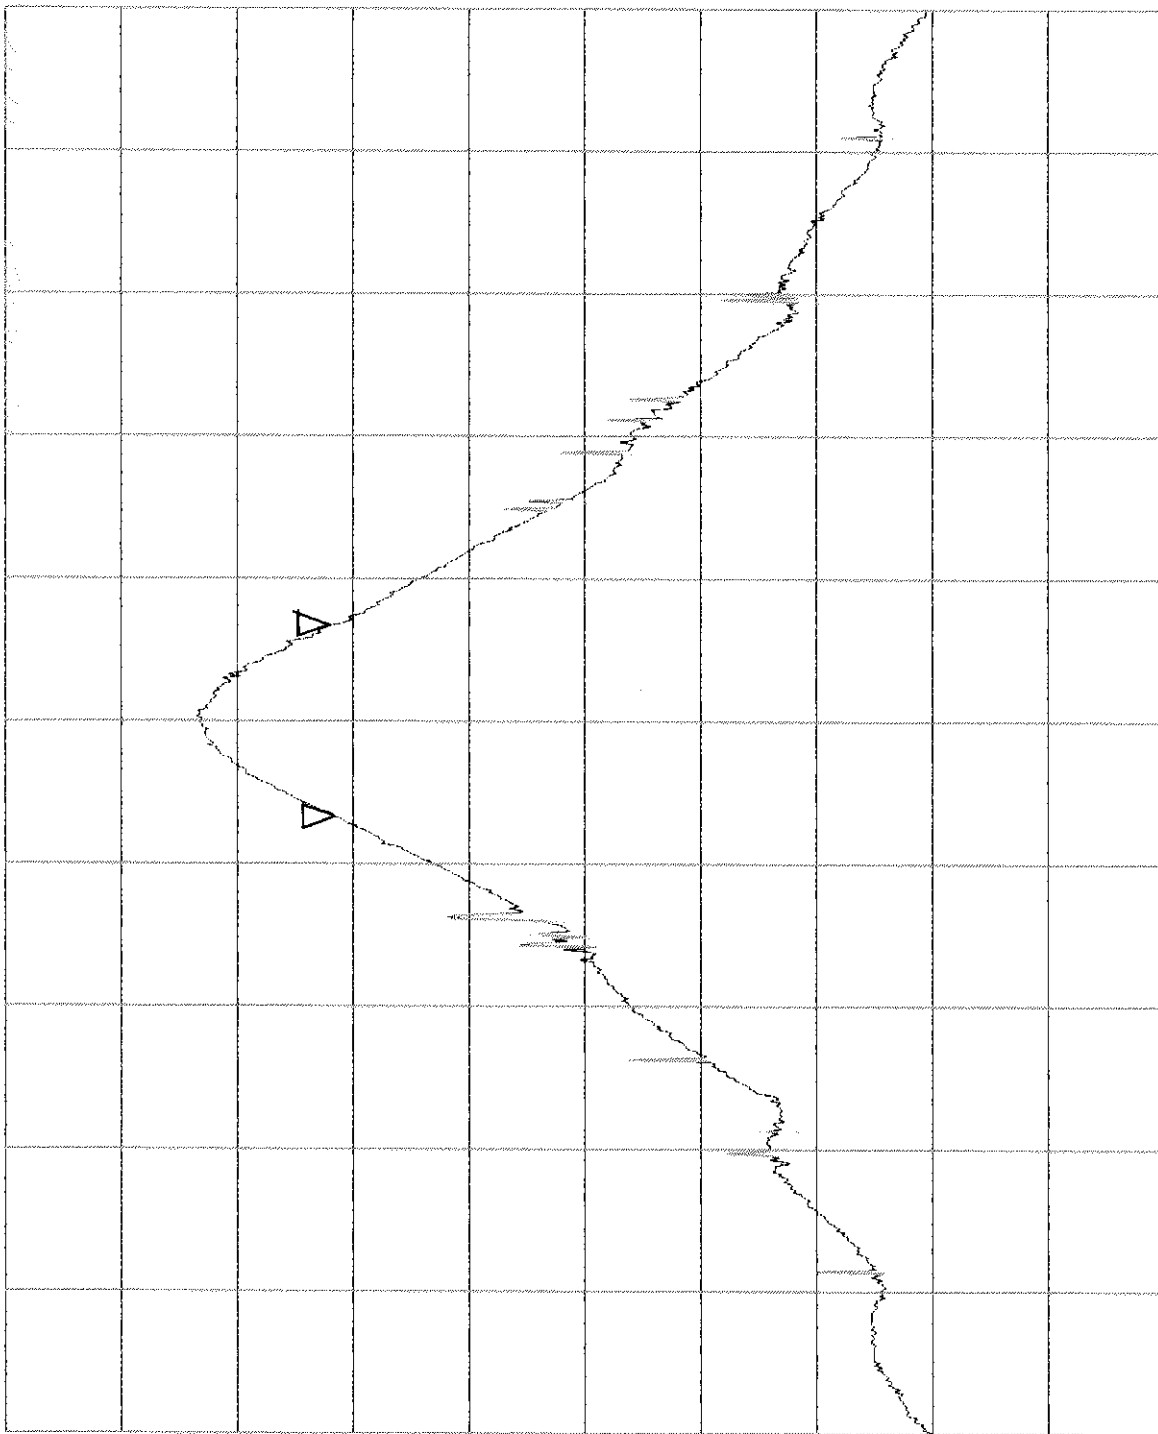

START 2.455000GHz
RBW 1MHz

VBW 1MHz

STOP 2.465000GHz
SWP 50ms