


FCC C2PC Test Report

FCC ID : E52-K777
Equipment : WLAN (11ac/a/b/g/n 1x1) USB module
Model No. : DHUA-K77-7
Brand Name : KYOCERA
Applicant : KYOCERA Document Solutions Inc.
Address : 2-28, 1-chome, Tamatsukuri, Chuo-Ku, Osaka,
540-8585 JAPAN
Standard : 47 CFR FCC Part 15.247
Received Date : Sep. 18, 2023
Tested Date : Sep. 22 ~ Sep. 26, 2023

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	8
1.4	The Equipment List	9
1.5	Test Standards	10
1.6	Reference Guidance	10
1.7	Deviation from Test Standard and Measurement Procedure.....	10
1.8	Measurement Uncertainty	10
2	TEST CONFIGURATION.....	11
2.1	Testing Facility	11
2.2	The Worst Test Modes and Channel Details	11
3	TRANSMITTER TEST RESULTS	12
3.1	6dB and Occupied Bandwidth.....	12
3.2	Conducted Output Power	13
3.3	Power Spectral Density	14
3.4	Unwanted Emissions into Restricted Frequency Bands	15
3.5	Emissions in Non-Restricted Frequency Bands.....	17
3.6	AC Power Line Conducted Emissions	18
4	TEST LABORATORY INFORMATION	19
Appendix A. 6dB and Occupied Bandwidth		
Appendix B. Conducted Output Power		
Appendix C. Power Spectral Density		
Appendix D. Unwanted Emissions into Restricted Frequency Bands		
Appendix E. Emissions in Non-Restricted Frequency Bands		
Appendix F. AC Power Line Conducted Emissions		

Release Record

Report No.	Version	Description	Issued Date
FR9O0201-04AC	Rev. 01	Initial issue	Dec. 07, 2023

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emission	[dBuV]: 0.150MHz 47.02 (Margin -18.89dB) - QP	Pass
15.247(d) 15.209	Unwanted Emissions	[dBuV/m at 3m]: 2483.50MHz 52.99 (Margin -1.01dB) - AV	Pass
15.247(b)(3)	Conducted Output Power	Max Power [dBm]: 18.15	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

This report is issued as a Class II Permissive Change.

The modification is only concerned with adding channel 12 (2467MHz) and channel 13(2472MHz) by software setting.

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
2400-2483.5	b	2412-2472	1-13 [13]	1	1-11 Mbps
2400-2483.5	g	2412-2472	1-13 [13]	1	6-54 Mbps
2400-2483.5	n (HT20)	2412-2472	1-13 [13]	1	MCS 0-7
Note 1: RF output power specifies that Maximum Conducted (Average) Output Power. Note 2: DSSS-DBPSK, DQPSK, CCK modulation OFDM - BPSK, QPSK, 16QAM and 64QAM modulation.					

1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Gain (dBi)
1	ANT-0	PCB printed ANT	NA	2.69

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from host
-------------------	----------------

1.1.4 Accessories

N/A

1.1.5 Channel List

Frequency band (MHz)	2400~2483.5
802.11 b / g / n HT20	
Channel	Frequency(MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462
12	2467
13	2472

1.1.6 Test Tool and Duty Cycle

Test Tool	QRCT, V 3.0.264.0		
Duty Cycle and Duty Factor	Mode	Duty Cycle (%)	Duty Factor (dB)
	11b	99.53%	0.02
	11g	95.93%	0.18
	HT20	95.45%	0.20


1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)	Power Index
11b	2462	17.5
11b	2472	14.5
11g	2462	13
11g	2472	6.5
HT20	2462	12.5
HT20	2472	6

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Notebook	DELL	Latitude E6430	DoC	---

1.3 Test Setup Chart

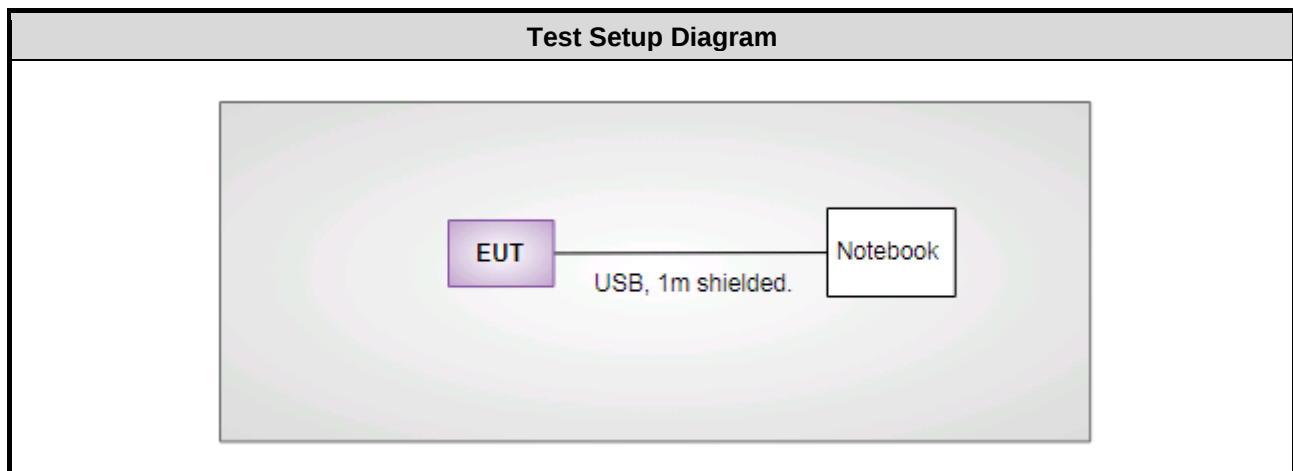

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Sep. 26, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 17, 2023	Feb. 16, 2024
LISN	R&S	ENV216	101579	May. 09, 2023	May. 08, 2024
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127667	Jan. 03, 2023	Jan. 02, 2024
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 17, 2022	Oct. 16, 2023
50 ohm terminal (Support Unit)	NA	50	01	Jun. 14, 2023	Jun. 13, 2024
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	Sep. 22 ~ Sep. 26, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 03, 2023	Mar. 02, 2024
Spectrum Analyzer	R&S	FSV40	101499	Mar. 16, 2023	Mar. 15, 2024
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 01, 2022	Oct. 31, 2023
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Jul. 04, 2023	Jul. 03, 2024
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Dec. 15, 2022	Dec. 14, 2023
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 27, 2022	Oct. 26, 2023
Preamplifier	EMC	EMC02325	980187	Jul. 10, 2023	Jul. 09, 2024
Preamplifier	EMC	EMC118A45SE	980897	Aug. 01, 2023	Jul. 31, 2024
Preamplifier	EMC	EMC184045SE	980903	Jul. 17, 2023	Jul. 16, 2024
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 04, 2022	Oct. 03, 2023
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Sep. 22, 2023	Sep. 21, 2024
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 22, 2023	Sep. 21, 2024
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Sep. 22, 2023	Sep. 21, 2024
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 22, 2023	Sep. 21, 2024
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Sep. 22, 2023	Sep. 21, 2024
Attenuator	Pasternack	PE7005-10	10-3	Oct. 14, 2022	Oct. 13, 2023
HIGHPASS FILTER	WI	WHK3.1-18G-10SS	43	Sep. 28, 2022	Sep. 27, 2023
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Sep. 26, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101910	Apr. 14, 2023	Apr. 13, 2024
Power Meter	Anritsu	ML2495A	1241002	Nov. 23, 2022	Nov. 22, 2023
Power Sensor	Anritsu	MA2411B	1207366	Nov. 23, 2022	Nov. 22, 2023
Attenuator	Pasternack	PE7005-10	10-2	Oct. 06, 2022	Oct. 05, 2023
Measurement Software	Sporton	SENSE-15247_DTS	V5.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.247
ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Unwanted Emission ≤ 1 GHz	± 3.96 dB
Unwanted Emission > 1 GHz	± 4.51 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)
Test Site	03CH03-WS
Address of Test Site	No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807C
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emission	11b	2467	1 Mbps	---
Unwanted Emissions ≤ 1GHz	11b	2467	1 Mbps	---
Unwanted Emissions >1GHz				
Conducted Output Power	11b	2467 / 2472	1 Mbps	---
6dB bandwidth	11g		6 Mbps	
Power spectral density	HT20		MCS 0	
NOTE:				
1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.				

3 Transmitter Test Results

3.1 6dB and Occupied Bandwidth

3.1.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.1.2 Test Procedures


6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.1.3 Test Setup



3.1.4 Test Results

Ambient Condition	24°C / 64%	Tested By	Akun Chung
-------------------	------------	-----------	------------

Refer to Appendix A.

3.2 Conducted Output Power

3.2.1 Limit of Conducted Output Power

Conducted power shall not exceed 1Watt.

Antenna gain $\leq 6\text{dBi}$, no any corresponding reduction is in output power limit.

Antenna gain $> 6\text{dBi}$

Non Fixed, point to point operations.

The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB


Fixed, point to point operations

Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.2.3 Test Setup



3.2.4 Test Results

Ambient Condition	24°C / 64%	Tested By	Akun Chung
-------------------	------------	-----------	------------

Refer to Appendix B.

3.3 Power Spectral Density

3.3.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.3.2 Test Procedures

Peak PSD

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.


Average PSD, duty cycle $\geq 98\%$

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = RMS, Sweep time = auto couple.
3. Sweep time = auto couple.
4. Employ trace averaging (RMS) mode over a minimum of 100 traces.
5. Use the peak marker function to determine the maximum amplitude level.

Average PSD, duty cycle $< 98\%$

1. Set the RBW = 3 kHz, VBW = 10 kHz
2. Detector = RMS, Sweep time = auto couple.
3. Sweep time = auto couple.
4. Employ trace averaging (RMS) mode over a minimum of 100 traces.
5. Use the peak marker function to determine the maximum amplitude level.
6. Add $10 \log (1/x)$, where x is the duty cycle.

3.3.3 Test Setup



3.3.4 Test Results

Ambient Condition	24°C / 64%	Tested By	Akun Chung
-------------------	------------	-----------	------------

Refer to Appendix C.

3.4 Unwanted Emissions into Restricted Frequency Bands

3.4.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.4.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.4.3 Test Setup

Radiated Emissions below 1 GHz

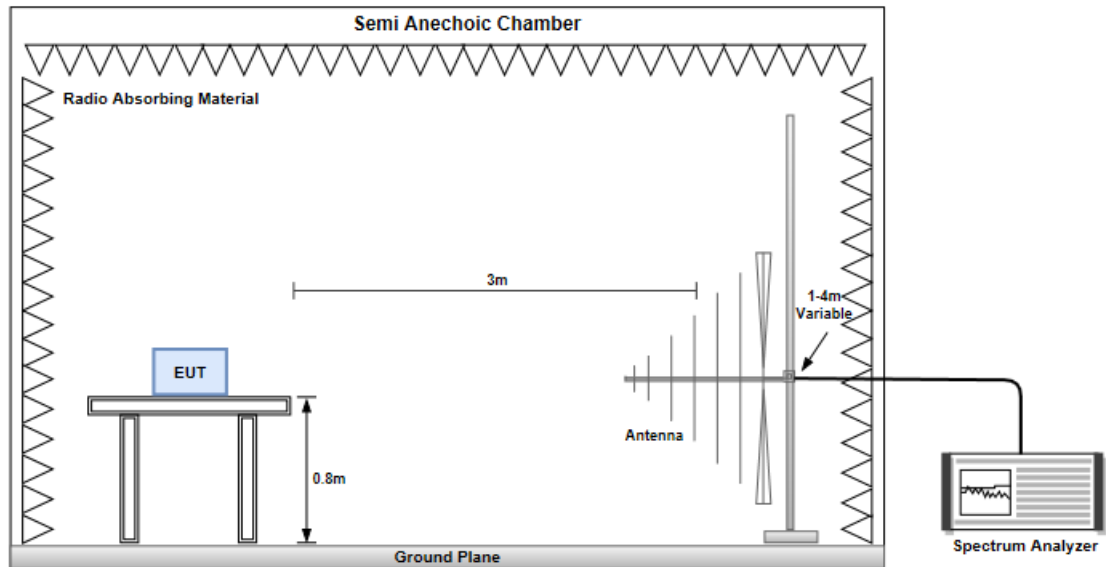

Radiated Emissions above 1 GHz

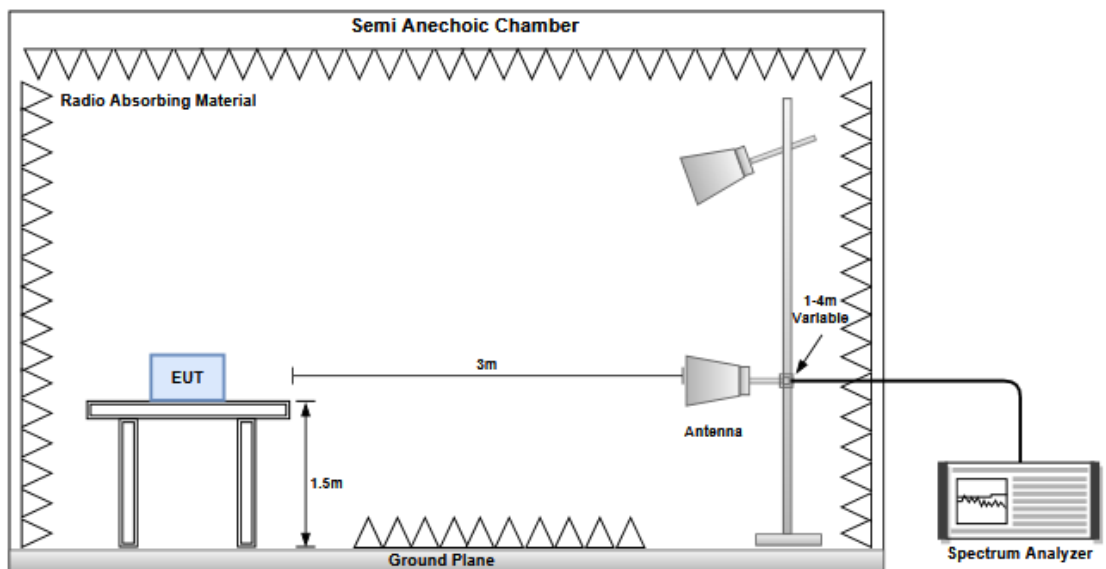

3.4.4 Test Results

Refer to Appendix D.

3.5 Emissions in Non-Restricted Frequency Bands

3.5.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.5.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.5.3 Test Setup



3.5.4 Test Results

Ambient Condition	24°C / 64%	Tested By	Akun Chung
-------------------	------------	-----------	------------

Refer to Appendix E.

3.6 AC Power Line Conducted Emissions

3.6.1 Limit of AC Power Line Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.6.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

3.6.3 Test Setup

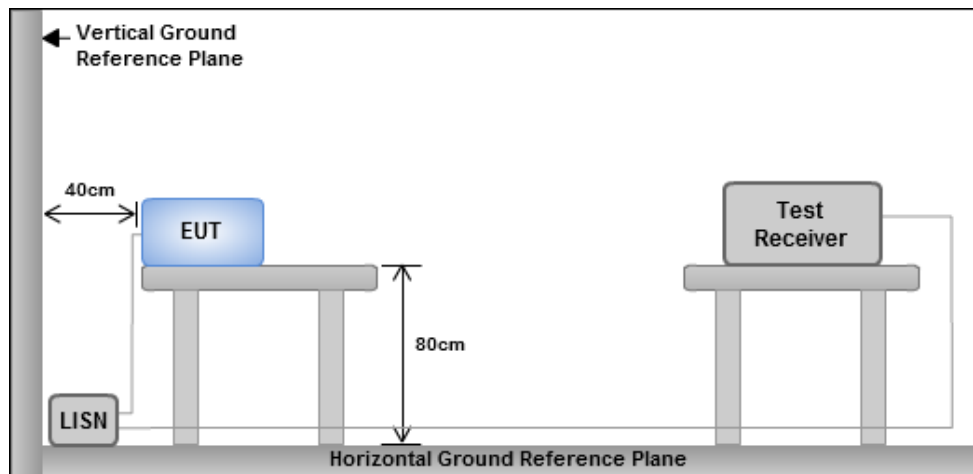

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.6.4 Test Results

Refer to Appendix F.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	7.6M	13.043M	13M0G1D	7.125M	13.028M
802.11g_Nss1,(6Mbps)_1TX	15.3M	16.228M	16M2D1D	15.1M	16.228M
802.11n HT20_Nss1,(MCS0)_1TX	15.425M	17.366M	17M4D1D	15.1M	17.366M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

Result



Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-
2467MHz	Pass	500k	7.6M	13.028M
2472MHz	Pass	500k	7.125M	13.043M
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-
2467MHz	Pass	500k	15.1M	16.228M
2472MHz	Pass	500k	15.3M	16.228M
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-
2467MHz	Pass	500k	15.425M	17.366M
2472MHz	Pass	500k	15.1M	17.366M

Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

EBW



2467MHz

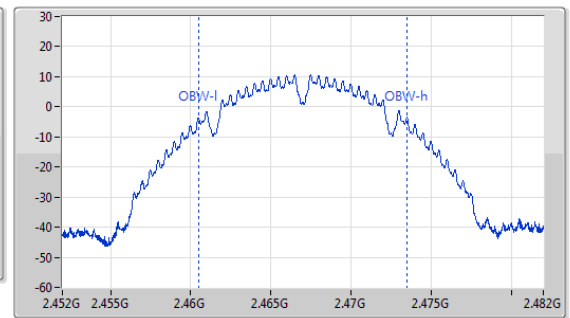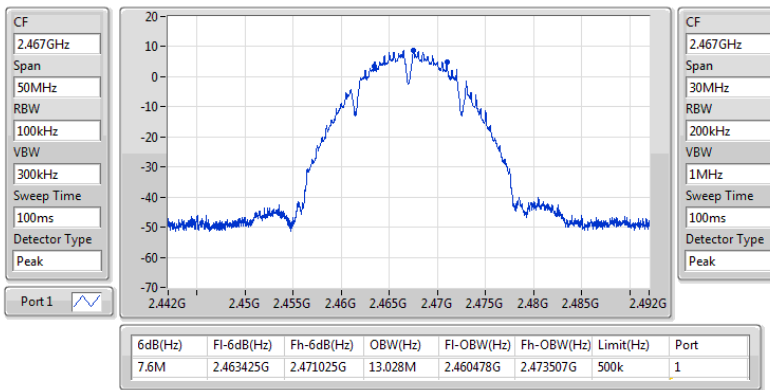

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

EBW



2472MHz

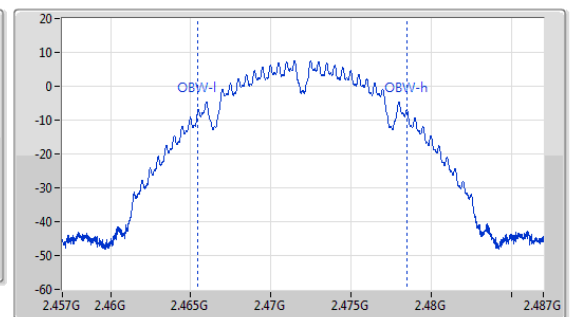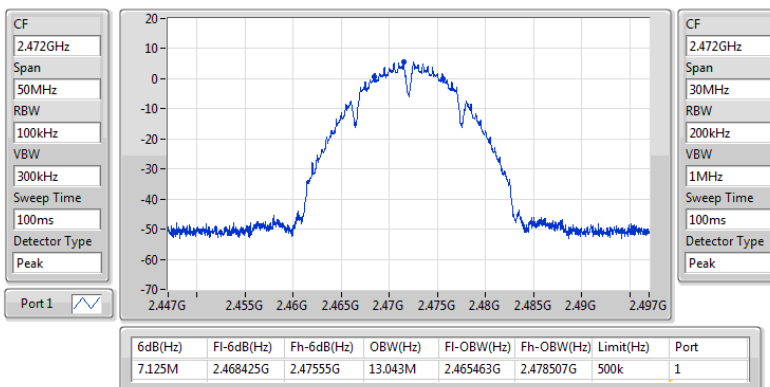

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

EBW



2467MHz

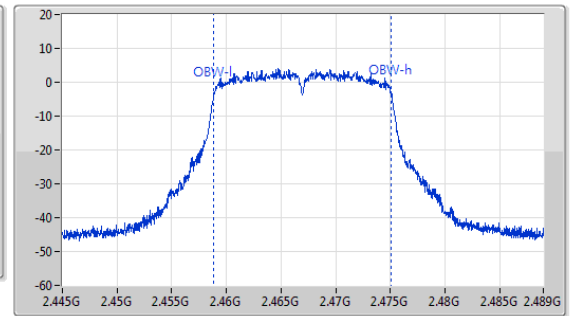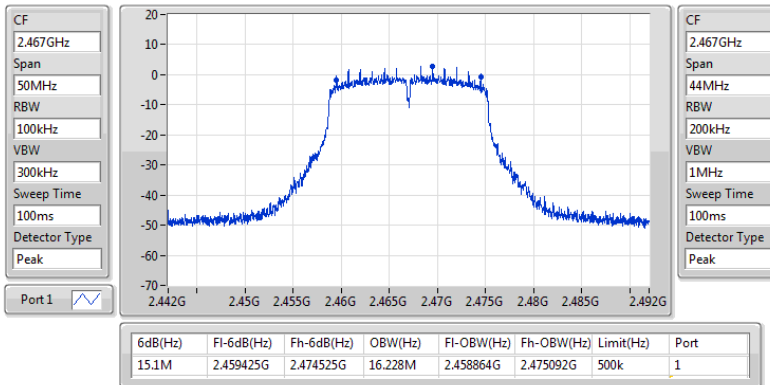

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

EBW



2472MHz

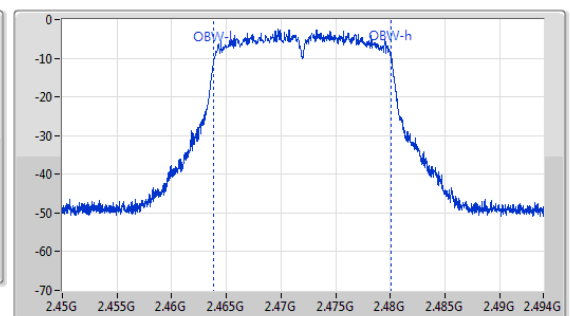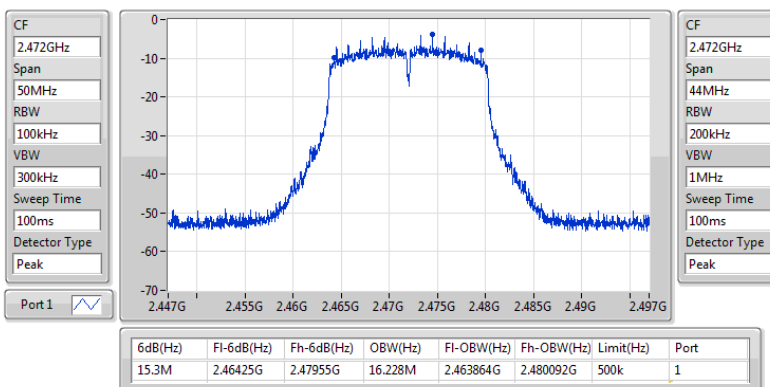

2.4-2.4835GHz_802.11n_HT20_Nss1,(MCS0)_1TX

EBW



2467MHz

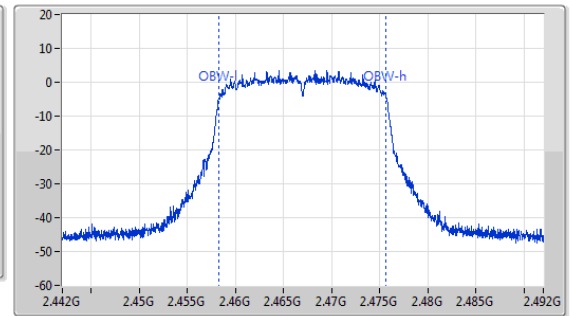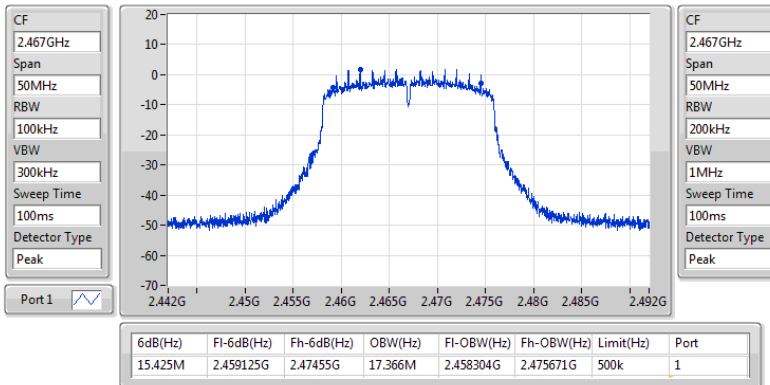

2.4-2.4835GHz_802.11n_HT20_Nss1,(MCS0)_1TX

EBW

2472MHz

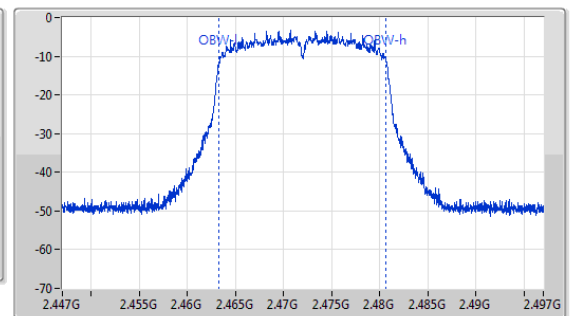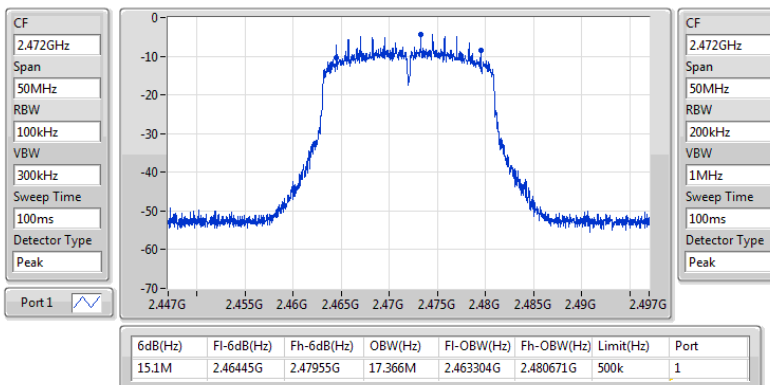



Conducted Output Power(Average)

Appendix B

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_1TX	18.15	0.06531
802.11g_Nss1,(6Mbps)_1TX	13.29	0.02133
802.11n HT20_Nss1,(MCS0)_1TX	12.72	0.01871

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-
2467MHz	Pass	2.69	18.15	18.15	30.00	20.84	36.00
2472MHz	Pass	2.69	15.18	15.18	30.00	17.87	36.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-
2467MHz	Pass	2.69	13.29	13.29	30.00	15.98	36.00
2472MHz	Pass	2.69	6.9	6.90	30.00	9.59	36.00
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
2467MHz	Pass	2.69	12.72	12.72	30.00	15.41	36.00
2472MHz	Pass	2.69	6.09	6.09	30.00	8.78	36.00

DG = Directional Gain; Port X = Port X output power

Note : Conducted average output power is for reference

**Summary**

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	-7.63
802.11g_Nss1,(6Mbps)_1TX	-17.95
802.11n HT20_Nss1,(MCS0)_1TX	-19.15

RBW = 3kHz;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2467MHz	Pass	2.69	-7.63	-7.63	8.00
2472MHz	Pass	2.69	-12.22	-12.22	8.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2467MHz	Pass	2.69	-17.95	-17.95	8.00
2472MHz	Pass	2.69	-24.16	-24.16	8.00
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2467MHz	Pass	2.69	-19.15	-19.15	8.00
2472MHz	Pass	2.69	-25.91	-25.91	8.00


DG = Directional Gain; RBW = 3kHz;

PD = Power density; Port X = Port X Power Density;

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

PSD


2467MHz

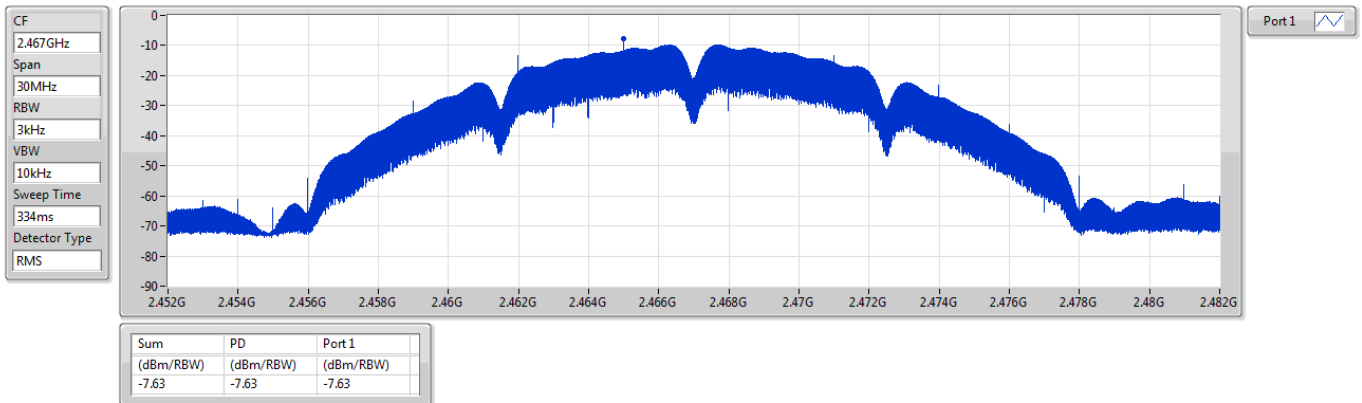

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

PSD


2472MHz

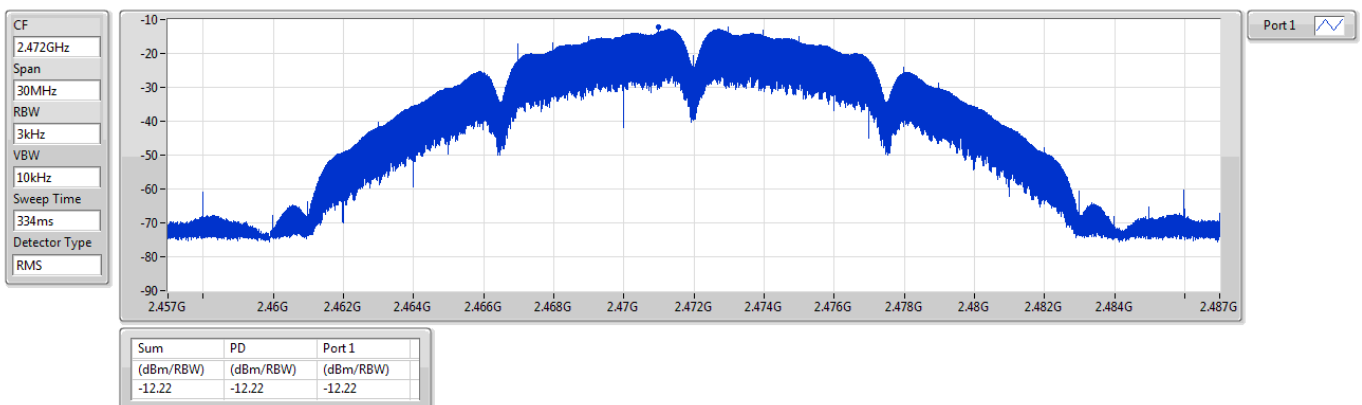

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

PSD


2467MHz

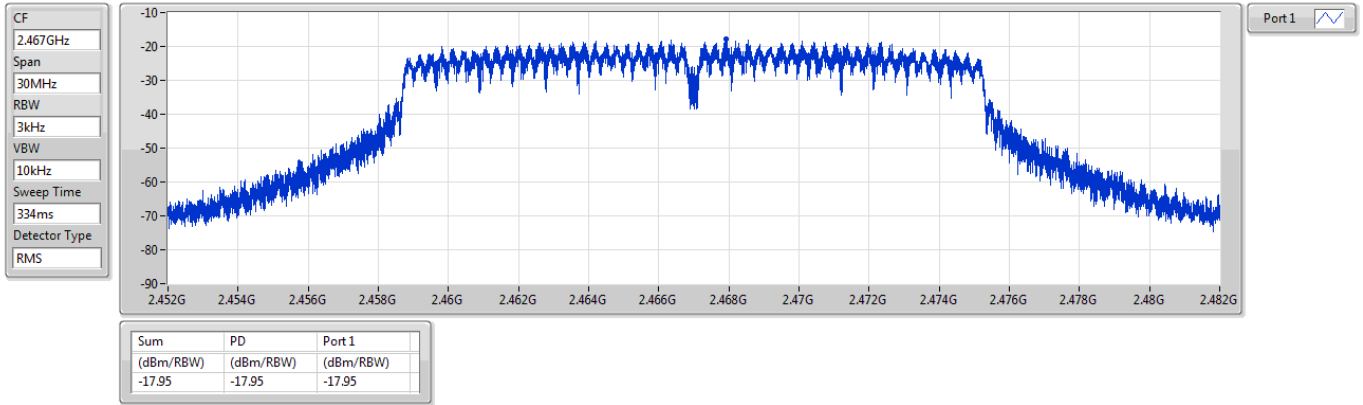

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

PSD


2472MHz

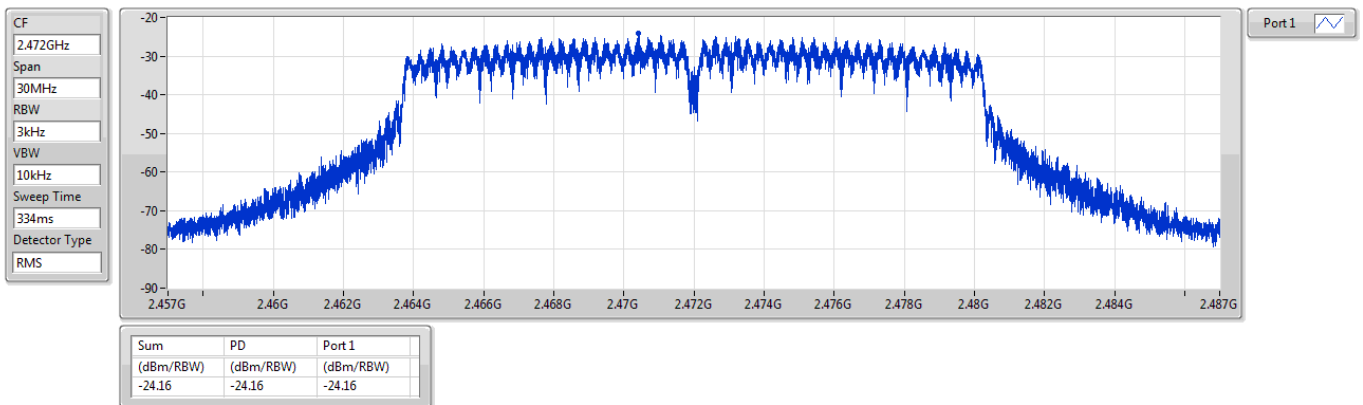

2.4-2.4835GHz_802.11n HT20_Nss1,(MCS0)_1TX

PSD


2467MHz

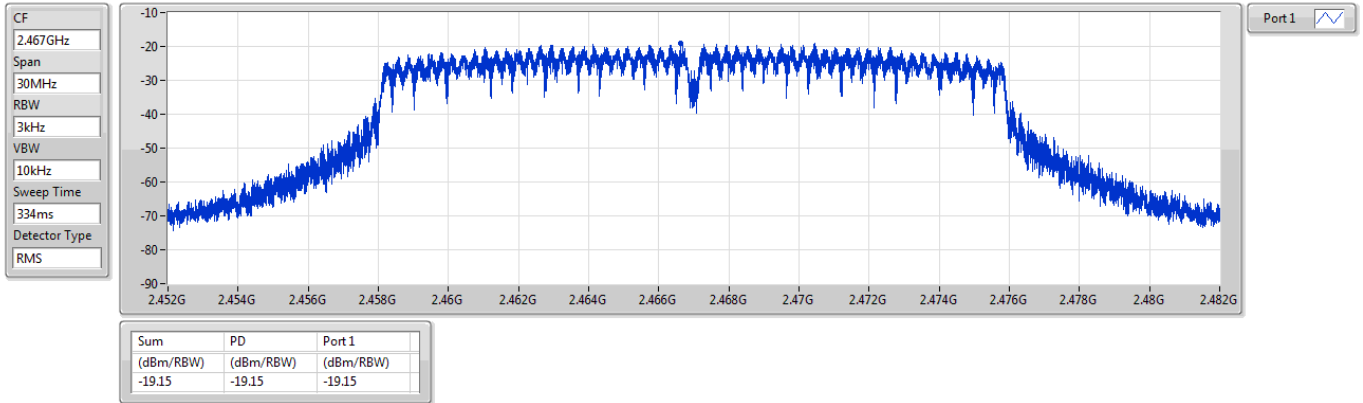

2.4-2.4835GHz_802.11n HT20_Nss1,(MCS0)_1TX

PSD

2472MHz

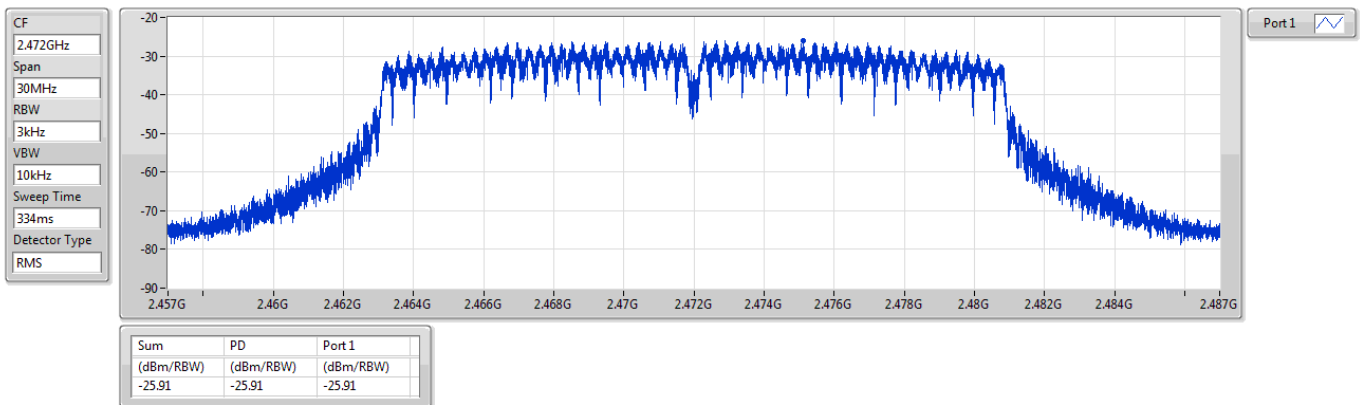



Unwanted Emissions (Below 1GHz)

Modulation	11b	Test Freq. (MHz)	2467
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	11b	Test Freq. (MHz)	2467
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):62			
Level (dBUV/m) </			

Unwanted Emission (Above 1GHz) for 11b

Modulation	11b	Test Freq. (MHz)	2467
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) <			



Modulation	11b	Test Freq. (MHz)	2467
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			



Modulation	11b	Test Freq. (MHz)	2472
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Modulation	11b	Test Freq. (MHz)	2472						
Polarization	Vertical								
Test By :Akun Chung Temperature(°C):24 Humidity(%):64									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2376.00	42.29	54.00	-11.71	45.57	-3.28	Average	205	164
2	2376.00	51.86	74.00	-22.14	55.14	-3.28	Peak	205	164
3	2483.50	41.68	54.00	-12.32	45.34	-3.66	Average	205	164
4	2483.50	54.51	74.00	-19.49	58.17	-3.66	Peak	205	164
5	4944.00	32.05	54.00	-21.95	31.91	0.14	Average	100	274
6	4944.00	44.29	74.00	-29.71	44.15	0.14	Peak	100	274
7	7416.00	36.74	54.00	-17.26	31.09	5.65	Average	110	315
8	7416.00	50.81	74.00	-23.19	45.16	5.65	Peak	110	315

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Unwanted Emissions (Above 1GHz) for 11g

Modulation	11g	Test Freq. (MHz)	2467
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) </			



Modulation	11g	Test Freq. (MHz)	2467																																																																																										
Polarization	Vertical																																																																																												
Test By :Akun Chung Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>2371.00</td><td>39.47</td><td>54.00</td><td>-14.53</td><td>42.72</td><td>-3.25</td><td>Average</td><td>200</td><td>158</td></tr><tr><td>2</td><td>2371.00</td><td>51.94</td><td>74.00</td><td>-22.06</td><td>55.19</td><td>-3.25</td><td>Peak</td><td>200</td><td>158</td></tr><tr><td>3</td><td>2483.50</td><td>42.44</td><td>54.00</td><td>-11.56</td><td>46.10</td><td>-3.66</td><td>Average</td><td>200</td><td>158</td></tr><tr><td>4</td><td>2483.50</td><td>57.20</td><td>74.00</td><td>-16.80</td><td>60.86</td><td>-3.66</td><td>Peak</td><td>200</td><td>158</td></tr><tr><td>5</td><td>4934.00</td><td>31.43</td><td>54.00</td><td>-22.57</td><td>31.32</td><td>0.11</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>6</td><td>4934.00</td><td>45.04</td><td>74.00</td><td>-28.96</td><td>44.93</td><td>0.11</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>7</td><td>7401.00</td><td>37.44</td><td>54.00</td><td>-16.56</td><td>31.82</td><td>5.62</td><td>Average</td><td>110</td><td>314</td></tr><tr><td>8</td><td>7401.00</td><td>50.45</td><td>74.00</td><td>-23.55</td><td>44.83</td><td>5.62</td><td>Peak</td><td>110</td><td>314</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	2371.00	39.47	54.00	-14.53	42.72	-3.25	Average	200	158	2	2371.00	51.94	74.00	-22.06	55.19	-3.25	Peak	200	158	3	2483.50	42.44	54.00	-11.56	46.10	-3.66	Average	200	158	4	2483.50	57.20	74.00	-16.80	60.86	-3.66	Peak	200	158	5	4934.00	31.43	54.00	-22.57	31.32	0.11	Average	100	251	6	4934.00	45.04	74.00	-28.96	44.93	0.11	Peak	100	251	7	7401.00	37.44	54.00	-16.56	31.82	5.62	Average	110	314	8	7401.00	50.45	74.00	-23.55	44.83	5.62	Peak	110	314
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	2371.00	39.47	54.00	-14.53	42.72	-3.25	Average	200	158																																																																																				
2	2371.00	51.94	74.00	-22.06	55.19	-3.25	Peak	200	158																																																																																				
3	2483.50	42.44	54.00	-11.56	46.10	-3.66	Average	200	158																																																																																				
4	2483.50	57.20	74.00	-16.80	60.86	-3.66	Peak	200	158																																																																																				
5	4934.00	31.43	54.00	-22.57	31.32	0.11	Average	100	251																																																																																				
6	4934.00	45.04	74.00	-28.96	44.93	0.11	Peak	100	251																																																																																				
7	7401.00	37.44	54.00	-16.56	31.82	5.62	Average	110	314																																																																																				
8	7401.00	50.45	74.00	-23.55	44.83	5.62	Peak	110	314																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	11g	Test Freq. (MHz)	2472
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) </			



Modulation	11g	Test Freq. (MHz)	2472
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)			

Unwanted Emissions (Above 1GHz) for HT20

Modulation	HT20	Test Freq. (MHz)	2467
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			

Modulation	HT20	Test Freq. (MHz)	2467
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			



Modulation	HT20	Test Freq. (MHz)	2472
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			




Modulation	HT20	Test Freq. (MHz)	2472
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) </			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSEndB


2467MHz

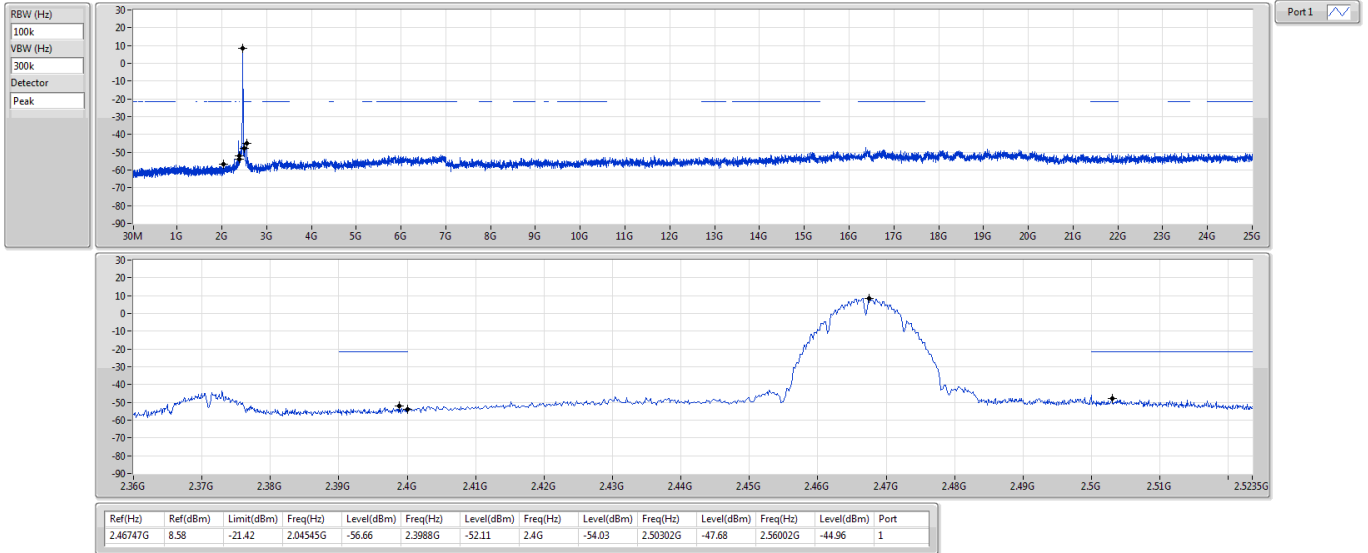

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSEndB

2472MHz

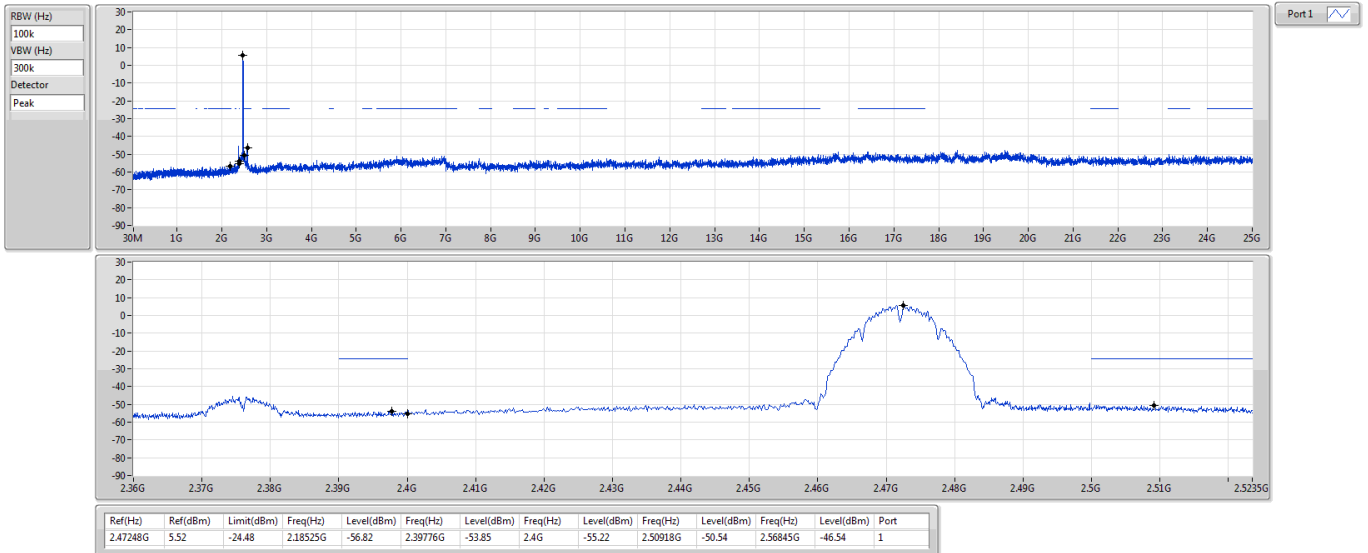




2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

CSEndB


2467MHz

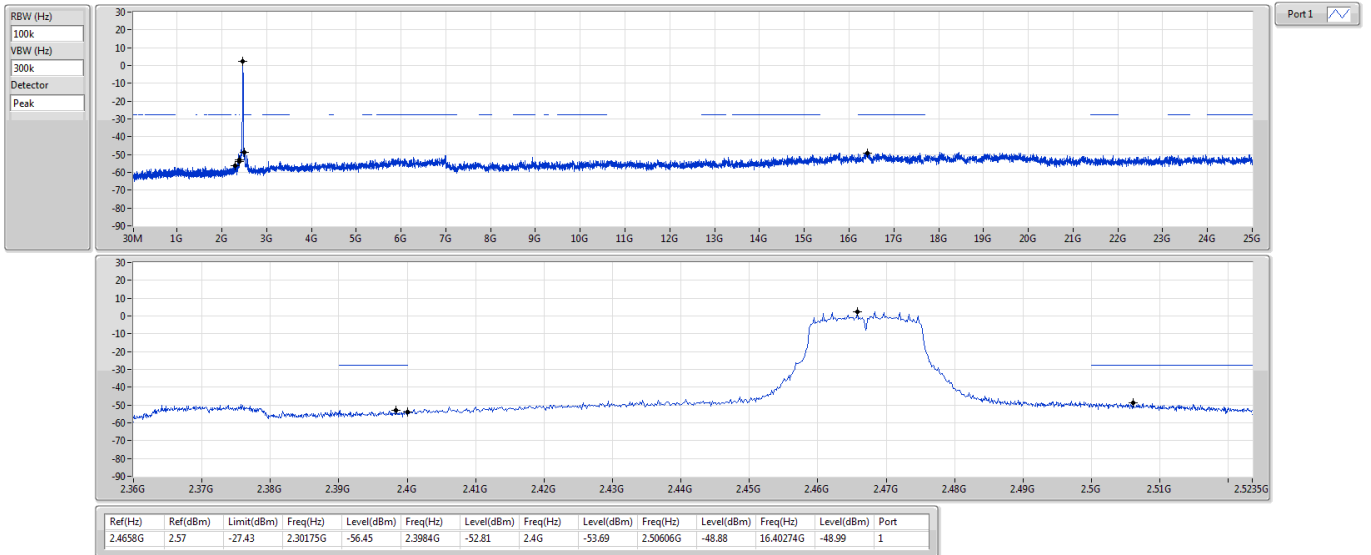

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

CSEndB

2472MHz

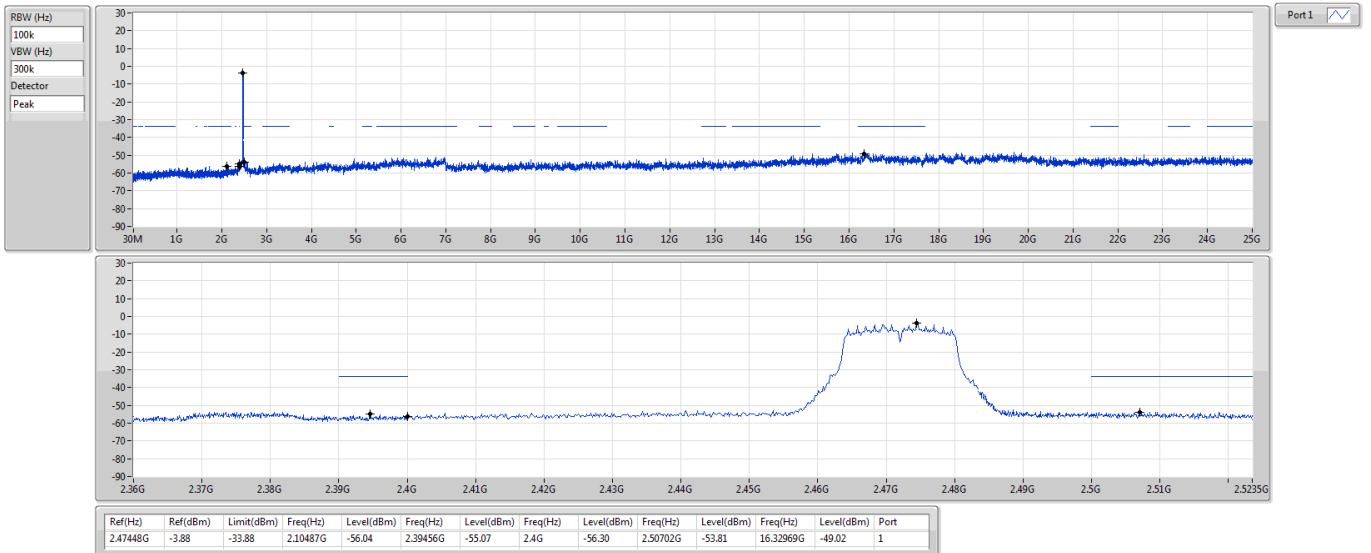




2.4-2.4835GHz_802.11n_HT20_Nss1,(MCS0)_1TX

CSEndB


2467MHz

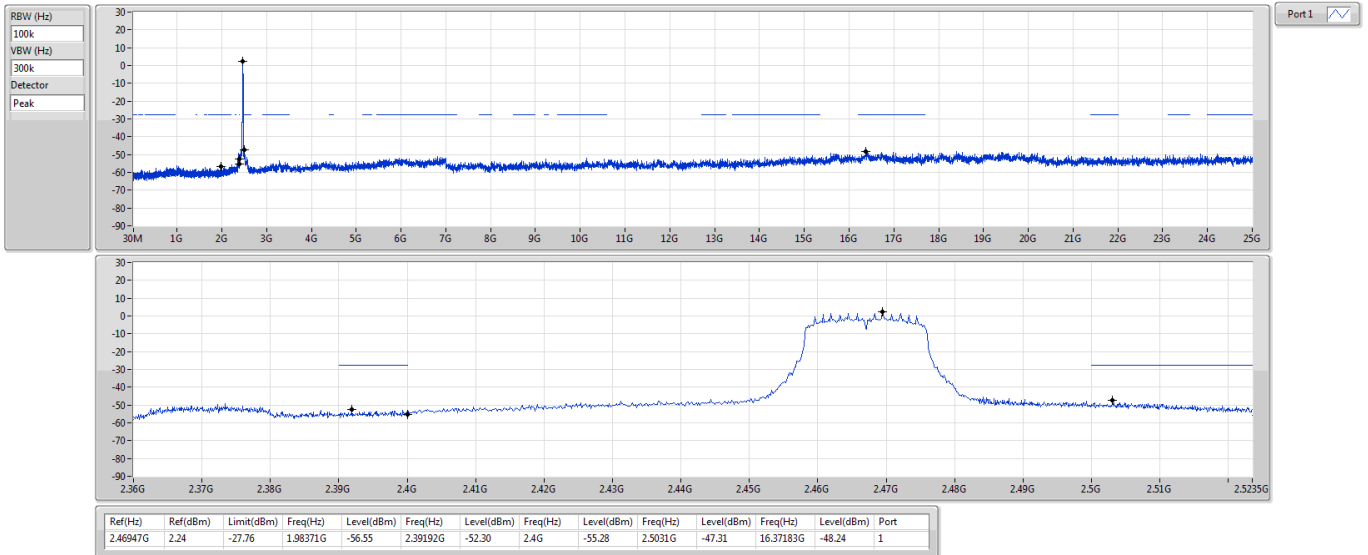

2.4-2.4835GHz_802.11n_HT20_Nss1,(MCS0)_1TX

CSEndB

2472MHz

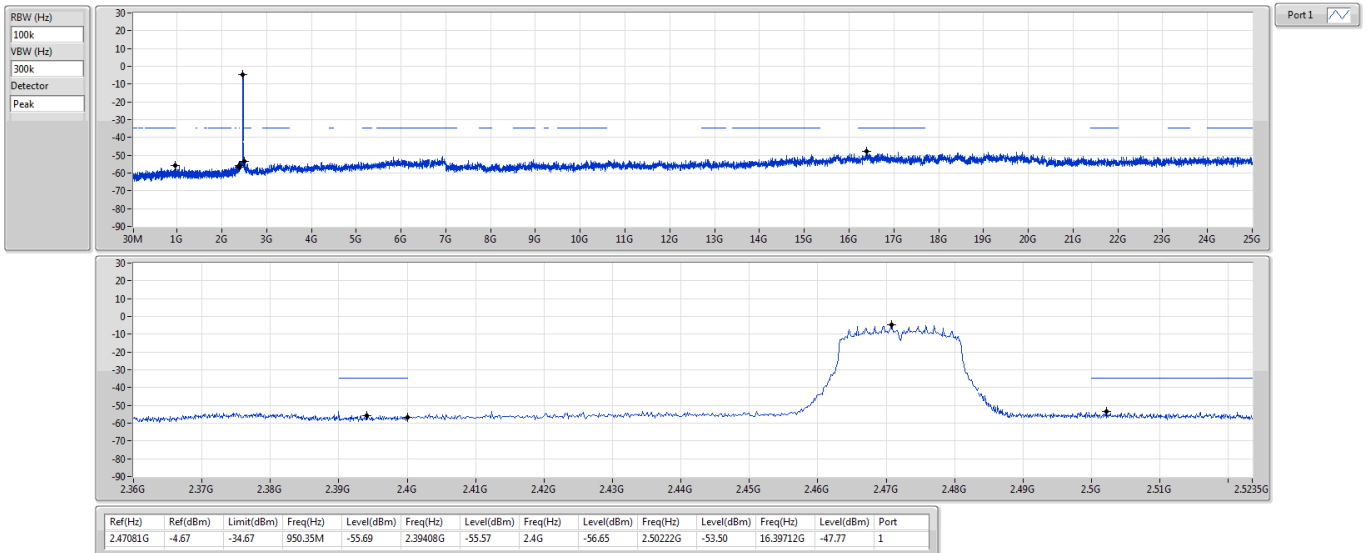




Modulation Mode	11b	Test Freq. (MHz)	2467
Power Phase	Line		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

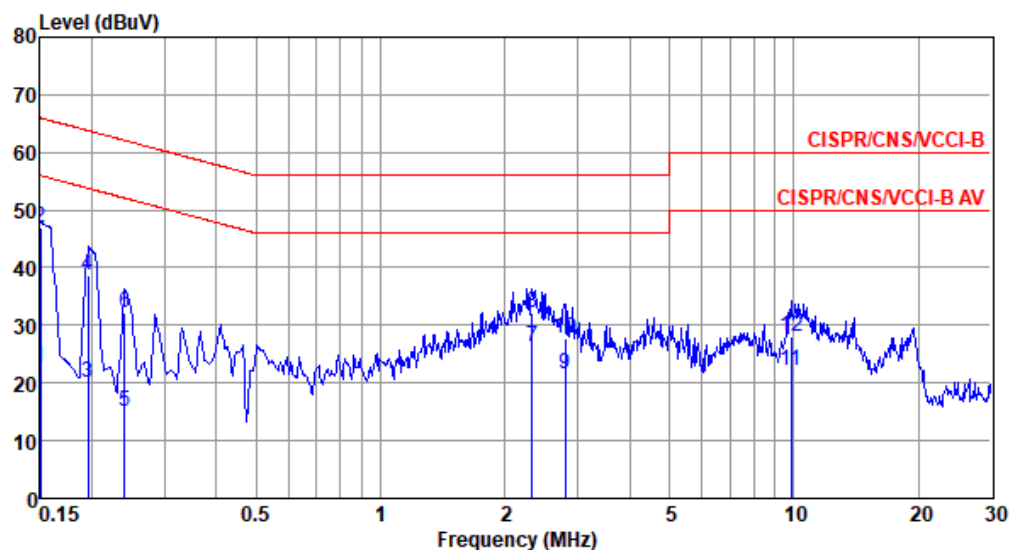

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.150	22.77	56.00	-33.23	13.08	9.63	0.06	0.00	Average
2*	0.150	47.02	66.00	-18.98	37.33	9.63	0.06	0.00	QP
3	0.195	19.95	53.80	-33.85	10.27	9.62	0.06	0.00	Average
4	0.195	38.60	63.80	-25.20	28.92	9.62	0.06	0.00	QP
5	0.240	14.98	52.08	-37.10	5.30	9.62	0.06	0.00	Average
6	0.240	32.10	62.08	-29.98	22.42	9.62	0.06	0.00	QP
7	2.321	26.42	46.00	-19.58	16.65	9.63	0.14	0.00	Average
8	2.321	32.05	56.00	-23.95	22.28	9.63	0.14	0.00	QP
9	2.794	21.53	46.00	-24.47	11.74	9.64	0.15	0.00	Average
10	2.794	27.85	56.00	-28.15	18.06	9.64	0.15	0.00	QP
11	9.861	22.21	50.00	-27.79	12.16	9.69	0.36	0.00	Average
12	9.861	27.95	60.00	-32.05	17.90	9.69	0.36	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).



Modulation Mode	11b	Test Freq. (MHz)	2467																																																																																																																																		
Power Phase	Neutral																																																																																																																																				
Test by : Joe Liao Temperature: 23°C Humidity: 63%																																																																																																																																					
Level (dBuV) Frequency (MHz) <table><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr><tr><td>1</td><td>0.159</td><td>33.57</td><td>55.52</td><td>-21.95</td><td>23.88</td><td>9.63</td><td>0.06</td><td>0.00</td><td>Average</td></tr><tr><td>2*</td><td>0.159</td><td>46.29</td><td>65.52</td><td>-19.23</td><td>36.60</td><td>9.63</td><td>0.06</td><td>0.00</td><td>QP</td></tr><tr><td>3</td><td>0.303</td><td>19.44</td><td>50.15</td><td>-30.71</td><td>9.76</td><td>9.62</td><td>0.06</td><td>0.00</td><td>Average</td></tr><tr><td>4</td><td>0.303</td><td>33.59</td><td>60.15</td><td>-26.56</td><td>23.91</td><td>9.62</td><td>0.06</td><td>0.00</td><td>QP</td></tr><tr><td>5</td><td>0.437</td><td>18.20</td><td>47.11</td><td>-28.91</td><td>8.52</td><td>9.62</td><td>0.06</td><td>0.00</td><td>Average</td></tr><tr><td>6</td><td>0.437</td><td>31.44</td><td>57.11</td><td>-25.67</td><td>21.76</td><td>9.62</td><td>0.06</td><td>0.00</td><td>QP</td></tr><tr><td>7</td><td>0.491</td><td>21.08</td><td>46.14</td><td>-25.06</td><td>11.39</td><td>9.62</td><td>0.07</td><td>0.00</td><td>Average</td></tr><tr><td>8</td><td>0.491</td><td>29.35</td><td>56.14</td><td>-26.79</td><td>19.66</td><td>9.62</td><td>0.07</td><td>0.00</td><td>QP</td></tr><tr><td>9</td><td>0.573</td><td>18.18</td><td>46.00</td><td>-27.82</td><td>8.48</td><td>9.62</td><td>0.08</td><td>0.00</td><td>Average</td></tr><tr><td>10</td><td>0.573</td><td>29.98</td><td>56.00</td><td>-26.02</td><td>20.28</td><td>9.62</td><td>0.08</td><td>0.00</td><td>QP</td></tr><tr><td>11</td><td>2.144</td><td>25.35</td><td>46.00</td><td>-20.65</td><td>15.57</td><td>9.64</td><td>0.14</td><td>0.00</td><td>Average</td></tr><tr><td>12</td><td>2.144</td><td>31.29</td><td>56.00</td><td>-24.71</td><td>21.51</td><td>9.64</td><td>0.14</td><td>0.00</td><td>QP</td></tr></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark	1	0.159	33.57	55.52	-21.95	23.88	9.63	0.06	0.00	Average	2*	0.159	46.29	65.52	-19.23	36.60	9.63	0.06	0.00	QP	3	0.303	19.44	50.15	-30.71	9.76	9.62	0.06	0.00	Average	4	0.303	33.59	60.15	-26.56	23.91	9.62	0.06	0.00	QP	5	0.437	18.20	47.11	-28.91	8.52	9.62	0.06	0.00	Average	6	0.437	31.44	57.11	-25.67	21.76	9.62	0.06	0.00	QP	7	0.491	21.08	46.14	-25.06	11.39	9.62	0.07	0.00	Average	8	0.491	29.35	56.14	-26.79	19.66	9.62	0.07	0.00	QP	9	0.573	18.18	46.00	-27.82	8.48	9.62	0.08	0.00	Average	10	0.573	29.98	56.00	-26.02	20.28	9.62	0.08	0.00	QP	11	2.144	25.35	46.00	-20.65	15.57	9.64	0.14	0.00	Average	12	2.144	31.29	56.00	-24.71	21.51	9.64	0.14	0.00	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1	0.159	33.57	55.52	-21.95	23.88	9.63	0.06	0.00	Average																																																																																																																												
2*	0.159	46.29	65.52	-19.23	36.60	9.63	0.06	0.00	QP																																																																																																																												
3	0.303	19.44	50.15	-30.71	9.76	9.62	0.06	0.00	Average																																																																																																																												
4	0.303	33.59	60.15	-26.56	23.91	9.62	0.06	0.00	QP																																																																																																																												
5	0.437	18.20	47.11	-28.91	8.52	9.62	0.06	0.00	Average																																																																																																																												
6	0.437	31.44	57.11	-25.67	21.76	9.62	0.06	0.00	QP																																																																																																																												
7	0.491	21.08	46.14	-25.06	11.39	9.62	0.07	0.00	Average																																																																																																																												
8	0.491	29.35	56.14	-26.79	19.66	9.62	0.07	0.00	QP																																																																																																																												
9	0.573	18.18	46.00	-27.82	8.48	9.62	0.08	0.00	Average																																																																																																																												
10	0.573	29.98	56.00	-26.02	20.28	9.62	0.08	0.00	QP																																																																																																																												
11	2.144	25.35	46.00	-20.65	15.57	9.64	0.14	0.00	Average																																																																																																																												
12	2.144	31.29	56.00	-24.71	21.51	9.64	0.14	0.00	QP																																																																																																																												
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																					