




Wi-Fi 802.11 ac(HT20) mode

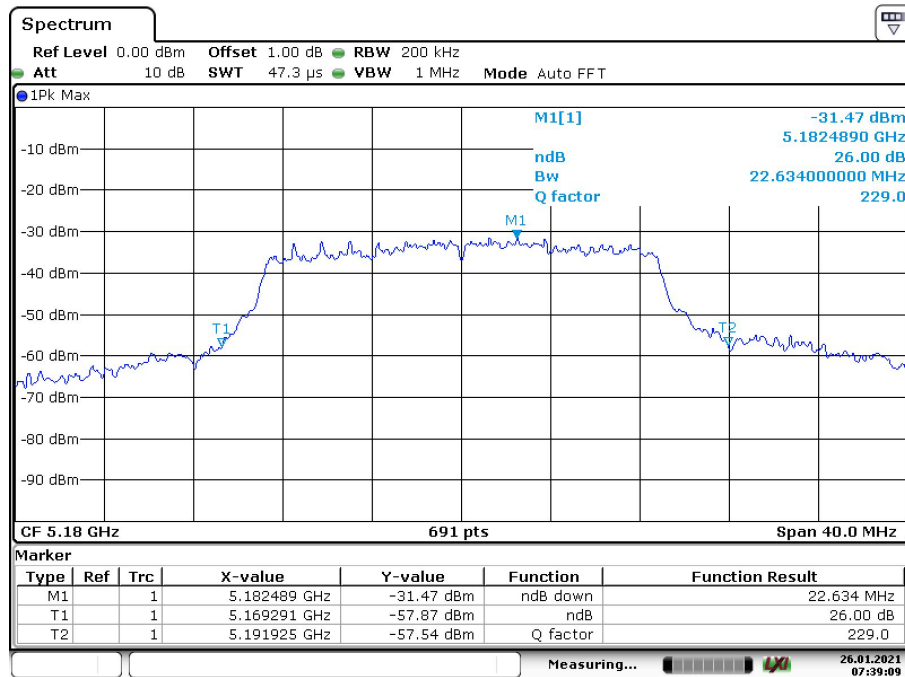

Date: 26.JAN.2021 07:39:09

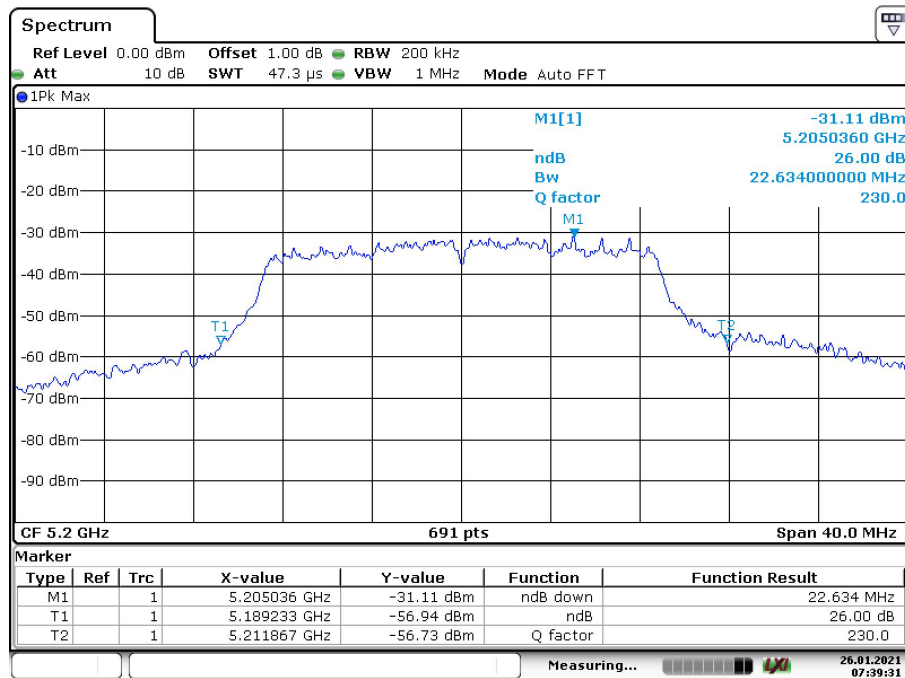


Date: 26.JAN.2021 07:39:31

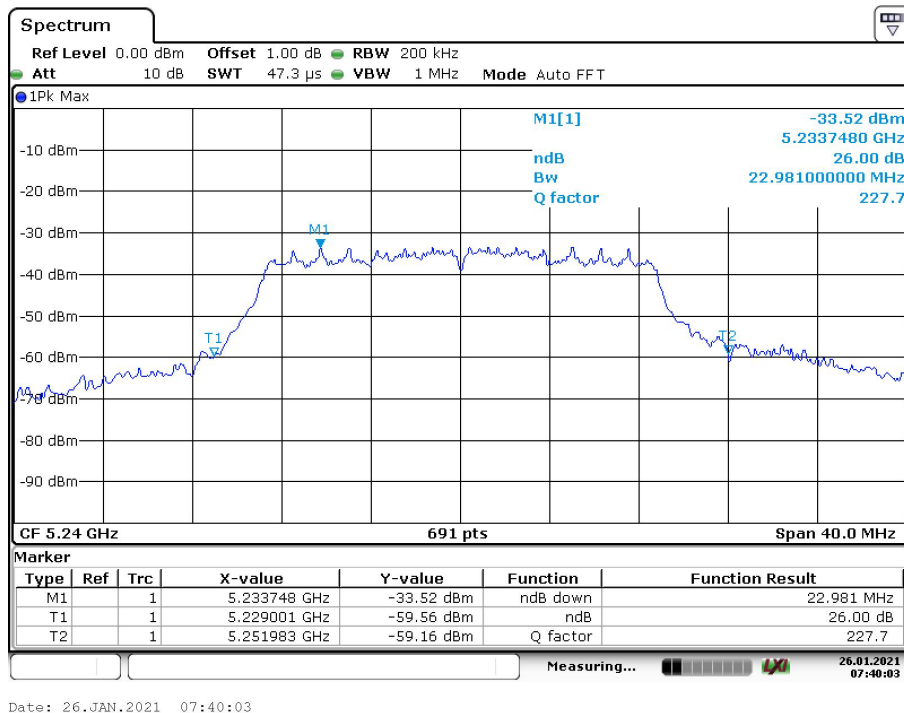


Date: 26.JAN.2021 07:40:03


Wi-Fi 802.11 ac(HT40) mode

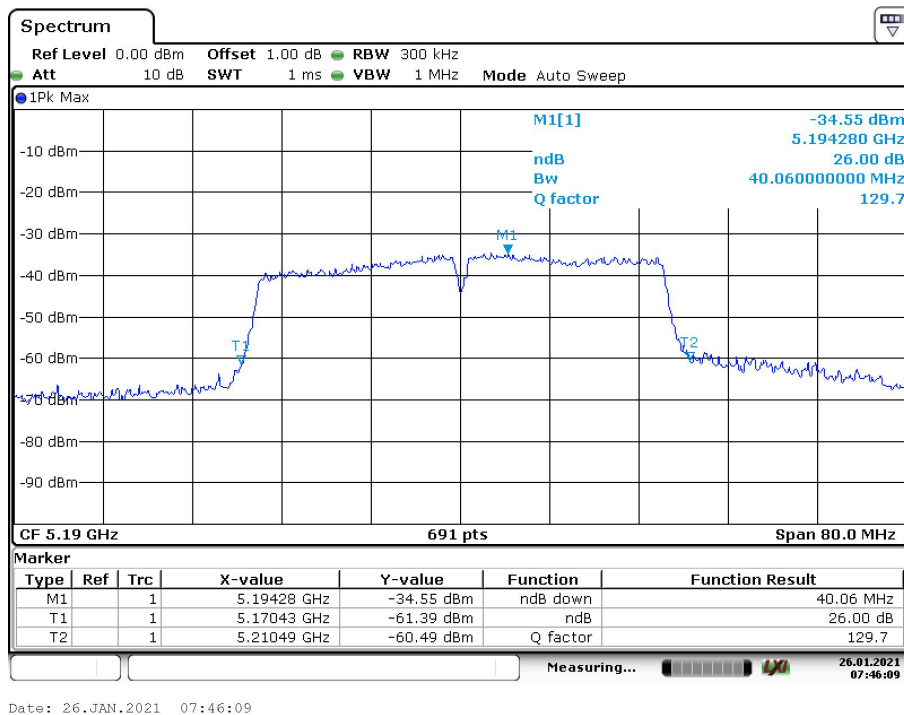

Date: 26.JAN.2021 07:46:09

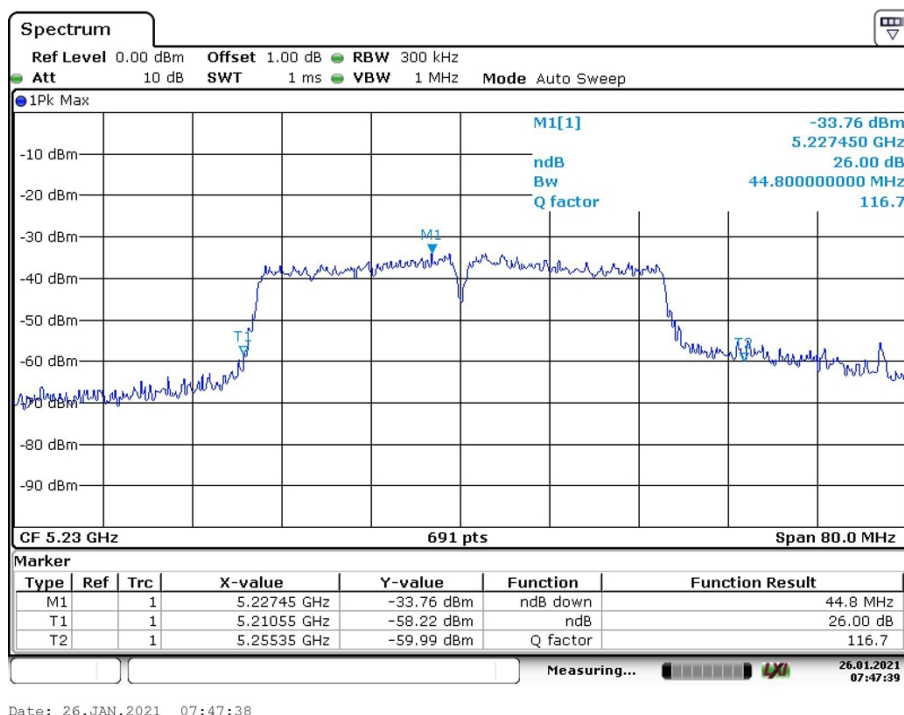

Wi-Fi 802.11 ac(HT80) mode

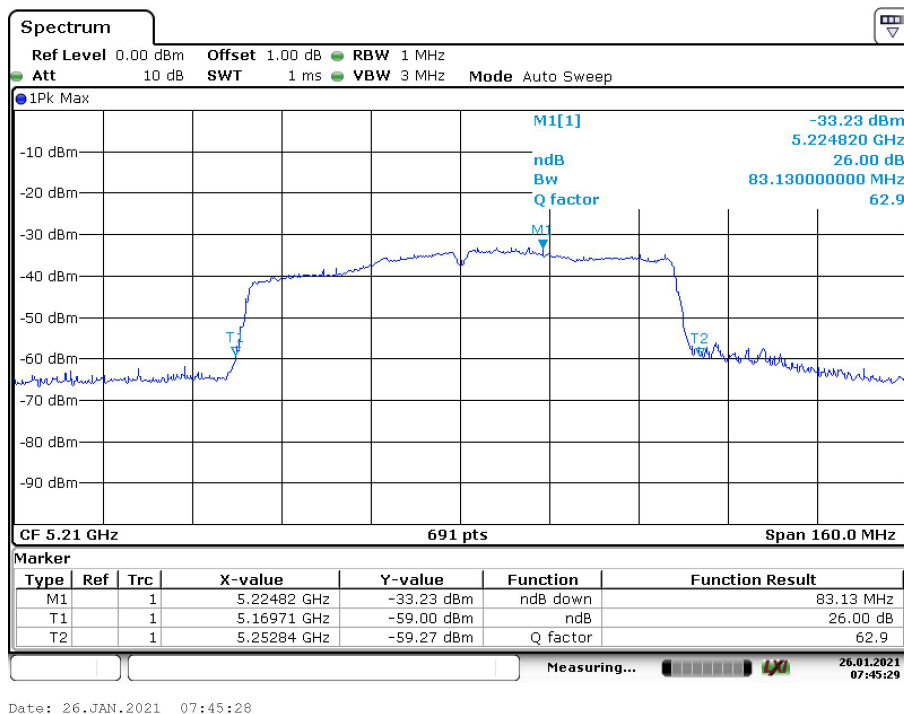

Appendix B.4: Test Results of 99% Bandwidth

Wi-Fi 802.11 a mode

FCC 15.407 2017

Occupied Channel Bandwidth 99% (5180 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 D and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5180.000000	17.500000	---	---	5171.050000	5188.550000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5180.000000	PASS

99 % Bandwidth

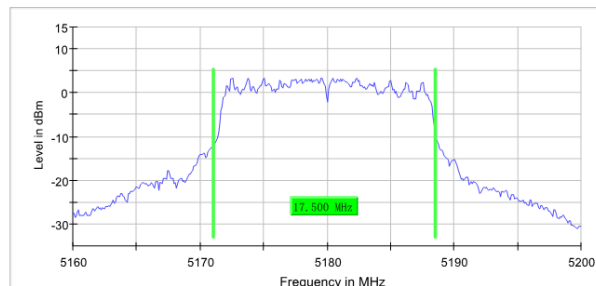

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.16000 GHz	5.16000 GHz
Stop Frequency	5.20000 GHz	5.20000 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	47.266 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	32 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.04 dB	0.30 dB

FCC 15.407 2017

Occupied Channel Bandwidth 99% (5200 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 D and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5200.000000	17.200000	---	---	5191.250000	5208.450000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5200.000000	PASS

99 % Bandwidth

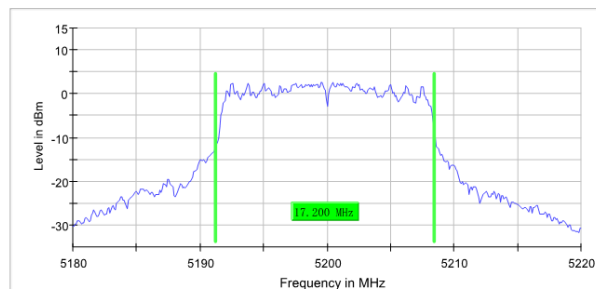

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.18000 GHz	5.18000 GHz
Stop Frequency	5.22000 GHz	5.22000 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	47.266 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	24 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.21 dB	0.30 dB

FCC 15.407 2017

Occupied Channel Bandwidth 99% (5240 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 D and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5240.000000	17.100000	---	---	5231.550000	5248.650000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5240.000000	PASS

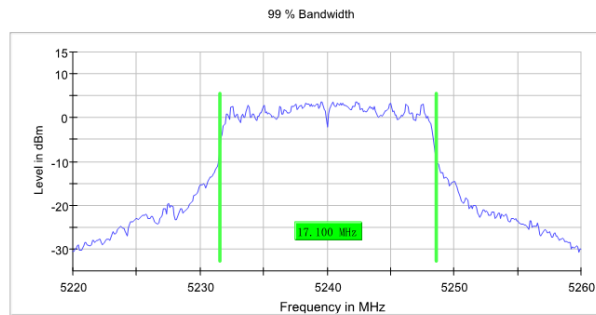

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.22000 GHz	5.22000 GHz
Stop Frequency	5.26000 GHz	5.26000 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	47.266 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	28 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.06 dB	0.30 dB

Wi-Fi 802.11 n(HT20) mode

FCC 15.407 2017

Occupied Channel Bandwidth 99% (5180 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 D and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5180.000000	18.200000	---	---	5170.850000	5189.050000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5180.000000	PASS

99 % Bandwidth

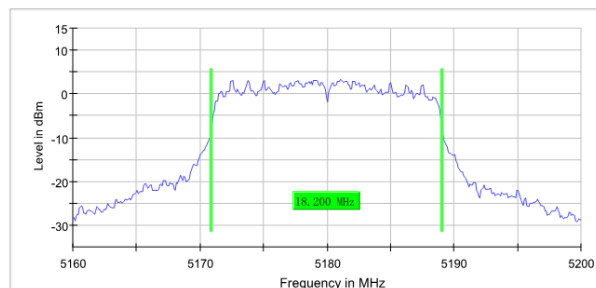

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.16000 GHz	5.16000 GHz
Stop Frequency	5.20000 GHz	5.20000 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	47.266 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	48 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.30 dB

FCC 15.407 2017

Occupied Channel Bandwidth 99% (5200 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 D and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5200.000000	18.200000	---	---	5190.850000	5209.050000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5200.000000	PASS

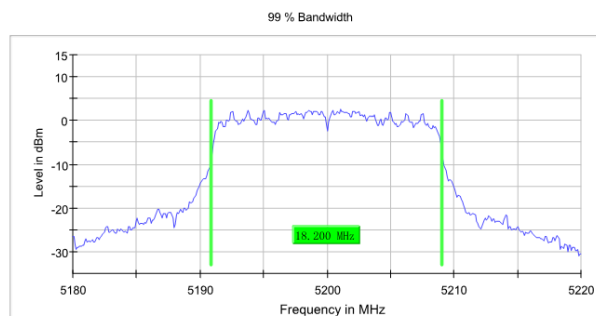

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.18000 GHz	5.18000 GHz
Stop Frequency	5.22000 GHz	5.22000 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	47.266 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	66 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.09 dB	0.30 dB

FCC 15.407 2017

Occupied Channel Bandwidth 99% (5240 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 D and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5240.000000	18.200000	---	---	5230.950000	5249.150000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5240.000000	PASS

99 % Bandwidth

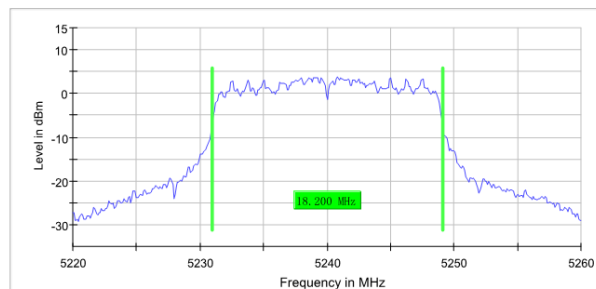

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.22000 GHz	5.22000 GHz
Stop Frequency	5.26000 GHz	5.26000 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	47.266 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	51 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.30 dB

Wi-Fi 802.11 n(HT40) mode

FCC 15.407 2017

Occupied Channel Bandwidth 99% (5190 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 D and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5190.000000	36.750000	---	---	5171.625000	5208.375000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5190.000000	PASS

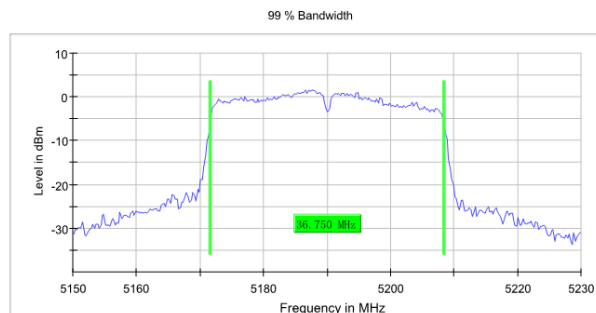

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.15000 GHz	5.15000 GHz
Stop Frequency	5.23000 GHz	5.23000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	52 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.28 dB	0.30 dB

FCC 15.407 2017

Occupied Channel Bandwidth 99% (5230 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 D and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5230.000000	37.500000	---	---	5211.375000	5248.875000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5230.000000	PASS

99 % Bandwidth

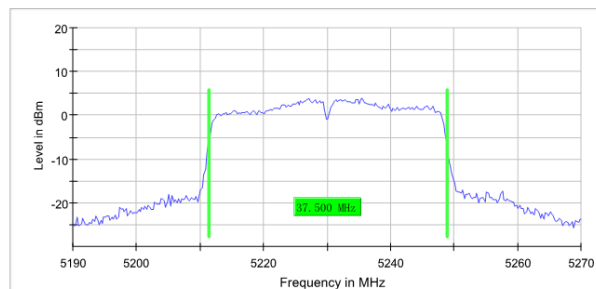

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.19000 GHz	5.19000 GHz
Stop Frequency	5.27000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	76 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.10 dB	0.30 dB

Wi-Fi 802.11 ac(HT20) mode

FCC 15.407 2017

Occupied Channel Bandwidth 99% (5180 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 D and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5180.000000	18.300000	---	---	5170.750000	5189.050000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5180.000000	PASS

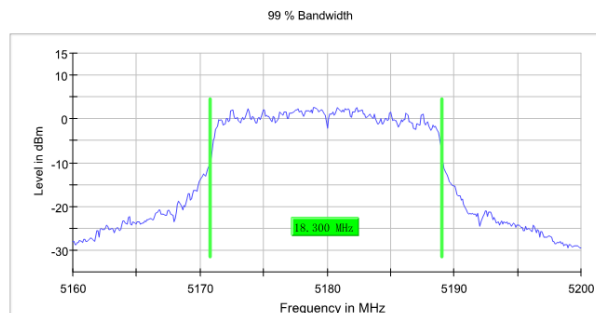

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.16000 GHz	5.16000 GHz
Stop Frequency	5.20000 GHz	5.20000 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	47.266 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	75 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.01 dB	0.30 dB

FCC 15.407 2017

Occupied Channel Bandwidth 99% (5200 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 D and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5200.000000	18.200000	---	---	5190.850000	5209.050000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5200.000000	PASS

99 % Bandwidth

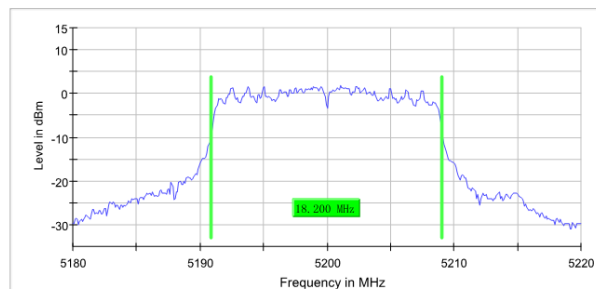

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.18000 GHz	5.18000 GHz
Stop Frequency	5.22000 GHz	5.22000 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	47.266 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	31 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.13 dB	0.30 dB

FCC 15.407 2017

Occupied Channel Bandwidth 99% (5240 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 D and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5240.000000	18.300000	---	---	5230.950000	5249.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5240.000000	PASS

99 % Bandwidth

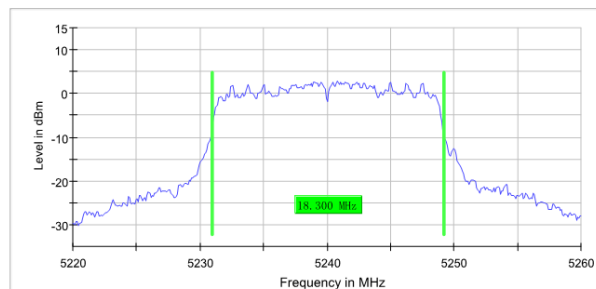

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.22000 GHz	5.22000 GHz
Stop Frequency	5.26000 GHz	5.26000 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	47.266 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	64 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.04 dB	0.30 dB

Wi-Fi 802.11 ac(HT40) mode

FCC 15.407 2017

Occupied Channel Bandwidth 99% (5190 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 D and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5190.000000	36.750000	---	---	5171.625000	5208.375000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5190.000000	PASS

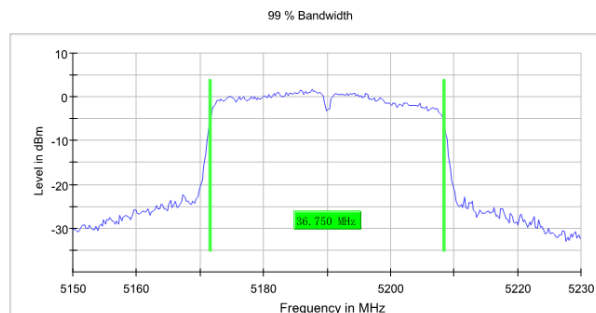

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.15000 GHz	5.15000 GHz
Stop Frequency	5.23000 GHz	5.23000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	99 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.30 dB

FCC 15.407 2017

Occupied Channel Bandwidth 99% (5230 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 D and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5230.000000	37.250000	---	---	5211.625000	5248.875000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5230.000000	PASS

99 % Bandwidth

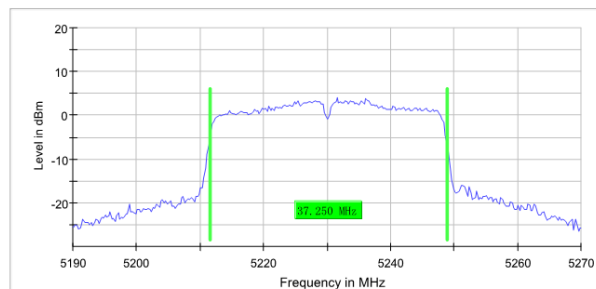

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.19000 GHz	5.19000 GHz
Stop Frequency	5.27000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	51 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.02 dB	0.30 dB

Wi-Fi 802.11 ac(HT80) mode

FCC 15.407 2017

Occupied Channel Bandwidth 99% (5210 MHz; 15.000 dBm; 80 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 D and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5210.000000	76.500000	---	---	5171.750000	5248.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5210.000000	PASS

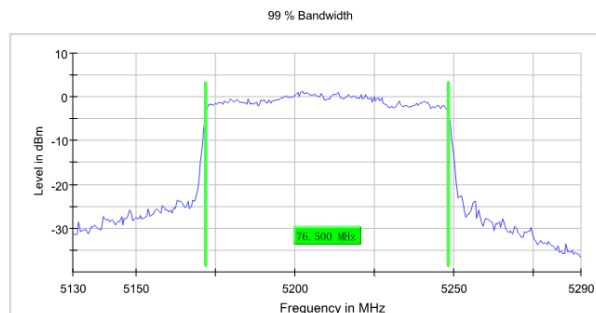

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.13000 GHz	5.13000 GHz
Stop Frequency	5.29000 GHz	5.29000 GHz
Span	160.000 MHz	160.000 MHz
RBW	1.000 MHz	>= 800.000 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	73 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.21 dB	0.30 dB

Note: Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and above 18GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.


Appendix B.5: Test Results of Radiated Spurious Emissions

30MHz - 1GHz (Worst case)

Wi-Fi 802.11 a mode

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11a_Ch36
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

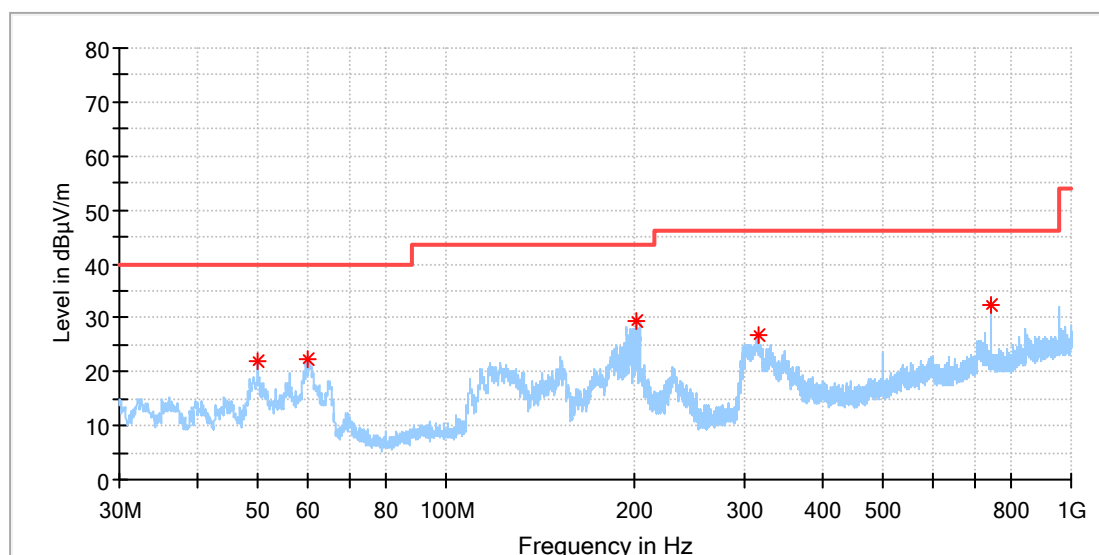

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.982000	22.07	---	40.00	17.93	100.0	H	336.0	-18.6
60.070000	22.39	---	40.00	17.61	100.0	H	287.0	-19.3
201.835500	29.26	---	43.50	14.24	100.0	H	120.0	-19.3
315.471000	26.68	---	46.00	19.32	100.0	H	158.0	-16.2
742.465000	32.47	---	46.00	13.53	100.0	H	147.0	-7.7

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11a_Ch36
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

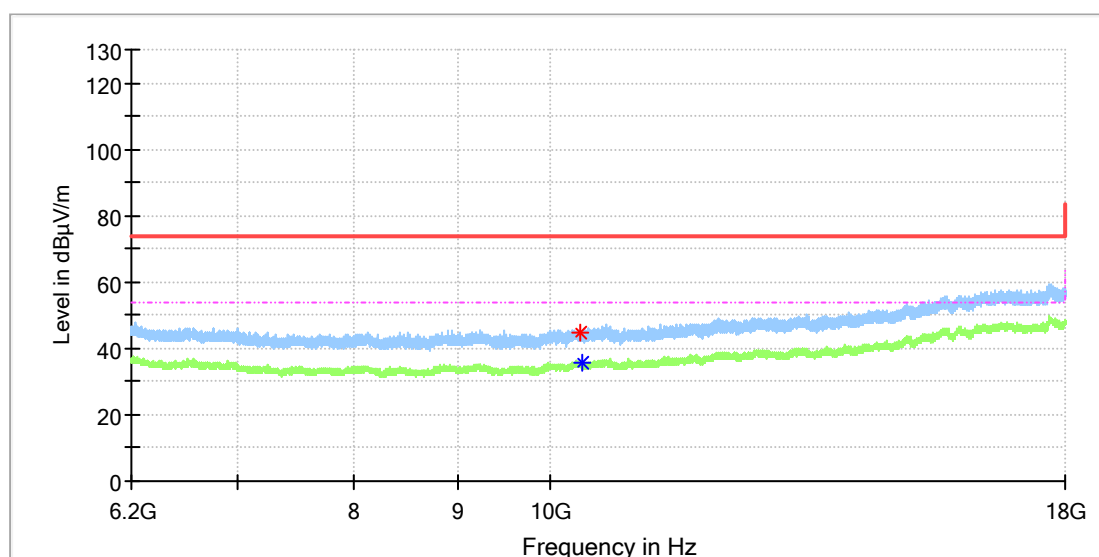

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10360.483333	44.79	---	74.00	29.21	100.0	H	338.0	11.8
10368.841667	---	35.55	54.00	18.45	100.0	H	82.0	11.8

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	

[illegible]

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.00	100.00	100.00	100.00	100.00	100.00		100.00	100.00

[illegible]


Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.00	100.00	100.00	100.00	100.00	100.00		100.00	100.00

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11a_Ch40
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.00	100.00	100.00	100.00	100.00	100.00		100.00	100.00

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11a_Ch48
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

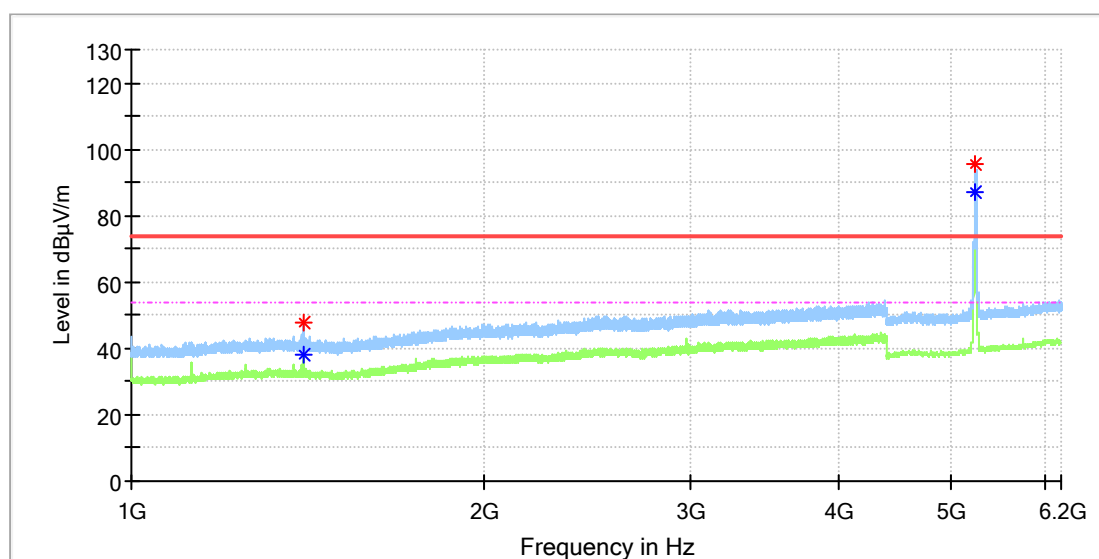

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1403.580000	47.80	---	74.00	26.20	100.0	H	177.0	1.7
1403.580000	---	37.82	54.00	16.18	100.0	H	177.0	1.7
5238.000000	95.55	---	---	---	100.0	H	151.0	12.8
5239.000000	---	86.93	---	---	100.0	H	151.0	12.8


Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.00	100.00	100.00	100.00	100.00	100.00		100.00	100.00

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11a_Ch48
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

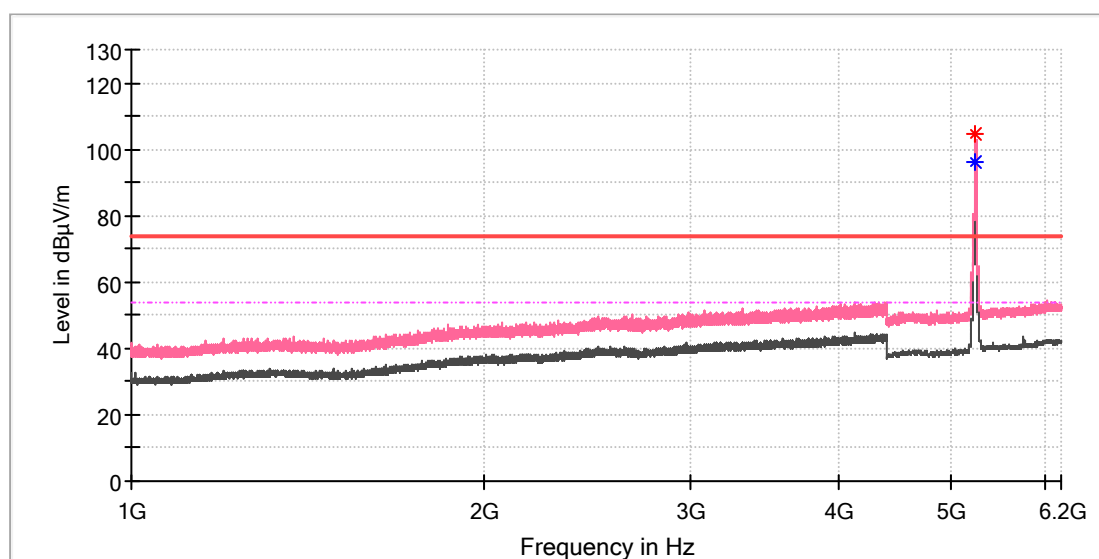

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5239.000000	---	96.35			100.0	V	310.0	12.8
5241.000000	104.90	---			100.0	V	301.0	12.8

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.00	100.00	100.00	100.00	100.00	100.00		100.00	100.00

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.0	100.0	100.0	100.0	100.0	100.0		100.0	100.0

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.00	100.00	100.00	100.00	100.00	100.00		100.00	100.00

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11n20_Ch36
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.00	100.00	100.00	100.00	100.00	100.00		100.00	100.00

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11n20_Ch40
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin


Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.00	100.00	100.00	100.00	100.00	100.00		100.00	100.00

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.00	100.00	100.00	100.00	100.00	100.00		100.00	100.00

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11n20_Ch40
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

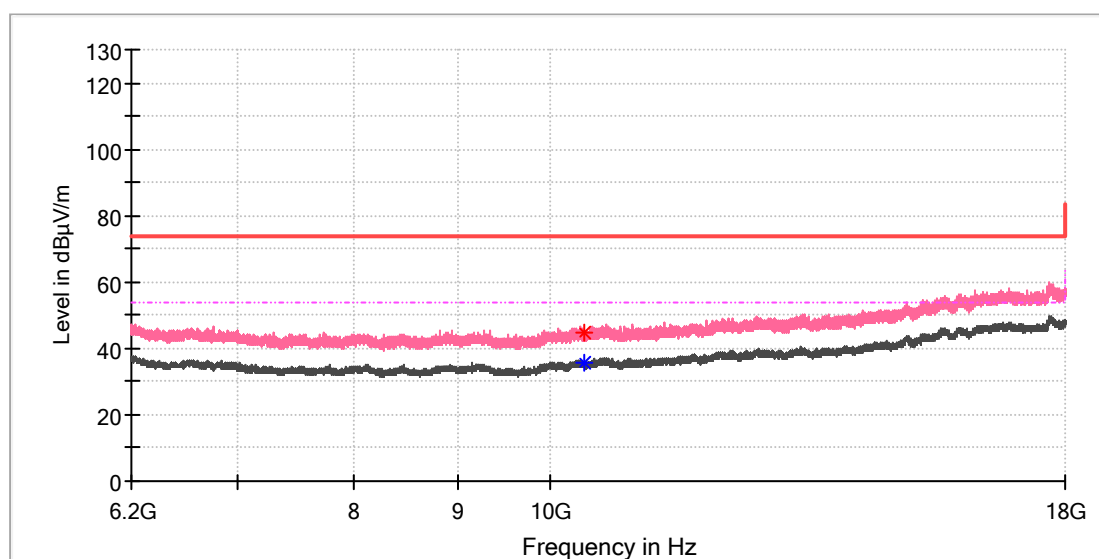

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10399.325000	---	35.64	54.00	18.36	100.0	V	34.0	11.9
10401.783333	44.85	---	74.00	29.15	100.0	V	0.0	11.9

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11n20_Ch48
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin


Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11n20_Ch48
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.00	100.00	100.00	100.00	100.00	100.00		100.00	100.00

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11n20_Ch48
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

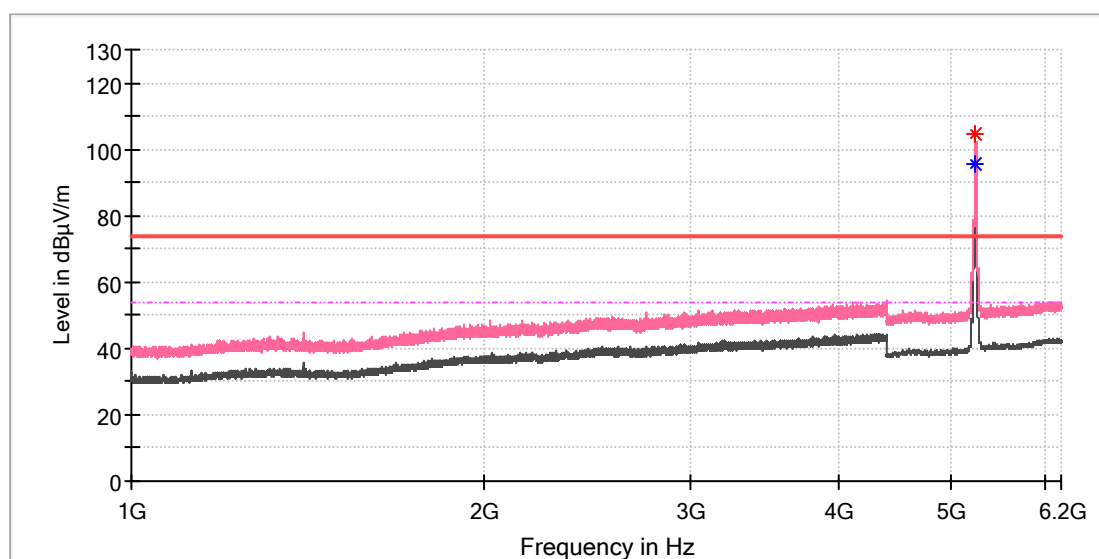

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5239.000000	---	95.56			100.0	V	301.0	12.8
5241.000000	104.45	---			100.0	V	301.0	12.8

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11n20_Ch48
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

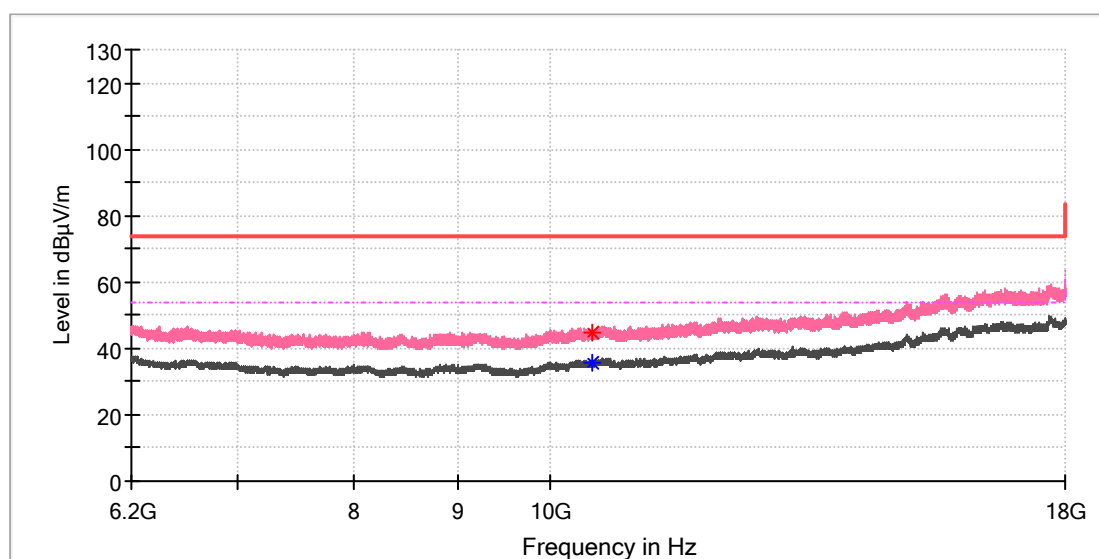

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10479.958333	---	35.56	54.00	18.44	100.0	V	359.0	12.0
10480.941667	44.92	---	74.00	29.08	100.0	V	279.0	12.0


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	

Wi-Fi 802.11 n(HT40) mode

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11n40_Ch38
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

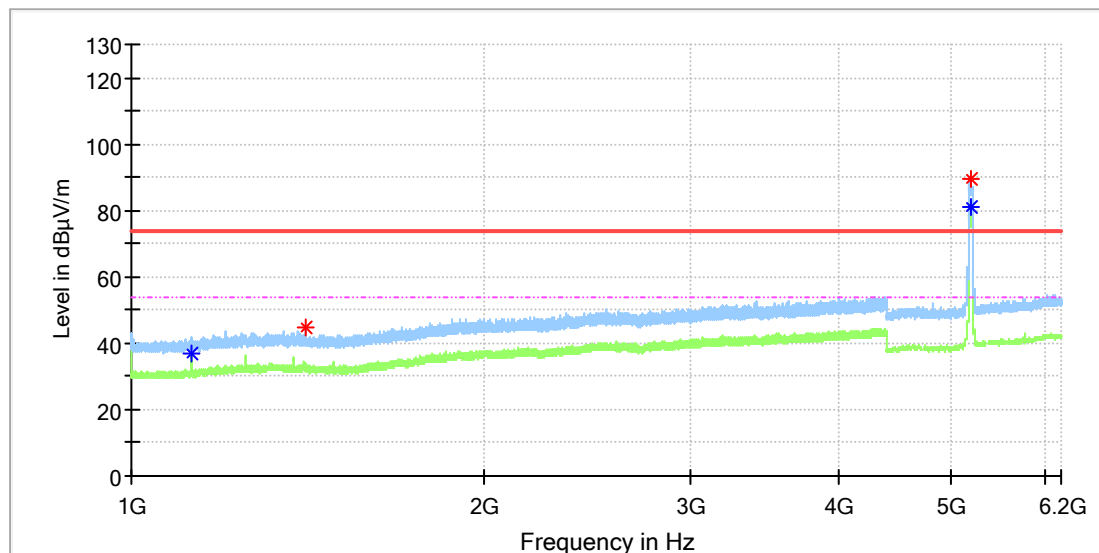

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.780000	---	37.03	54.00	16.97	100.0	H	176.0	0.3
1406.640000	44.79	---	74.00	29.21	100.0	H	176.0	1.7
5191.500000	---	80.76			100.0	H	146.0	12.6
5192.000000	89.35	---			100.0	H	146.0	12.6

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11n40_Ch38
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

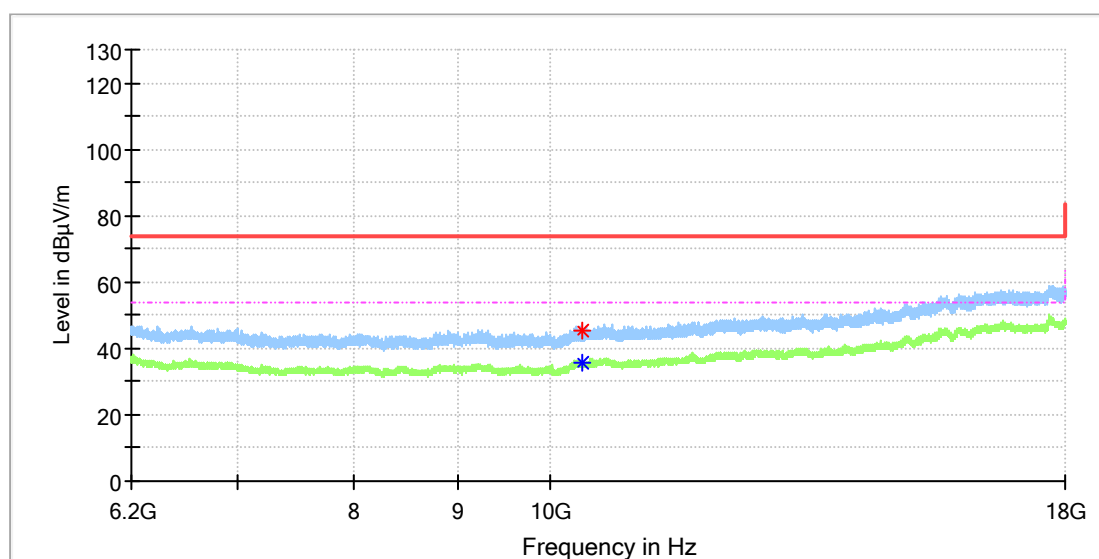

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10374.250000	---	35.68	54.00	18.32	100.0	H	1.0	11.8
10379.658333	45.28	---	74.00	28.72	100.0	H	167.0	11.9

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11n40_Ch38
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

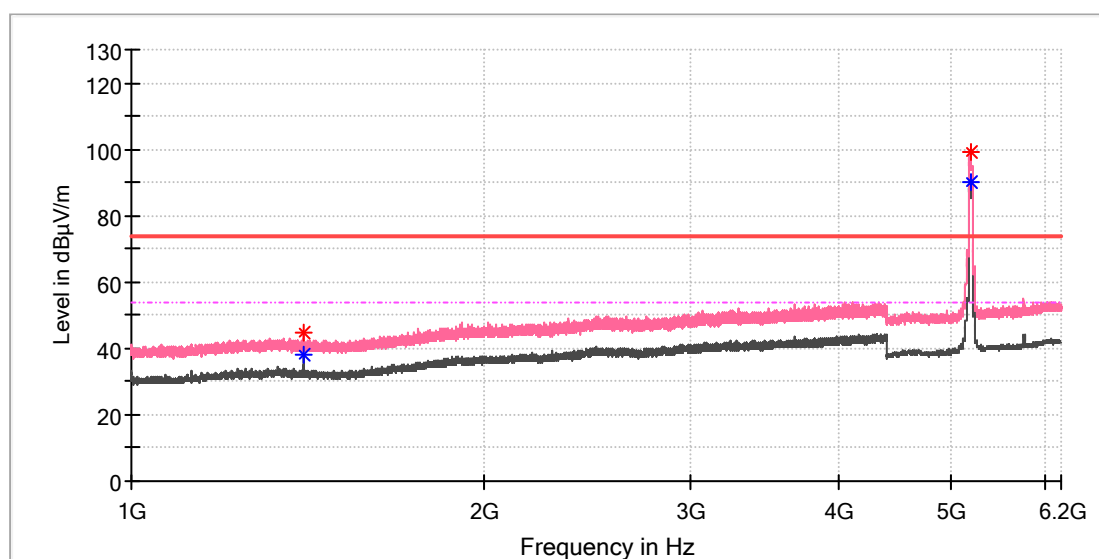

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	PoI	Azimuth (deg)	Corr. (dB/m)
1404.090000	44.76	---	74.00	29.24	100.0	V	186.0	1.7
1404.090000	---	37.88	54.00	16.12	100.0	V	186.0	1.7
5188.000000	98.94	---			100.0	V	294.0	12.6
5191.000000	---	90.03			100.0	V	304.0	12.6

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11n40_Ch38
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

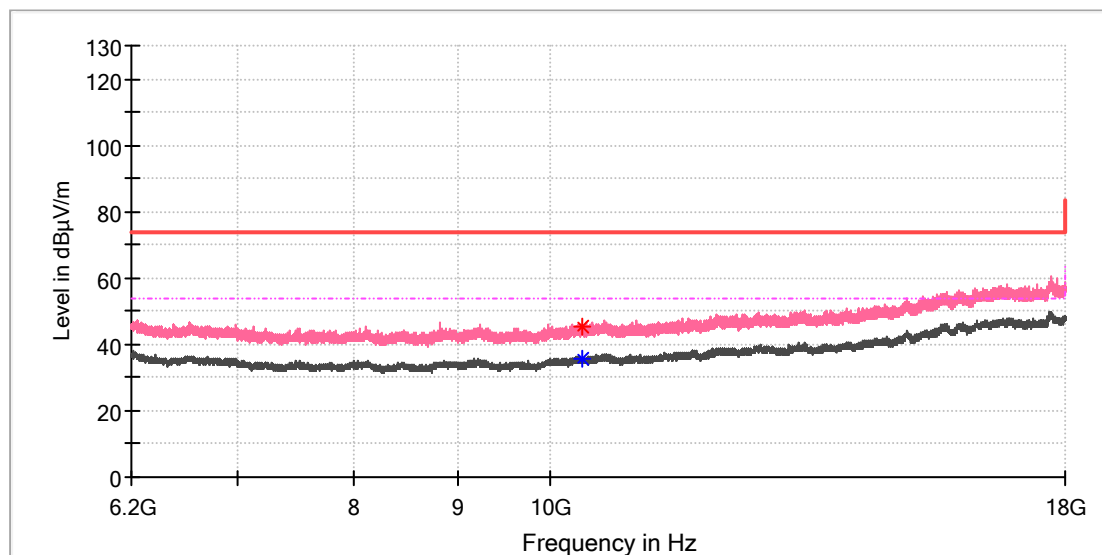

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10375.233333	---	35.96	54.00	18.04	100.0	V	338.0	11.8
10378.183333	45.19	---	74.00	28.81	100.0	V	273.0	11.9

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11n40_Ch46
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

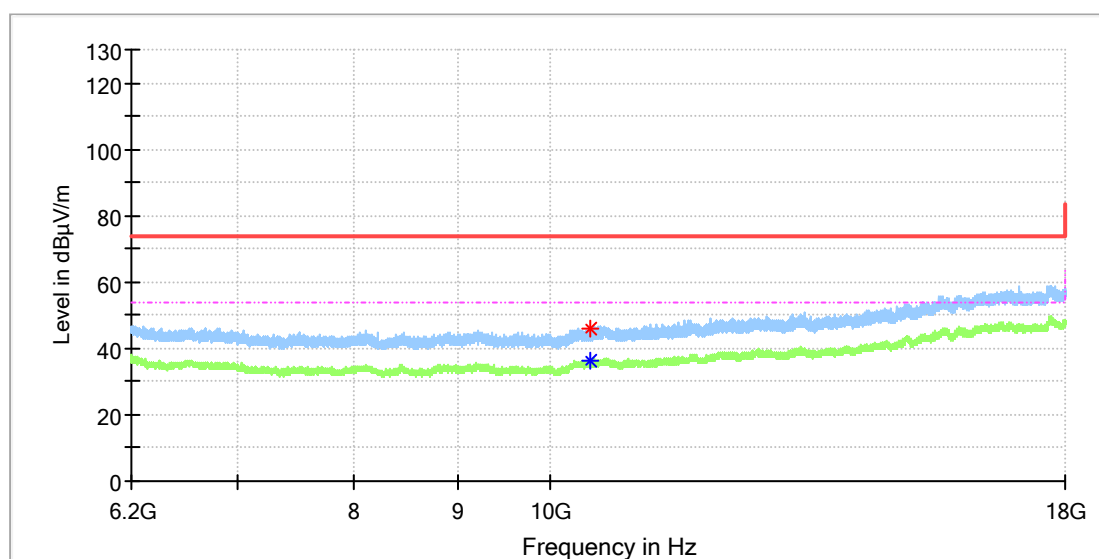

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10458.325000	45.76	---	74.00	28.24	100.0	H	255.0	12.0
10468.650000	---	36.33	54.00	17.67	100.0	H	341.0	12.0

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	

Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.00	100.00	100.00	100.00	100.00	100.00		100.00	100.00

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11ac80_Ch42
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

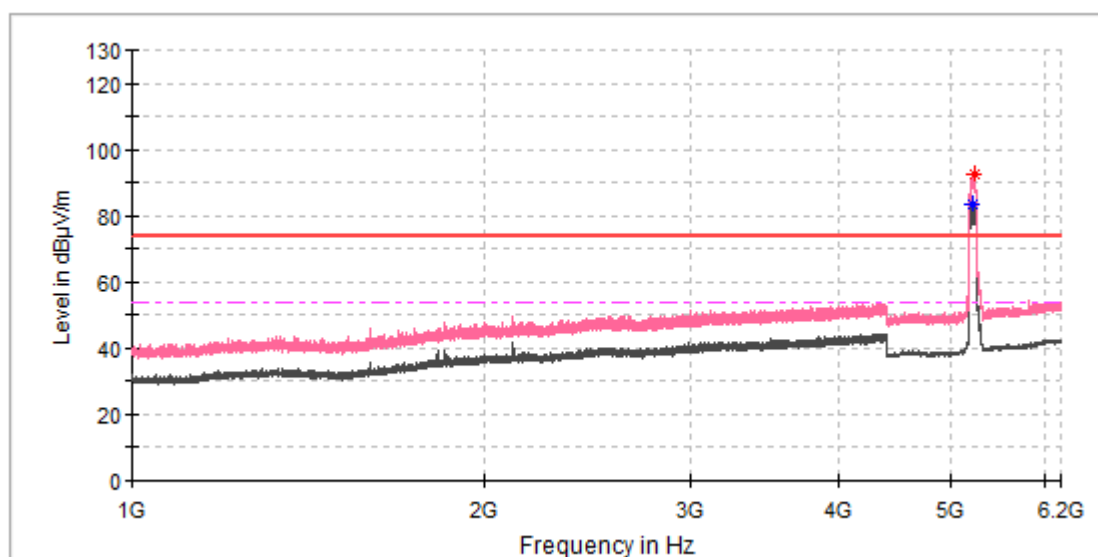

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5218.500000	---	83.57			100.0	V	34.0	12.7
5227.000000	92.78	---			100.0	V	49.0	12.8

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
93.750000	100.0000	100.0000	100.0000	0.0000	0.0000		0.0000	0.0000


Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.00	100.00	100.00	100.00	100.00	100.00		100.00	100.00

Appendix B.6: Test Results of Radiated Emissions in Restricted Bands

Wi-Fi 802.11 a mode

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11a_Ch36
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

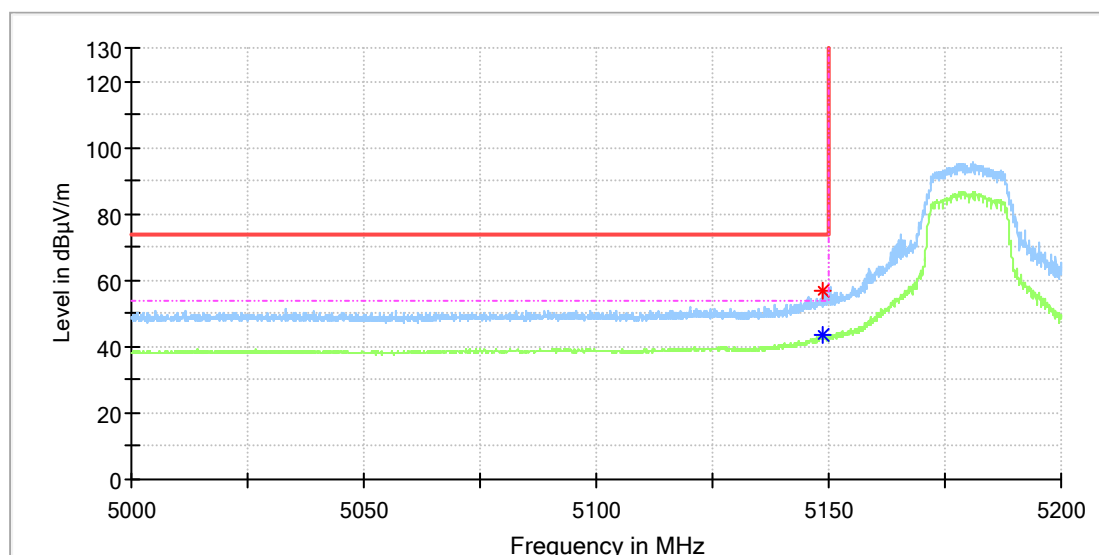

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5148.555556	---	43.35	54.00	10.65	100.0	H	147.0	12.4
5148.611111	57.11	---	74.00	16.89	100.0	H	261.0	12.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11a_Ch36
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

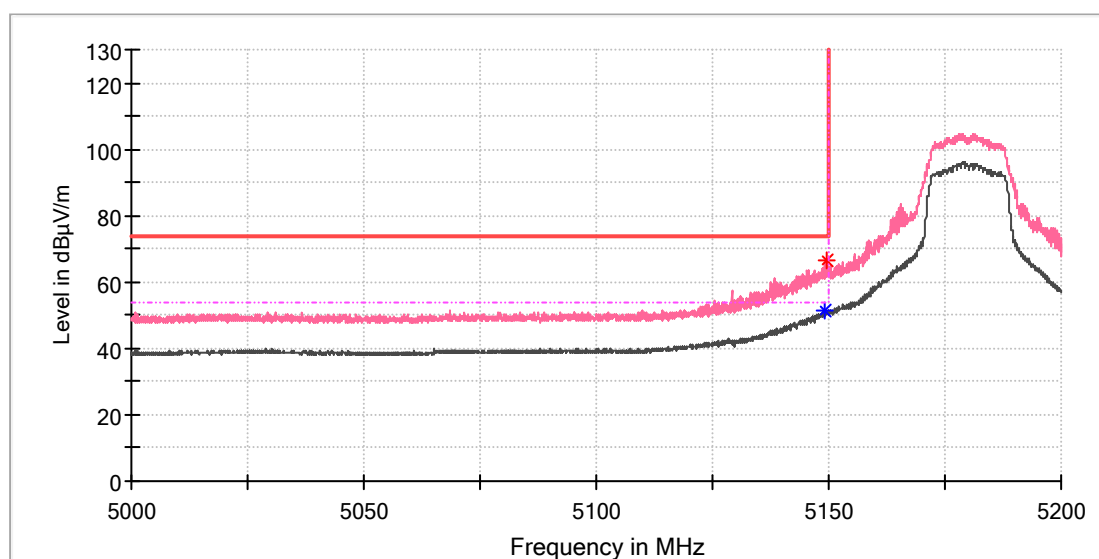

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5149.111111	---	51.48	54.00	2.52	100.0	V	67.0	12.4
5149.388889	66.37	---	74.00	7.63	100.0	V	67.0	12.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
93.7	122.5	119.5	120.0	0.5	100	V	135	0.0

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11a_Ch48
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

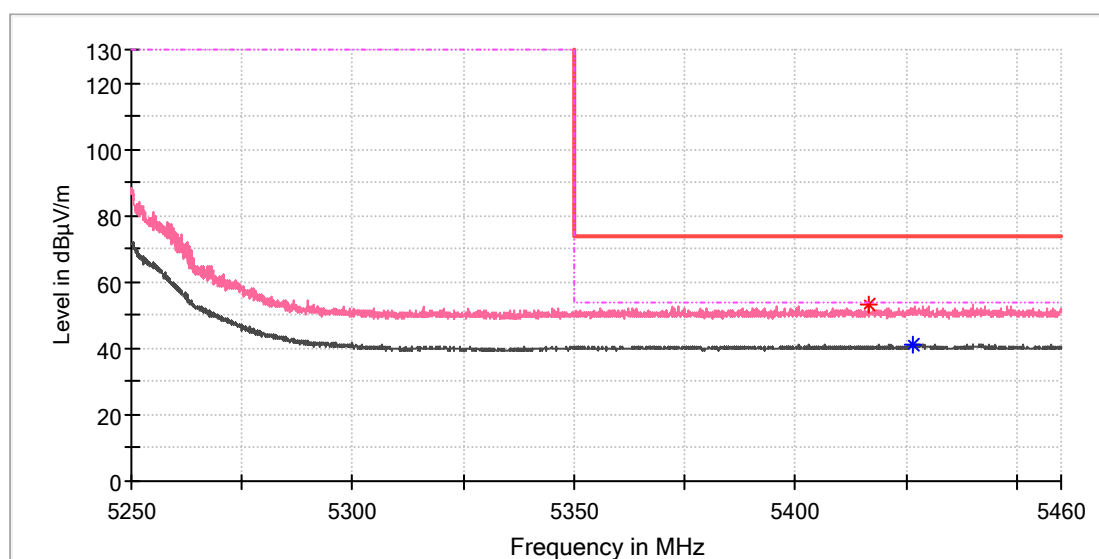

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5416.541667	53.50	---	74.00	20.50	100.0	V	101.0	13.5
5426.458333	---	41.37	54.00	12.63	100.0	V	301.0	13.5


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	

Wi-Fi 802.11 n(HT20) mode

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11n20_Ch36
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

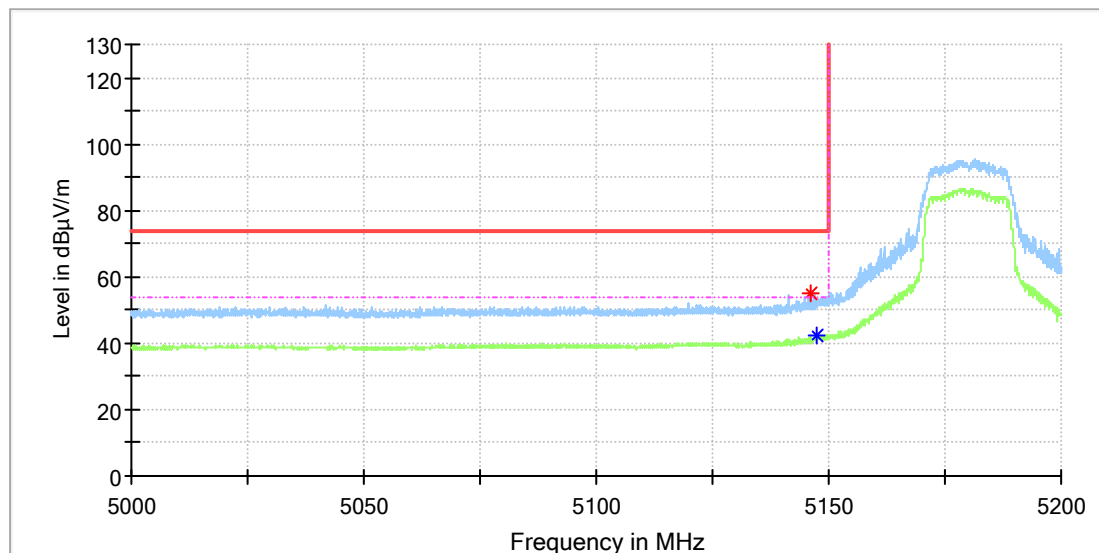

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5146.333333	55.24	---	74.00	18.76	100.0	H	156.0	12.4
5147.444445	---	42.13	54.00	11.87	100.0	H	139.0	12.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
93.7	122.5	118.5	120.0	1.5	100	V	135	0.0

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11n20_Ch36
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

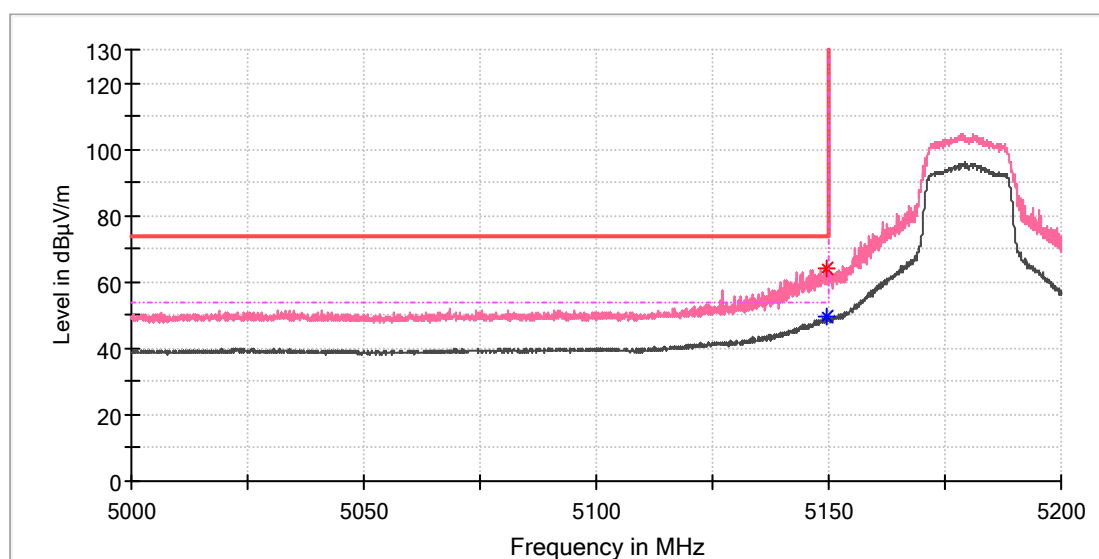

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5149.722222	64.28	---	74.00	9.72	100.0	V	301.0	12.4
5149.777778	---	49.35	54.00	4.65	100.0	V	65.0	12.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11n20_Ch48
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

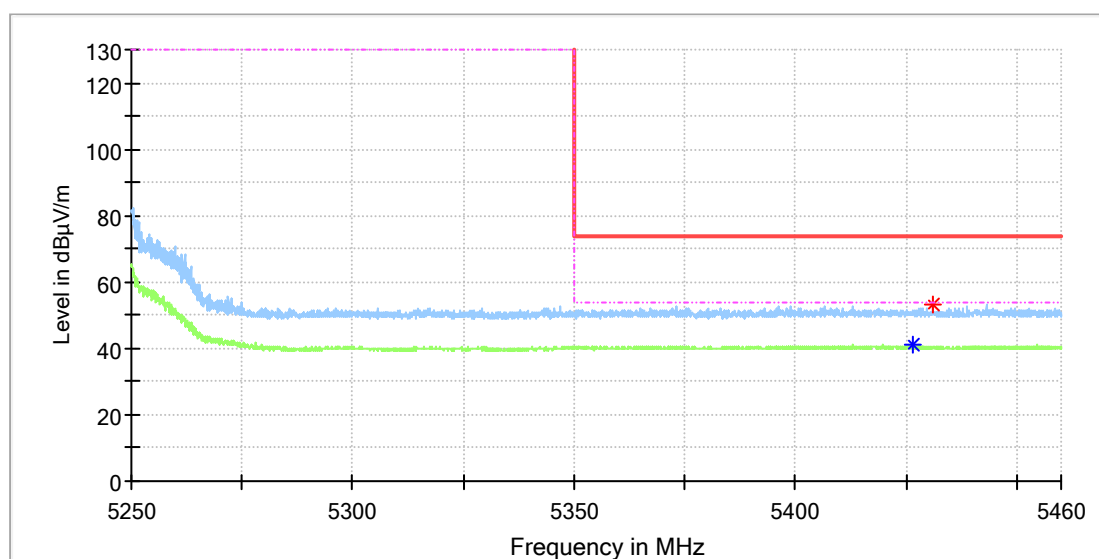

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5426.691667	---	41.01	54.00	12.99	100.0	H	13.0	13.5
5431.008333	53.50	---	74.00	20.50	100.0	H	0.0	13.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
93.7	122.5	122.5	122.5	0	100	0	0	0

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11n20_Ch48
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

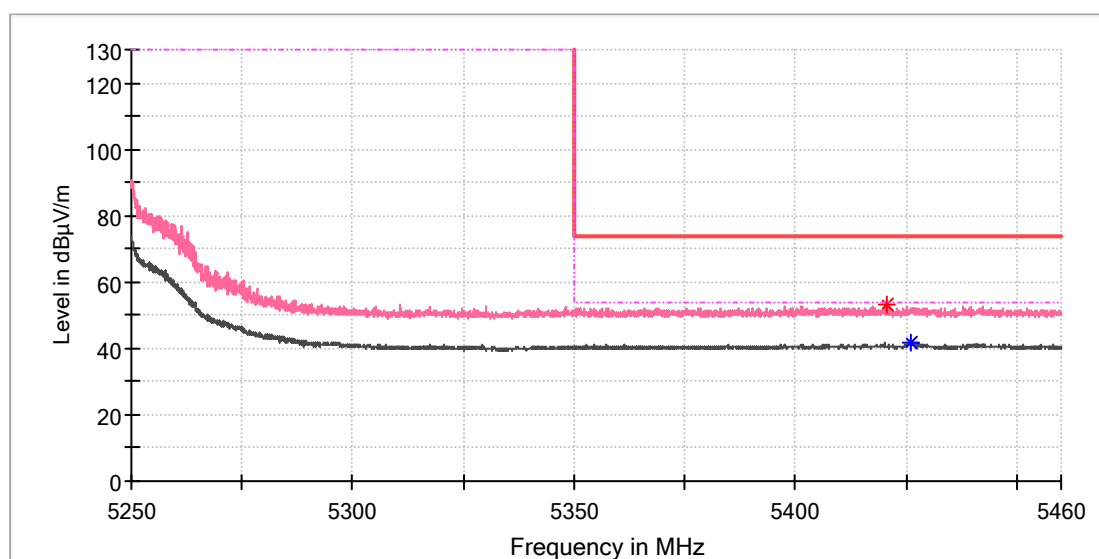

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5420.450000	53.39	---	74.00	20.61	100.0	V	199.0	13.5
5426.050000	---	41.88	54.00	12.12	100.0	V	59.0	13.5

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11n40_Ch46
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

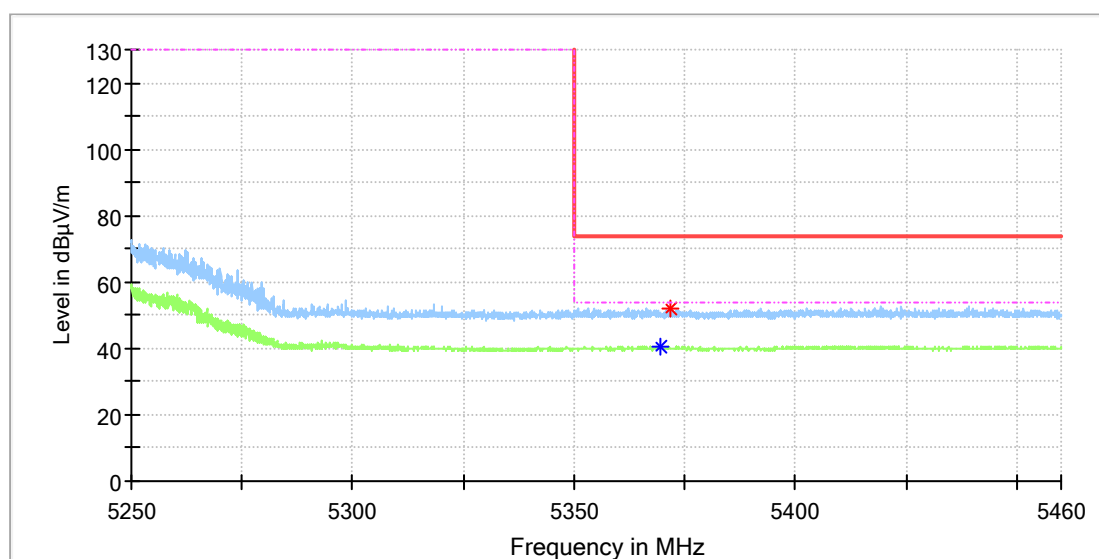

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5369.700000	---	40.53	54.00	13.47	100.0	H	236.0	13.3
5371.566667	52.20	---	74.00	21.80	100.0	H	0.0	13.3

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)

Wi-Fi 802.11 ac(HT80) mode

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11ac80_Ch42
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

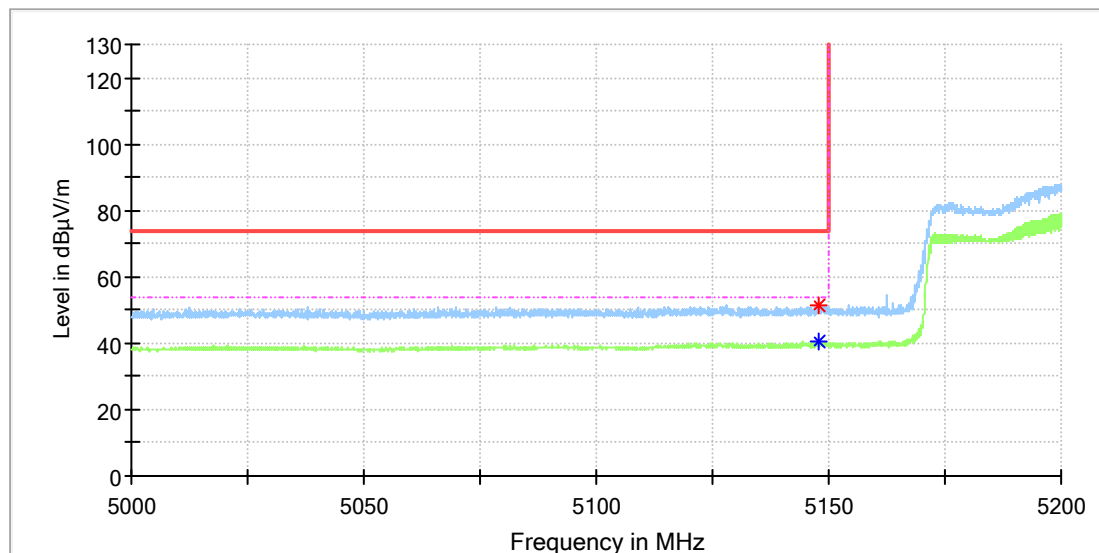

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5147.777778	---	40.41	54.00	13.59	100.0	H	359.0	12.4
5147.888889	51.26	---	74.00	22.74	100.0	H	348.0	12.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
93.7	122.5	118.5	120.0	1.5	100	V	135	0.0

EUT Information

EUT Name:	System Controller
Model:	EL-SC-300
Test Mode:	WiFi 5G_11ac80_Ch42
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.407
Tested By:	Alano Qu
Reviewed By:	Terry Yin

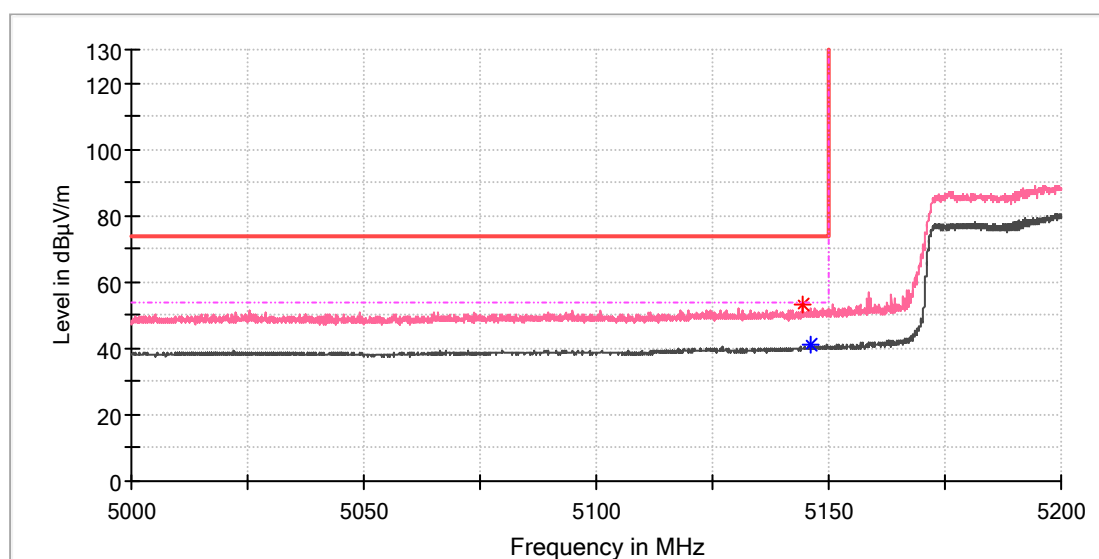

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5144.444445	53.10	---	74.00	20.90	100.0	V	348.0	12.4
5146.055556	---	40.88	54.00	13.12	100.0	V	5.0	12.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
93.7	122.5	118.5	120.0	1.5	100	V	135	0.0