

EXHIBIT 4

Test Report

Test Report

TTEMC-F98096

APPLICATION FOR CERTIFICATION

On Behalf of
Microtek International Inc.
Image Scanner

Model : MCS-600U

FCC ID : EF9MCS-600U

Prepared for : Microtek International Inc.
No. 6 Industry East Road 3
Science-Based Industrial Park,
Hsinchu, Taiwan, R.O.C.

Prepared By : Taiwan Tokin EMC Eng. Corp.
No. 53-11, Tin-Fu Tsun, Lin-Kou,
Taipei Hsien, Taiwan, R.O.C.

Tel: (02) 2609-9301, (02) 2609-2133

File Number : ATM-G98319
Report Number : TTEMF-F98096
Date of Test : May 25 / Jun. 03, 1998
Date of Report : Jun. 08, 1998

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	1.-1
1.1. Description of Device (EUT).....	1.-1
1.2. Details of Support Equipments	1.-2
1.3. Description of Test Facility	1.-3
2. POWERLINE CONDUCTED TEST.....	2.-1
2.1. Test Equipment	2.-1
2.2. Block Diagram of Test Setup.....	2.-1
2.3. Conducted Powerline Emission Limit (CLASS B).....	2.-2
2.4. EUT Configuration on Measurement.....	2.-2
2.5. Operating Condition of EUT.....	2.-2
2.6. Test Procedure.....	2.-3
2.7. Line Conducted RF Voltage Measurement Results.....	2.-4
3. RADIATED EMISSION TEST	3.-1
3.1. Test Equipment	3.-1
3.2. Block Diagram of Test Setup.....	3.-1
3.3. Radiation Limit (CLASS B)	3.-2
3.4. EUT Configuration on Measurement.....	3.-2
3.5. Operating Condition of EUT.....	3.-2
3.6. Test Procedure.....	3.-2
3.7. Radiated Emission Noise Measurement Results.....	3.-3
4. DEVIATION TO TEST SPECIFICATIONS	4.-1
5. PHOTOGRAPHS.....	5.-1
5.1. Photos of Powerline Conducted Measurement	5.-1
5.2. Photos of Radiated Measurement on Open Field Test Site	5.-2

TEST REPORT CERTIFICATION

Applicant : Microtek International Inc.
Manufacturer : Microtek International Inc.
FCC ID : EF9MCS-600U
EUT Description : Image Scanner
(A) MODEL NO. : MCS-600U
(B) SERIAL NO. : N/A
(C) POWER SUPPLY : AC 120V/60Hz

Measurement Procedure Used:

FCC RULES AND REGULATIONS PART 15 SUBPART B CLASS B OCTOBER 1996
AND FCC / ANSI C63.4-1992

The device described above was tested by TAIWAN TOKIN EMC ENG. CORP. to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15B Class B limits both radiated and conducted emissions.

The measurement results are contained in this test report and TAIWAN TOKIN EMC ENG. CORP. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits. TAIWAN TOKIN EMC ENG. CORP. recommends that this data was submitted for FCC certification purposes if a 6dB margin below FCC limits is obtained. This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Taiwan Tokin EMC Eng. corp.

Date of Test : May 25 / Jun. 03, 1998

Prepared by : Monica Chang
(MONICA CHANG)

Test Engineer : Allen Wang
(ALLEN WANG)

Approve & Authorized Signer : Jackie Deng 6/10/98
(JACKIE DENG)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	Image Scanner (USB Interface)
Model Number	:	MCS-600U
FCC ID	:	EF9MCS-600U
Applicant	:	Microtek International Inc. No. 6 Industry East Road 3 Science-Based Industrial Park, Hsinchu, Taiwan, R.O.C.
Manufacturer	:	Microtek International Inc. No. 6 Industry East Road 3 Science-Based Industrial Park, Hsinchu, Taiwan, R.O.C.
Power Adapter #1	:	Kentex, M/N WA15-120 Input: 100-120V~ 1.0A MAX, 47-63Hz Output: +12Vdc ; 1.25A Cable: Non-Shielded, Undetachable, 1.9m
Power Adapter #2	:	Delta, M/N ADP-12EB Input: 100-120V~ 0.5A Output: +12Vdc ; 1.0A Cable: Non-Shielded, Undetachable, 1.9m
USB Cable	:	Shielded, Detachable, 1.5m
Date of Test	:	May 25 / Jun. 03, 1998

1.2. Details of Support Equipments

1.2.1. PERSONAL COMPUTER

Mother Board	:	Asus, M/N P2L97 FCC By DoC
CPU	:	Intel Pentium II 233MMX
S.P.S	:	Enlight, M/N EN-8257901
Floppy Driver 3.5"	:	Mitsumi, M/N D359T6
Case	:	Enlight, M/N EN-7230
Hard Disk Driver	:	Seagate, M/N ST32122A
VGA Card	:	Dataexpert, M/N CP765V2 FCC ID LUT-CP765
Disk Ctrl Card	:	Within Mother Board
Series/Parallel Card	:	Within Mother Board
Power Cord	:	Non-Shielded, Detachable, 1.8m

1.2.2. MONITOR

Model Number	:	PM36A
Serial Number	:	W70205140A
FCC ID	:	LLW9ZB1564
Manufacturer	:	Funai Electric Company of Taiwan
Data Cable	:	Shielded, Undetachable, 1.2m
Power Cord	:	Non-Shielded, Detachable, 1.5m

1.2.3. KEYBOARD

Model Number	:	BTC-5139
Serial Number	:	73B304241
FCC ID	:	E5XKBM111
Manufacturer	:	Behavior Tech Computer Corp.
Data Cable	:	Shielded, Undetachable, 1.2m

1.2.4. PRINTER

Model Number	:	2225C+
Serial Number	:	3121S96627
FCC ID	:	DSI6XU2225
Manufacturer	:	Hewlett Packard
Power Adapter	:	Hewlett Packard, M/N 82241A Non-Shielded, Undetachable, 2.0m
Data Cable	:	Shielded, Detachable, 1.2m

1.2.5. MODEM #1

Model Number	:	1414
Serial Number	:	950110300
FCC ID	:	IFAXDM1414
Manufacturer	:	Aceex
Data Cable	:	Shielded, Detachable, 1.2m
Power Adapter	:	Amigo, Model AM-91000A Non-Shielded, Undetachable, 1.8m

1.2.6. MODEM #2

Model Number	:	1414
Serial Number	:	950098201
FCC ID	:	IFAXDM1414
Manufacturer	:	Aceex
Data Cable	:	Shielded, Detachable, 1.2m
Power Adapter	:	Amigo, Model AM-91000A Non-Shielded, Undetachable, 1.8m

1.2.7. MOUSE


Model Number	:	M-S34
Serial Number	:	LZA65201997
FCC ID	:	DZL210472
Manufacturer	:	Logitech
Data Cable	:	Non-Shielded, Undetachable, 1.9m

1.2.8. USB GAMEPAD

Model Number	:	INT-002
Serial Number	:	N/A
FCC ID	:	CWTEAK032
Manufacturer	:	Alps
Data Cable	:	Shielded, Undetachable, 2.3m Bonded a ferrite core

1.3. Description of Test Facility

Site Description (No. 2 Open Site)	:	Jul. 15, 1996 Re-file on Federal Communication Commission FCC Engineering Laboratory 7435 Oakland Mills Road Columbia, MD 21046, U.S.A.
Name of Firm	:	Taiwan Tokin EMC Eng. Corp.
Site Location	:	No. 53-11, Tin-Fu Tsun, Lin-Kou, Taipei Hsien, Taiwan, R.O.C.
NVLAP Lab Code	:	200077-0

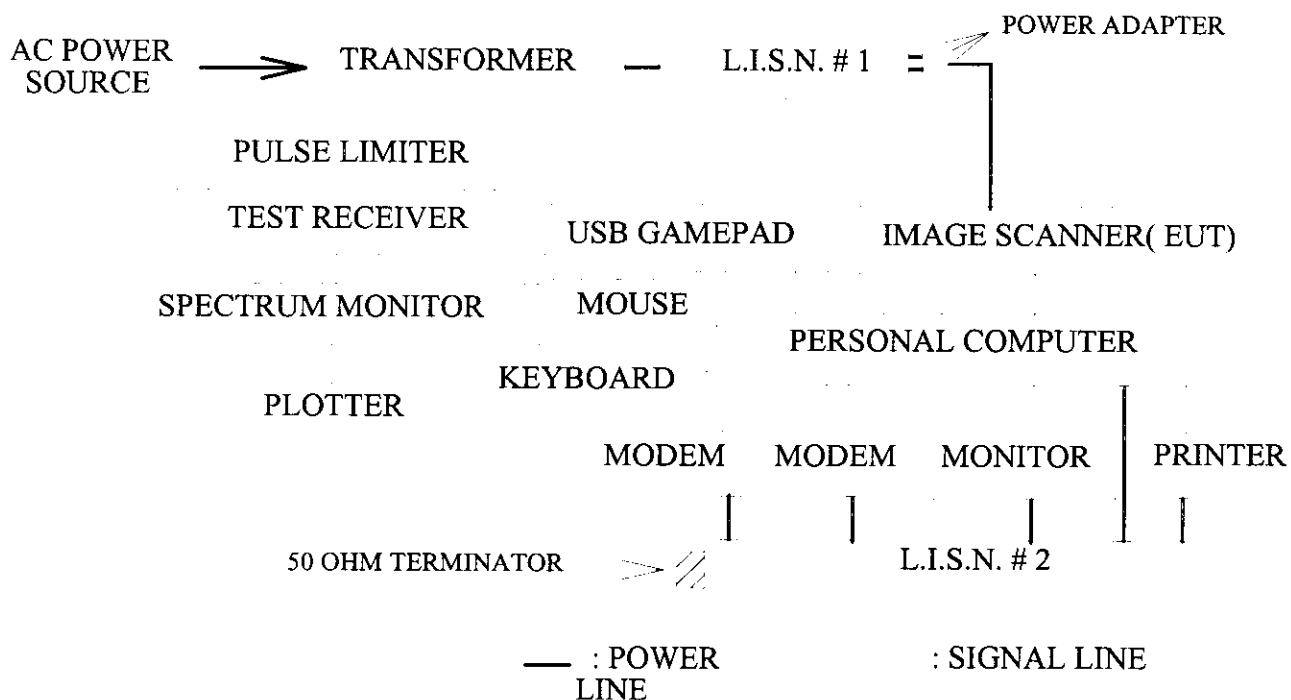

2.3. Conducted Powerline Emission Limit (CLASS B)

Frequency	Maximum RF Line Voltage	
	uV	dBuV
0.45MHz ~ 30MHz	250	48

REMARKS : RF LINE VOLTAGE (dBuV) = 20 log RF LINE VOLTAGE (uV)

2.4. EUT Configuration on Measurement

The following equipments were installed on RF LINE VOLTAGE measurement to meet the Commission requirement and operating in a manner which tended to maximize its emission characteristics in a normal application.

2.4.1. Image Scanner (EUT)

Model Number	:	MCS-600U
Serial Number	:	N/A
FCC ID	:	EF9MCS-600U
Manufacturer	:	Microtek International Inc.
Power Adapter #1	:	Kentex, M/N WA15-120 Input: 100V-120V~ 1.0A MAX 47-63Hz Output: +12Vdc ; 1.25A Cable: Non-Shielded, Undetachable, 1.9m
Power Adapter #2	:	Delta, M/N ADP-12EB Input: 100-120V~ 0.5A Output: +12Vdc ; 1.0A Cable : Non-Shielded, Undetachable, 1.9m
Data Cable	:	Shielded, Detachable, 1.5m

2.4.2. Support Simulators : As in section 1.2.

2.5. Operating Condition of EUT

2.5.1. Setup the EUT and simulators as shown on 2.2.

2.5.2. Turned on the power of all equipments.

2.5.3. Setup the personal computer to drive the EUT through the Microtek's scanner software driver "Scan Test".

2.5.4. Data was communicated between host personal computer and Image Scanner (EUT) through USB port.

2.5.5. Personal Computer displayed the test software image by windows to monitor.

2.5.6. The other peripheral devices were driven and operated in turn during all testing.

2.6. Test Procedure

The EUT was connected to the power mains through a line impedance stabilization network (L.I.S.N. #1) and the other peripheral devices power cord were connected to the power mains through a line impedance stabilization network (L.I.S.N. #2). This provided a 50 ohm coupling impedance for the measuring equipment. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions simulators of the interface cables should be manipulated according to FCC ANSI C63.4-1992 during conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESH3) was set at 10KHz.

The frequency range from 450KHz to 30MHz was checked.

Image Scanner (EUT) with two kinds of Power Adapters were done on conducted measured. All the test results are listed in section 2.7. The detail of test modes are as follows :

- (1)EUT with Kentex Power Adapter (M/N WA15-120)
- (2)EUT with Delta Power Adapter (M/N ADP-12EB)

2.7. Line Conducted RF Voltage Measurement Results

The frequency range from 450KHz to 30 MHz was investigated.

All emissions not reported below are too low against the prescribed limits.

Date of Test : Jun. 03, 1998 Temperature : 23 °C


EUT : Image Scanner Humidity : 50 %

Test Mode : Kentex Power Adapter, M/N WA15-120

Frequency (MHz)	Factor dB	Measurement (dBuV)		Reading (dBuV)		Limits (dBuV)	Margin (dBuV)	
		VA	VB	VA	VB		VA	VB
0.4691	0.2	*	43.1	*	43.3	48.0	*	4.7
0.4794	0.2	42.8	*	43.0	*	48.0	5	*
0.5878	0.2	*	44.4	*	44.6	48.0	*	3.4
0.5962	0.2	44.6	*	44.8	*	48.0	3.2	*
0.6395	0.2	*	44.7	*	44.9	48.0	*	3.1
0.6452	0.2	44.8	*	45.0	*	48.0	3	*
0.7978	0.2	41.2	*	41.4	*	48.0	6.6	*
1.1443	0.2	*	41.2	*	41.4	48.0	*	6.6
6.0012	0.3	*	38.1	*	38.4	48.0	*	9.6
6.0013	0.3	37.0	*	37.3	*	48.0	10.7	*
23.0047	1.1	44.4	45.0	45.5	46.1	48.0	2.5	1.9


- Remark :
1. All readings are Quasi-Peak values.
 2. Factor = Insertion Loss + Cable Loss
 3. The worst emission was detected at 23.0047MHz with corrected signal level of 46.1dBuV (limit is 48dBuV) when the VB side of the EUT was connected to L.I.S.N.

dBuV

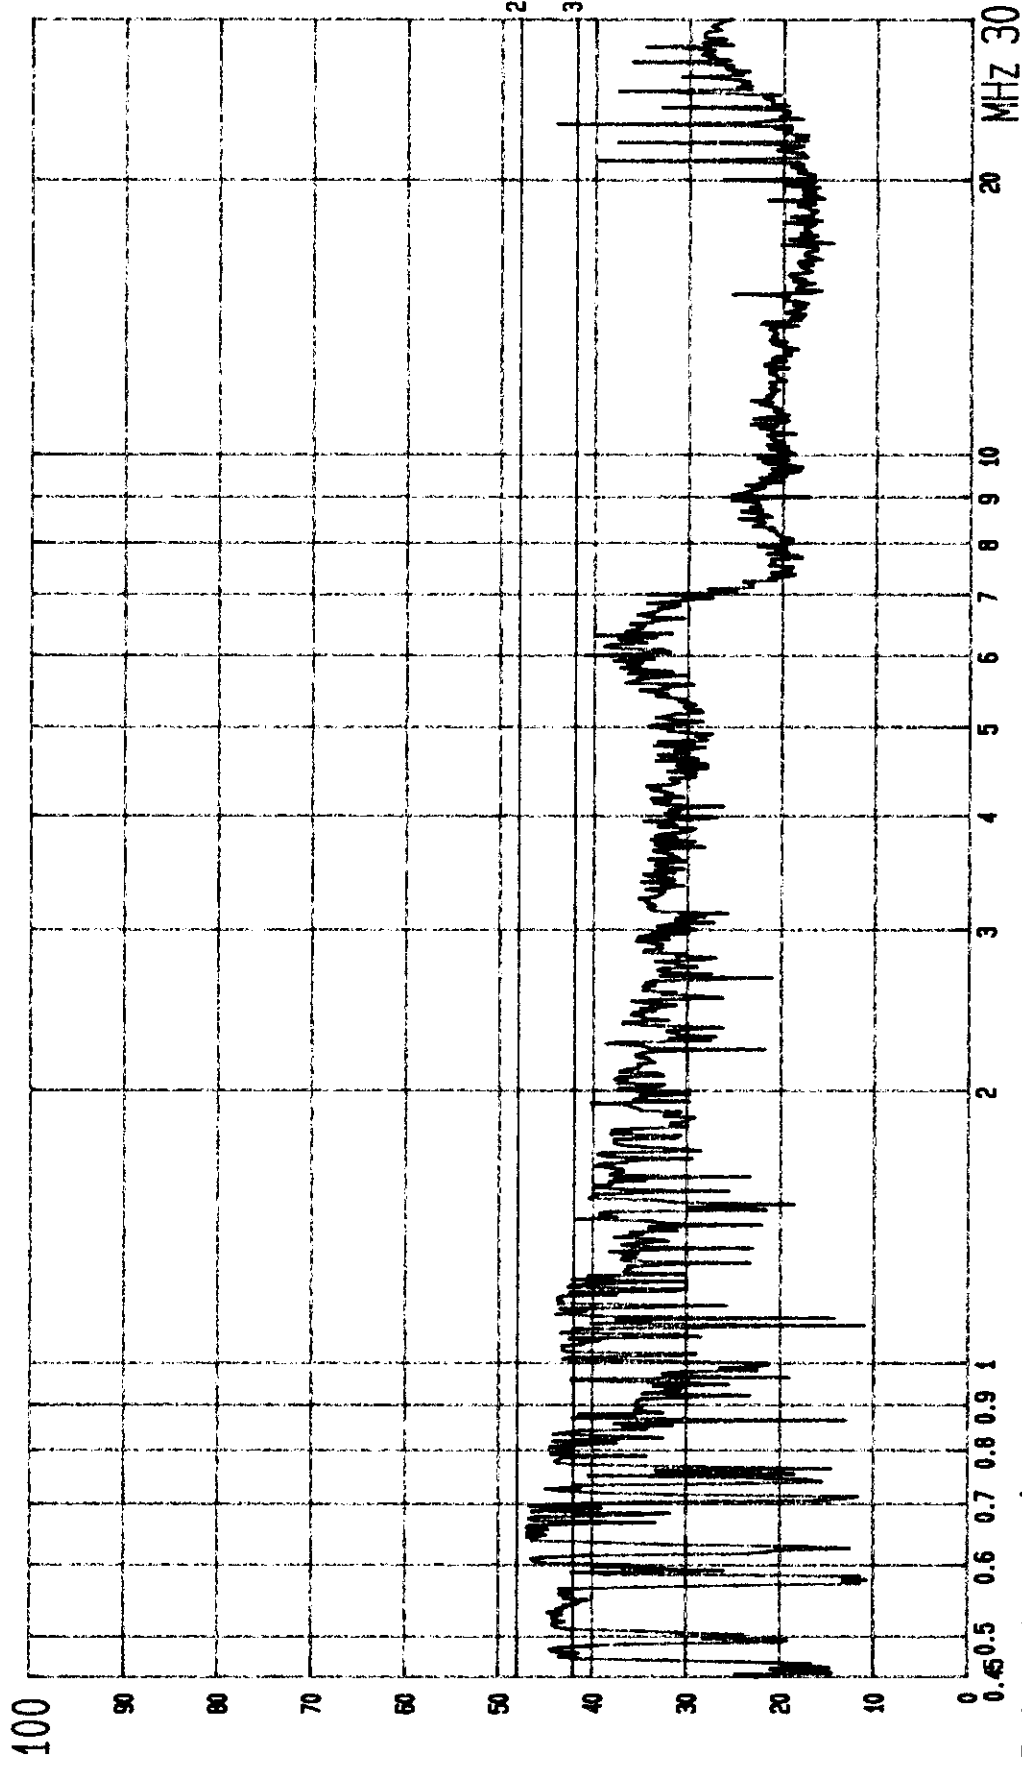

--- Date 03.JUN.'98 Time 20:55:52
MICROTEK EUT:SCANNER
LINE: VA. MEMO: KENTEX ADAPTOR

M/N: MCS-600U
(PEAK VALUE) TAIWAN TOKIN EMC.ENG.CORP.
PAGE: 002.

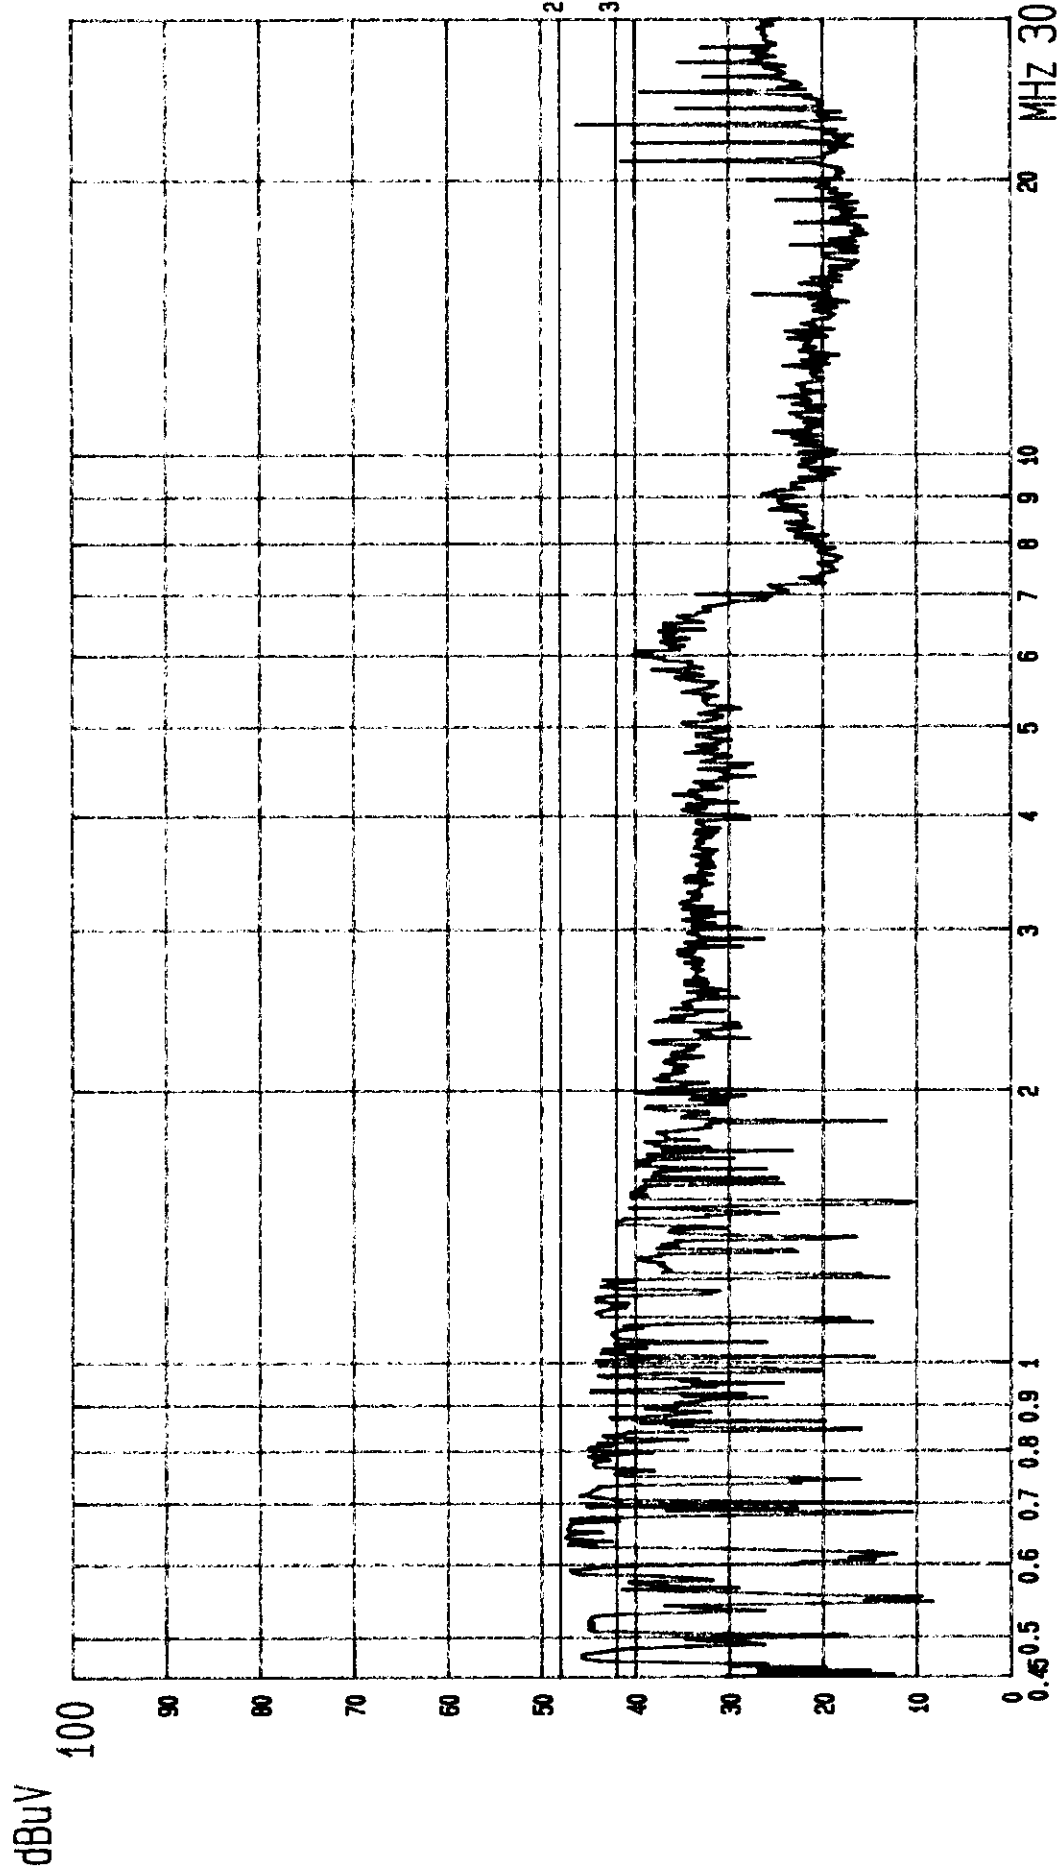

---- Date 03.JUN.'98 Time 20:48:31
MICROTEK
LINE: VB.


M/N: MCS-600U
(PEAK VALUE) TAIWAN TOKIN EMC.ENG.CORP.

PAGE: 001.

Date of Test : May 27, 1998 Temperature : 23 °CEUT : Image Scanner Humidity : 75 %Test Mode : Delta Power Adapter, M/N ADP-12EB


Frequency (MHz)	Factor dB	Measurement (dBuV)		Reading (dBuV)		Limits (dBuV)	Margin (dBuV)	
		VA	VB	VA	VB		VA	VB
0.5300	0.2	28.6	*	28.8	*	48.0	19.2	*
0.5870	0.2	*	32.1	*	32.3	48.0	*	15.7
0.9230	0.2	30.3	*	30.5	*	48.0	17.5	*
1.2100	0.2	*	27.1	*	27.3	48.0	*	20.7
1.2979	0.2	36.0	*	36.2	*	48.0	11.8	*
2.4400	0.2	24.4	*	24.6	*	48.0	23.4	*
2.7640	0.2	*	26.6	*	26.8	48.0	*	21.2
5.8000	0.3	32.7	33.0	33.0	33.3	48.0	15	14.7
9.0800	0.3	*	26.7	*	27.0	48.0	*	21
23.0040	0.6	35.0	*	35.6	*	48.0	12.4	*
23.0050	0.6	*	34.5	*	35.1	48.0	*	12.9

Remark : 1. All readings are Quasi-Peak values.
 2. Factor = Insertion Loss + Cable Loss
 3. The worst emission was detected at 1.2979MHz with corrected signal level of 36.2dBuV (limit is 48dBuV) when the VA side of the EUT was connected to L.I.S.N.

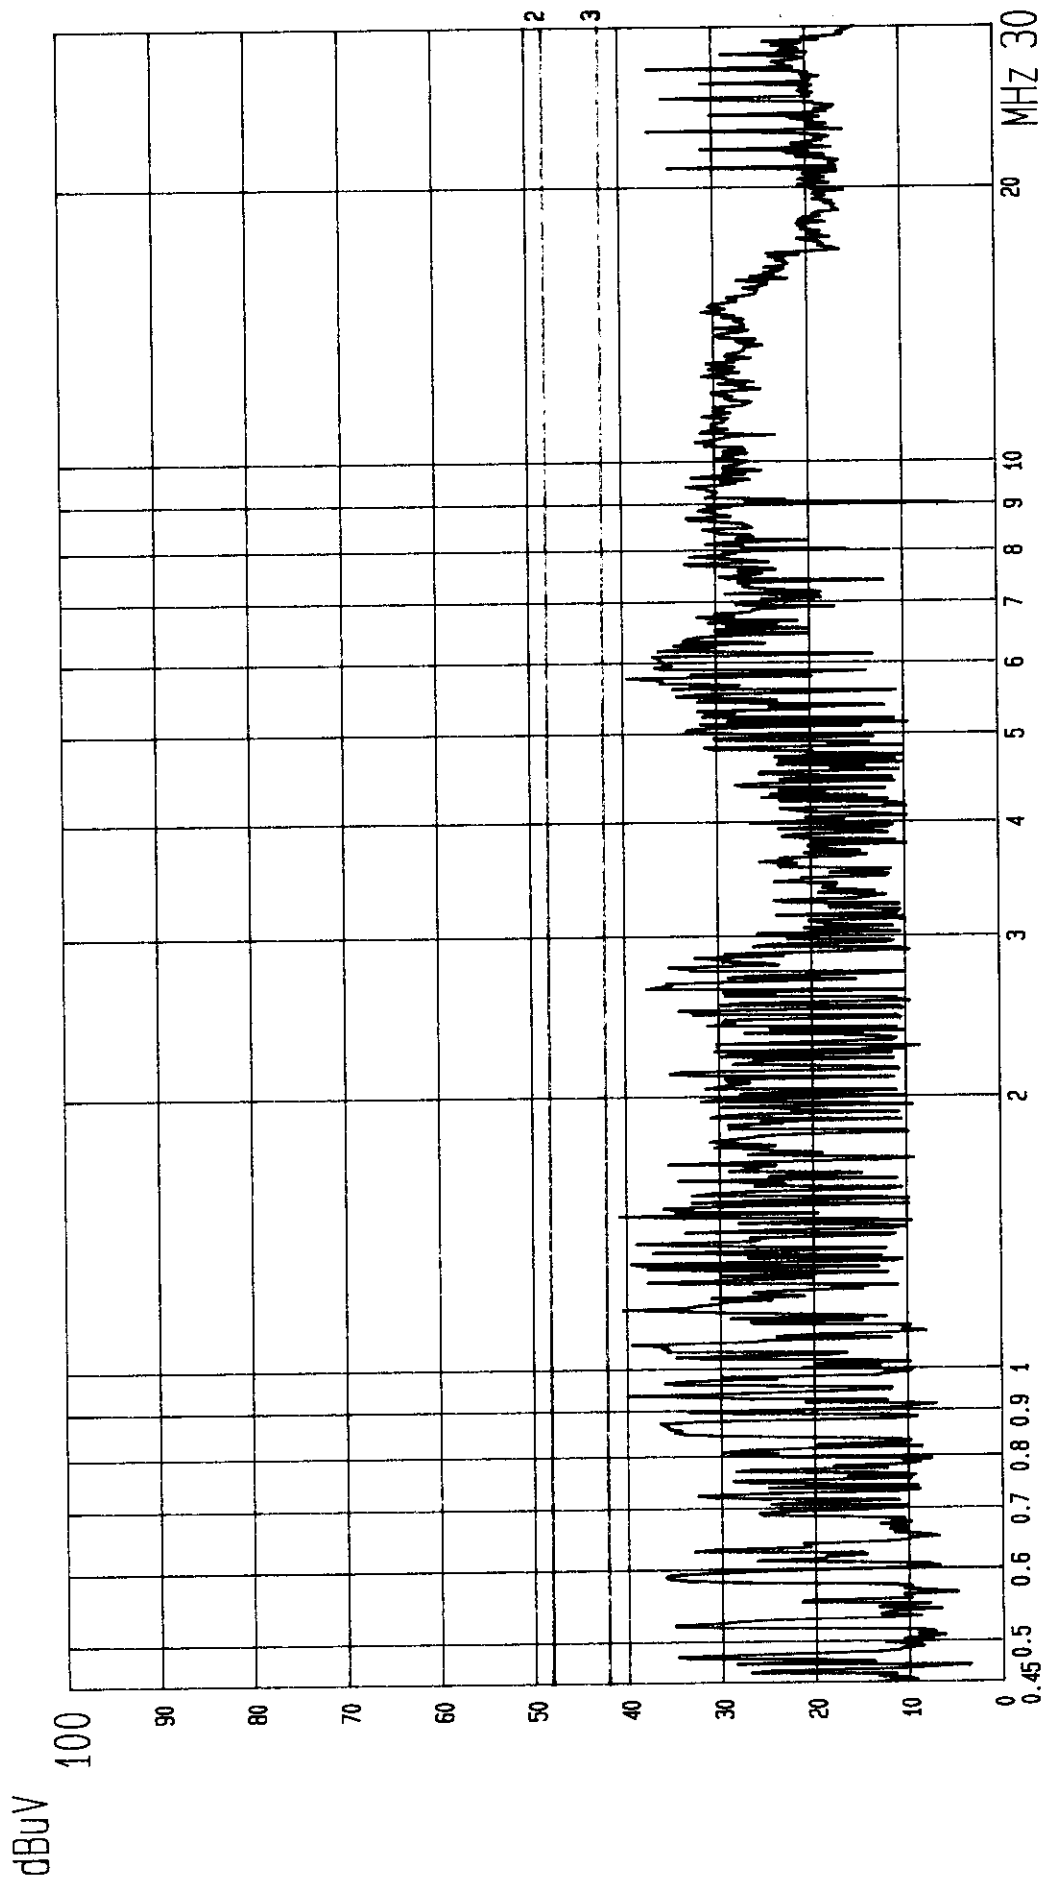

--- Date 27.MAY.'98 Time 09:51:24
MICROTEK EUT: SCANNER M/N: MCS-600U
LINE: VA. MEMO: W/ DELTA ADAPTOR

(PEAK VALUE) TAIWAN TOKIN EMC.CNG.CORP.
PAGE: 002.

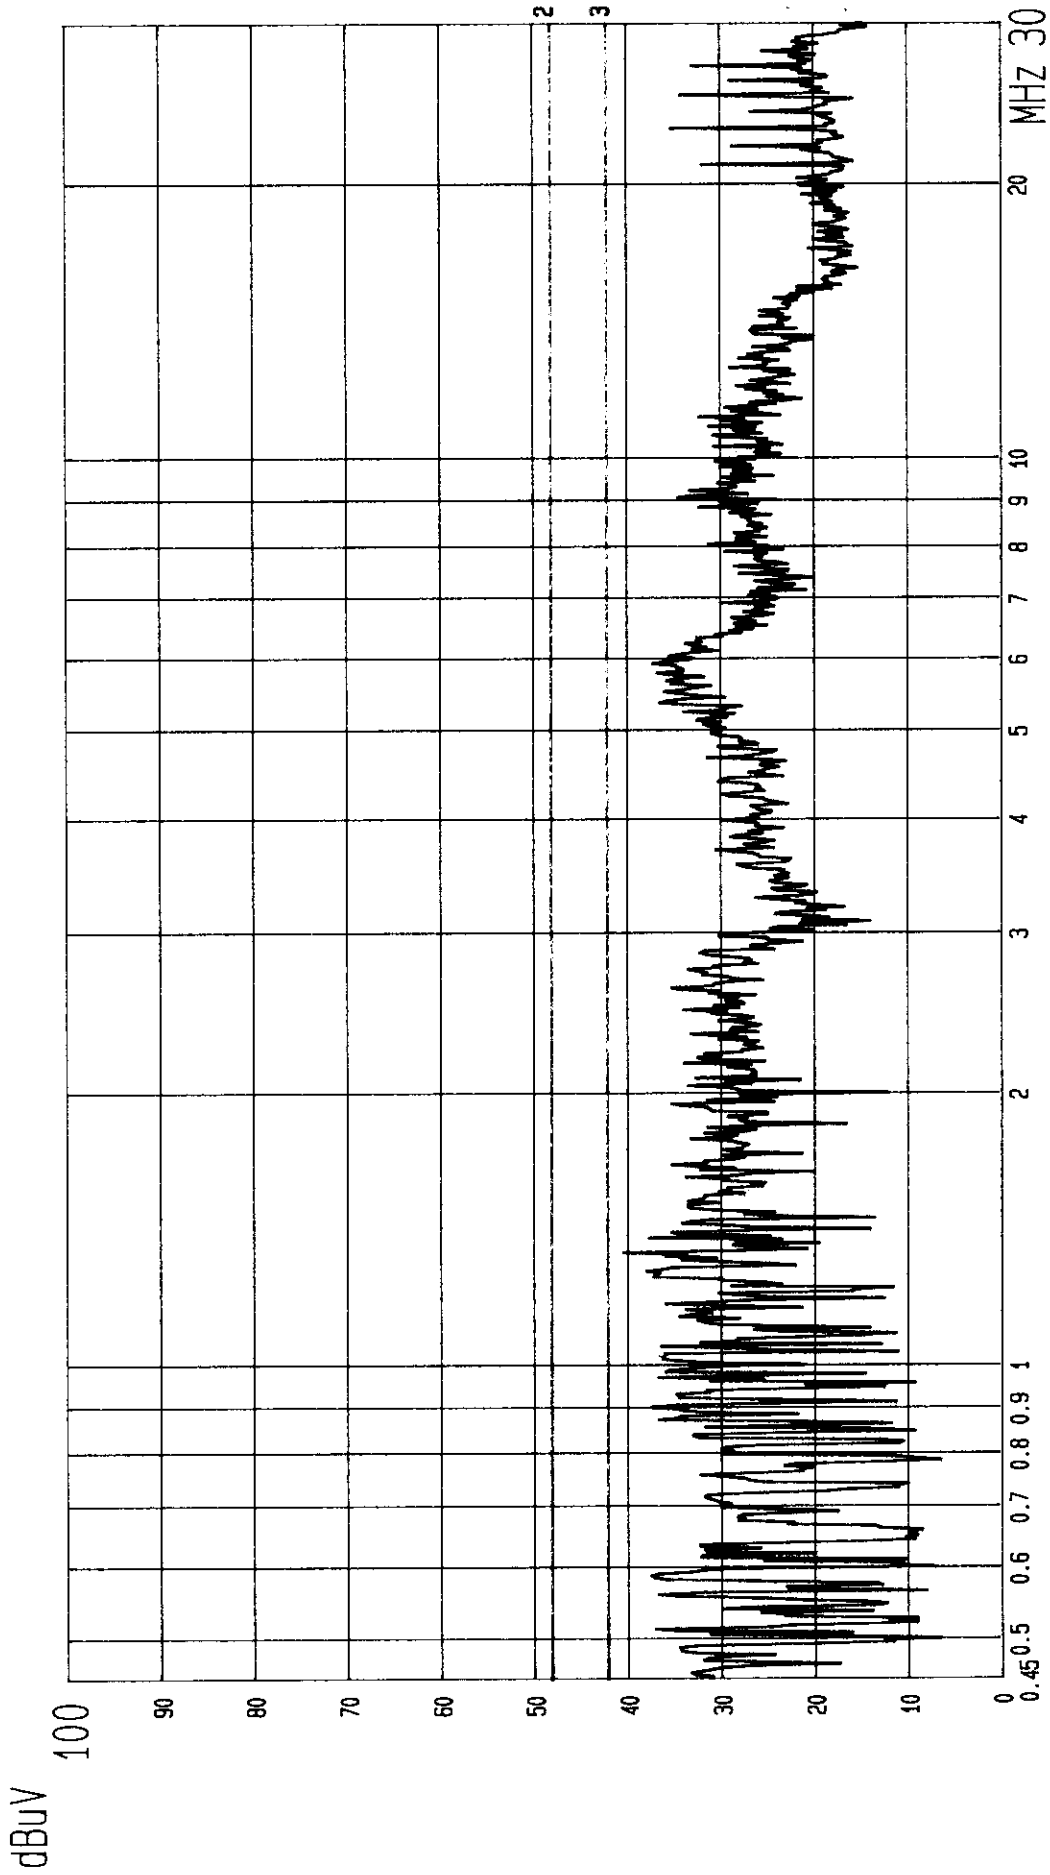

---- Date 27.MAY.'98 Time 09:49:41
MICROTEK EUT: SCANNER M/N: MCS-600U
LINE: VB. MEMO: W/ DELTA ADAPTOR

PAGE: 001.
(PEAK VALUE) TAIWAN TOKIN EMC.CNG.CORP.

70678-5045

3. RADIATED EMISSION TEST


3.1. Test Equipment

The following test equipments are used during the radiated emission tests :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde&Schwarz	ESVP	893202/001	Aug.04, 97'	1 Year
2.	Broadband Antenna	Chase	VBA6106A	1240	Jan. 14, 98'	1 Year
3.	Broadband Antenna	Schwarzbeck	UHALP 9108-A	0139	Jan. 14, 98'	1 Year

3.2. Block Diagram of Test Setup

3.2.1. Block Diagram of connection between EUT and simulators

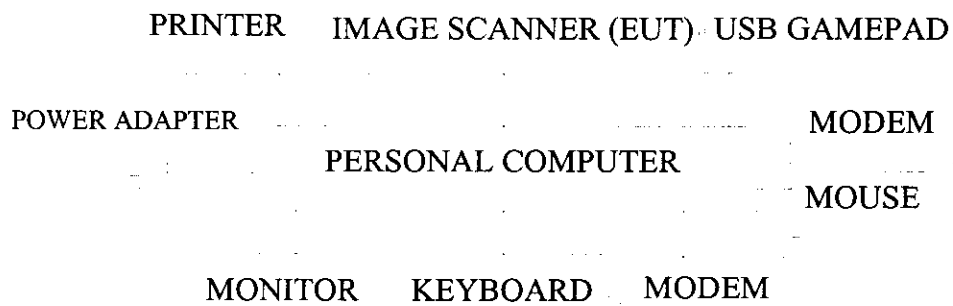

3.2.2. Open Field Test Site Setup Diagram

ANTENNA TOWER

ANTENNA ELEVATION VARIES FROM 1METER TO 4 METER

3 METERS

EUT

0.8
METER

TURN TABLE

GROUND PLANE

3.3. Radiation Limit (CLASS B)

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMITS	
		uV/M	dBuV/M
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

Remark : (1) Emission level (dBuV/M) = 20 log Emission level (uV/M)
 (2) The tighter limit applies at the edge between two frequency bands.
 (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. EUT Configuration on Measurement

The configuration of EUT and its simulators are same as those used in conducted measurement. Please refer to 2.4.

3.5. Operating Condition of EUT

Same as conducted measurement which is listed in 2.5.

3.6. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which was mounted on a antenna tower. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated biconical and log periodical antenna) and dipole antenna were used as receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4-1992 during radiated measurement.

The bandwidth setting on the field strength meter (R&S TEST RECEIVER ESVP) was 120KHz.

The frequency range from 30MHz to 1000MHz was checked.

Image Scanner (EUT) with two kinds of Power Adapters were done on radiated measured. All the test results are listed in section 3.7. The detail of test modes are as follows :

- (1)EUT with Kentex Power Adapter (M/N WA15-120)
- (2)EUT with Delta Power Adapter (M/N ADP-12EB)

3.7. Radiated Emission Noise Measurement Results

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All the emissions not reported below are too low against the FCC CLASS B limit..

Date of Test : May 25, 1998 Temperature : 25 °C

EUT : Image Scanner Humidity : 85 %

Test Mode : Kentex Power Adapter, M/N WA15-120

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level		Margin dBuV/m
			Horizontal dBuV	Horizontal dBuV/m	Limits dBuV/m		
33.010	23.33	1.56	-1.26	23.63	40.00		16.37
50.010	16.21	2.00	3.73	21.94	40.00		18.06
56.010	13.77	2.21	4.09	20.07	40.00		19.93
64.010	11.42	2.24	9.70	23.36	40.00		16.64
72.010	12.10	2.35	11.38	25.83	40.00		14.17
* 111.019	18.72	2.94	8.82	30.48	43.50		13.02
123.024	19.52	3.05	4.52	27.09	43.50		16.41
199.033	22.33	4.03	1.08	27.44	43.50		16.06
216.033	22.24	4.20	-1.25	25.19	43.50		18.31
225.033	22.52	4.32	1.22	28.06	46.00		17.94
242.033	22.91	4.52	-2.10	25.33	46.00		20.67
310.005	13.42	5.23	3.55	22.20	46.00		23.80
330.005	13.94	5.43	3.87	23.24	46.00		22.76
360.005	15.11	5.76	3.98	24.85	46.00		21.15
430.005	16.78	6.36	3.51	26.65	46.00		19.35
470.005	17.30	6.89	3.33	27.52	46.00		18.48

- Remark :
1. All readings are Quasi-Peak values.
 2. The worst emission was detected at 111.019MHz with corrected signal level of 30.48dBuV/m (limit is 43.5dBuV/m) when the antenna was at horizontal polarization and was at 3m high and the turn table was at 265 ° .
 3. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Date of Test : May 25, 1998 Temperature : 25 °CEUT : Image Scanner Humidity : 85 %Test Mode : Kentex Power Adapter, M/N WA15-120

Frequency MHz	Antenna Cable		Meter Reading		Emission Level	
	Factor dB/m	Loss dB	Vertical dBuV	Vertical dBuV/m	Limits dBuV/m	Margin dBuV/m
32.005	22.85	1.56	7.19	31.60	40.00	8.40
37.005	21.05	1.68	9.06	31.79	40.00	8.21
39.005	19.66	1.79	10.12	31.57	40.00	8.43
47.005	16.16	1.94	13.24	31.34	40.00	8.66
64.005	12.41	2.24	10.77	25.42	40.00	14.58
82.005	15.50	2.48	8.24	26.22	40.00	13.78
111.021	17.21	2.94	7.41	27.56	43.50	15.94
119.021	19.13	2.98	5.94	28.05	43.50	15.45
152.007	20.57	3.49	-0.06	24.00	43.50	19.50
167.051	21.05	3.69	6.63	31.37	43.50	12.13
192.008	20.55	3.95	3.75	28.25	43.50	15.25
240.982	23.28	4.48	-2.09	25.67	46.00	20.33
312.005	14.01	5.23	7.50	26.74	46.00	19.26
322.005	14.30	5.29	7.67	27.26	46.00	18.74
332.005	14.35	5.43	7.54	27.32	46.00	18.68
382.005	15.56	5.90	3.72	25.18	46.00	20.82
472.005	17.04	6.88	7.33	31.25	46.00	14.75

Remark : All readings are Quasi-Peak values.

Date of Test : May 25, 1998 Temperature : 25 °C
 EUT : Image Scanner Humidity : 85 %
 Test Mode : Delta Power Adapter, M/N ADP-12EB

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level	
			Horizontal dBuV	Horizontal dBuV/m	Limits dBuV/m	Margin dBuV/m
33.010	23.33	1.56	25.75	25.00	40.00	15.00
35.010	22.45	1.60	24.69	23.13	40.00	16.87
57.010	13.33	2.11	31.24	21.09	40.00	18.91
69.010	11.48	2.31	29.04	17.23	40.00	22.77
87.017	15.55	2.60	30.10	22.73	40.00	17.27
94.017	16.69	2.65	29.95	23.81	43.50	19.69
111.023	18.72	2.94	30.77	26.99	43.50	16.51
117.023	19.38	2.98	28.74	25.67	43.50	17.83
123.023	19.52	3.05	28.85	26.02	43.50	17.48
168.032	21.36	3.67	23.94	23.85	43.50	19.65
232.032	22.63	4.35	20.04	22.31	46.00	23.69
312.061	13.48	5.23	29.11	23.18	46.00	22.82
329.066	13.89	5.41	26.78	21.39	46.00	24.61
336.066	14.12	5.55	31.03	25.97	46.00	20.03
341.066	14.44	5.55	27.17	22.39	46.00	23.61
360.073	15.11	5.76	28.04	24.04	46.00	21.96
365.073	15.46	5.83	31.82	28.13	46.00	17.87
377.073	16.43	5.87	28.82	26.00	46.00	20.00
401.080	17.03	6.08	28.28	26.10	46.00	19.90
413.080	16.99	6.18	28.12	25.90	46.00	20.10
540.114	18.80	7.70	23.35	23.83	46.00	22.17

Remark : All readings are Quasi-Peak values.

Date of Test : May 25, 1998 Temperature : 25 °C

EUT : Image Scanner Humidity : 85 %

Test Mode : Delta Power Adapter, M/N ADP-12EB

Frequency MHz	Antenna Cable		Meter Reading		Emission Level	
	Factor dB/m	Loss dB	Vertical dBuV	Vertical dBuV/m	Limits dBuV/m	Margin dBuV/m
33.013	22.72	1.56	32.67	31.31	40.00	8.69
* 35.013	21.88	1.60	34.20	32.07	40.00	7.93
37.013	21.05	1.68	32.42	29.54	40.00	10.46
47.010	16.16	1.94	38.84	31.33	40.00	8.67
57.010	13.83	2.11	39.30	29.65	40.00	10.35
59.012	13.68	2.10	37.90	28.09	40.00	11.91
95.019	17.77	2.69	38.43	33.41	43.50	10.09
127.024	18.99	3.12	29.46	26.20	43.50	17.30
168.031	21.03	3.67	22.73	22.31	43.50	21.19
216.031	23.17	4.20	21.75	24.23	43.50	19.27
240.044	23.44	4.49	20.79	24.03	46.00	21.97
264.044	24.20	4.82	21.81	26.21	46.00	19.79
312.061	14.01	5.23	23.09	17.69	46.00	28.31
329.990	14.27	5.43	22.47	17.48	46.00	28.52
340.063	14.58	5.48	20.54	15.92	46.00	30.08
360.071	14.68	5.76	23.48	19.05	46.00	26.95
480.096	17.23	6.95	21.61	19.95	46.00	26.05
540.107	19.23	7.70	22.69	23.60	46.00	22.40

- Remark :
1. All readings are Quasi-Peak values.
 2. The worst emission was detected at 35.013MHz with corrected signal level of 32.07dBuV/m (limit is 40.0dBuV/m) when the antenna was at vertical polarization and was at 1m high and the turn table was at 140 ° .
 3. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

4. DEVIATION TO TEST SPECIFICATIONS

【 NONE 】