

Intermec Technologies Corporation

Stretch CN3

July 20, 2007

Report No. ITRM0160.1 Rev. 1

Report Prepared By



www.nwemc.com
1-888-EMI-CERT

© 2007 Northwest EMC, Inc

EMC Test Report

Certificate of Test
Issue Date: July 20, 2007
Intermec Technologies Corporation
Model: Stretch CN3

Emissions				
Test Description	Specification	Test Method	Pass	Fail
AC Powerline Conducted Emissions	FCC 15.107:2006	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Occupied Bandwidth	FCC 15.247 (FHSS):2006	ANSI C63.4:2003 DA 00-705:2000	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Output Power	FCC 15.247 (FHSS):2006	ANSI C63.4:2003 DA 00-705:2000	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Band Edge Compliance	FCC 15.247 (FHSS):2006	ANSI C63.4:2003 DA 00-705:2000	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Power Spectral Density	FCC 15.247 (FHSS):2006	ANSI C63.4:2003 DA 00-705:2000	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Conducted Emissions	FCC 15.247 (FHSS):2006	ANSI C63.4:2003 DA 00-705:2000	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Radiated Emissions	FCC 15.247 (FHSS):2006	ANSI C63.4:2003 DA 00-705:2000	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Modifications made to the product
See the Modifications section of this report

Test Facility

The measurement facility used to collect the data is located at:

Northwest EMC, Inc.
41 Tesla Avenue
Irvine, CA 92618

Phone: (949) 861-8918 Fax: 861-8923

This site has been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada.

Approved By:

Ethan Schoonover, Sultan Lab Manager

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.

Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested, the specific description is noted in each of the individual sections of the test report supporting this certificate of test.

Revision Number	Description	Date	Page Number
01	Changed the Band Edge Data	8-23-07	45-50

FCC: Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



NVLAP: Northwest EMC, Inc. is accredited under the United States Department of Commerce, National Institute of Standards and Technology, and National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 2004/108/EC, and ANSI C63.4. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada.



NVLAP LAB CODE 200629-0
 NVLAP LAB CODE 200630-0
 NVLAP LAB CODE 200676-0
 NVLAP LAB CODE 200761-0

Industry Canada: Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS 212, Issue 1 (Provisional) and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements.



CAB: Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement.



TÜV Product Service: Included in TÜV Product Service Group's Listing of Recognized Laboratories. It qualifies in connection with the TÜV Certification after Recognition of Agent's Testing Program for the product categories and/or standards shown in TÜV's current Listing of CARAT Laboratories, available from TÜV. A certificate was issued to represent that this laboratory continues to meet TÜV's CARAT Program requirements. Certificate No. USA0604C.



TÜV Rheinland: Authorized to carryout EMC tests by order and under supervision of TÜV Rheinland. This authorization is based on "Conditions for EMC-Subcontractors" of November 1992.



NEMKO: Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).



Australia/New Zealand: The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body (NVLAP).



VCCI: Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (*Registration Numbers. - Hillsboro: C-1071, R-1025, C-2687, T-289, and R-2318, Irvine: R-1943, C-2766, and T-298, Sultan: R-871, C-1784, and T-294.*)



BSMI: Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement. License No.SL2-IN-E-1017.




GOST: Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



SCOPE


For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/scope.asp>

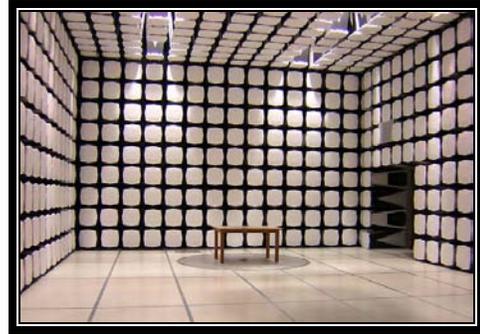

**California – Orange County Facility
Labs OC01 – OC13**

41 Tesla Ave. Irvine, CA 92618
(888) 364-2378 Fax: (503) 844-3826

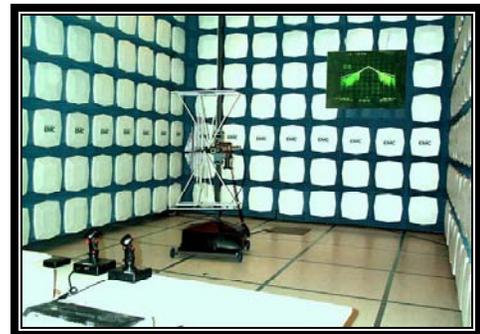

**Oregon – Evergreen Facility
Labs EV01 – EV11**

22975 NW Evergreen Pkwy. Suite 400 Hillsboro, OR 97124
(503) 844-4066 Fax: (503) 844-3826



**Washington – Sultan Facility
Labs SU01 – SU07**

14128 339th Ave. SE Sultan, WA 98294
(888) 364-2378

Party Requesting the Test

Company Name:	Intermec Technologies Corporation
Address:	550 Second St. SE
City, State, Zip:	Cedar Rapids, IA 52401-2023
Test Requested By:	Scott Holub
Model:	Stretch CN3
First Date of Test:	June 19, 2007
Last Date of Test:	July 16, 2007
Receipt Date of Samples:	June 19, 2007
Equipment Design Stage:	Production
Equipment Condition:	No Damage

Information Provided by the Party Requesting the Test

Functional Description of the EUT (Equipment Under Test):

Bluetooth radio in the host device Stretch CN3.

Testing Objective:

These tests were selected to satisfy FCC 15.247 requirements.

EUT Photo



CONFIGURATION 1 ITRM0160

Software/Firmware Running during test	
Description	Version
FCC Test Utility	1.01
BroadTest	1.0

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Stretch CN3 (Direct Connect)	Intermec Technologies Corporation	Stretch CN3	12090700022

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
DC Power Supply	Intermec Technologies Corporation	Model 0	557007

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Power Supply	No	1.8m	Yes	DC Power Supply	Stretch CN3
AC Power	No	1.8m	No	DC Power Supply	AC Mains
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

CONFIGURATION 2 ITRM0160

Software/Firmware Running during test	
Description	Version
FCC Test Utility	1.01
BroadTest	1.0

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Stretch CN3	Intermec Technologies Corporation	Stretch CN3	12090700027

Equipment modifications					
Item	Date	Test	Modification	Note	Disposition of EUT
1	6/19/2007	Radiated Spurious Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	6/20/2007	AC Power Line Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	6/22/2007	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
4	6/22/2007	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
5	6/22/2007	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
6	6/22/2007	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
7	7/16/2007	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

MODES OF OPERATION

Standby-Typical Use
Bluetooth Mode. Channel 39, Mid Data Rate
Bluetooth Mode. Channel 80, Highest Data Rate 8-DPSK, 0 dBm
Bluetooth Mode. Channel 39, Middle Data Rate QPSK, 0 dBm
Bluetooth Mode. Channel 2, Lowest Data Rate GFSK, 0 dBm

POWER SETTINGS INVESTIGATED

230V/50Hz

SAMPLE CALCULATIONS

Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
LISN	Solar	9252-50-24-BNC	LIB	5/8/2006	16
OC11 cables a-b-e-f			OCM	1/8/2007	13
Receiver	Rohde & Schwartz	ESCI	ARF	12/14/2006	13

MEASUREMENT BANDWIDTHS

	Frequency Range	Peak Data	Quasi-Peak Data	Average Data
	(MHz)	(kHz)	(kHz)	(kHz)
	0.01 - 0.15	1.0	0.2	0.2
	0.15 - 30.0	10.0	9.0	9.0
	30.0 - 1000	100.0	120.0	120.0
	Above 1000	1000.0	N/A	1000.0

Measurements were made using the bandwidths and detectors specified. No video filter was used.

MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50 Ω measuring port is terminated by a 50 Ω EMI meter or a 50 Ω resistive load. All 50 Ω measuring ports of the LISN are terminated by 50 Ω .


EMC

CONDUCTED EMISSIONS

Work Order:	ITRM0160	Date:	06/20/07	
Project:	None	Temperature:	22°C	
Job Site:	OC06	Humidity:	42	
Serial Number:	12090700027	Barometric Pres.:	29.98	
EUT:	Stretch CN3			
Configuration:	1			
Customer:	Intermec Technologies Corporation			
Attendees:	None			
EUT Power:	230V/50Hz			
Operating Mode:	Bluetooth Mode. Channel 2, Lowest Data Rate GFSK, 0 dBm			
Deviations:	No Deviations			
Comments:	Bluetooth Mode			

Test Specifications	Class B	Test Method
FCC 15.107:2006		ANSI C63.4:2003

Run #	1	Line:	High Line	Ext. Attenuation:	20	Results	Pass
--------------	---	--------------	-----------	--------------------------	----	----------------	------

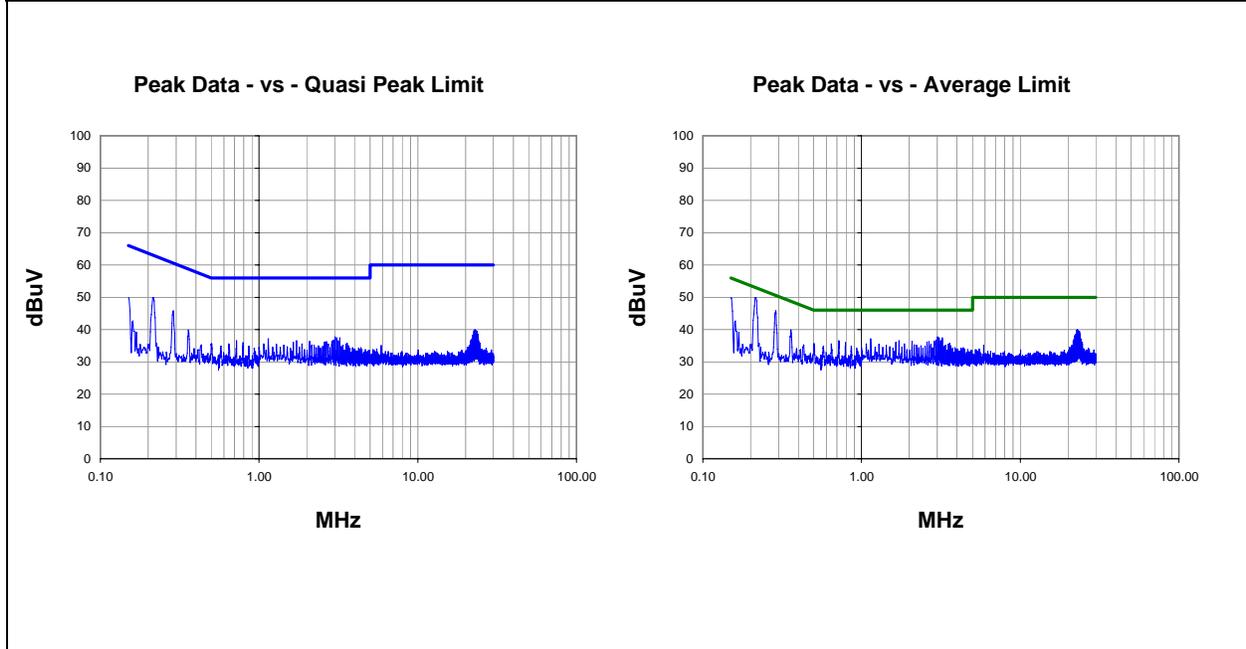

Peak Data - vs - Quasi Peak Limit						Peak Data - vs - Average Limit					
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)	Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.215	28.6	1.3	49.9	63.0	-13.1	0.215	28.6	1.3	49.9	53.0	-3.1
0.288	24.7	1.1	45.8	60.6	-14.7	0.288	24.7	1.1	45.8	50.6	-4.7
0.150	27.7	2.3	50.0	66.0	-16.0	0.150	27.7	2.3	50.0	56.0	-6.0
3.016	16.9	0.8	37.7	56.0	-18.3	3.016	16.9	0.8	37.7	46.0	-8.3
3.088	16.6	0.8	37.4	56.0	-18.6	3.088	16.6	0.8	37.4	46.0	-8.6
3.232	16.6	0.8	37.4	56.0	-18.6	3.232	16.6	0.8	37.4	46.0	-8.6
0.357	18.8	1.1	39.9	58.8	-18.9	0.357	18.8	1.1	39.9	48.8	-8.9
1.144	16.4	0.7	37.1	56.0	-18.9	1.144	16.4	0.7	37.1	46.0	-8.9
2.944	16.0	0.8	36.8	56.0	-19.2	2.944	16.0	0.8	36.8	46.0	-9.2
1.720	15.9	0.7	36.6	56.0	-19.4	1.720	15.9	0.7	36.6	46.0	-9.4
3.160	15.8	0.8	36.6	56.0	-19.4	3.160	15.8	0.8	36.6	46.0	-9.4
0.719	15.7	0.8	36.5	56.0	-19.5	0.719	15.7	0.8	36.5	46.0	-9.5
2.080	15.7	0.7	36.4	56.0	-19.6	2.080	15.7	0.7	36.4	46.0	-9.6
2.872	15.6	0.8	36.4	56.0	-19.6	2.872	15.6	0.8	36.4	46.0	-9.6
2.656	15.5	0.8	36.3	56.0	-19.7	2.656	15.5	0.8	36.3	46.0	-9.7
2.584	15.4	0.8	36.2	56.0	-19.8	2.584	15.4	0.8	36.2	46.0	-9.8
1.648	15.4	0.7	36.1	56.0	-19.9	1.648	15.4	0.7	36.1	46.0	-9.9
22.890	18.7	1.3	40.0	60.0	-20.0	22.890	18.7	1.3	40.0	50.0	-10.0
0.793	15.1	0.8	35.9	56.0	-20.1	0.793	15.1	0.8	35.9	46.0	-10.1
3.592	15.0	0.8	35.8	56.0	-20.2	3.592	15.0	0.8	35.8	46.0	-10.2



EMC

CONDUCTED EMISSIONS

Work Order:	ITRM0160	Date:	06/20/07	
Project:	None	Temperature:	22°C	
Job Site:	OC06	Humidity:	42	
Serial Number:	12090700027	Barometric Pres.:	29.98	
EUT:	Stretch CN3			
Configuration:	1			
Customer:	Intermec Technologies Corporation			
Attendees:	None			
EUT Power:	230V/50Hz			
Operating Mode:	Bluetooth Mode. Channel 2, Lowest Data Rate GFSK, 0 dBm			
Deviations:	No Deviations			
Comments:	Bluetooth Mode			

Test Specifications	Class B	Test Method
FCC 15.107:2006		ANSI C63.4:2003

Run #	2	Line:	Neutral	Ext. Attenuation:	20	Results	Pass
--------------	---	--------------	---------	--------------------------	----	----------------	------

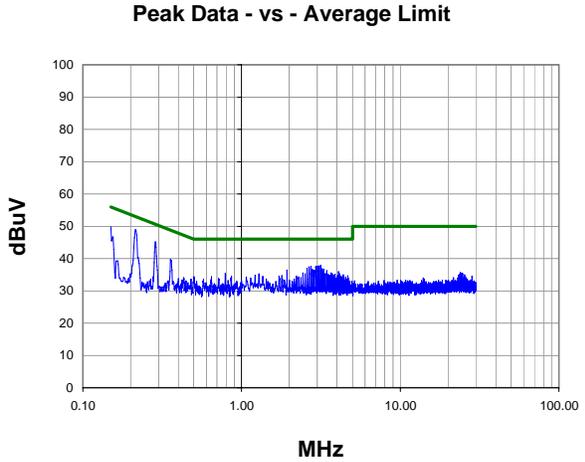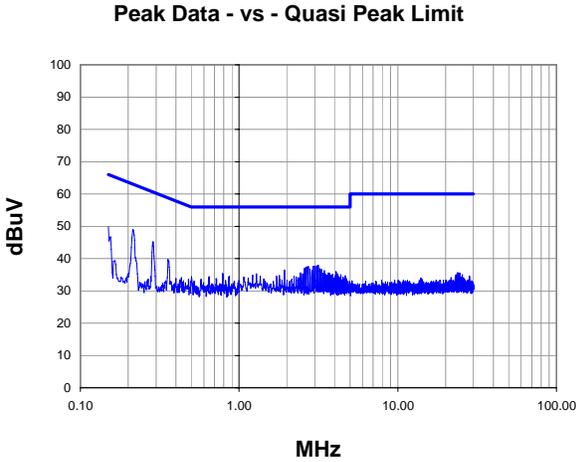

Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.215	27.6	1.3	48.9	63.0	-14.1
0.286	24.0	1.1	45.1	60.6	-15.5
0.150	27.6	2.3	49.9	66.0	-16.1
3.160	17.1	0.8	37.9	56.0	-18.1
3.088	16.9	0.8	37.7	56.0	-18.3
2.944	16.8	0.8	37.6	56.0	-18.4
3.016	16.8	0.8	37.6	56.0	-18.4
2.728	16.7	0.8	37.5	56.0	-18.5
2.656	16.6	0.8	37.4	56.0	-18.6
2.584	16.2	0.8	37.0	56.0	-19.0
3.232	16.1	0.8	36.9	56.0	-19.1
0.356	18.6	1.1	39.7	58.8	-19.1
2.800	15.9	0.8	36.7	56.0	-19.3
3.304	15.9	0.8	36.7	56.0	-19.3
1.936	15.8	0.7	36.5	56.0	-19.5
2.872	15.6	0.8	36.4	56.0	-19.6
3.448	15.5	0.8	36.3	56.0	-19.7
4.088	15.2	0.8	36.0	56.0	-20.0
2.440	14.8	0.8	35.6	56.0	-20.4
3.664	14.8	0.8	35.6	56.0	-20.4

Peak Data - vs - Average Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.215	27.6	1.3	48.9	53.0	-4.1
0.286	24.0	1.1	45.1	50.6	-5.5
0.150	27.6	2.3	49.9	56.0	-6.1
3.160	17.1	0.8	37.9	46.0	-8.1
3.088	16.9	0.8	37.7	46.0	-8.3
2.944	16.8	0.8	37.6	46.0	-8.4
3.016	16.8	0.8	37.6	46.0	-8.4
2.728	16.7	0.8	37.5	46.0	-8.5
2.656	16.6	0.8	37.4	46.0	-8.6
2.584	16.2	0.8	37.0	46.0	-9.0
3.232	16.1	0.8	36.9	46.0	-9.1
0.356	18.6	1.1	39.7	48.8	-9.1
2.800	15.9	0.8	36.7	46.0	-9.3
3.304	15.9	0.8	36.7	46.0	-9.3
1.936	15.8	0.7	36.5	46.0	-9.5
2.872	15.6	0.8	36.4	46.0	-9.6
3.448	15.5	0.8	36.3	46.0	-9.7
4.088	15.2	0.8	36.0	46.0	-10.0
2.440	14.8	0.8	35.6	46.0	-10.4
3.664	14.8	0.8	35.6	46.0	-10.4



EMC

CONDUCTED EMISSIONS

Work Order:	ITRM0160	Date:	06/20/07	
Project:	None	Temperature:	22°C	
Job Site:	OC06	Humidity:	42	
Serial Number:	12090700027	Barometric Pres.:	29.98	
EUT:	Stretch CN3			
Configuration:	1			
Customer:	Intermec Technologies Corporation			
Attendees:	None			
EUT Power:	230V/50Hz			
Operating Mode:	Bluetooth Mode. Channel 39, Middle Data Rate QPSK, 0 dBm			
Deviations:	No Deviations			
Comments:	Bluetooth Mode			

Test Specifications	Class B	Test Method
FCC 15.107:2006		ANSI C63.4:2003

Run #	3	Line:	High Line	Ext. Attenuation:	20	Results	Pass
--------------	---	--------------	-----------	--------------------------	----	----------------	------

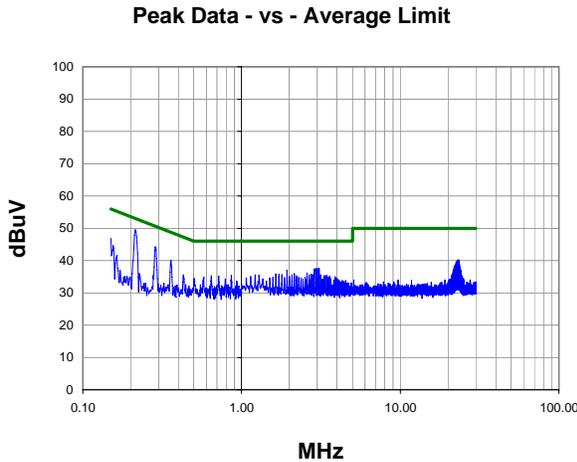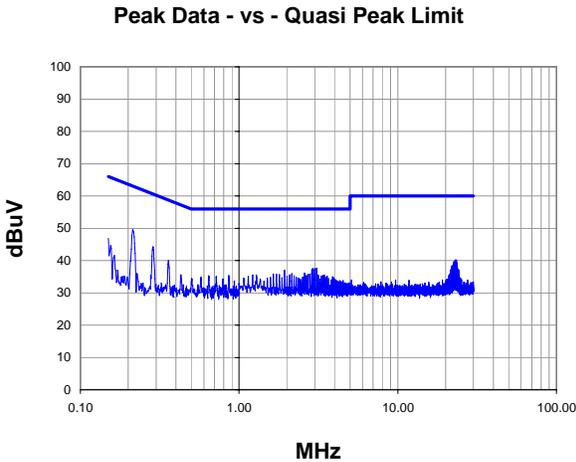

Peak Data - vs - Quasi Peak Limit					
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.213	28.1	1.3	49.4	63.1	-13.7
0.286	23.1	1.1	44.2	60.6	-16.4
3.088	16.8	0.8	37.6	56.0	-18.4
2.936	16.7	0.8	37.5	56.0	-18.5
3.016	16.7	0.8	37.5	56.0	-18.5
2.872	16.5	0.8	37.3	56.0	-18.7
0.357	18.9	1.1	40.0	58.8	-18.8
1.936	16.3	0.7	37.0	56.0	-19.0
0.150	24.6	2.3	46.9	66.0	-19.1
2.584	15.4	0.8	36.2	56.0	-19.8
23.470	18.9	1.3	40.2	60.0	-19.8
22.960	18.9	1.3	40.2	60.0	-19.8
2.152	15.3	0.7	36.0	56.0	-20.0
1.648	15.2	0.7	35.9	56.0	-20.1
1.720	15.1	0.7	35.8	56.0	-20.2
2.728	15.0	0.8	35.8	56.0	-20.2
22.750	18.5	1.3	39.8	60.0	-20.2
23.030	18.5	1.3	39.8	60.0	-20.2
23.250	18.5	1.3	39.8	60.0	-20.2
1.792	15.0	0.7	35.7	56.0	-20.3

Peak Data - vs - Average Limit					
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.213	28.1	1.3	49.4	53.1	-3.7
0.286	23.1	1.1	44.2	50.6	-6.4
3.088	16.8	0.8	37.6	46.0	-8.4
2.936	16.7	0.8	37.5	46.0	-8.5
3.016	16.7	0.8	37.5	46.0	-8.5
2.872	16.5	0.8	37.3	46.0	-8.7
0.357	18.9	1.1	40.0	48.8	-8.8
1.936	16.3	0.7	37.0	46.0	-9.0
0.150	24.6	2.3	46.9	56.0	-9.1
2.584	15.4	0.8	36.2	46.0	-9.8
23.470	18.9	1.3	40.2	50.0	-9.8
22.960	18.9	1.3	40.2	50.0	-9.8
2.152	15.3	0.7	36.0	46.0	-10.0
1.648	15.2	0.7	35.9	46.0	-10.1
1.720	15.1	0.7	35.8	46.0	-10.2
2.728	15.0	0.8	35.8	46.0	-10.2
22.750	18.5	1.3	39.8	50.0	-10.2
23.030	18.5	1.3	39.8	50.0	-10.2
23.250	18.5	1.3	39.8	50.0	-10.2
1.792	15.0	0.7	35.7	46.0	-10.3



EMC

CONDUCTED EMISSIONS

Work Order:	ITRM0160	Date:	06/20/07	
Project:	None	Temperature:	22°C	
Job Site:	OC06	Humidity:	42	
Serial Number:	12090700027	Barometric Pres.:	29.98	
EUT:	Stretch CN3			
Configuration:	1			
Customer:	Intermec Technologies Corporation			
Attendees:	None			
EUT Power:	230V/50Hz			
Operating Mode:	Bluetooth Mode. Channel 39, Middle Data Rate QPSK, 0 dBm			
Deviations:	No Deviations			
Comments:	Bluetooth Mode			

Test Specifications	Class B	Test Method
FCC 15.107:2006		ANSI C63.4:2003

Run #	4	Line:	Neutral	Ext. Attenuation:	20	Results	Pass
--------------	---	--------------	---------	--------------------------	----	----------------	------

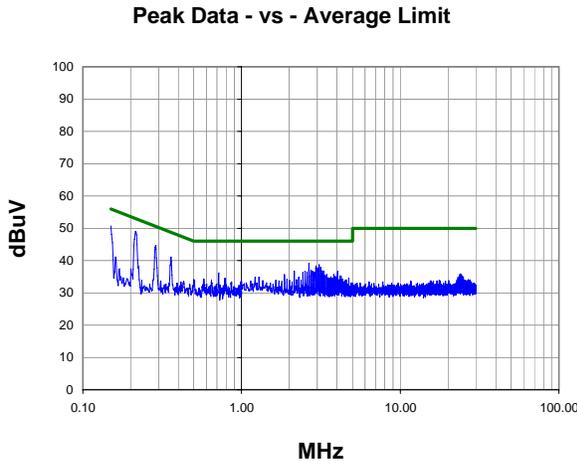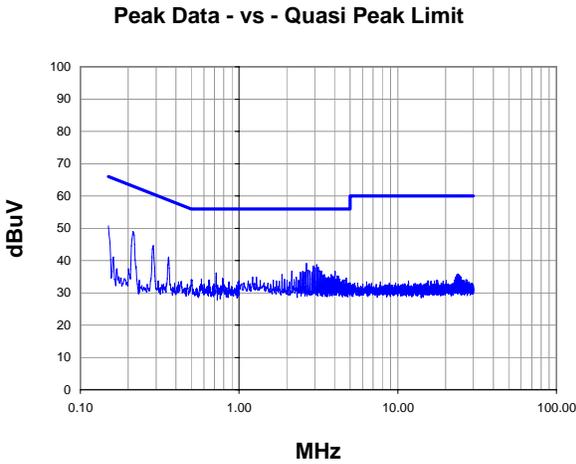

Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.215	27.6	1.3	48.9	63.0	-14.1
0.150	28.4	2.3	50.7	66.0	-15.3
0.288	23.5	1.1	44.6	60.6	-15.9
2.656	18.3	0.8	39.1	56.0	-16.9
3.088	17.9	0.8	38.7	56.0	-17.3
0.359	20.0	1.1	41.1	58.7	-17.6
2.944	17.5	0.8	38.3	56.0	-17.7
3.160	17.1	0.8	37.9	56.0	-18.1
3.016	16.9	0.8	37.7	56.0	-18.3
2.728	16.2	0.8	37.0	56.0	-19.0
3.232	16.1	0.8	36.9	56.0	-19.1
2.152	16.1	0.7	36.8	56.0	-19.2
2.800	16.0	0.8	36.8	56.0	-19.2
3.304	16.0	0.8	36.8	56.0	-19.2
2.512	15.9	0.8	36.7	56.0	-19.3
4.024	15.9	0.8	36.7	56.0	-19.3
2.584	15.7	0.8	36.5	56.0	-19.5
2.872	15.7	0.8	36.5	56.0	-19.5
2.432	15.6	0.8	36.4	56.0	-19.6
0.718	15.3	0.8	36.1	56.0	-19.9

Peak Data - vs - Average Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.215	27.6	1.3	48.9	53.0	-4.1
0.150	28.4	2.3	50.7	56.0	-5.3
0.288	23.5	1.1	44.6	50.6	-5.9
2.656	18.3	0.8	39.1	46.0	-6.9
3.088	17.9	0.8	38.7	46.0	-7.3
0.359	20.0	1.1	41.1	48.7	-7.6
2.944	17.5	0.8	38.3	46.0	-7.7
3.160	17.1	0.8	37.9	46.0	-8.1
3.016	16.9	0.8	37.7	46.0	-8.3
2.728	16.2	0.8	37.0	46.0	-9.0
3.232	16.1	0.8	36.9	46.0	-9.1
2.152	16.1	0.7	36.8	46.0	-9.2
2.800	16.0	0.8	36.8	46.0	-9.2
3.304	16.0	0.8	36.8	46.0	-9.2
2.512	15.9	0.8	36.7	46.0	-9.3
4.024	15.9	0.8	36.7	46.0	-9.3
2.584	15.7	0.8	36.5	46.0	-9.5
2.872	15.7	0.8	36.5	46.0	-9.5
2.432	15.6	0.8	36.4	46.0	-9.6
0.718	15.3	0.8	36.1	46.0	-9.9



EMC

CONDUCTED EMISSIONS

Work Order:	ITRM0160	Date:	06/20/07	
Project:	None	Temperature:	22°C	
Job Site:	OC06	Humidity:	42	
Serial Number:	12090700027	Barometric Pres.:	29.98	
EUT:	Stretch CN3			
Configuration:	1			
Customer:	Intermec Technologies Corporation			
Attendees:	None			
EUT Power:	230V/50Hz			
Operating Mode:	Bluetooth Mode. Channel 80, Highest Data Rate 8-DPSK, 0 dBm			
Deviations:	No Deviations			
Comments:	Bluetooth Mode			

Test Specifications	Class B	Test Method
FCC 15.107:2006		ANSI C63.4:2003

Run #	5	Line:	High Line	Ext. Attenuation:	20	Results	Pass
--------------	---	--------------	-----------	--------------------------	----	----------------	------

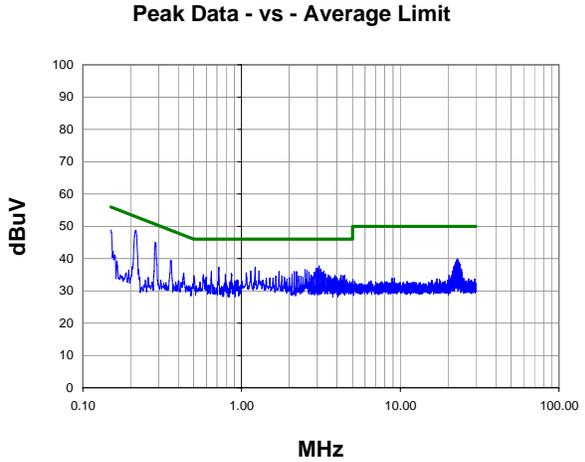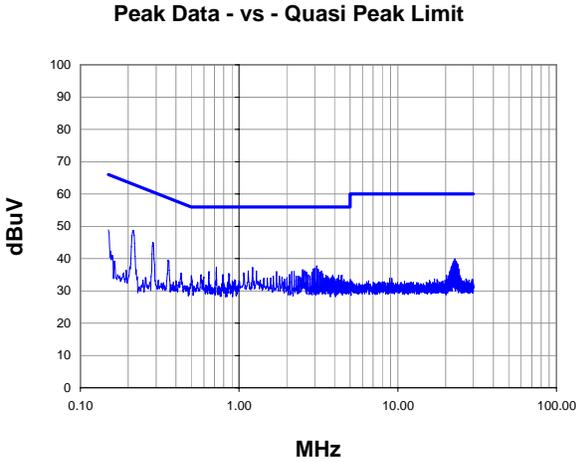

Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.215	27.4	1.3	48.7	63.0	-14.3
0.286	23.8	1.1	44.9	60.6	-15.7
0.150	26.6	2.3	48.9	66.0	-17.1
3.088	16.9	0.8	37.7	56.0	-18.3
0.718	16.5	0.8	37.3	56.0	-18.7
1.216	16.5	0.7	37.2	56.0	-18.8
3.016	16.2	0.8	37.0	56.0	-19.0
2.944	16.1	0.8	36.9	56.0	-19.1
0.357	18.4	1.1	39.5	58.8	-19.3
3.160	15.9	0.8	36.7	56.0	-19.3
2.512	15.8	0.8	36.6	56.0	-19.4
2.584	15.5	0.8	36.3	56.0	-19.7
1.144	15.5	0.7	36.2	56.0	-19.8
1.288	15.5	0.7	36.2	56.0	-19.8
3.304	15.4	0.8	36.2	56.0	-19.8
1.720	15.3	0.7	36.0	56.0	-20.0
2.152	15.3	0.7	36.0	56.0	-20.0
2.224	15.2	0.7	35.9	56.0	-20.1
0.646	15.1	0.8	35.9	56.0	-20.1
2.656	15.1	0.8	35.9	56.0	-20.1

Peak Data - vs - Average Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.215	27.4	1.3	48.7	53.0	-4.3
0.286	23.8	1.1	44.9	50.6	-5.7
0.150	26.6	2.3	48.9	56.0	-7.1
3.088	16.9	0.8	37.7	46.0	-8.3
0.718	16.5	0.8	37.3	46.0	-8.7
1.216	16.5	0.7	37.2	46.0	-8.8
3.016	16.2	0.8	37.0	46.0	-9.0
2.944	16.1	0.8	36.9	46.0	-9.1
0.357	18.4	1.1	39.5	48.8	-9.3
3.160	15.9	0.8	36.7	46.0	-9.3
2.512	15.8	0.8	36.6	46.0	-9.4
2.584	15.5	0.8	36.3	46.0	-9.7
1.144	15.5	0.7	36.2	46.0	-9.8
1.288	15.5	0.7	36.2	46.0	-9.8
3.304	15.4	0.8	36.2	46.0	-9.8
1.720	15.3	0.7	36.0	46.0	-10.0
2.152	15.3	0.7	36.0	46.0	-10.0
2.224	15.2	0.7	35.9	46.0	-10.1
0.646	15.1	0.8	35.9	46.0	-10.1
2.656	15.1	0.8	35.9	46.0	-10.1


EMC

CONDUCTED EMISSIONS

Work Order:	ITRM0160	Date:	06/20/07	
Project:	None	Temperature:	22°C	
Job Site:	OC06	Humidity:	42	
Serial Number:	12090700027	Barometric Pres.:	29.98	
EUT:	Stretch CN3			
Configuration:	1			
Customer:	Intermec Technologies Corporation			
Attendees:	None			
EUT Power:	230V/50Hz			
Operating Mode:	Bluetooth Mode. Channel 80, Highest Data Rate 8-DPSK, 0 dBm			
Deviations:	No Deviations			
Comments:	Bluetooth Mode			

Test Specifications	Class B	Test Method
FCC 15.107:2006		ANSI C63.4:2003

Run #	6	Line:	Neutral	Ext. Attenuation:	20	Results	Pass
--------------	---	--------------	---------	--------------------------	----	----------------	------

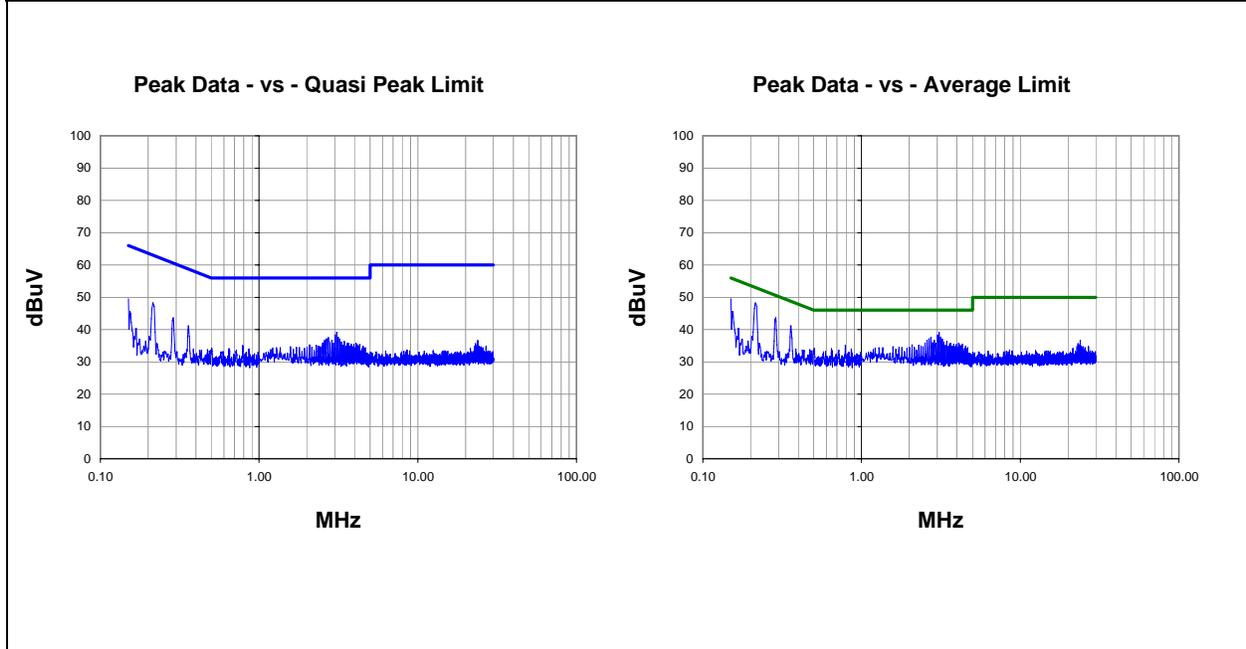

Peak Data - vs - Quasi Peak Limit						Peak Data - vs - Average Limit					
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)	Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.215	27.0	1.3	48.3	63.0	-14.7	0.215	27.0	1.3	48.3	53.0	-4.7
0.150	27.3	2.3	49.6	66.0	-16.4	0.150	27.3	2.3	49.6	56.0	-6.4
3.088	18.3	0.8	39.1	56.0	-16.9	3.088	18.3	0.8	39.1	46.0	-6.9
0.288	22.5	1.1	43.6	60.6	-16.9	0.288	22.5	1.1	43.6	50.6	-6.9
0.357	20.1	1.1	41.2	58.8	-17.6	0.357	20.1	1.1	41.2	48.8	-7.6
3.016	17.5	0.8	38.3	56.0	-17.7	3.016	17.5	0.8	38.3	46.0	-7.7
3.160	16.8	0.8	37.6	56.0	-18.4	3.160	16.8	0.8	37.6	46.0	-8.4
2.728	16.7	0.8	37.5	56.0	-18.5	2.728	16.7	0.8	37.5	46.0	-8.5
2.656	16.3	0.8	37.1	56.0	-18.9	2.656	16.3	0.8	37.1	46.0	-8.9
3.232	16.2	0.8	37.0	56.0	-19.0	3.232	16.2	0.8	37.0	46.0	-9.0
2.584	15.9	0.8	36.7	56.0	-19.3	2.584	15.9	0.8	36.7	46.0	-9.3
2.872	15.9	0.8	36.7	56.0	-19.3	2.872	15.9	0.8	36.7	46.0	-9.3
3.448	15.6	0.8	36.4	56.0	-19.6	3.448	15.6	0.8	36.4	46.0	-9.6
3.304	15.4	0.8	36.2	56.0	-19.8	3.304	15.4	0.8	36.2	46.0	-9.8
2.800	15.2	0.8	36.0	56.0	-20.0	2.800	15.2	0.8	36.0	46.0	-10.0
2.512	15.1	0.8	35.9	56.0	-20.1	2.512	15.1	0.8	35.9	46.0	-10.1
0.153	23.4	2.2	45.6	65.8	-20.2	0.153	23.4	2.2	45.6	55.8	-10.2
2.944	15.0	0.8	35.8	56.0	-20.2	2.944	15.0	0.8	35.8	46.0	-10.2
3.664	15.0	0.8	35.8	56.0	-20.2	3.664	15.0	0.8	35.8	46.0	-10.2
4.096	15.0	0.8	35.8	56.0	-20.2	4.096	15.0	0.8	35.8	46.0	-10.2



EMC

CONDUCTED EMISSIONS

Work Order:	ITRM0160	Date:	06/20/07	
Project:	None	Temperature:	22°C	
Job Site:	OC06	Humidity:	42	
Serial Number:	12090700027	Barometric Pres.:	29.98	
EUT:	Stretch CN3			
Configuration:	1			
Customer:	Intermec Technologies Corporation			
Attendees:	None			
EUT Power:	230V/50Hz			
Operating Mode:	Bluetooth Mode. Channel 39, Mid Data Rate			
Deviations:	No Deviations			
Comments:	Bluetooth Mode			

Test Specifications	Class B	Test Method
FCC 15.107:2006		ANSI C63.4:2003

Run #	22	Line:	High Line	Ext. Attenuation:	20	Results	Pass
--------------	----	--------------	-----------	--------------------------	----	----------------	------

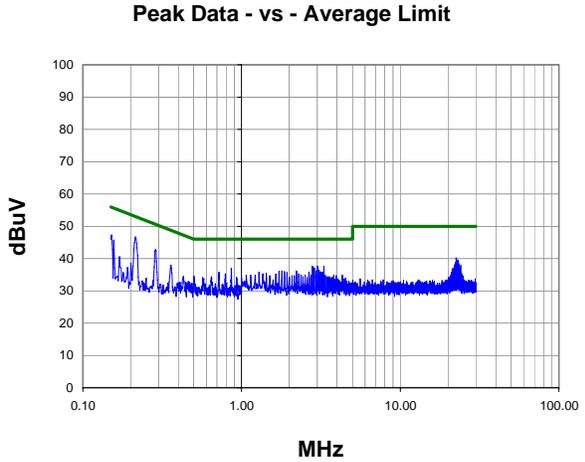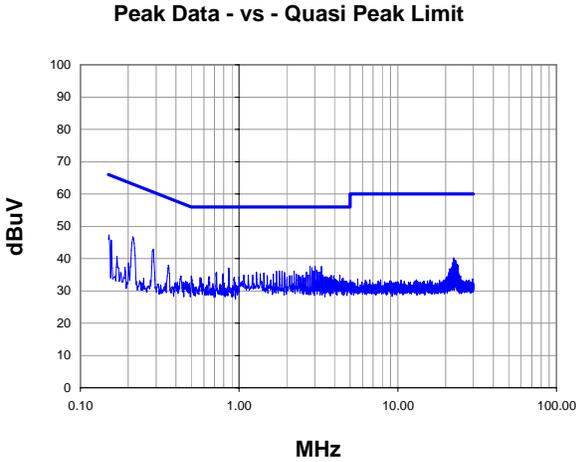

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.215	25.4	1.3	46.7	63.0	-16.3
0.288	21.7	1.1	42.8	60.6	-17.7
2.800	16.8	0.8	37.6	56.0	-18.4
3.016	16.8	0.8	37.6	56.0	-18.4
3.304	16.7	0.8	37.5	56.0	-18.5
0.152	25.0	2.3	47.3	65.9	-18.6
2.872	16.3	0.8	37.1	56.0	-18.9
0.862	16.3	0.8	37.1	56.0	-18.9
3.088	15.6	0.8	36.4	56.0	-19.6
1.792	15.5	0.7	36.2	56.0	-19.8
2.944	15.4	0.8	36.2	56.0	-19.8
22.530	18.9	1.3	40.2	60.0	-19.8
2.224	15.4	0.7	36.1	56.0	-19.9
1.720	15.4	0.7	36.1	56.0	-19.9
0.157	23.5	2.2	45.7	65.6	-19.9
22.610	18.8	1.3	40.1	60.0	-19.9
1.864	15.3	0.7	36.0	56.0	-20.0
3.160	15.1	0.8	35.9	56.0	-20.1
1.288	15.1	0.7	35.8	56.0	-20.2
2.656	15.0	0.8	35.8	56.0	-20.2

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.215	25.4	1.3	46.7	53.0	-6.3
0.288	21.7	1.1	42.8	50.6	-7.7
2.800	16.8	0.8	37.6	46.0	-8.4
3.016	16.8	0.8	37.6	46.0	-8.4
3.304	16.7	0.8	37.5	46.0	-8.5
0.152	25.0	2.3	47.3	55.9	-8.6
2.872	16.3	0.8	37.1	46.0	-8.9
0.862	16.3	0.8	37.1	46.0	-8.9
3.088	15.6	0.8	36.4	46.0	-9.6
1.792	15.5	0.7	36.2	46.0	-9.8
2.944	15.4	0.8	36.2	46.0	-9.8
22.530	18.9	1.3	40.2	50.0	-9.8
2.224	15.4	0.7	36.1	46.0	-9.9
1.720	15.4	0.7	36.1	46.0	-9.9
0.157	23.5	2.2	45.7	55.6	-9.9
22.610	18.8	1.3	40.1	50.0	-9.9
1.864	15.3	0.7	36.0	46.0	-10.0
3.160	15.1	0.8	35.9	46.0	-10.1
1.288	15.1	0.7	35.8	46.0	-10.2
2.656	15.0	0.8	35.8	46.0	-10.2



EMC

CONDUCTED EMISSIONS

Work Order:	ITRM0160	Date:	06/20/07	<i>Sami Khan</i> Tested by: Sami Khan
Project:	None	Temperature:	22°C	
Job Site:	OC06	Humidity:	42	
Serial Number:	12090700027	Barometric Pres.:	29.98	
EUT:	Stretch CN3			
Configuration:	1			
Customer:	Intermec Technologies Corporation			
Attendees:	None			
EUT Power:	230V/50Hz			
Operating Mode:	Bluetooth Mode. Channel 39, Mid Data Rate			
Deviations:	No Deviations			
Comments:	Bluetooth Mode			

Test Specifications	Class B	Test Method
FCC 15.107:2006		ANSI C63.4:2003

Run #	23	Line:	Neutral	Ext. Attenuation:	20	Results	Pass
--------------	----	--------------	---------	--------------------------	----	----------------	------

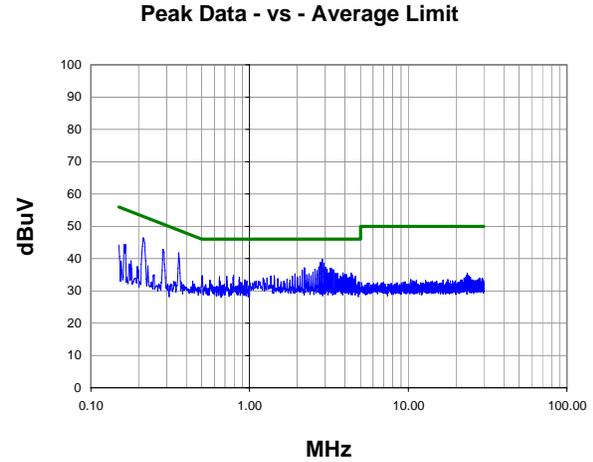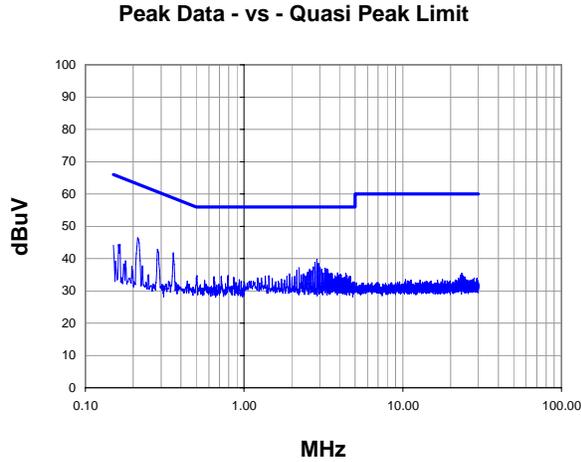

Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
2.872	19.0	0.8	39.8	56.0	-16.2
0.215	25.1	1.3	46.4	63.0	-16.6
0.357	20.7	1.1	41.8	58.8	-17.0
2.800	18.0	0.8	38.8	56.0	-17.2
2.944	17.7	0.8	38.5	56.0	-17.5
0.284	21.7	1.1	42.8	60.7	-17.8
2.728	16.6	0.8	37.4	56.0	-18.6
3.016	16.5	0.8	37.3	56.0	-18.7
2.224	16.4	0.7	37.1	56.0	-18.9
3.232	16.2	0.8	37.0	56.0	-19.0
3.304	16.1	0.8	36.9	56.0	-19.1
2.584	15.9	0.8	36.7	56.0	-19.3
3.088	15.9	0.8	36.7	56.0	-19.3
3.376	15.8	0.8	36.6	56.0	-19.4
2.152	15.7	0.7	36.4	56.0	-19.6
2.656	15.5	0.8	36.3	56.0	-19.7
2.512	15.0	0.8	35.8	56.0	-20.2
3.152	14.8	0.8	35.6	56.0	-20.4
3.880	14.8	0.8	35.6	56.0	-20.4
4.384	14.7	0.8	35.5	56.0	-20.5

Peak Data - vs - Average Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
2.872	19.0	0.8	39.8	46.0	-6.2
0.215	25.1	1.3	46.4	53.0	-6.6
0.357	20.7	1.1	41.8	48.8	-7.0
2.800	18.0	0.8	38.8	46.0	-7.2
2.944	17.7	0.8	38.5	46.0	-7.5
0.284	21.7	1.1	42.8	50.7	-7.8
2.728	16.6	0.8	37.4	46.0	-8.6
3.016	16.5	0.8	37.3	46.0	-8.7
2.224	16.4	0.7	37.1	46.0	-8.9
3.232	16.2	0.8	37.0	46.0	-9.0
3.304	16.1	0.8	36.9	46.0	-9.1
2.584	15.9	0.8	36.7	46.0	-9.3
3.088	15.9	0.8	36.7	46.0	-9.3
3.376	15.8	0.8	36.6	46.0	-9.4
2.152	15.7	0.7	36.4	46.0	-9.6
2.656	15.5	0.8	36.3	46.0	-9.7
2.512	15.0	0.8	35.8	46.0	-10.2
3.152	14.8	0.8	35.6	46.0	-10.4
3.880	14.8	0.8	35.6	46.0	-10.4
4.384	14.7	0.8	35.5	46.0	-10.5

EMC


CONDUCTED EMISSIONS

Work Order:	ITRM0160	Date:	06/20/07	
Project:	None	Temperature:	22°C	
Job Site:	OC06	Humidity:	42	
Serial Number:	12090700027	Barometric Pres.:	29.98	
EUT:	Stretch CN3			
Configuration:	1			
Customer:	Intermec Technologies Corporation			
Attendees:	None			
EUT Power:	230V/50Hz			
Operating Mode:	Standby-Typical Use			
Deviations:	No Deviations			
Comments:	Bluetooth Mode			


Test Specifications FCC 15.107:2006	Class B	Test Method ANSI C63.4:2003
---	----------------	---------------------------------------

Run #	18	Line:	High Line	Ext. Attenuation:	20	Results	Pass
--------------	----	--------------	-----------	--------------------------	----	----------------	------

Quasi Peak Data - vs - Quasi Peak Limit

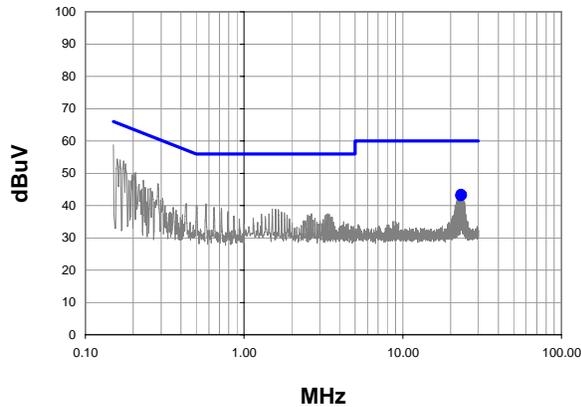

Average Data - vs - Average Limit

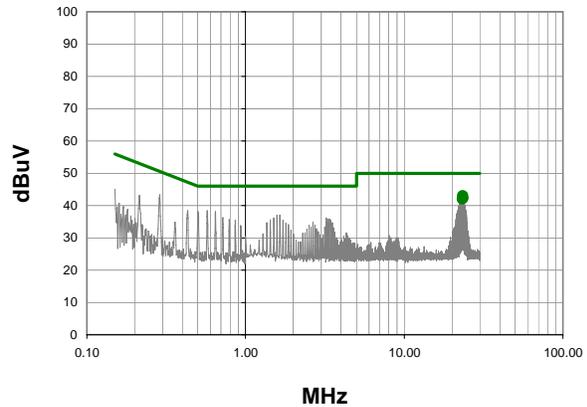

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
23.336	22.2	1.3	43.5	60.0	-16.5
23.480	22.1	1.3	43.4	60.0	-16.6
23.406	22.0	1.3	43.3	60.0	-16.7
23.550	21.9	1.3	43.2	60.0	-16.8
23.266	21.9	1.3	43.2	60.0	-16.8
23.194	21.7	1.3	43.0	60.0	-17.0

Average Data - vs - Average Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
23.480	21.8	1.3	43.1	50.0	-6.9
23.336	21.7	1.3	43.0	50.0	-7.0
23.550	21.0	1.3	42.3	50.0	-7.7
23.406	20.9	1.3	42.2	50.0	-7.8
23.266	20.8	1.3	42.1	50.0	-7.9
23.194	20.7	1.3	42.0	50.0	-8.0

EMC


CONDUCTED EMISSIONS

Work Order:	ITRM0160	Date:	06/20/07	
Project:	None	Temperature:	22°C	
Job Site:	OC06	Humidity:	42	
Serial Number:	12090700027	Barometric Pres.:	29.98	
EUT:	Stretch CN3			
Configuration:	1			
Customer:	Intermec Technologies Corporation			
Attendees:	None			
EUT Power:	230V/50Hz			
Operating Mode:	Standby-Typical Use			
Deviations:	No Deviations			
Comments:	Bluetooth Mode			


Test Specifications FCC 15.107:2006	Class B	Test Method ANSI C63.4:2003
---	----------------	---------------------------------------

Run #	20	Line:	Neutral	Ext. Attenuation:	20	Results	Pass
--------------	----	--------------	---------	--------------------------	----	----------------	------

Quasi Peak Data - vs - Quasi Peak Limit

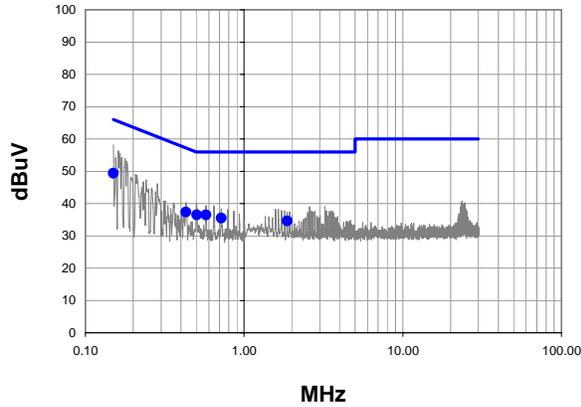

Average Data - vs - Average Limit

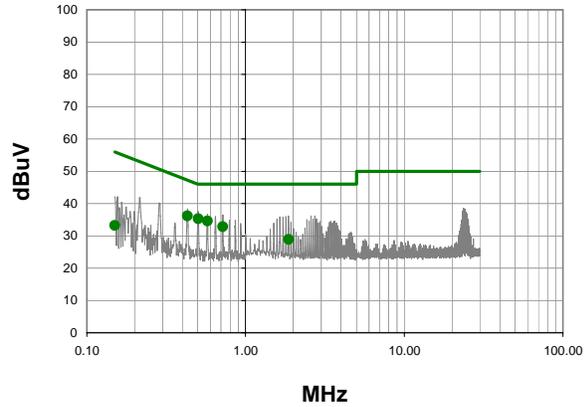


Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.150	27.1	2.3	49.4	66.0	-16.6
0.575	15.6	0.9	36.5	56.0	-19.5
0.504	15.5	0.9	36.4	56.0	-19.6
0.431	16.3	1.1	37.4	57.2	-19.9
0.719	14.7	0.8	35.5	56.0	-20.5
1.868	13.9	0.7	34.6	56.0	-21.4

Average Data - vs - Average Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.504	14.4	0.9	35.3	46.0	-10.7
0.431	15.1	1.1	36.2	47.2	-11.1
0.575	13.7	0.9	34.6	46.0	-11.4
0.719	12.0	0.8	32.8	46.0	-13.2
1.868	8.2	0.7	28.9	46.0	-17.1
0.150	10.9	2.3	33.2	56.0	-22.8

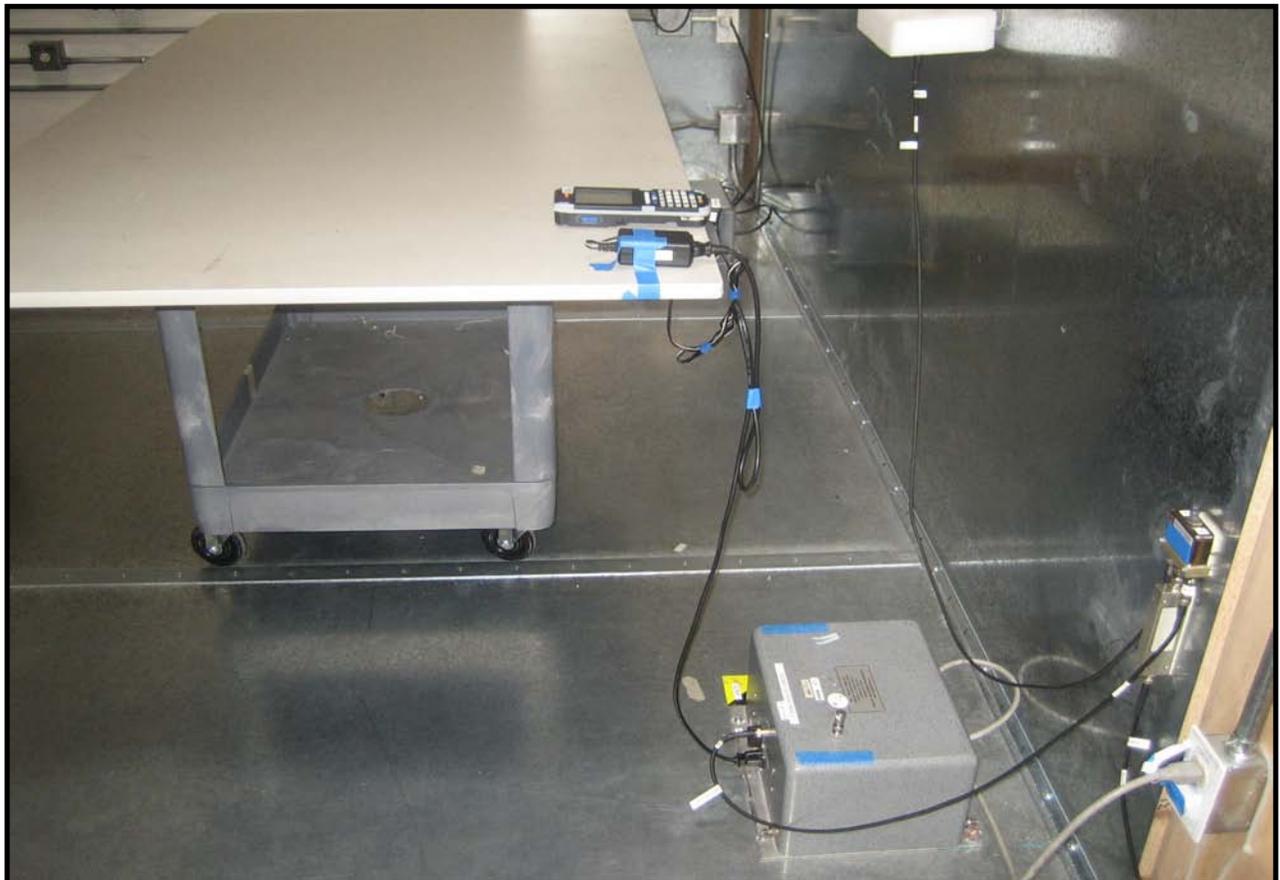



Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

MODES OF OPERATION INVESTIGATED

High Channel. Channel 80
Mid Channel. Channel 39
Low Channel. Channel 1

MODULATION TYPES INVESTIGATED

DH5
2DH5
3DH5

POWER SETTINGS INVESTIGATED

Battery

POWER SETTINGS USED FOR FINAL DATA

Battery

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	26 GHz
-----------------	--------	----------------	--------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Pre-Amplifier	Miteq	AMF-6F-18002650-25-10P	AOI	7/11/2006	13
Antenna, Horn	EMCO	3160-09	AHN	NCR	0
OC10 SMA cable for 18-26 GHz			OCK	7/11/2006	13
High Pass Filter	Micro-Tronics	HPM50111	HFM	12/17/2006	13
Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AOF	10/13/2006	12
Antenna, Horn	ETS	3160-08	AHT	NCR	0
Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AOE	10/13/2006	12
Antenna, Horn	ETS	3160-07	AHR	NCR	24
OC10 cables a,b,c,e,f Horn Cables			OCJ	1/14/2007	13
Antenna, Horn	EMCO	3115	AHB	8/1/2005	24
OC 10 Cables a, b, c, l Cables			OCO	1/14/2007	13
Antenna, Biconilog	EMCO	3142	AXJ	3/14/2006	24
OC10 cables a,b,c,d Bilog			OCH	12/17/2006	13
Pre-Amplifier	Miteq	AM-1616-1000	AOM	12/17/2006	13
Spectrum Analyzer	Agilent	E4446A	AAQ	1/18/2007	13

MEASUREMENT BANDWIDTHS

Frequency Range	Peak Data	Quasi-Peak Data	Average Data
	(MHz)	(kHz)	(kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

Measurements were made using the bandwidths and detectors specified. No video filter was used.

MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization, and manipulating the EUT antenna in 3 orthogonal planes (per ANSI C63.4:2003). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

EUT: Stretch CN3	Work Order: ITRM0160
Serial Number: 12090700027	Date: 06/19/07
Customer: Intermec Technologies Corporation	Temperature: 22°C
Attendees: None	Humidity: 42%
Project: None	Barometric Pres.: 29.98
Tested by: Jaemi Suh	Power: Battery
	Job Site: OC13

TEST SPECIFICATIONS

FCC 15.247 (FHSS):2006	Test Method
	ANSI C63.4:2003 DA 00-705:2000

TEST PARAMETERS

Antenna Height(s) (m)	1 - 4	Test Distance (m)	0
-----------------------	-------	-------------------	---

COMMENTS

Bluetooth Mode. Channel 2 (2402 MHz). Data Rate: DH5, 2DH5, 3DH5.


EUT OPERATING MODES

Bluetooth Mode. Channel 1

DEVIATIONS FROM TEST STANDARD

No deviations.

Run #	4	Signature 
Configuration #	2	
Results	Pass	

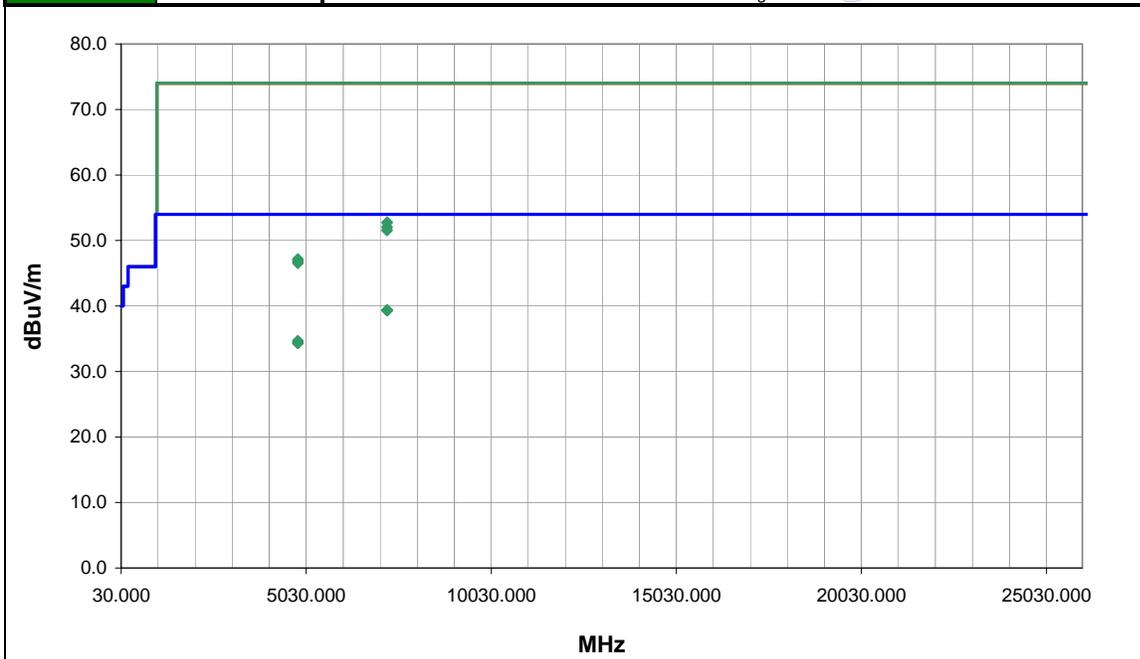

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
7215.685	24.9	14.5	283.0	3.3	0.0	0.0	H-Horn	AV	0.0	39.4	54.0	-14.6	2DH5
7217.769	24.9	14.5	103.0	3.3	0.0	0.0	V-Horn	AV	0.0	39.4	54.0	-14.6	DH5
7218.562	24.9	14.5	61.0	3.3	0.0	0.0	V-Horn	AV	0.0	39.4	54.0	-14.6	2DH5
7213.953	24.8	14.5	66.0	1.9	0.0	0.0	H-Horn	AV	0.0	39.3	54.0	-14.7	3DH5
7216.550	24.8	14.5	191.0	1.0	0.0	0.0	H-Horn	AV	0.0	39.3	54.0	-14.7	DH5
7217.453	24.8	14.5	167.0	3.2	0.0	0.0	V-Horn	AV	0.0	39.3	54.0	-14.7	3DH5
4803.942	24.4	10.3	272.0	2.0	0.0	0.0	V-Horn	AV	0.0	34.7	54.0	-19.3	3DH5
4804.028	24.3	10.3	234.0	1.3	0.0	0.0	V-Horn	AV	0.0	34.6	54.0	-19.4	2DH5
4804.164	24.3	10.3	295.0	1.4	0.0	0.0	V-Horn	AV	0.0	34.6	54.0	-19.4	DH5
4804.482	24.1	10.3	89.0	2.1	0.0	0.0	H-Horn	AV	0.0	34.4	54.0	-19.6	3DH5
4804.232	24.0	10.3	99.0	2.2	0.0	0.0	H-Horn	AV	0.0	34.3	54.0	-19.7	DH5
4804.532	24.0	10.3	219.0	2.2	0.0	0.0	H-Horn	AV	0.0	34.3	54.0	-19.7	2DH5
7216.381	38.3	14.5	167.0	3.2	0.0	0.0	V-Horn	PK	0.0	52.8	74.0	-21.2	3DH5
7215.055	38.2	14.5	191.0	1.0	0.0	0.0	H-Horn	PK	0.0	52.7	74.0	-21.3	DH5
7215.862	37.6	14.5	61.0	3.3	0.0	0.0	V-Horn	PK	0.0	52.1	74.0	-21.9	2DH5
7215.281	37.5	14.5	103.0	3.3	0.0	0.0	V-Horn	PK	0.0	52.0	74.0	-22.0	DH5
7215.086	37.1	14.5	283.0	3.3	0.0	0.0	H-Horn	PK	0.0	51.6	74.0	-22.4	2DH5
7214.538	37.0	14.5	66.0	1.9	0.0	0.0	H-Horn	PK	0.0	51.5	74.0	-22.5	3DH5
4803.691	36.9	10.3	295.0	1.4	0.0	0.0	V-Horn	PK	0.0	47.2	74.0	-26.8	DH5
4804.172	36.7	10.3	234.0	1.3	0.0	0.0	V-Horn	PK	0.0	47.0	74.0	-27.0	2DH5

EUT: Stretch CN3	Work Order: ITRM0160
Serial Number: 12090700027	Date: 06/20/07
Customer: Intermecc Technologies Corporation	Temperature: 22°C
Attendees: None	Humidity: 42%
Project: None	Barometric Pres.: 29.98
Tested by: Jaemi Suh	Power: Battery
	Job Site: OC13

TEST SPECIFICATIONS	Test Method
FCC 15.247 (FHSS):2006	ANSI C63.4:2003 DA 00-705:2000

TEST PARAMETERS	
Antenna Height(s) (m) 1 - 4	Test Distance (m) 0


COMMENTS
Bluetooth Mode. Channel 39 (2439 MHz). Data Rate: DH5, 2DH5, 3DH5.

EUT OPERATING MODES
Bluetooth Mode. Channel 39

DEVIATIONS FROM TEST STANDARD

No deviations.

Run #	5	Signature 
Configuration #	2	
Results	Pass	

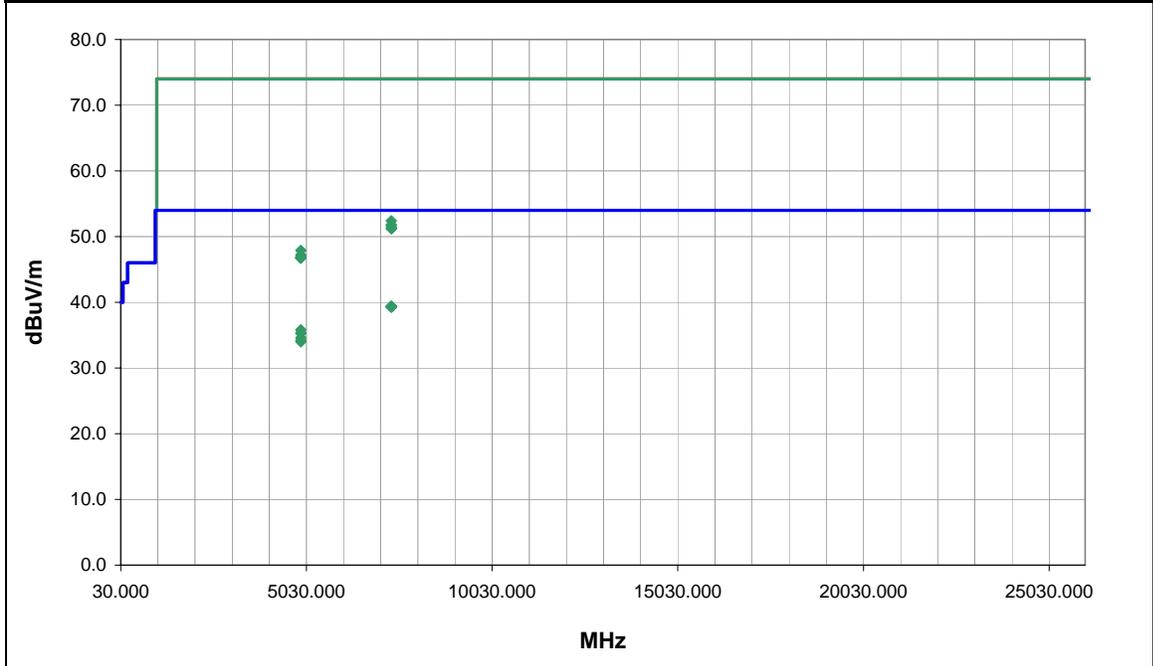

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
7314.248	24.4	15.0	285.0	2.4	0.0	0.0	V-Horn	AV	0.0	39.4	54.0	-14.6	3DH5
7315.583	24.4	15.0	359.0	1.0	0.0	0.0	V-Horn	AV	0.0	39.4	54.0	-14.6	DH5
7315.776	24.3	15.0	335.0	1.0	0.0	0.0	H-Horn	AV	0.0	39.3	54.0	-14.7	DH5
7315.861	24.3	15.0	319.0	2.9	0.0	0.0	H-Horn	AV	0.0	39.3	54.0	-14.7	2DH5
7316.463	24.3	15.0	66.0	2.5	0.0	0.0	V-Horn	AV	0.0	39.3	54.0	-14.7	2DH5
7316.473	24.3	15.0	168.0	2.8	0.0	0.0	H-Horn	AV	0.0	39.3	54.0	-14.7	3DH5
4878.038	25.2	10.6	187.0	1.0	0.0	0.0	V-Horn	AV	0.0	35.8	54.0	-18.2	2DH5
4878.062	24.7	10.6	246.0	1.0	0.0	0.0	V-Horn	AV	0.0	35.3	54.0	-18.7	DH5
4878.068	24.7	10.6	215.0	1.0	0.0	0.0	V-Horn	AV	0.0	35.3	54.0	-18.7	3DH5
4878.262	24.0	10.6	217.0	1.0	0.0	0.0	H-Horn	AV	0.0	34.6	54.0	-19.4	3DH5
4878.468	23.6	10.6	0.0	1.0	0.0	0.0	H-Horn	AV	0.0	34.2	54.0	-19.8	2DH5
4878.032	23.4	10.6	353.0	1.0	0.0	0.0	H-Horn	AV	0.0	34.0	54.0	-20.0	DH5
7316.747	37.4	15.0	66.0	2.5	0.0	0.0	V-Horn	PK	0.0	52.4	74.0	-21.6	2DH5
7315.581	36.8	15.0	359.0	1.0	0.0	0.0	V-Horn	PK	0.0	51.8	74.0	-22.2	DH5
7316.210	36.7	15.0	285.0	2.4	0.0	0.0	V-Horn	PK	0.0	51.7	74.0	-22.3	3DH5
7316.346	36.4	15.0	335.0	1.0	0.0	0.0	H-Horn	PK	0.0	51.4	74.0	-22.6	DH5
7317.193	36.2	15.0	319.0	2.9	0.0	0.0	H-Horn	PK	0.0	51.2	74.0	-22.8	2DH5
7318.389	36.2	15.0	168.0	2.8	0.0	0.0	H-Horn	PK	0.0	51.2	74.0	-22.8	3DH5
4877.954	37.3	10.6	187.0	1.0	0.0	0.0	V-Horn	PK	0.0	47.9	74.0	-26.1	2DH5
4878.190	36.6	10.6	215.0	1.0	0.0	0.0	V-Horn	PK	0.0	47.2	74.0	-26.8	3DH5
4877.654	36.3	10.6	246.0	1.0	0.0	0.0	V-Horn	PK	0.0	46.9	74.0	-27.1	DH5
4876.789	36.2	10.6	217.0	1.0	0.0	0.0	H-Horn	PK	0.0	46.8	74.0	-27.2	3DH5
4878.109	36.2	10.6	0.0	1.0	0.0	0.0	H-Horn	PK	0.0	46.8	74.0	-27.2	2DH5
4876.930	36.1	10.6	353.0	1.0	0.0	0.0	H-Horn	PK	0.0	46.7	74.0	-27.3	DH5

EUT: Stretch CN3	Work Order: ITRM0160
Serial Number: 12090700027	Date: 06/20/07
Customer: Intermecc Technologies Corporation	Temperature: 22°C
Attendees: None	Humidity: 42%
Project: None	Barometric Pres.: 29.98
Tested by: Jaemi Suh	Power: Battery
	Job Site: OC13

TEST SPECIFICATIONS	Test Method
FCC 15.247 (FHSS):2006	ANSI C63.4:2003 DA 00-705:2000

TEST PARAMETERS	
Antenna Height(s) (m) 1 - 4	Test Distance (m) 3

COMMENTS

Bluetooth Mode. Channel 80 (2480 MHz). Data Rate: DH5, 2DH5, 3DH5.


EUT OPERATING MODES

Bluetooth Mode. Channel 80

DEVIATIONS FROM TEST STANDARD

No deviations.

Run #	6	Signature 
Configuration #	2	
Results	Pass	

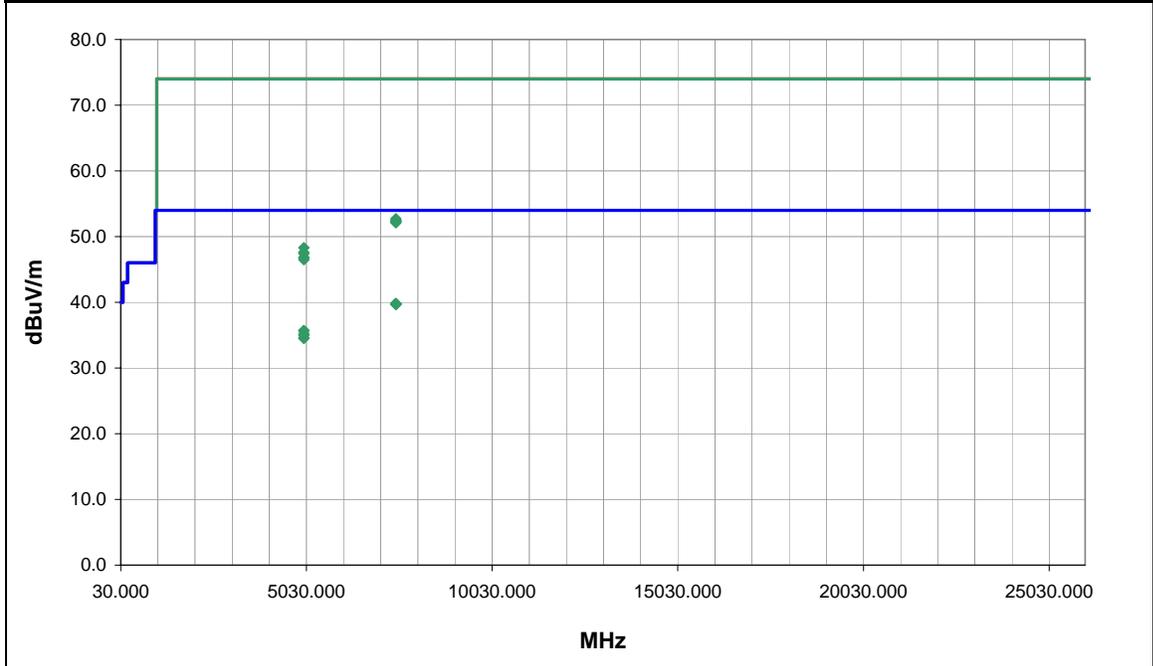

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
7437.433	24.1	15.7	229.0	1.2	0.0	0.0	V-Horn	AV	0.0	39.8	54.0	-14.2	3DH5
7438.619	24.1	15.7	65.0	3.0	0.0	0.0	V-Horn	AV	0.0	39.8	54.0	-14.2	2DH5
7437.436	24.0	15.7	57.0	2.6	0.0	0.0	H-Horn	AV	0.0	39.7	54.0	-14.3	3DH5
7438.664	24.0	15.7	110.0	1.0	0.0	0.0	H-Horn	AV	0.0	39.7	54.0	-14.3	2DH5
7439.011	24.0	15.7	9.0	3.1	0.0	0.0	V-Horn	AV	0.0	39.7	54.0	-14.3	DH5
7439.322	24.0	15.7	137.0	1.0	0.0	0.0	H-Horn	AV	0.0	39.7	54.0	-14.3	DH5
4960.043	24.7	11.0	243.0	1.0	0.0	0.0	V-Horn	AV	0.0	35.7	54.0	-18.3	DH5
4960.080	24.7	11.0	203.0	1.0	0.0	0.0	V-Horn	AV	0.0	35.7	54.0	-18.3	3DH5
4959.973	24.2	11.0	274.0	1.0	0.0	0.0	V-Horn	AV	0.0	35.2	54.0	-18.8	2DH5
4959.985	24.0	11.0	239.0	1.0	0.0	0.0	H-Horn	AV	0.0	35.0	54.0	-19.0	3DH5
4960.105	23.6	11.0	114.0	1.0	0.0	0.0	H-Horn	AV	0.0	34.6	54.0	-19.4	DH5
4960.050	23.5	11.0	157.0	1.0	0.0	0.0	H-Horn	AV	0.0	34.5	54.0	-19.5	2DH5
7438.803	37.0	15.7	57.0	2.6	0.0	0.0	H-Horn	PK	0.0	52.7	74.0	-21.3	3DH5
7438.749	36.7	15.7	110.0	1.0	0.0	0.0	H-Horn	PK	0.0	52.4	74.0	-21.6	2DH5
7441.226	36.7	15.7	137.0	1.0	0.0	0.0	H-Horn	PK	0.0	52.4	74.0	-21.6	DH5
7438.563	36.6	15.7	9.0	3.1	0.0	0.0	V-Horn	PK	0.0	52.3	74.0	-21.7	DH5
7440.009	36.6	15.7	65.0	3.0	0.0	0.0	V-Horn	PK	0.0	52.3	74.0	-21.7	2DH5
7438.994	36.4	15.7	229.0	1.2	0.0	0.0	V-Horn	PK	0.0	52.1	74.0	-21.9	3DH5
4959.662	37.3	11.0	203.0	1.0	0.0	0.0	V-Horn	PK	0.0	48.3	74.0	-25.7	3DH5
4958.578	36.6	11.0	243.0	1.0	0.0	0.0	V-Horn	PK	0.0	47.6	74.0	-26.4	DH5
4959.888	36.4	11.0	274.0	1.0	0.0	0.0	V-Horn	PK	0.0	47.4	74.0	-26.6	2DH5
4960.854	35.8	11.0	157.0	1.0	0.0	0.0	H-Horn	PK	0.0	46.8	74.0	-27.2	2DH5
4961.318	35.8	11.0	114.0	1.0	0.0	0.0	H-Horn	PK	0.0	46.8	74.0	-27.2	DH5
4960.721	35.5	11.0	239.0	1.0	0.0	0.0	H-Horn	PK	0.0	46.5	74.0	-27.5	3DH5

EUT:	Stretch CN3	Work Order:	ITRM0160
Serial Number:	12090700027	Date:	06/25/07
Customer:	Intermec Technologies Corporation	Temperature:	22°C
Attendees:	None	Humidity:	42%
Project:	None	Barometric Pres.:	29.98
Tested by:	Jaemi Suh	Power:	120VAC/60Hz
		Job Site:	OC06

TEST SPECIFICATIONS	Test Method
FCC 15.247 (FHSS):2006	ANSI C63.4:2003 DA 00-705:2000


TEST PARAMETERS			
Antenna Height(s) (m)	1 - 4	Test Distance (m)	3

COMMENTS
Bluetooth Mode. High Channel. All Data Rates: DH5, 2DH5, 3DH5.

EUT OPERATING MODES
Bluetooth Mode. High Channel

DEVIATIONS FROM TEST STANDARD
No deviations.

Run #	9	Signature 
Configuration #	2	
Results	Pass	

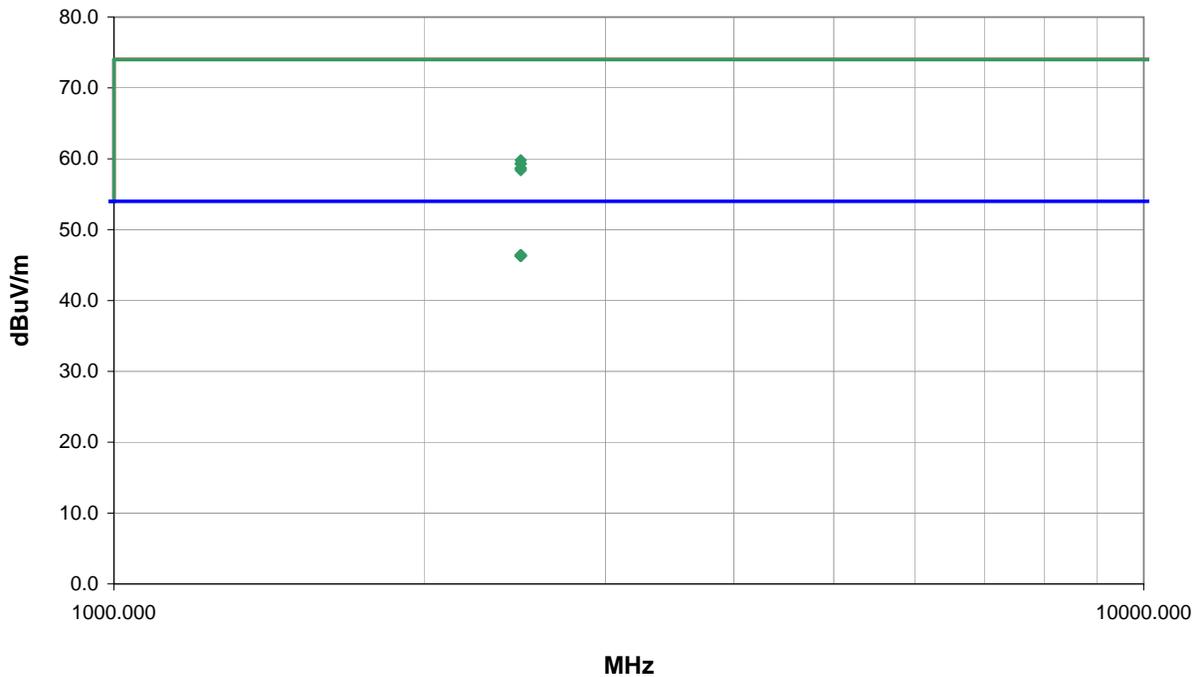

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
2483.473	25.0	1.4	309.0	3.3	0.0	20.0	H-Horn	AV	0.0	46.4	54.0	-7.6
2483.571	25.0	1.4	178.0	2.4	0.0	20.0	V-Horn	AV	0.0	46.4	54.0	-7.6
2483.360	24.9	1.4	97.0	3.1	0.0	20.0	H-Horn	AV	0.0	46.3	54.0	-7.7
2483.379	24.9	1.4	225.0	2.9	0.0	20.0	V-Horn	AV	0.0	46.3	54.0	-7.7
2483.518	24.9	1.4	183.0	3.4	0.0	20.0	H-Horn	AV	0.0	46.3	54.0	-7.7
2483.654	24.9	1.4	90.0	2.7	0.0	20.0	V-Horn	AV	0.0	46.3	54.0	-7.7
2483.510	38.4	1.4	178.0	2.4	0.0	20.0	V-Horn	PK	0.0	59.8	74.0	-14.2
2483.472	37.9	1.4	97.0	3.1	0.0	20.0	H-Horn	PK	0.0	59.3	74.0	-14.7
2483.508	37.9	1.4	183.0	3.4	0.0	20.0	H-Horn	PK	0.0	59.3	74.0	-14.7
2483.530	37.3	1.4	225.0	2.9	0.0	20.0	V-Horn	PK	0.0	58.7	74.0	-15.3
2483.495	37.2	1.4	309.0	3.3	0.0	20.0	H-Horn	PK	0.0	58.6	74.0	-15.4
2483.445	37.0	1.4	90.0	2.7	0.0	20.0	V-Horn	PK	0.0	58.4	74.0	-15.6



Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Hewlett Packard	8593E	AAP	12/14/2006	13

MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

The occupied bandwidth was measured with the EUT set to low, medium, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting in a no hop mode at its maximum data rate for each of the three different modulations available.

EMC

OCCUPIED BANDWIDTH

EUT: Stretch CN3	Work Order: ITRM0160
Serial Number: 12090700022	Date: 06/22/07
Customer: Intermec Technologies Corporation	Temperature: 23 °C
Attendees: None	Humidity: 42%
Project: None	Barometric Pres.: 30.03
Tested by: Jaemi Suh	Power: 120VAC/60Hz
	Job Site: OC13

TEST SPECIFICATIONS		Test Method
FCC 15.247 (FHSS):2006		ANSI C63.4:2003 DA 00-705:2000

COMMENTS
Bluetooth Mode

DEVIATIONS FROM TEST STANDARD

Configuration #	1	Signature 
-----------------	---	---


		Value	Limit	Results
GFSK (Lowest Data Rate DH5)				
	Low Channel	937 KHz	≤ 1.5 MHz	Pass
	Mid Channel	885 KHz	≤ 1.5 MHz	Pass
	High Channel	885 KHz	≤ 1.5 MHz	Pass
QPSK (Middle Data Rate 2DH5)				
	Low Channel	1.365 MHz	≤ 1.5 MHz	Pass
	Mid Channel	1.365 MHz	≤ 1.5 MHz	Pass
	High Channel	1.358 MHz	≤ 1.5 MHz	Pass
8-DPSK (Highest Data Rate 3DH5)				
	Low Channel	1.388 MHz	≤ 1.5 MHz	Pass
	Mid Channel	1.370 MHz	≤ 1.5 MHz	Pass
	High Channel	1.358 MHz	≤ 1.5 MHz	Pass

GFSK (Lowest Data Rate DH5), Low Channel

Result: Pass

Value: 937 KHz

Limit: ≤ 1.5 MHz

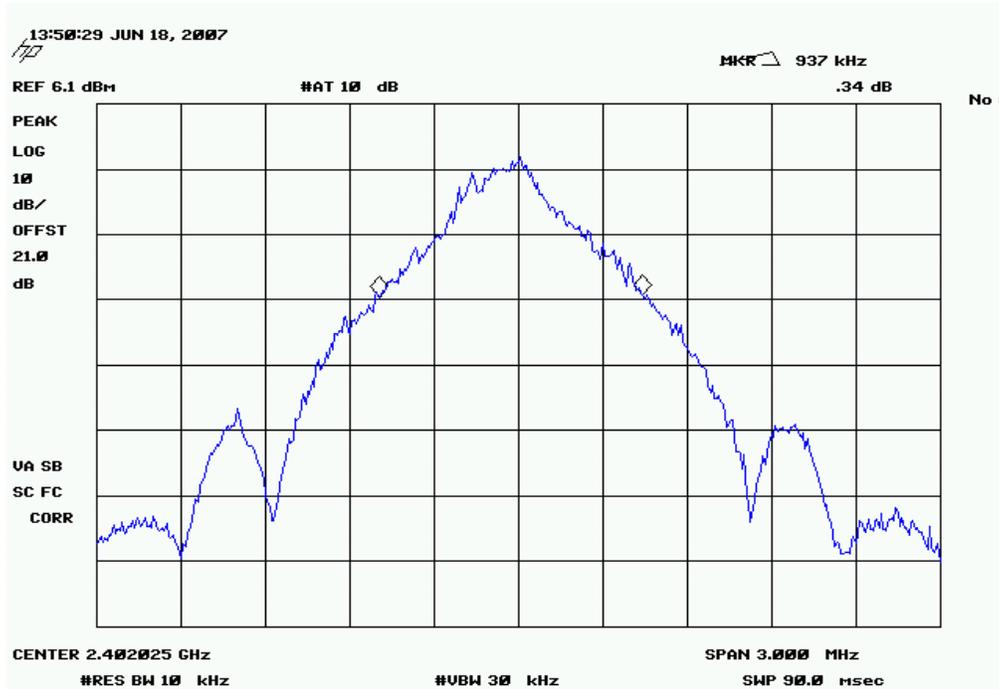


GFSK (Lowest Data Rate DH5), Mid Channel

Result: Pass

Value: 885 KHz

Limit: ≤ 1.5 MHz

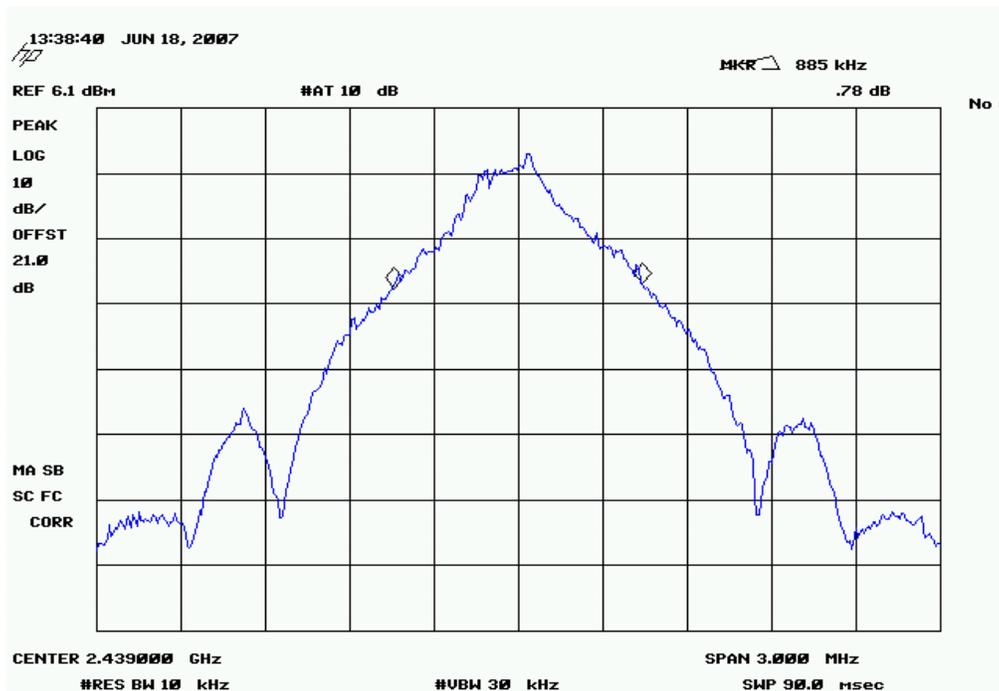


GFSK (Lowest Data Rate DH5), High Channel

Result: Pass

Value: 885 KHz

Limit: ≤ 1.5 MHz

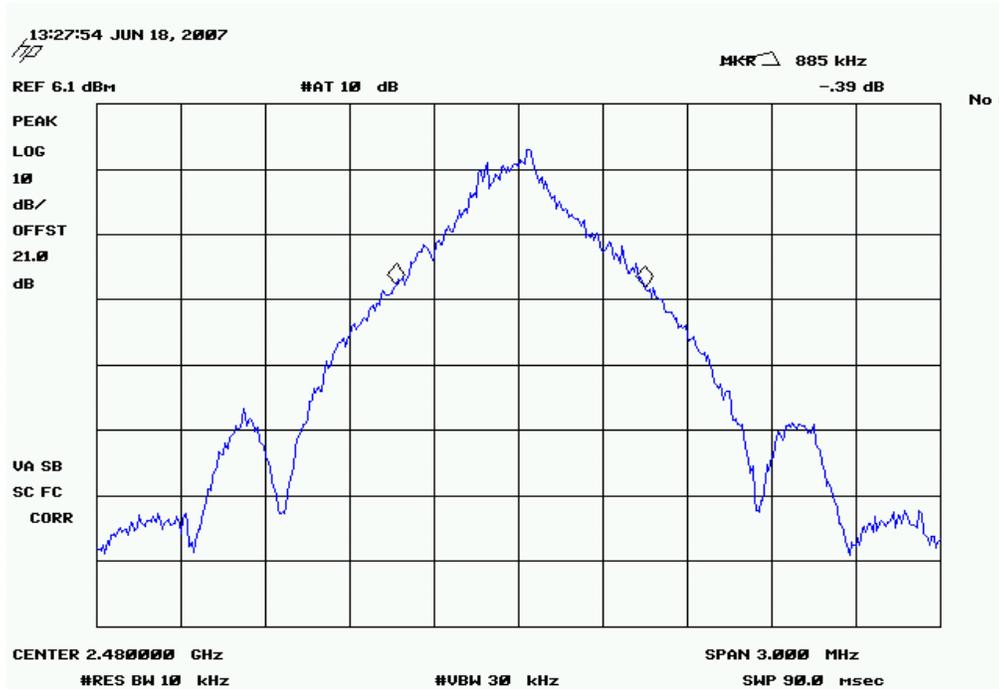


QPSK (Middle Data Rate 2DH5), Low Channel

Result: Pass

Value: 1.365 MHz

Limit: ≤ 1.5 MHz

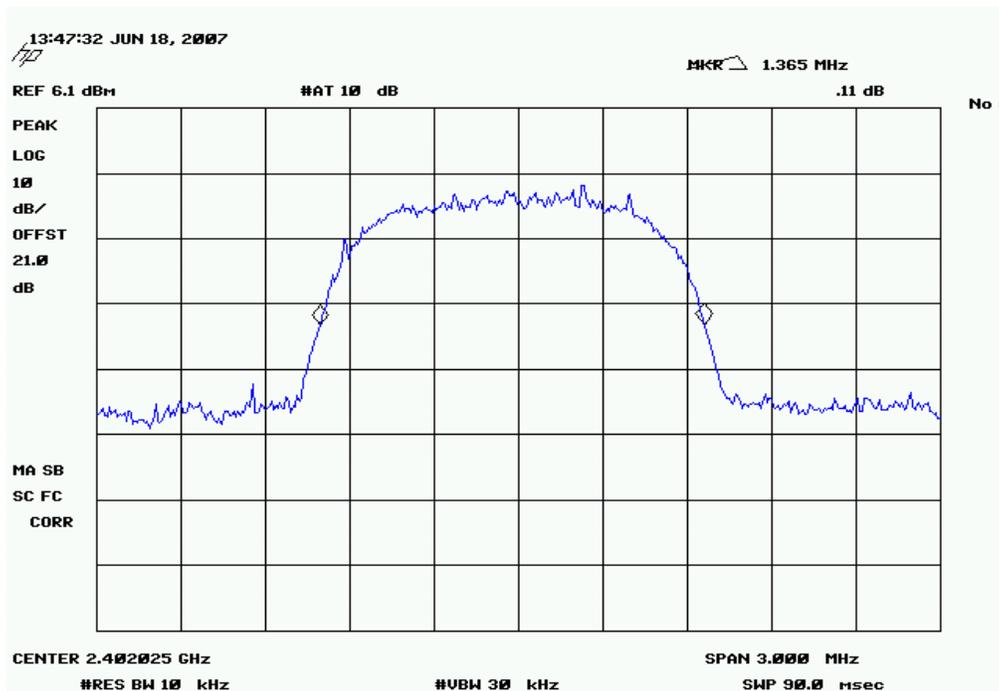


QPSK (Middle Data Rate 2DH5), Mid Channel

Result: Pass **Value:** 1.365 MHz **Limit:** ≤ 1.5 MHz



QPSK (Middle Data Rate 2DH5), High Channel

Result: Pass **Value:** 1.358 MHz **Limit:** ≤ 1.5 MHz

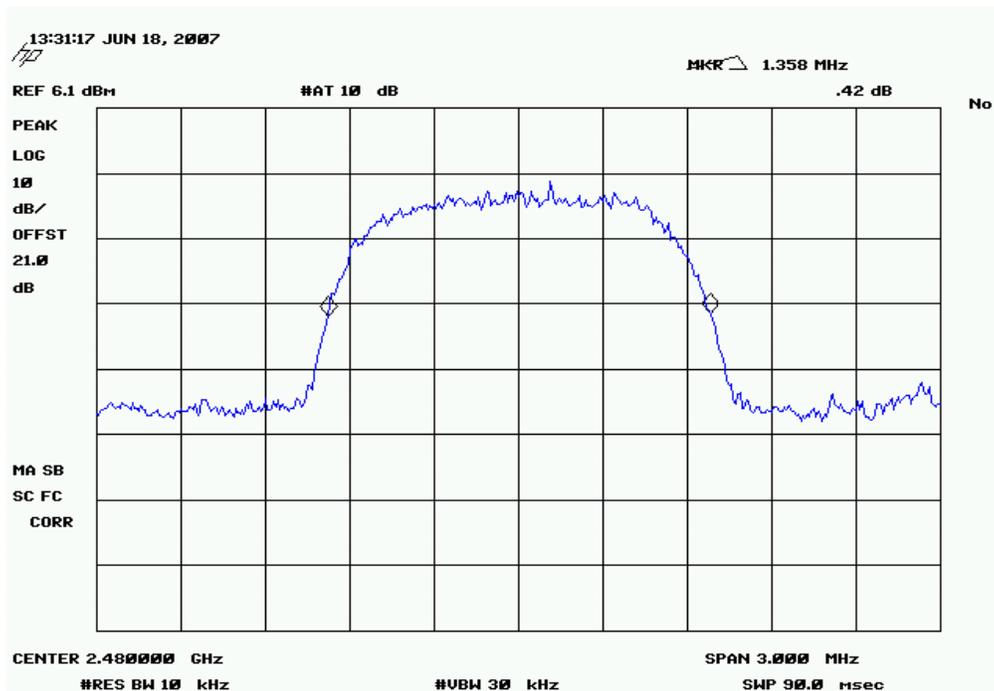

8-DPSK (Highest Data Rate 3DH5), Low Channel

Result: Pass

Value: 1.388 MHz

Limit: ≤ 1.5 MHz




8-DPSK (Highest Data Rate 3DH5), Mid Channel

Result: Pass

Value: 1.370 MHz

Limit: ≤ 1.5 MHz

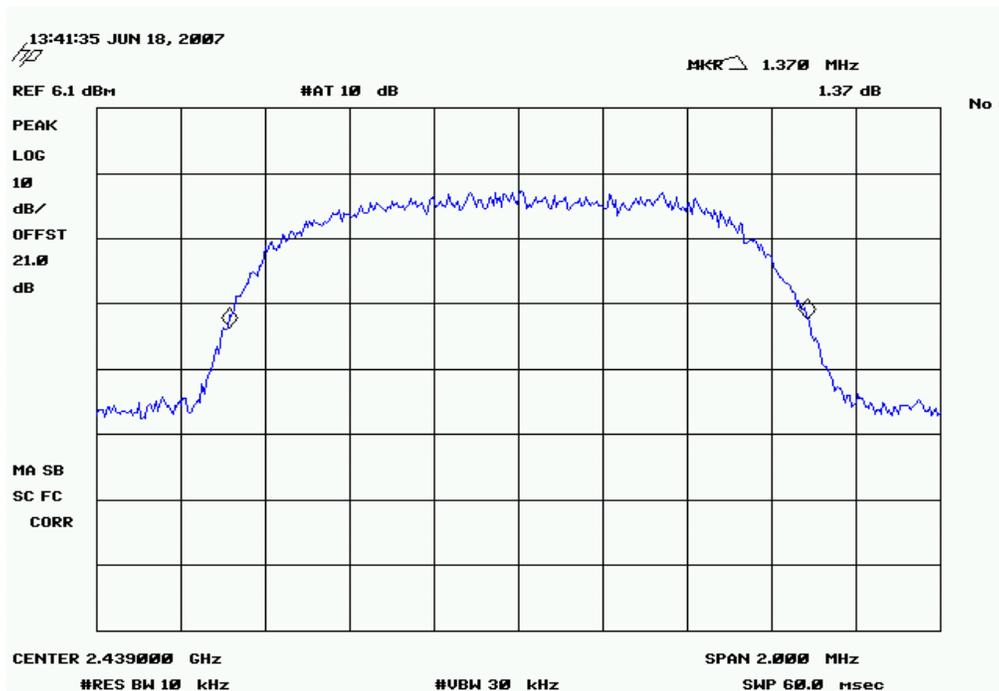


OCCUPIED BANDWIDTH


8-DPSK (Highest Data Rate 3DH5), High Channel

Result: Pass

Value: 1.358 MHz

Limit: ≤ 1.5 MHz

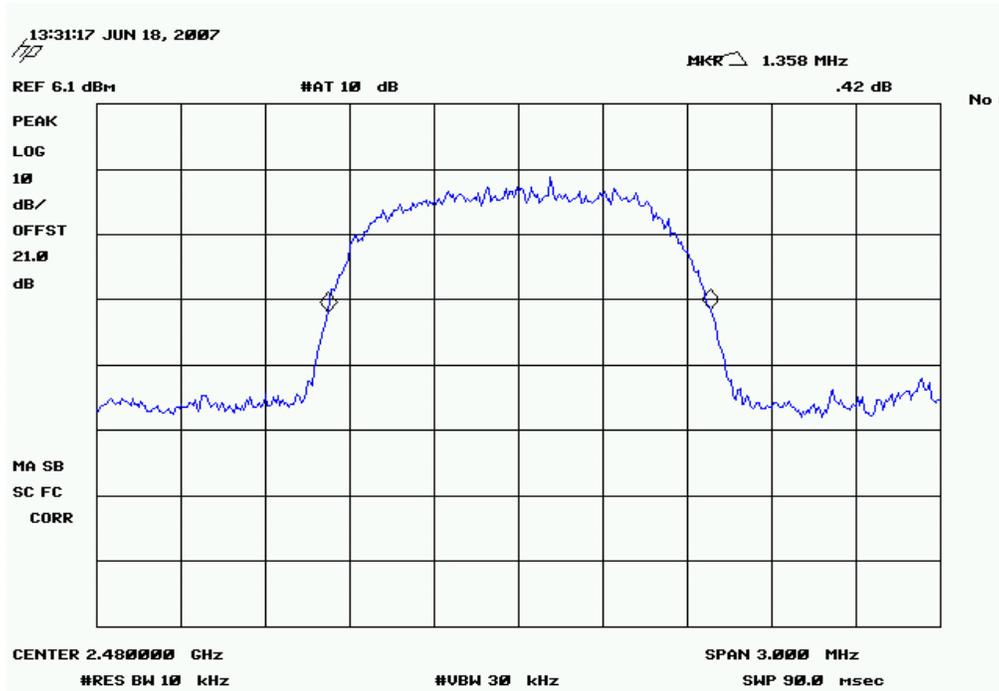

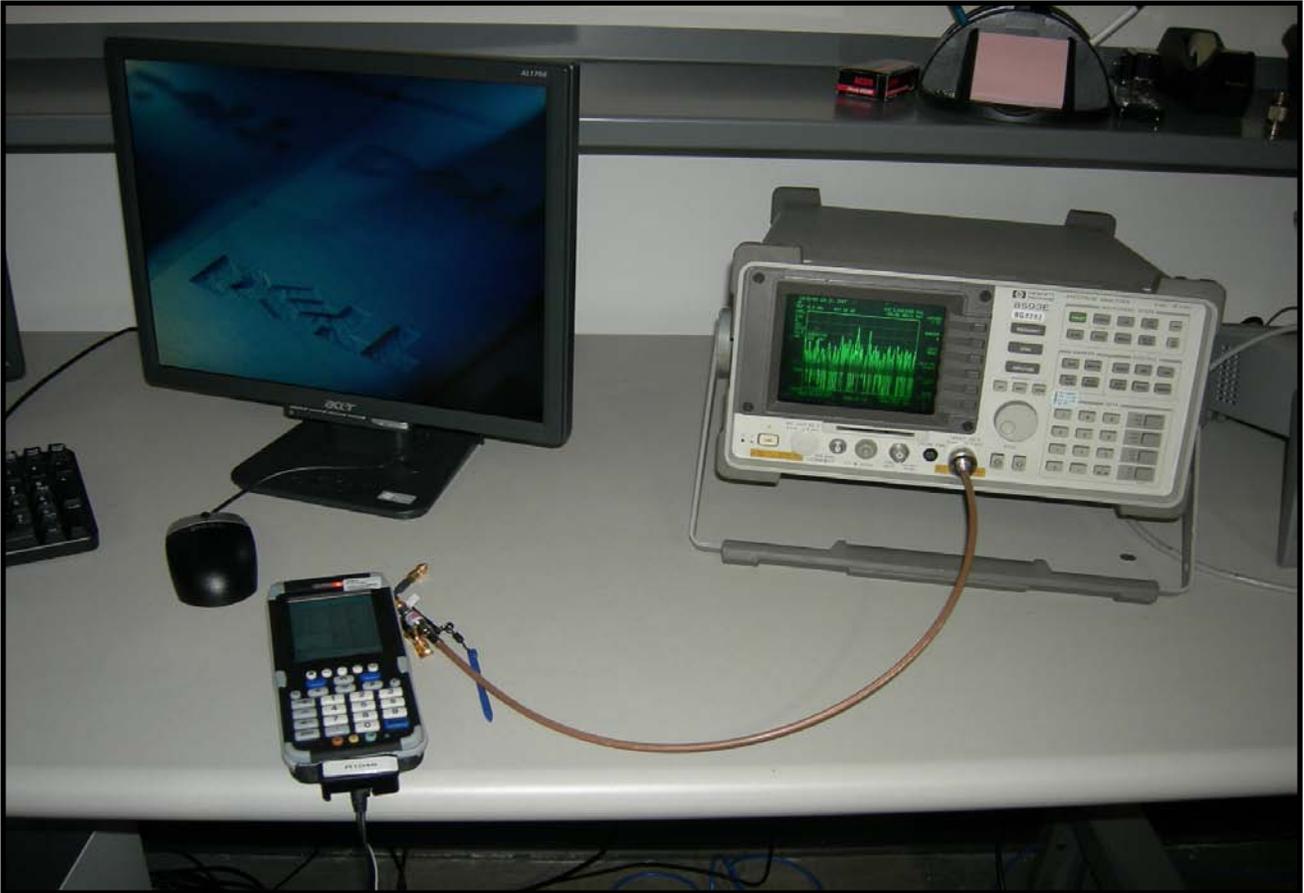

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Hewlett Packard	8593E	AAP	12/14/2006	13

MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

The peak output power was measured with the EUT set to low, medium, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. . The EUT was transmitting in a no hop mode at its maximum data rate for each of the three different modulations available.

De Facto EIRP Limit: Per 47 CFR 15.247 (b)(1-3), the EUT meets the de facto EIRP limit of +36dBm.

EMC OUTPUT POWER

EMC

EUT: Stretch CN3	Work Order: ITRM0160
Serial Number: 12090700022	Date: 06/22/07
Customer: Intermec Technologies Corporation	Temperature: 23 C°
Attendees: None	Humidity: 42%
Project: None	Barometric Pres.: 30.03
Tested by: Jaemi Suh	Power: 120VAC/60Hz
	Job Site: OC13

TEST SPECIFICATIONS		Test Method
FCC 15.247 (FHSS):2006		ANSI C63.4:2003 DA 00-705:2000

COMMENTS
Bluetooth


DEVIATIONS FROM TEST STANDARD

Configuration #	1	Signature 
------------------------	---	---

		Value	Limit	Results
GFSK (Lowest Data Rate DH5)				
	Low Channel	1.75 mW	<= 1 W	Pass
	Mid Channel	1.77 mW	<= 1 W	Pass
	High Channel	1.75 mW	<= 1 W	Pass
QPSK (Middle Data Rate 2DH5)				
	Low Channel	2.68 mW	<= 1 W	Pass
	Mid Channel	2.73 mW	<= 1 W	Pass
	High Channel	2.68 mW	<= 1 W	Pass
8-DPSK (Highest Data Rate 3DH5)				
	Low Channel	4.33 mW	<= 1 W	Pass
	Mid Channel	2.98 mW	<= 1 W	Pass
	High Channel	2.94 mW	<= 1 W	Pass


GFSK (Lowest Data Rate DH5), Low Channel

Result: Pass **Value:** 1.75 mW **Limit:** <= 1 W

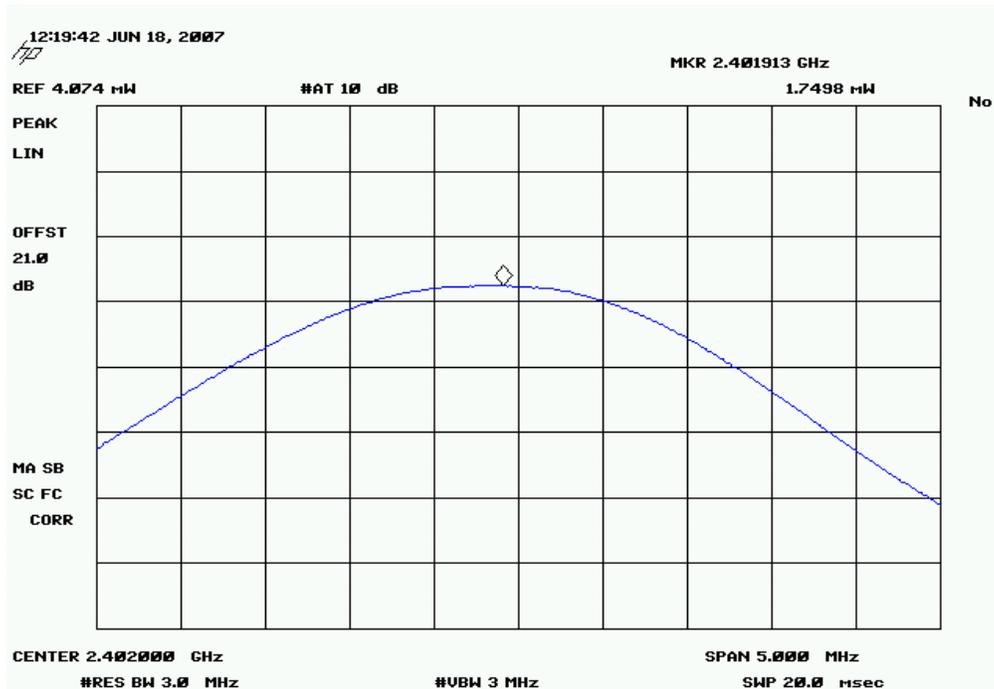


GFSK (Lowest Data Rate DH5), Mid Channel

Result: Pass **Value:** 1.77 mW **Limit:** <= 1 W

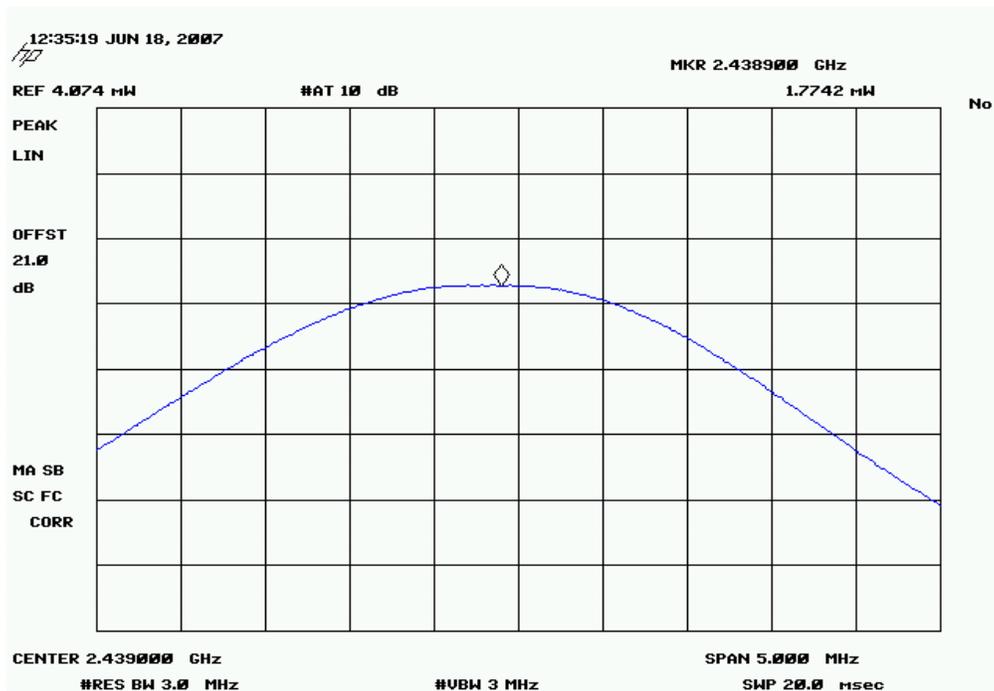


GFSK (Lowest Data Rate DH5), High Channel

Result: Pass **Value:** 1.75 mW **Limit:** <= 1 W

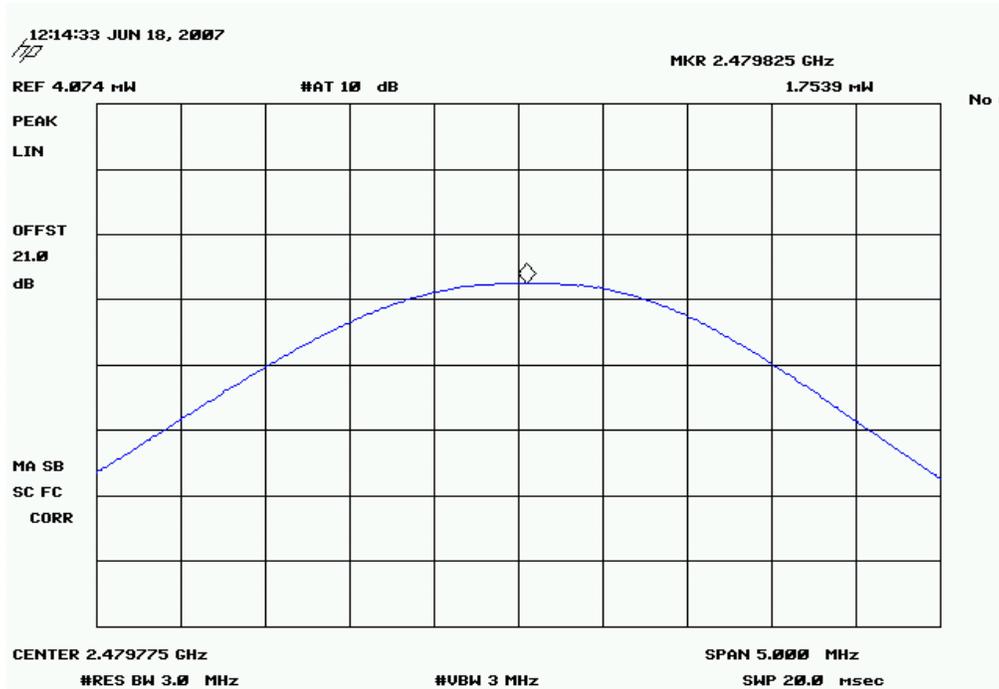


QPSK (Middle Data Rate 2DH5), Low Channel

Result: Pass **Value:** 2.68 mW **Limit:** <= 1 W

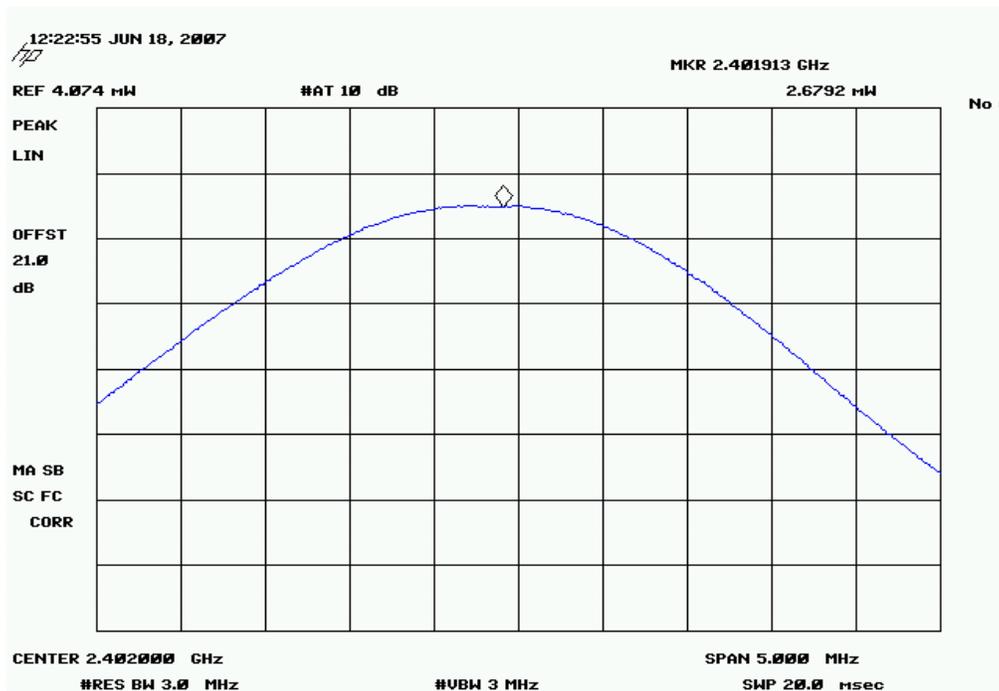


QPSK (Middle Data Rate 2DH5), Mid Channel

Result: Pass **Value:** 2.73 mW **Limit:** <= 1 W

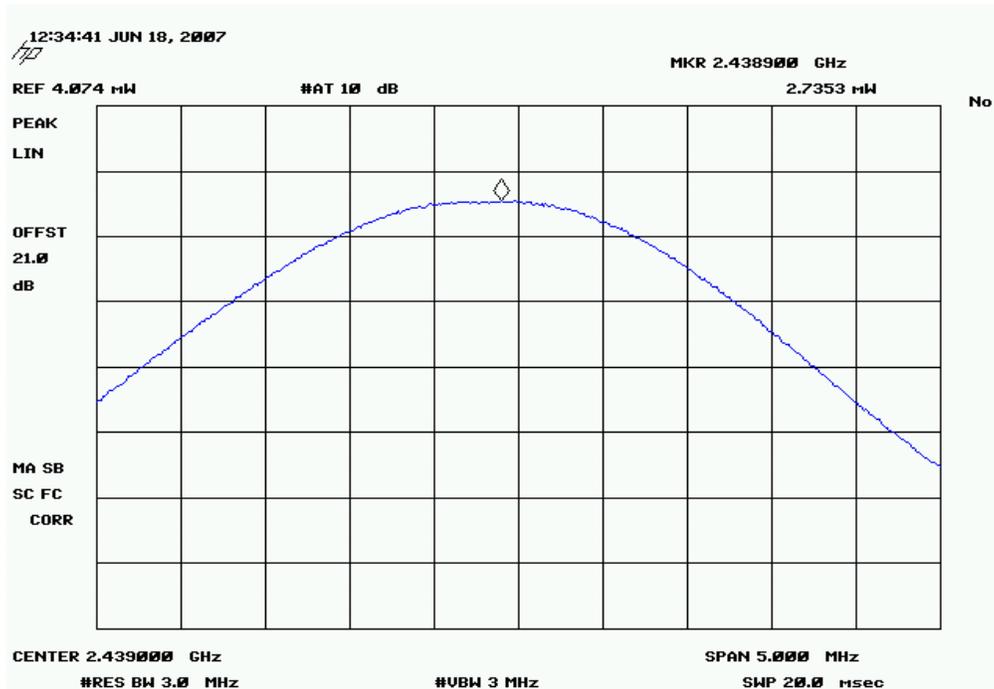

QPSK (Middle Data Rate 2DH5), High Channel

Result: Pass **Value:** 2.68 mW **Limit:** <= 1 W

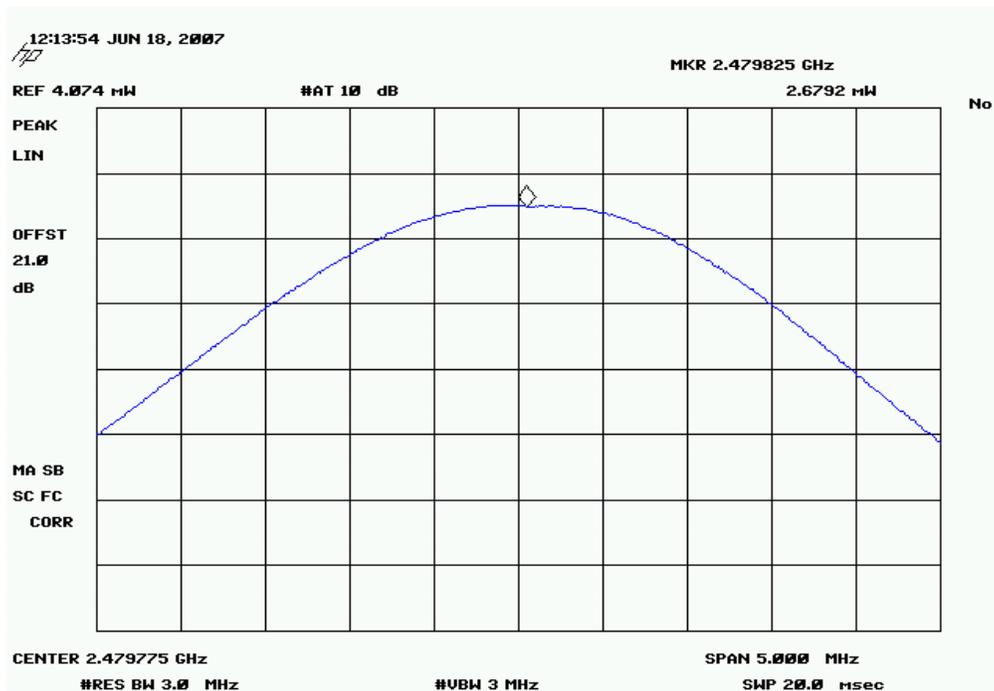


OUTPUT POWER

8-DPSK (Highest Data Rate 3DH5), Low Channel

Result: Pass

Value: 4.33 mW

Limit: <= 1 W

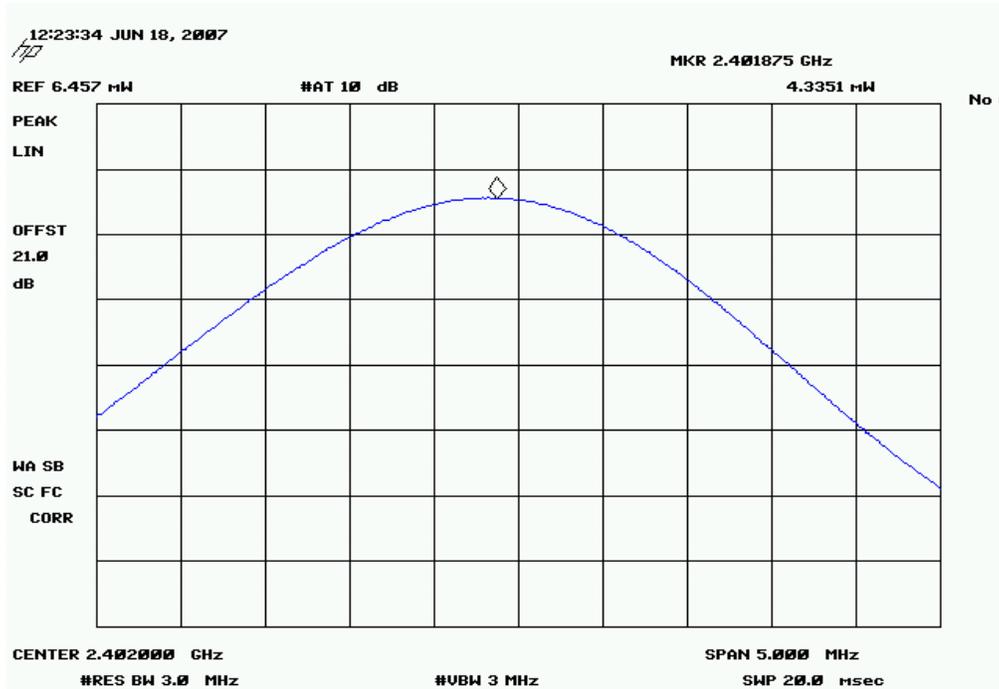


8-DPSK (Highest Data Rate 3DH5), Mid Channel

Result: Pass

Value: 2.98 mW

Limit: <= 1 W

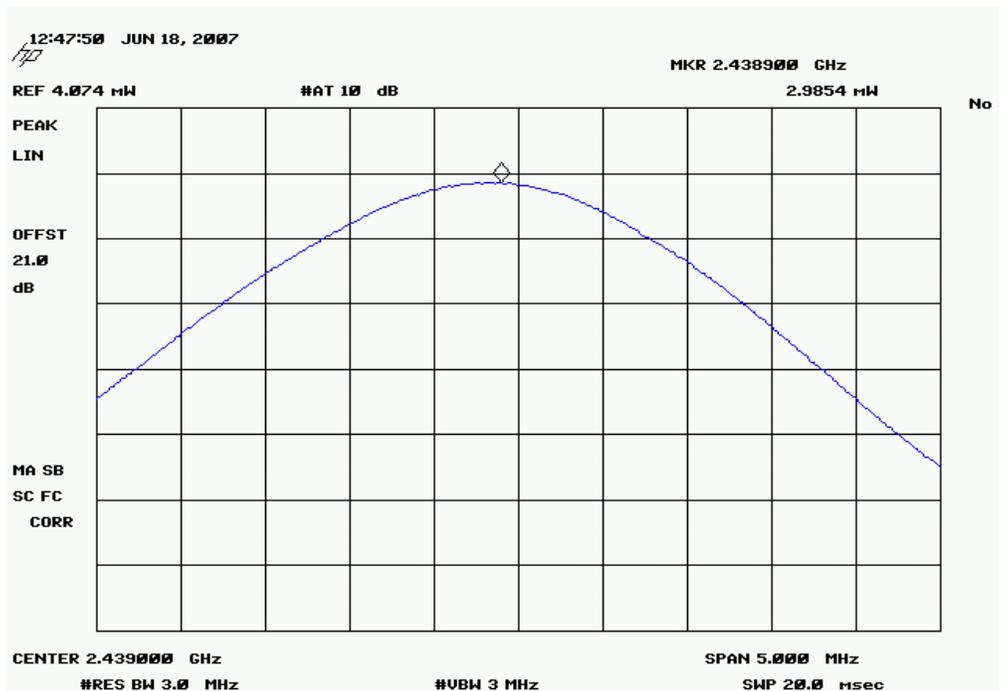


OUTPUT POWER


8-DPSK (Highest Data Rate 3DH5), High Channel

Result: Pass

Value: 2.94 mW

Limit: <= 1 W

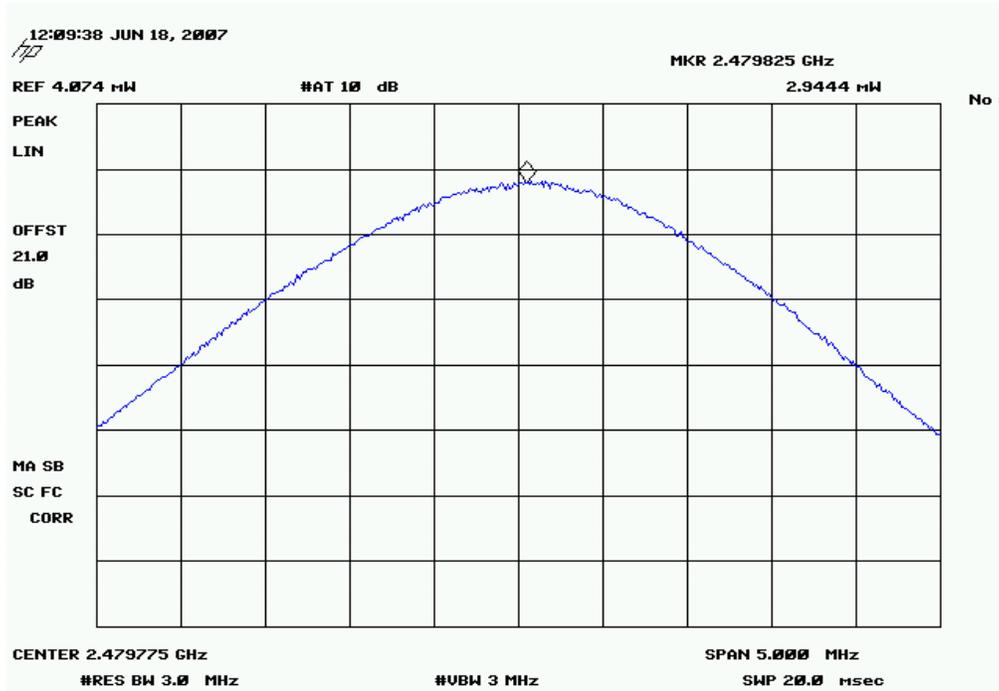

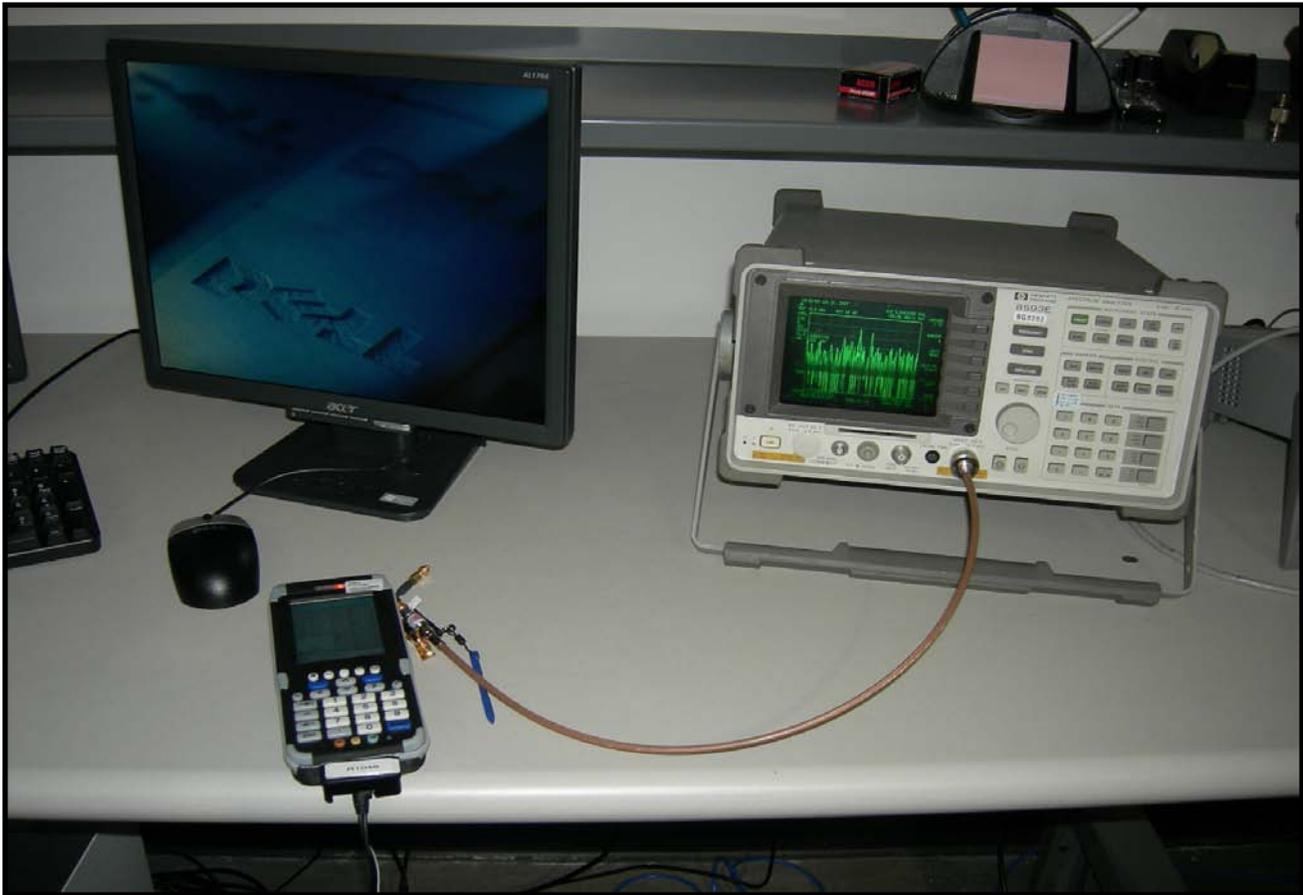

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Hewlett-Packard	8593E	AAN	1/25/2006	13

MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

The spurious RF conducted emissions at the edges of the authorized band were measured with the EUT set to low and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode. The channels closest to the band edges were selected. The spectrum was scanned across each band edge from 5 MHz below the band edge to 5 MHz above the band edge.

EMC

BAND EDGE COMPLIANCE

EUT: DHIB		Work Order: ITRM0128	
Serial Number: 000B6B943C06		Date: 08/25/06	
Customer: Intermec Technologies Corporation		Temperature: 23°C	
Attendees: None		Humidity: 35%	
Project: None		Barometric Pres.: 30.03	
Tested by: Rod Peloquin		Power: 3.3Vdc via 120VAC/60Hz	Job Site: EV06

TEST SPECIFICATIONS		Test Method	
FCC 15.247:2006 FHSS		ANSI C63.4:2003, DA 00-705:2000	

COMMENTS
 Transmitting Bluetooth modulated with GFSK modulation in PRBS9 mode


DEVIATIONS FROM TEST STANDARD

Configuration #	2	<i>Rod Peloquin</i> Signature
------------------------	---	----------------------------------

	Value	Limit	Results
Low Channel	-53.5 dBc	≤ -20 dBc	Pass
High Channel	-52.7 dBc	≤ -20 dBc	Pass


Low Channel

Result: Pass **Value:** -53.5 dBc **Limit:** ≤ -20 dBc

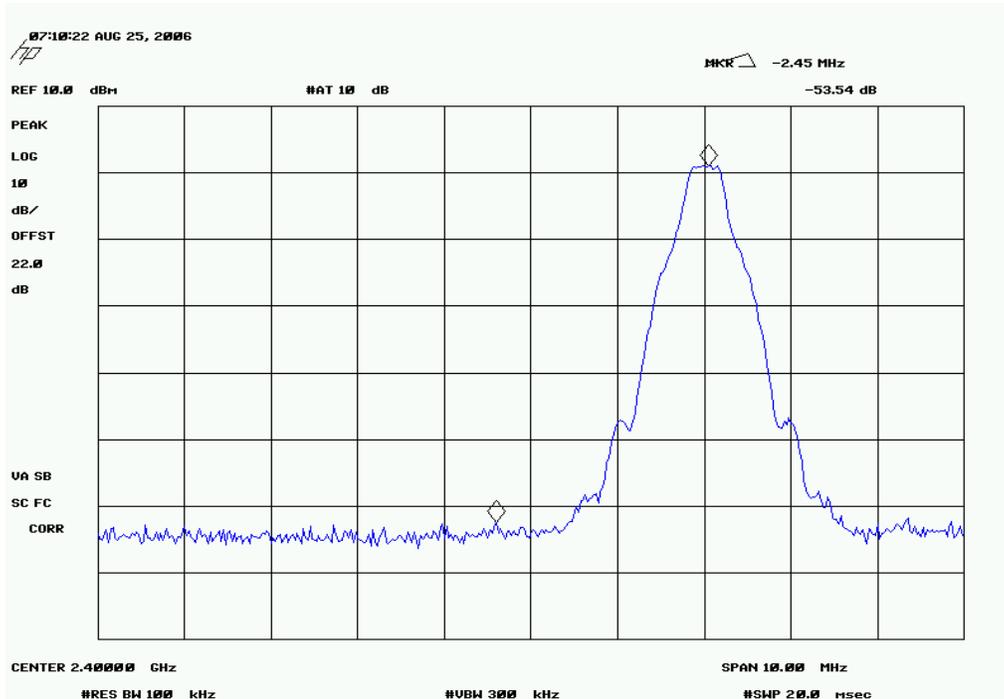

High Channel

Result: Pass **Value:** -52.7 dBc **Limit:** ≤ -20 dBc

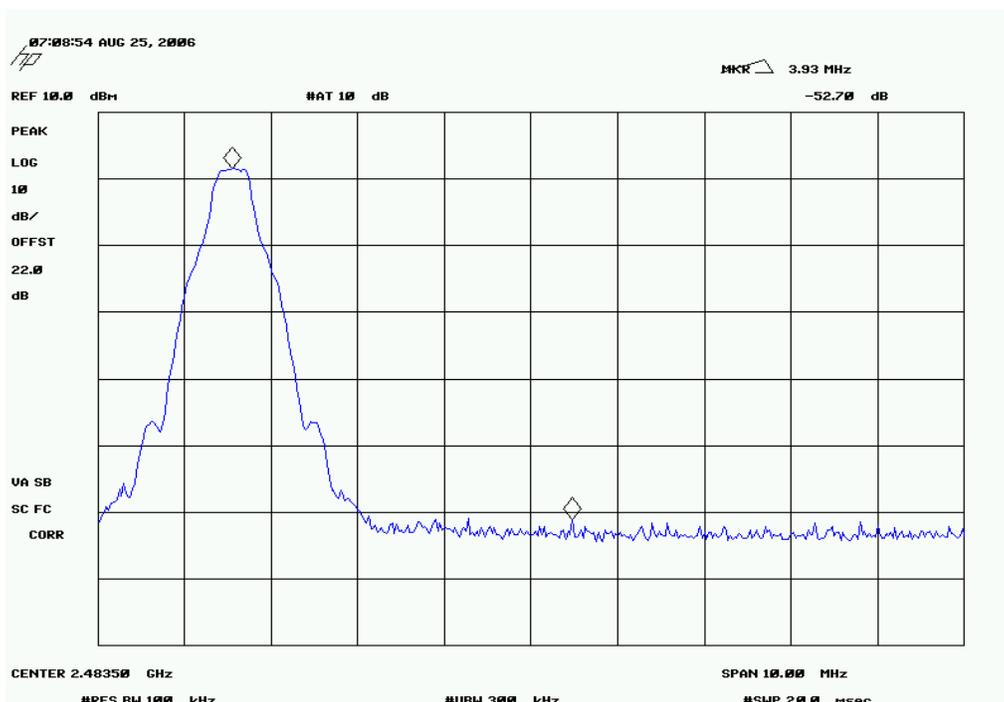



Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Agilent	E4446A	AAQ	1/18/2007	13

MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

The spurious RF conducted emissions were measured with the EUT set to low, medium, and high transmit frequencies. The measurements were made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode. For each transmit frequency, the spectrum was scanned throughout the specified frequency.

EMC

Spurious Conducted Emissions

EUT: Stretch CN3	Work Order: ITRM0160
Serial Number: 12090700022	Date: 07/16/07
Customer: Intermec Technologies Corporation	Temperature: 23 C°C
Attendees: None	Humidity: 42%
Project: None	Barometric Pres.: 30.03
Tested by: Jaemi Suh	Power: 120VAC/60Hz
	Job Site: OC10

TEST SPECIFICATIONS	Test Method
FCC 15.247 (FHSS):2006	ANSI C63.4:2003 DA 00-705:2000

COMMENTS
802.11 Mode


DEVIATIONS FROM TEST STANDARD

Configuration #	1	Signature 
------------------------	---	---


		Value	Limit	Results
Low Channel	GSFK (Lowest Data Rate DH5)			
	0 - 12 GHz	- 51.58 dBc	≤ - 20 dBc	Pass
	12 - 25 GHz	- 49.79 dBc	≤ - 20 dBc	Pass
	QPSK (Middle Data Rate 2DH5)			
	0 - 12 GHz	- 52.60 dBc	≤ - 20 dBc	Pass
	12 - 25 GHz	- 50.57 dBc	≤ - 20 dBc	Pass
	8-DPSK (Highest Data Rate)			
	0 - 12 GHz	- 52.12 dBc	≤ - 20 dBc	Pass
	12 - 25 GHz	- 49.93 dBc	≤ - 20 dBc	Pass
Mid Channel	GSFK (Lowest Data Rate DH5)			
	0 - 12 GHz	- 51.68 dBc	≤ - 20 dBc	Pass
	12 - 25 GHz	- 49.85 dBc	≤ - 20 dBc	Pass
	QPSK (Middle Data Rate 2DH5)			
	0 - 12 GHz	- 52.52 dBc	≤ - 20 dBc	Pass
	12 - 25 GHz	- 48.48 dBc	≤ - 20 dBc	Pass
	8-DPSK (Highest Data Rate)			
	0 - 12 GHz	- 53.08 dBc	≤ - 20 dBc	Pass
	12 - 25 GHz	- 50.49 dBc	≤ - 20 dBc	Pass
High Channel	GSFK (Lowest Data Rate DH5)			
	0 - 12 GHz	- 53.46 dBc	≤ - 20 dBc	Pass
	12 - 25 GHz	- 49.96 dBc	≤ - 20 dBc	Pass
	QPSK (Middle Data Rate 2DH5)			
	0 - 12 GHz	- 54.68 dBc	≤ - 20 dBc	Pass
	12 - 25 GHz	- 50.08 dBc	≤ - 20 dBc	Pass
	8-DPSK (Highest Data Rate)			
	0 - 12 GHz	- 54.46 dBc	≤ - 20 dBc	Pass
	12 - 25 GHz	- 49.77 dBc	≤ - 20 dBc	Pass

Spurious Conducted Emissions

Low Channel, GSKF (Lowest Data Rate DH5), 0 - 12 GHz
Result: Pass **Value:** - 51.58 dBc **Limit:** ≤ - 20 dBc

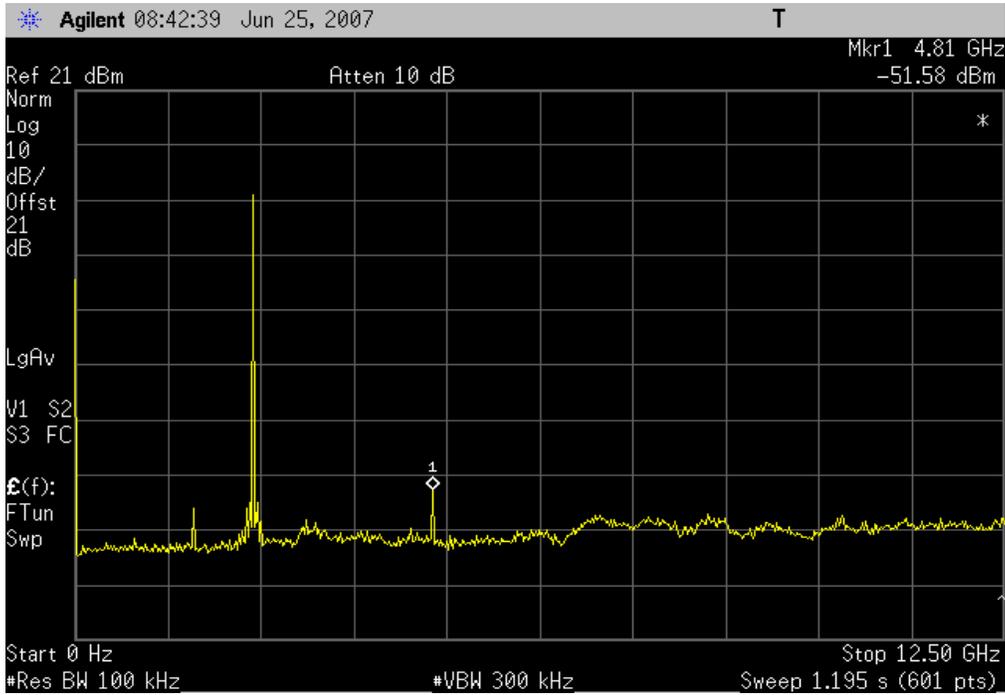


Low Channel, GSKF (Lowest Data Rate DH5), 12 - 25 GHz
Result: Pass **Value:** - 49.79 dBc **Limit:** ≤ - 20 dBc

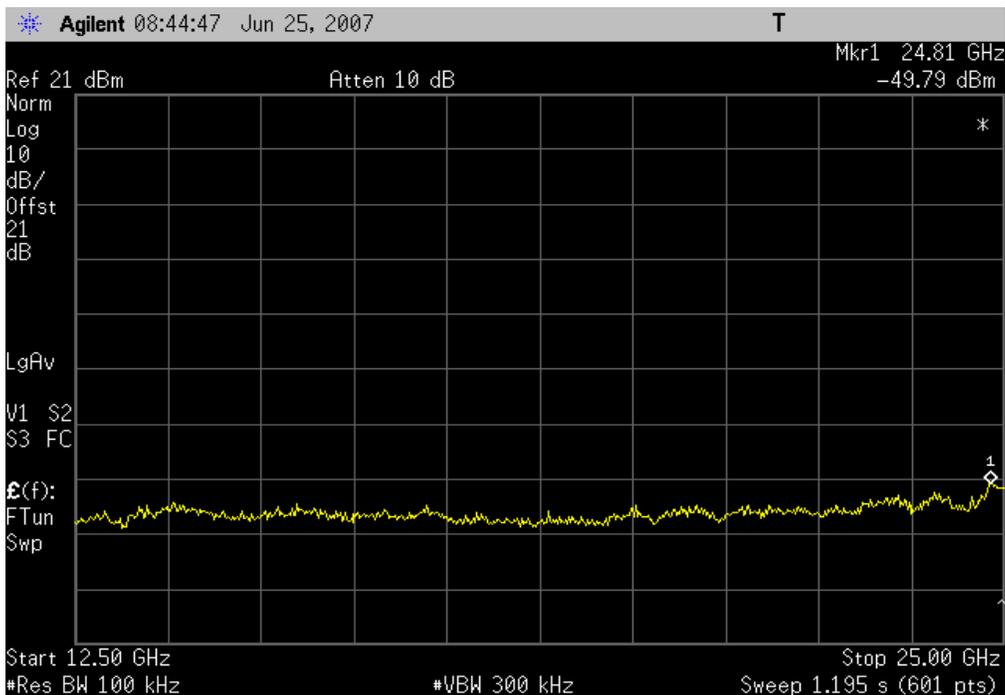


Low Channel, QPSK (Middle Data Rate 2DH5), 0 - 12 GHz

Result: Pass **Value:** - 52.60 dBc **Limit:** ≤ - 20 dBc

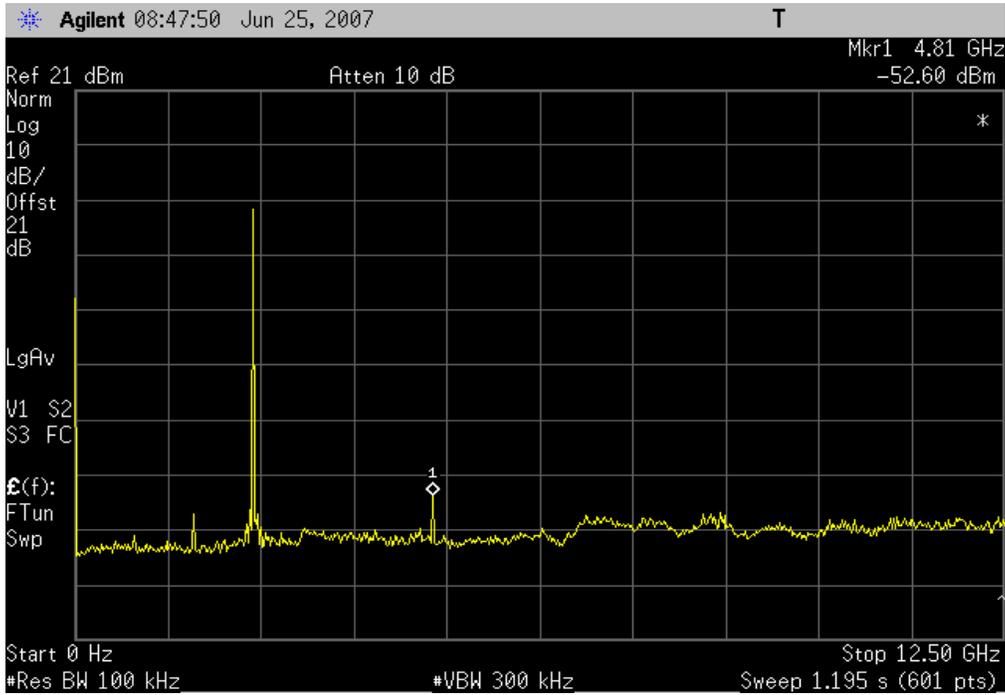

Low Channel, QPSK (Middle Data Rate 2DH5), 12 - 25 GHz

Result: Pass **Value:** - 50.57 dBc **Limit:** ≤ - 20 dBc

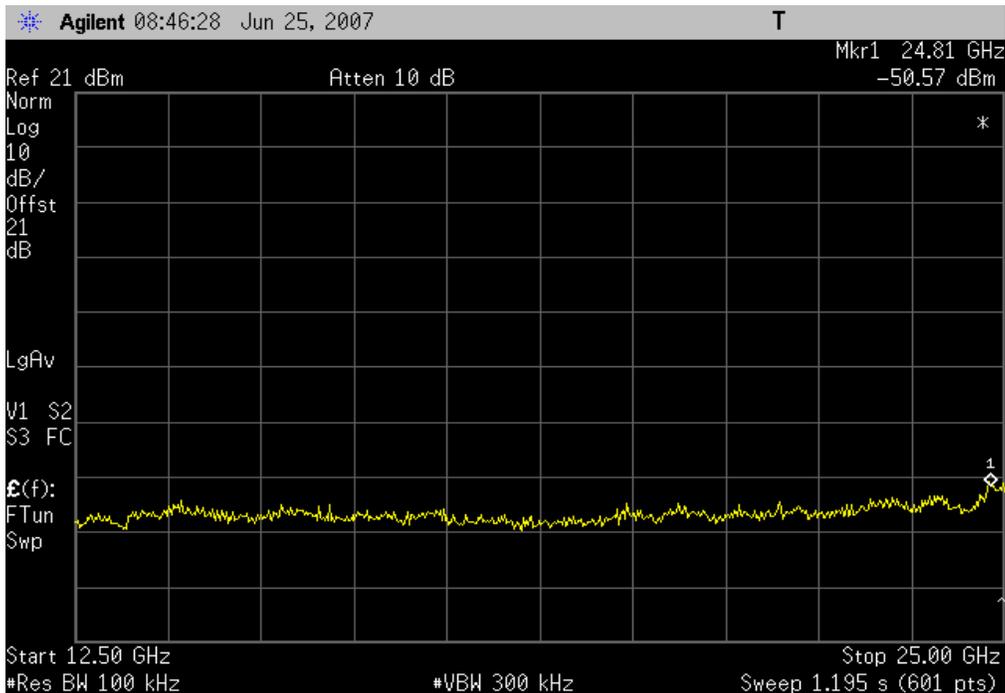


Low Channel, 8-DPSK (Highest Data Rate), 0 - 12 GHz

Result: Pass

Value: - 52.12 dBc

Limit: $\leq - 20$ dBc

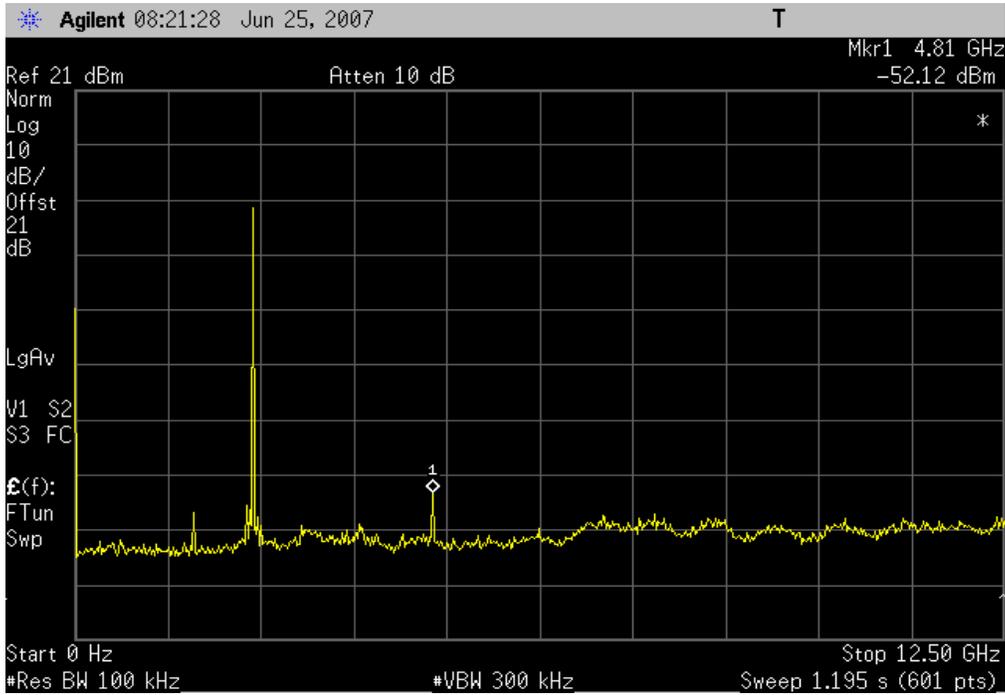


Low Channel, 8-DPSK (Highest Data Rate), 12 - 25 GHz

Result: Pass

Value: - 49.93 dBc

Limit: $\leq - 20$ dBc

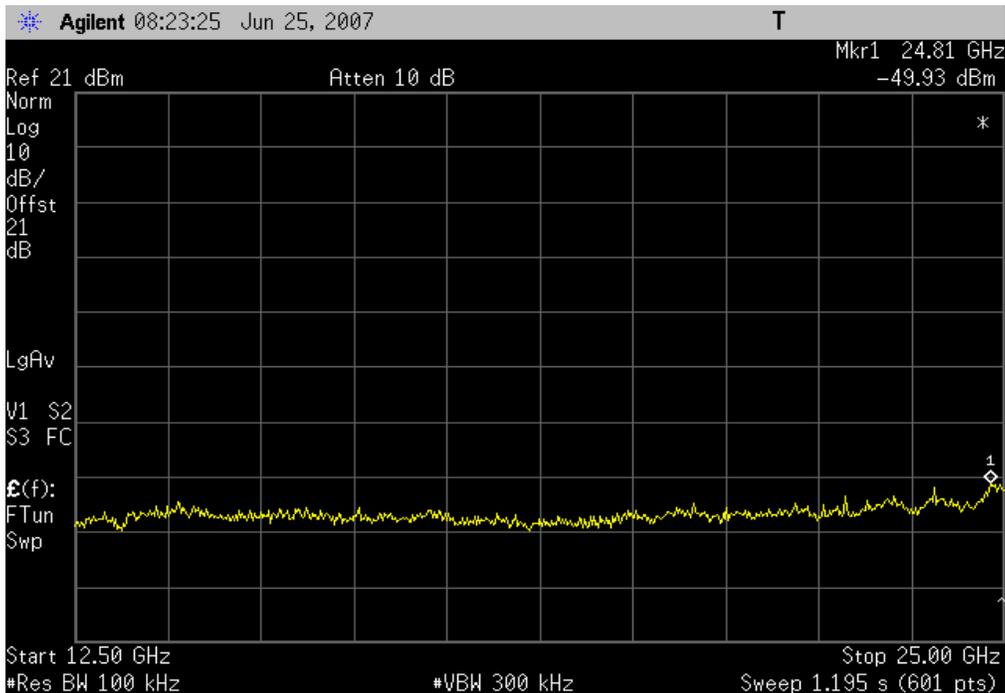


Mid Channel, GSKF (Lowest Data Rate DH5), 0 - 12 GHz

Result: Pass

Value: - 51.68 dBc

Limit: ≤ - 20 dBc

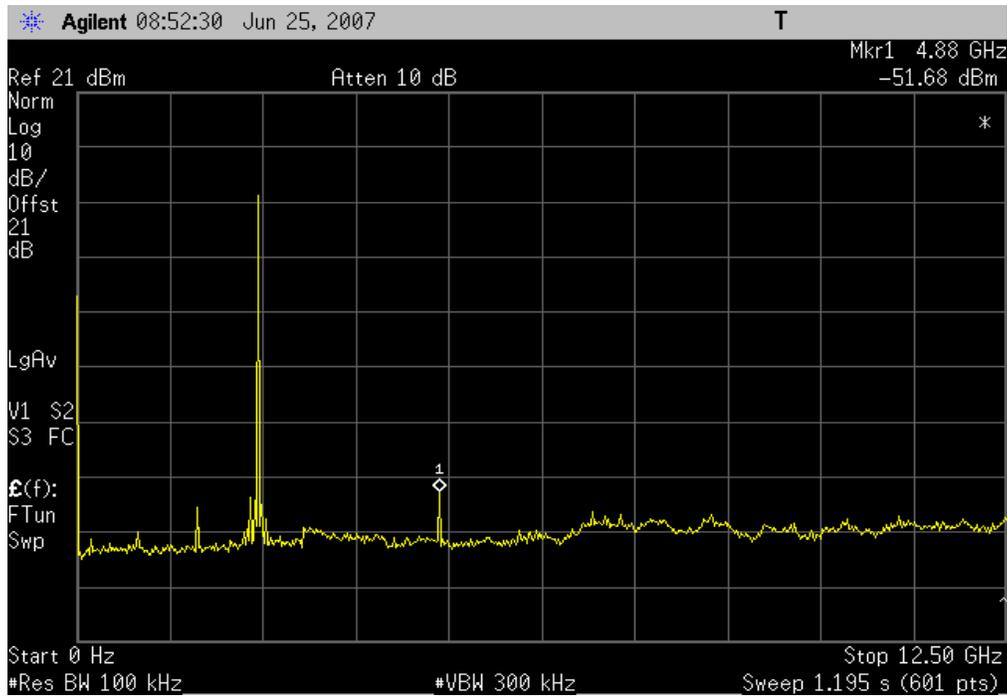


Mid Channel, GSKF (Lowest Data Rate DH5), 12 - 25 GHz

Result: Pass

Value: - 49.85 dBc


Limit: ≤ - 20 dBc

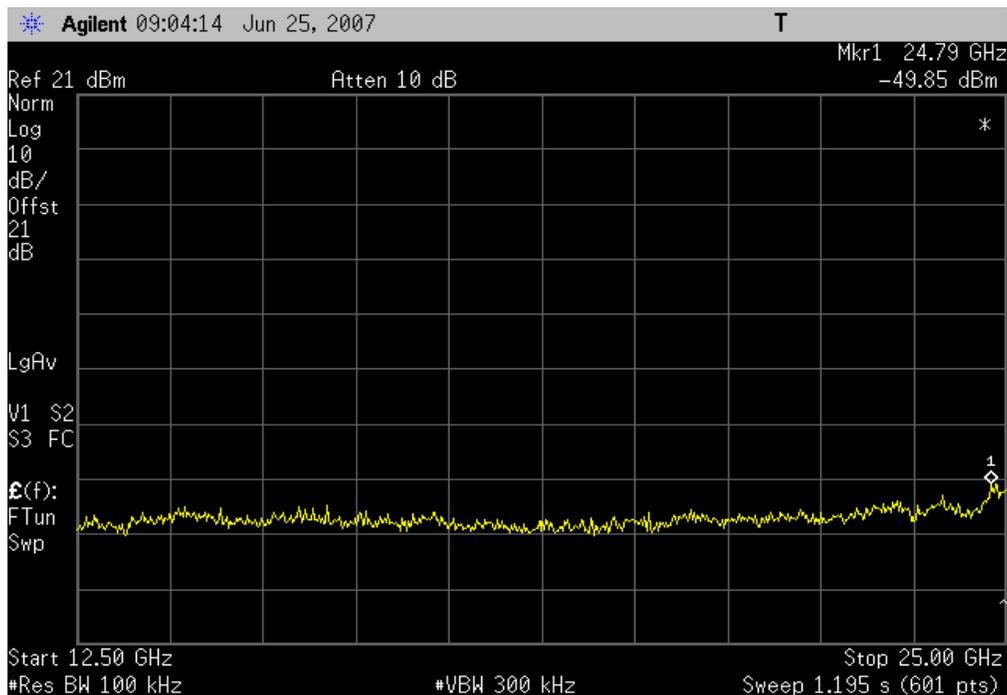

Spurious Conducted Emissions


Mid Channel, QPSK (Middle Data Rate 2DH5), 0 - 12 GHz

Result: Pass **Value:** - 52.52 dBc **Limit:** ≤ - 20 dBc

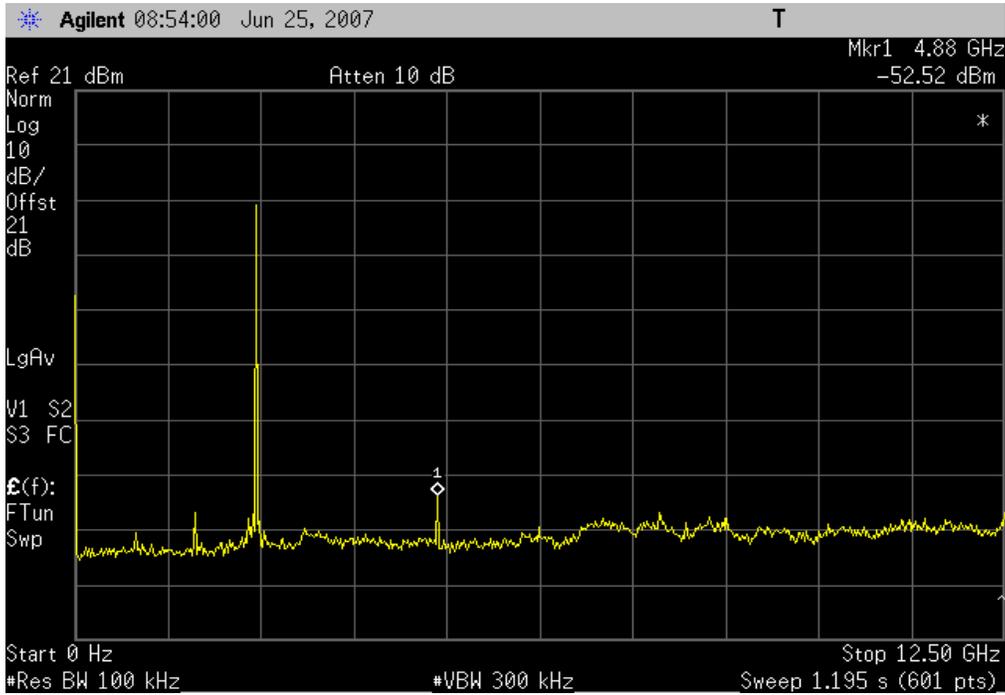

Mid Channel, QPSK (Middle Data Rate 2DH5), 12 - 25 GHz

Result: Pass **Value:** - 48.48 dBc **Limit:** ≤ - 20 dBc

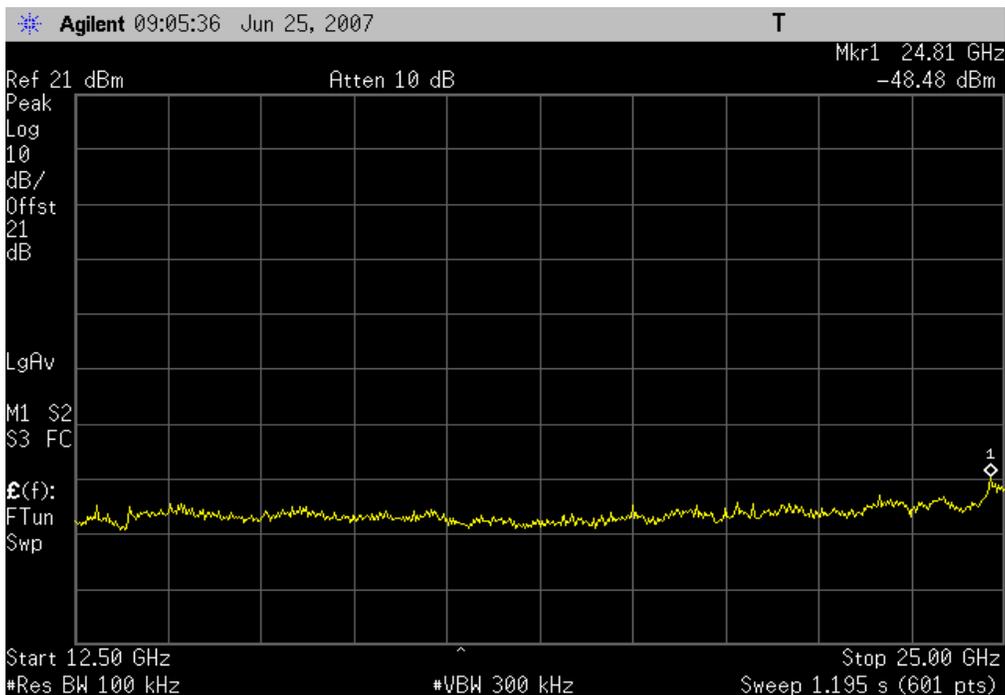


Mid Channel, 8-DPSK (Highest Data Rate), 0 - 12 GHz

Result: Pass

Value: - 53.08 dBc

Limit: ≤ - 20 dBc

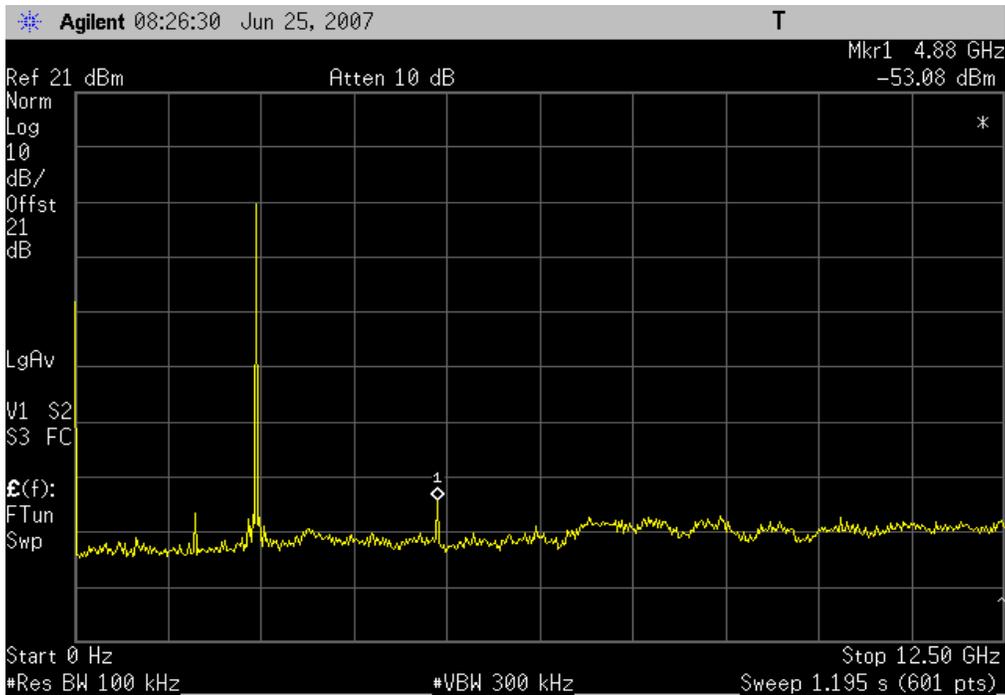


Mid Channel, 8-DPSK (Highest Data Rate), 12 - 25 GHz

Result: Pass

Value: - 50.49 dBc


Limit: ≤ - 20 dBc

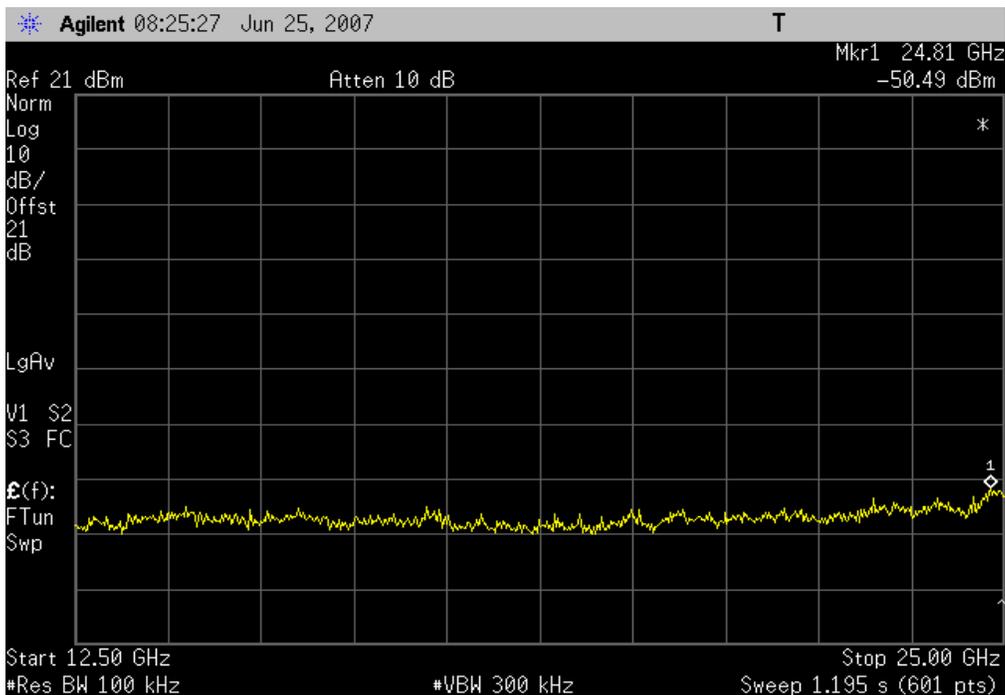

Spurious Conducted Emissions


High Channel, GSKF (Lowest Data Rate DH5), 0 - 12 GHz

Result: Pass **Value:** - 53.46 dBc **Limit:** ≤ - 20 dBc

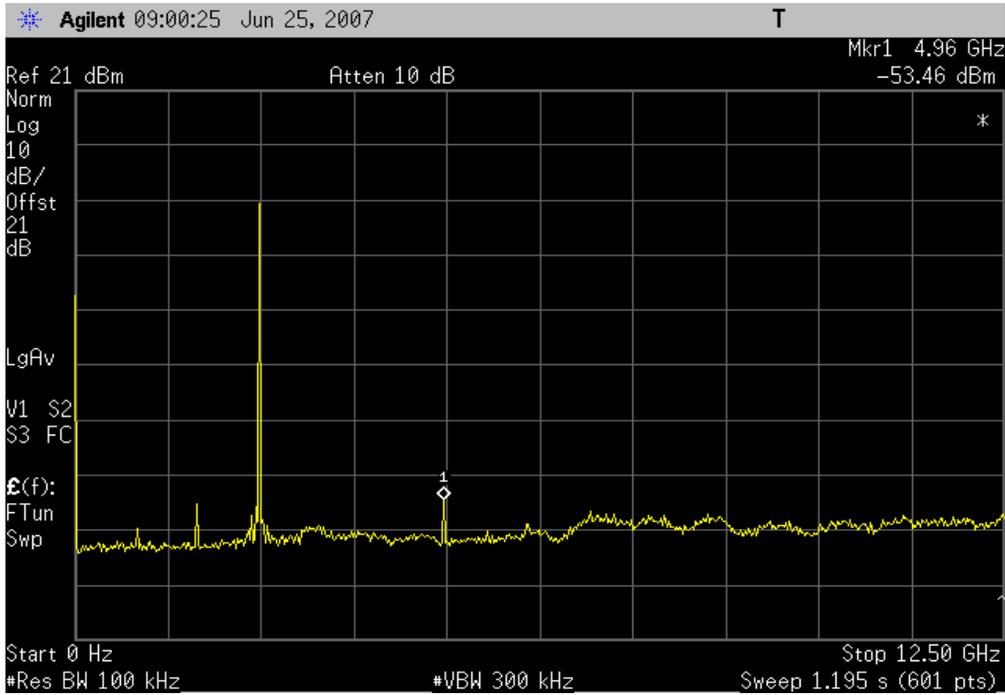


High Channel, GSKF (Lowest Data Rate DH5), 12 - 25 GHz

Result: Pass **Value:** - 49.96 dBc **Limit:** ≤ - 20 dBc

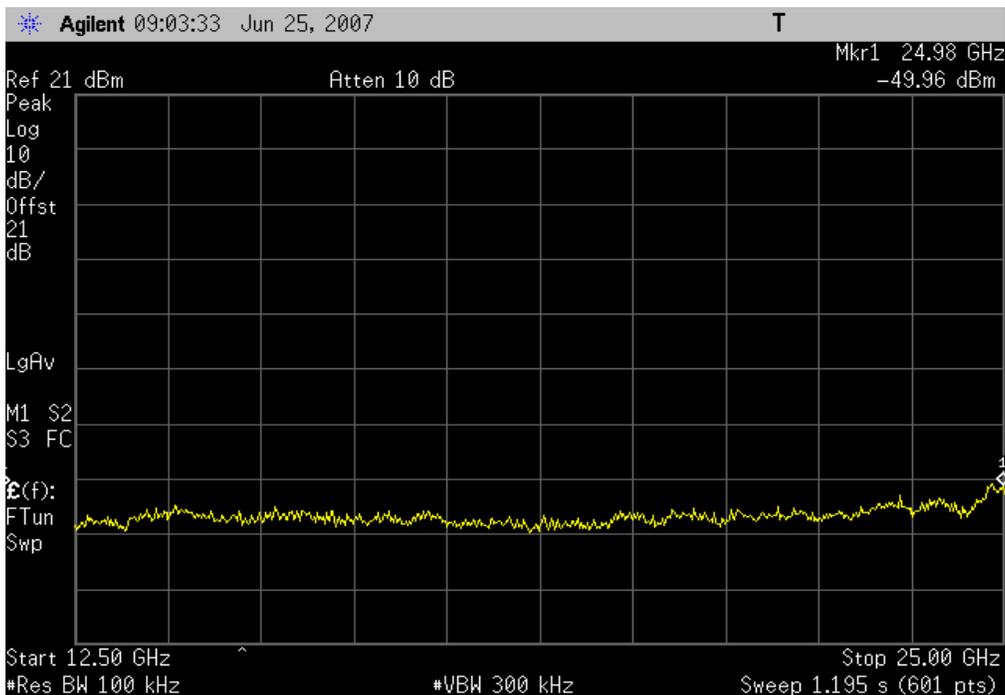


High Channel, QPSK (Middle Data Rate 2DH5), 0 - 12 GHz

Result: Pass **Value:** - 54.68 dBc **Limit:** ≤ - 20 dBc

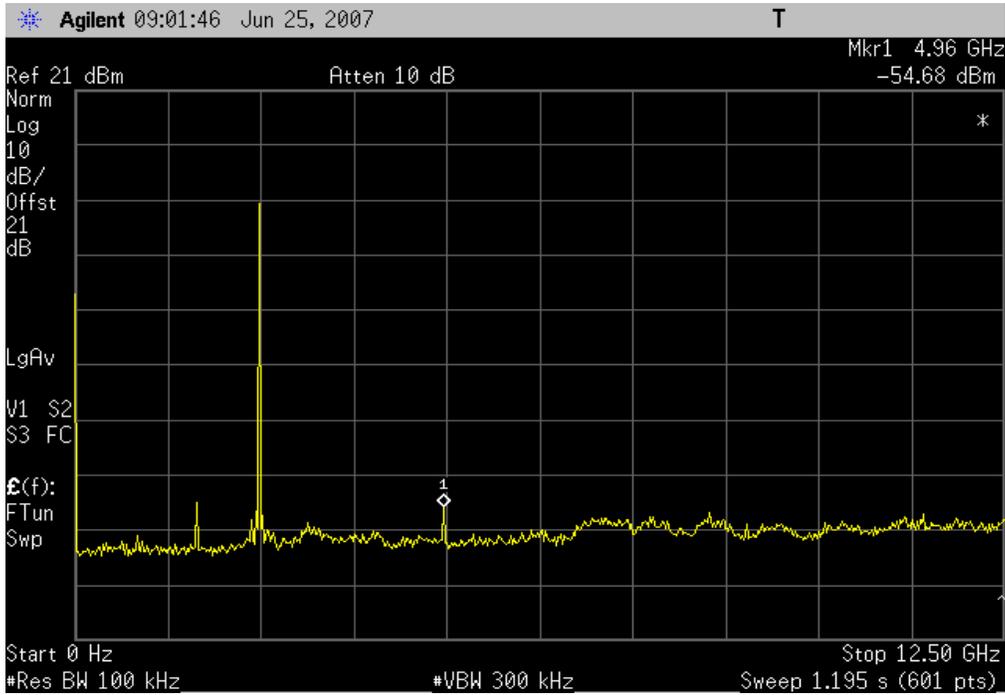

High Channel, QPSK (Middle Data Rate 2DH5), 12 - 25 GHz

Result: Pass **Value:** - 50.08 dBc **Limit:** ≤ - 20 dBc

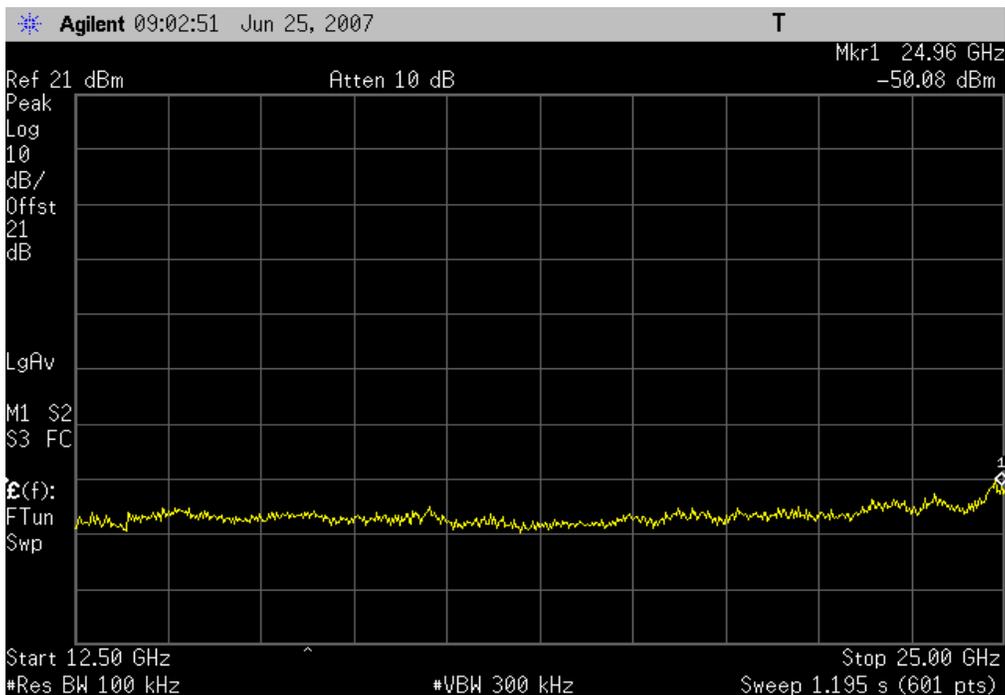


High Channel, 8-DPSK (Highest Data Rate), 0 - 12 GHz

Result: Pass

Value: - 54.46 dBc

Limit: ≤ - 20 dBc

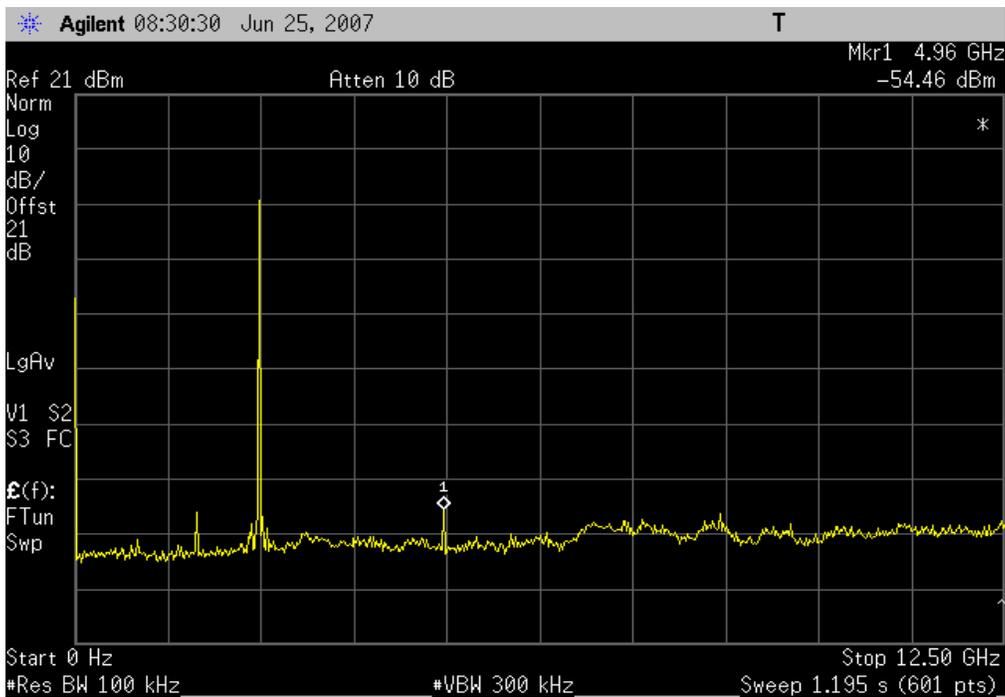


High Channel, 8-DPSK (Highest Data Rate), 12 - 25 GHz


Result: Pass

Value: - 49.77 dBc

Limit: ≤ - 20 dBc

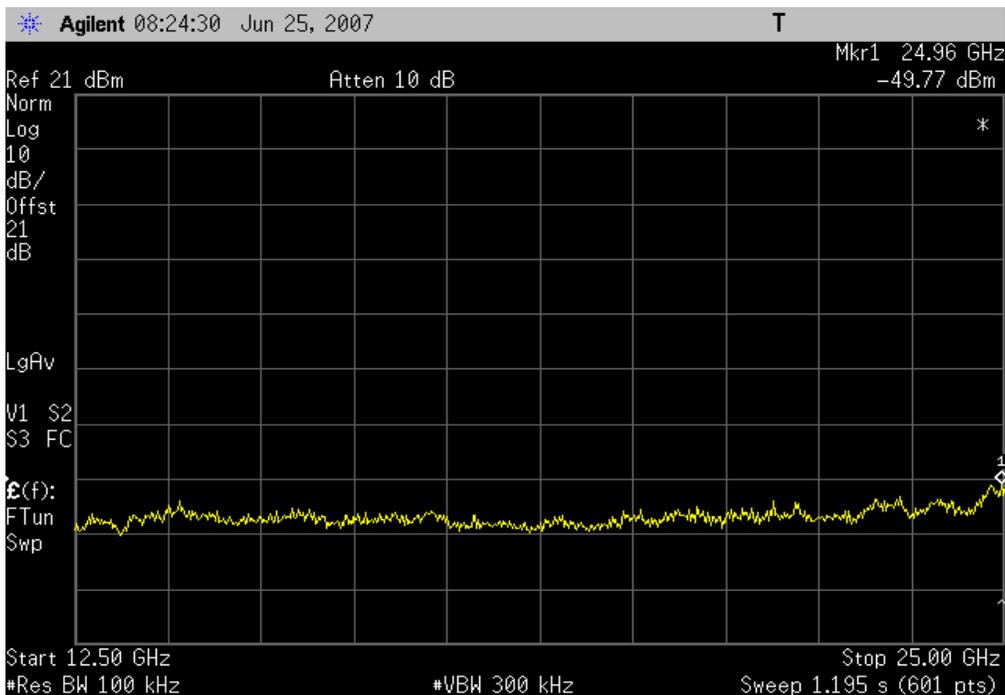

Spurious Conducted Emissions

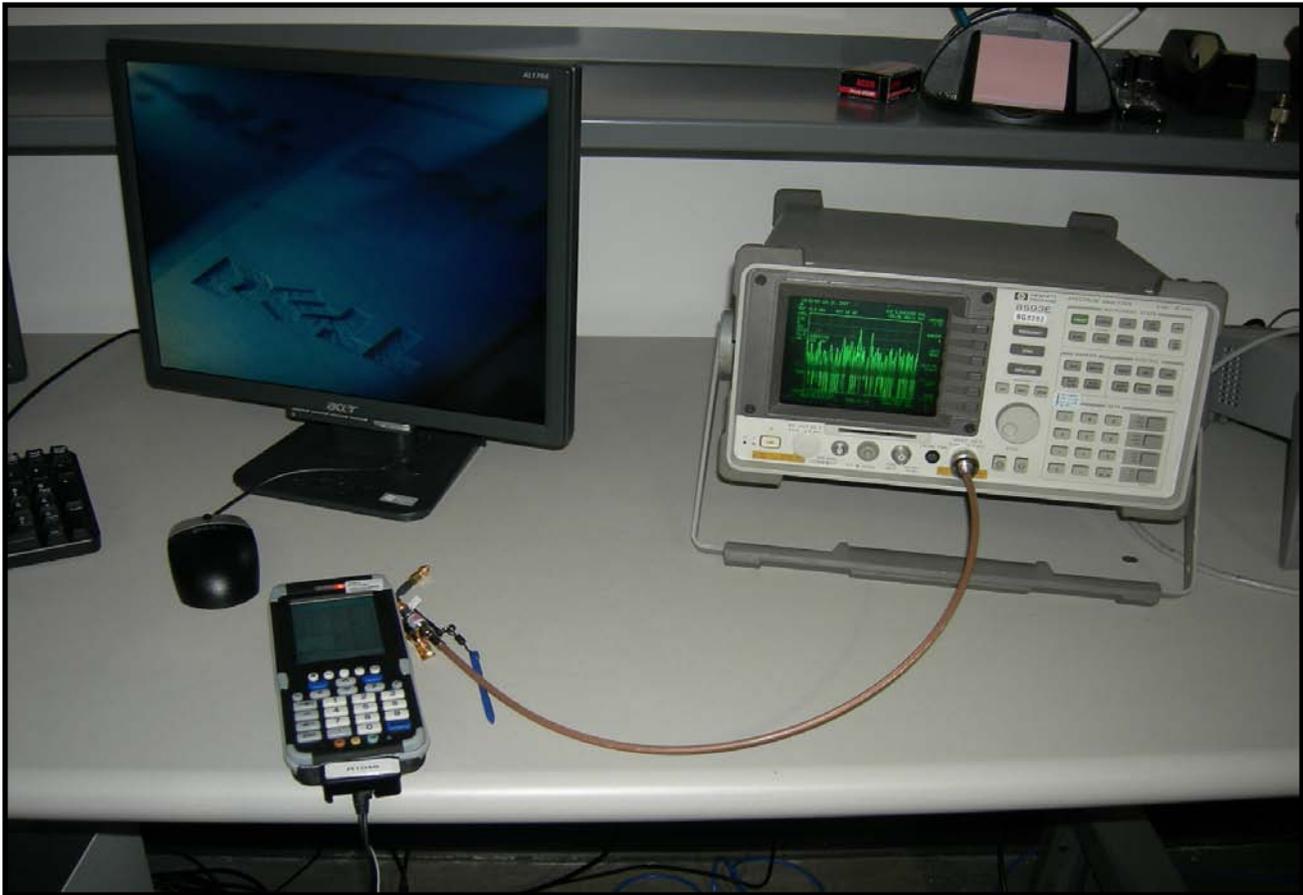

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Hewlett Packard	8593E	AAP	12/14/2006	13

MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

The peak power spectral density measurements were measured with the EUT set to low, mid, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate using direct sequence modulation. Per the procedure outlined in FCC 97-114, the spectrum analyzer was used as follows:

The emission peak(s) were located and zoom in on within the passband. The resolution bandwidth was set to 3 kHz, the video bandwidth was set to greater than or equal to the resolution bandwidth. The sweep speed was set equal to the span divided by 3 kHz (sweep = (SPAN/3 kHz)). For example, given a span of 1.5 MHz, the sweep should be $1.5 \times 10^6 \div 3 \times 10^3 = 500$ seconds. External attenuation was used and added to the reading. The following FCC procedure was used for modifying the power spectral density measurements:

"If the spectrum line spacing cannot be resolved on the available spectrum analyzer, the noise density function on most modern conventional spectrum analyzers will directly measure the noise power density normalized to a 1 Hz noise power bandwidth. Add 34.8 dB for correction to 3 kHz."

Power Spectral Density

EMC

EUT:	Stretch CN3	Work Order:	ITRM0160
Serial Number:	12090700022	Date:	06/22/07
Customer:	Intermec Technologies Corporation	Temperature:	23 C°
Attendees:	None	Humidity:	42%
Project:	None	Barometric Pres.:	30.03
Tested by:	Jaemi Suh	Power:	120VAC/60Hz
		Job Site:	OC13

TEST SPECIFICATIONS		Test Method	
FCC 15.247 (FHSS):2006		ANSI C63.4:2003 DA 00-705:2000	

COMMENTS
Bluetooth Mode

DEVIATIONS FROM TEST STANDARD

Configuration #	1	Signature 
------------------------	---	---

		Value	Limit	Results
GFSK (Lowest Data Rate DH5)				
	Low Channel	- 6.17 dBm / 3kHz	8 dBm / 3kHz	Pass
	Mid Channel	- 6.29 dBm / 3kHz	8 dBm / 3kHz	Pass
	High Channel	- 6.77 dBm / 3kHz	8 dBm / 3kHz	Pass
QPSK (Middle Data Rate 2DH5)				
	Low Channel	- 12.17 dBm / 3kHz	8 dBm / 3kHz	Pass
	Mid Channel	- 12.89 dBm / 3kHz	8 dBm / 3kHz	Pass
	High Channel	- 12.85 dBm / 3kHz	8 dBm / 3kHz	Pass
8-DPSK (Highest Data Rate 3DH5)				
	Low Channel	- 12.47 dBm / 3kHz	8 dBm / 3kHz	Pass
	Mid Channel	- 13.23 dBm / 3kHz	8 dBm / 3kHz	Pass
	High Channel	- 13.93 dBm / 3kHz	8 dBm / 3kHz	Pass


Power Spectral Density

GFSK (Lowest Data Rate DH5), Low Channel

Result: Pass

Value: -6.17 dBm / 3kHz

Limit: 8 dBm / 3kHz

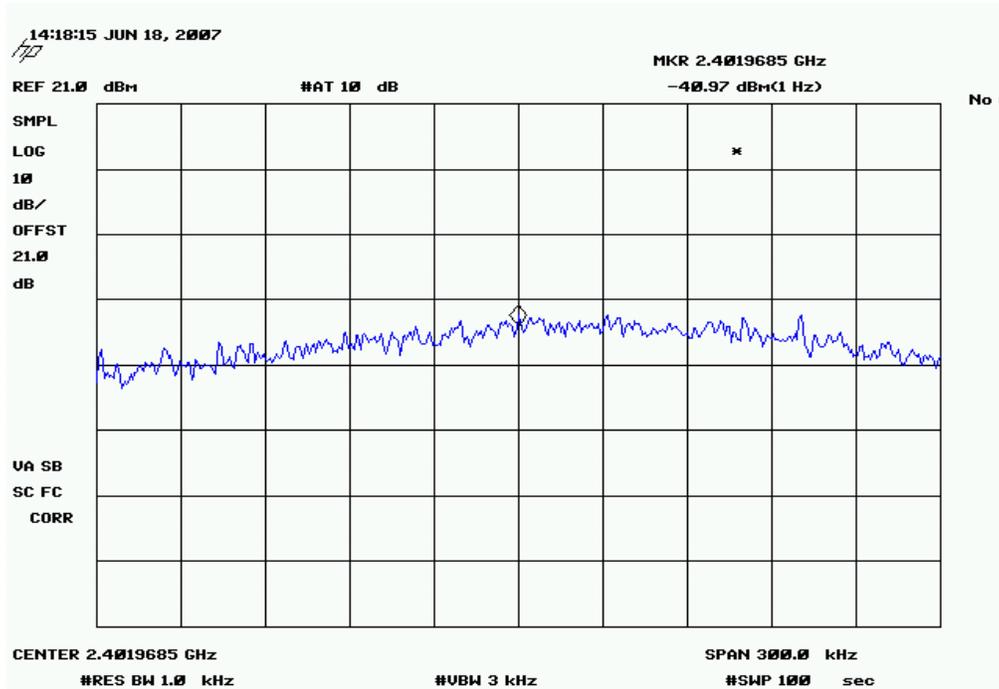


GFSK (Lowest Data Rate DH5), Mid Channel

Result: Pass

Value: -6.29 dBm / 3kHz

Limit: 8 dBm / 3kHz

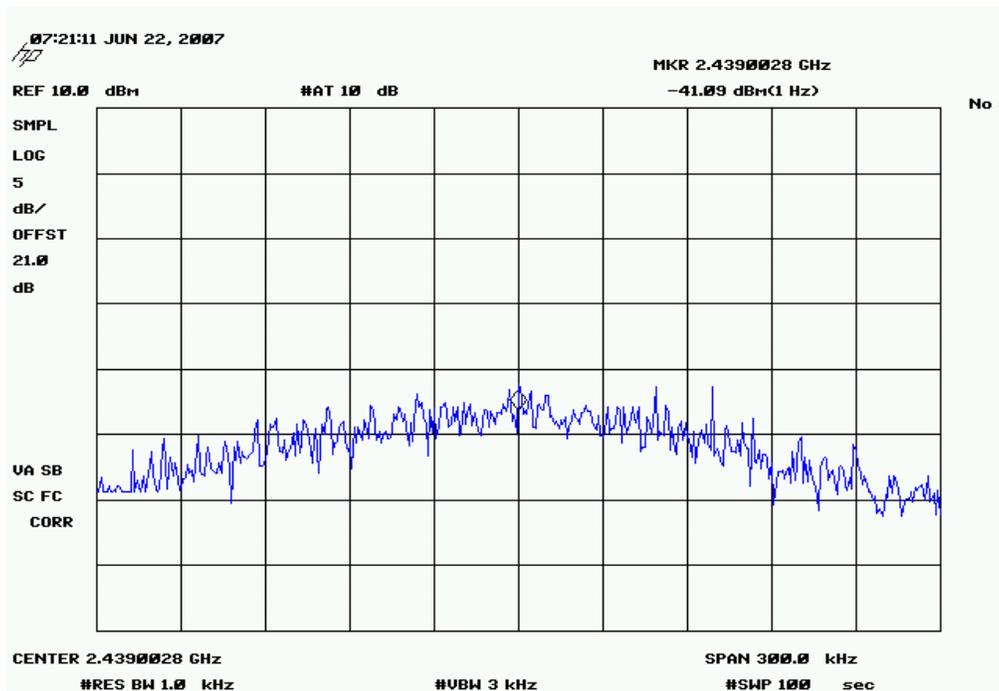


Power Spectral Density

GFSK (Lowest Data Rate DH5), High Channel

Result: Pass

Value: - 6.77 dBm / 3kHz

Limit: 8 dBm / 3kHz

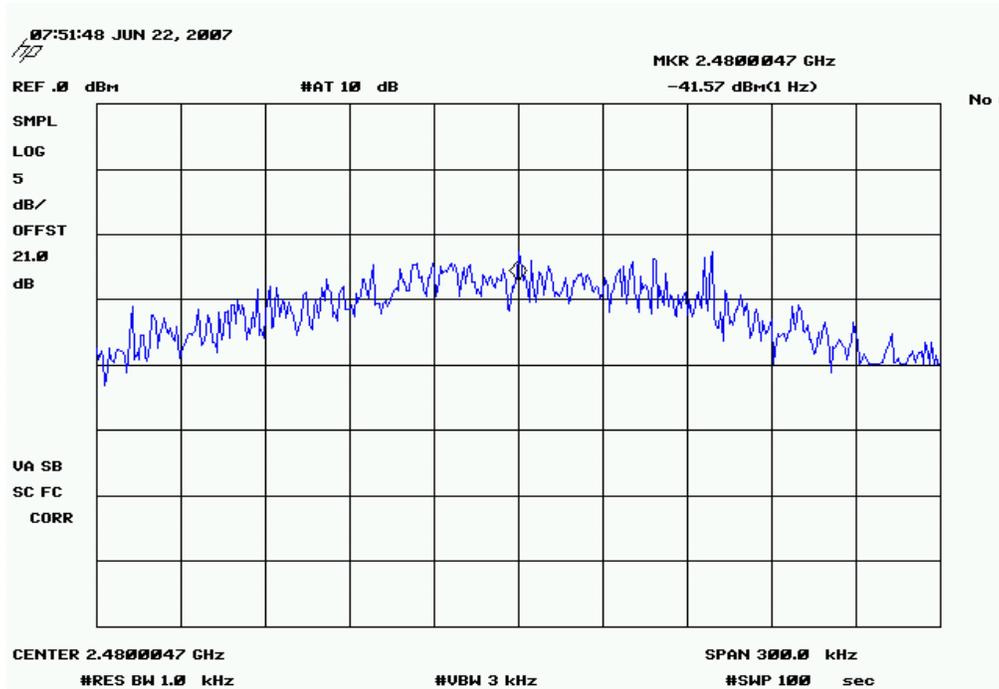


QPSK (Middle Data Rate 2DH5), Low Channel

Result: Pass

Value: - 12.17 dBm / 3kHz

Limit: 8 dBm / 3kHz

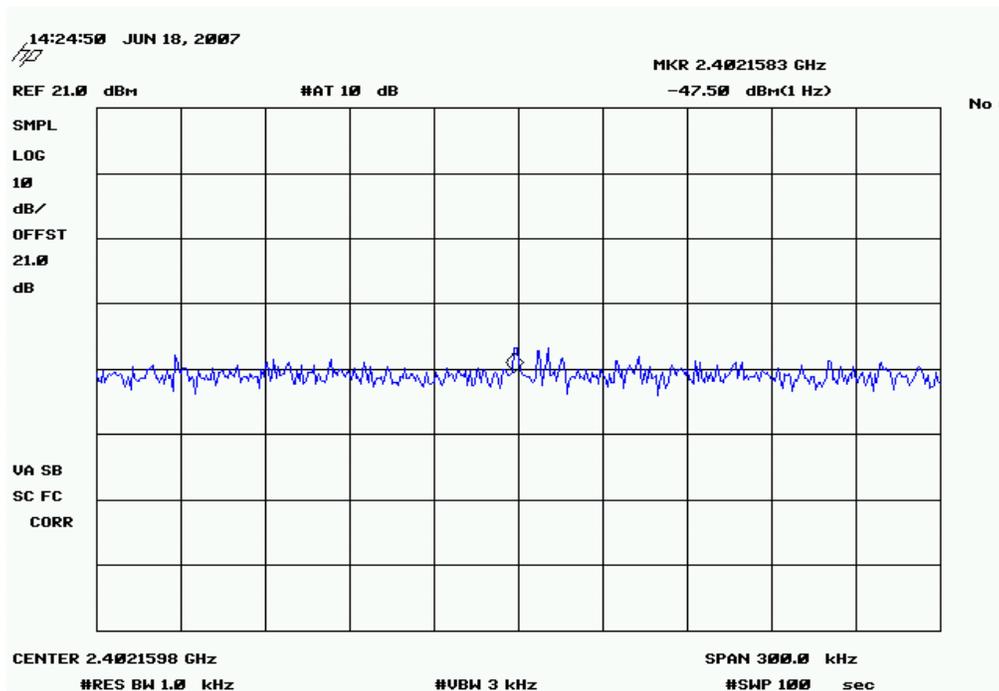


Power Spectral Density

QPSK (Middle Data Rate 2DH5), Mid Channel

Result: Pass

Value: - 12.89 dBm / 3kHz

Limit: 8 dBm / 3kHz

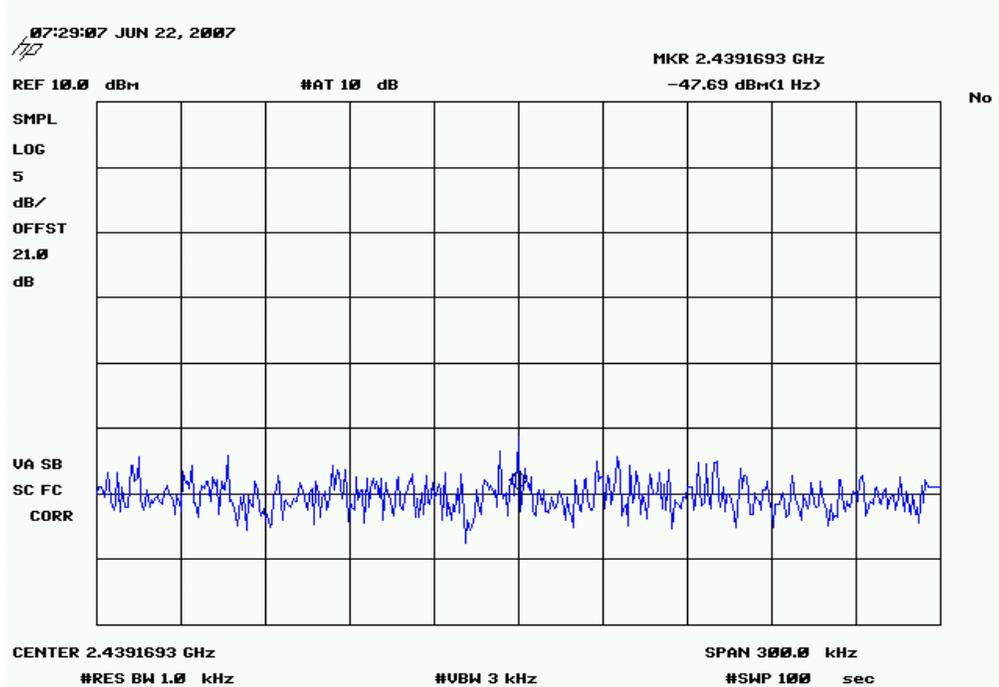


QPSK (Middle Data Rate 2DH5), High Channel

Result: Pass

Value: - 12.85 dBm / 3kHz

Limit: 8 dBm / 3kHz

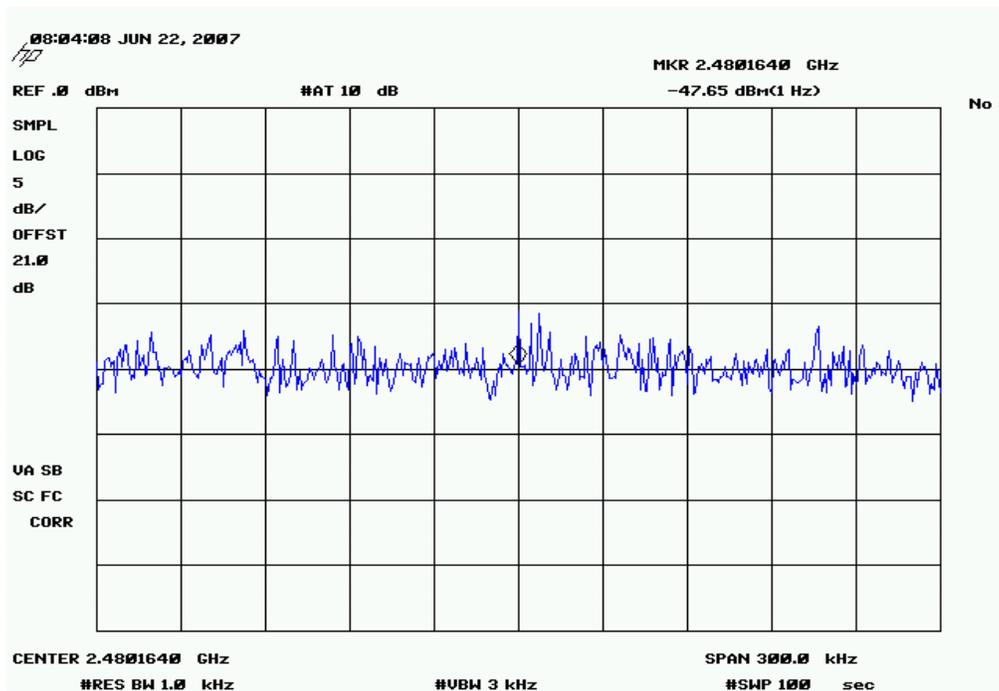


Power Spectral Density

8-DPSK (Highest Data Rate 3DH5), Low Channel

Result: Pass

Value: -12.47 dBm / 3kHz

Limit: 8 dBm / 3kHz

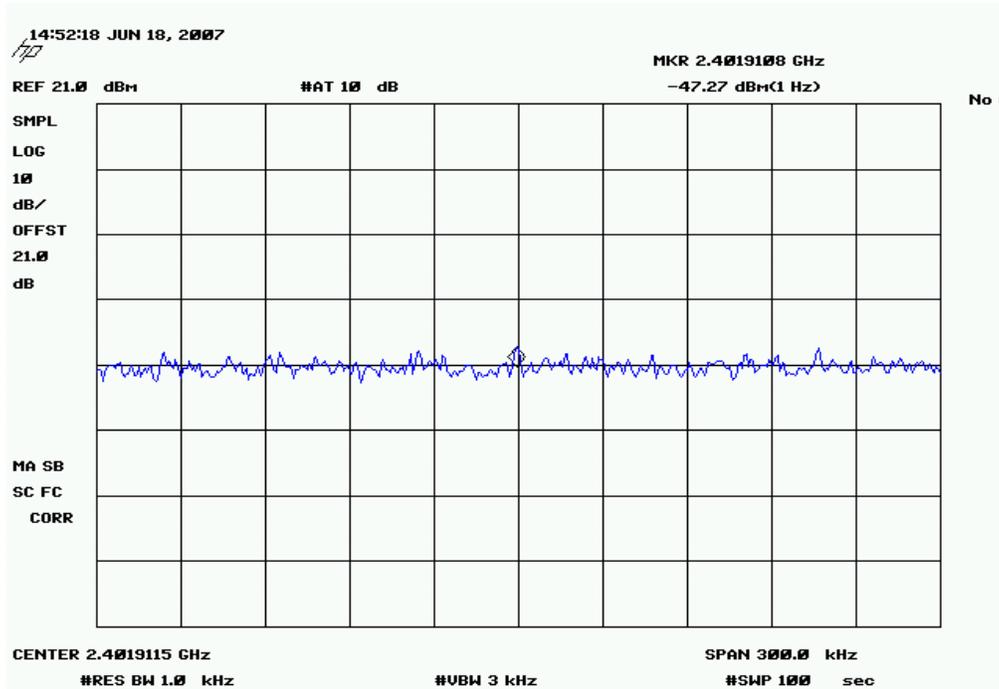



8-DPSK (Highest Data Rate 3DH5), Mid Channel

Result: Pass

Value: -13.23 dBm / 3kHz

Limit: 8 dBm / 3kHz

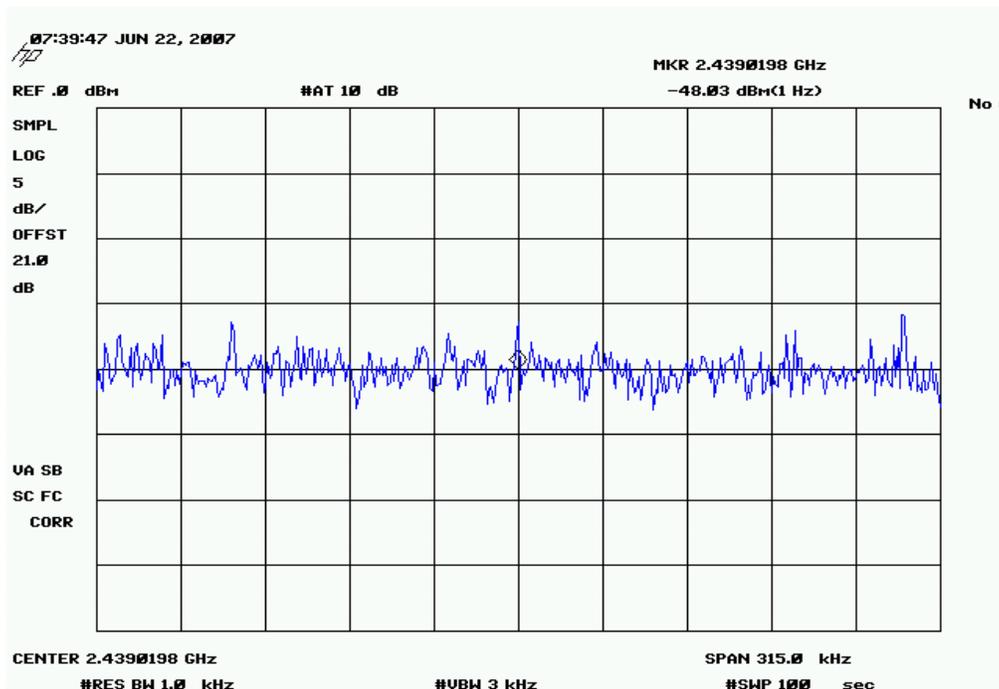

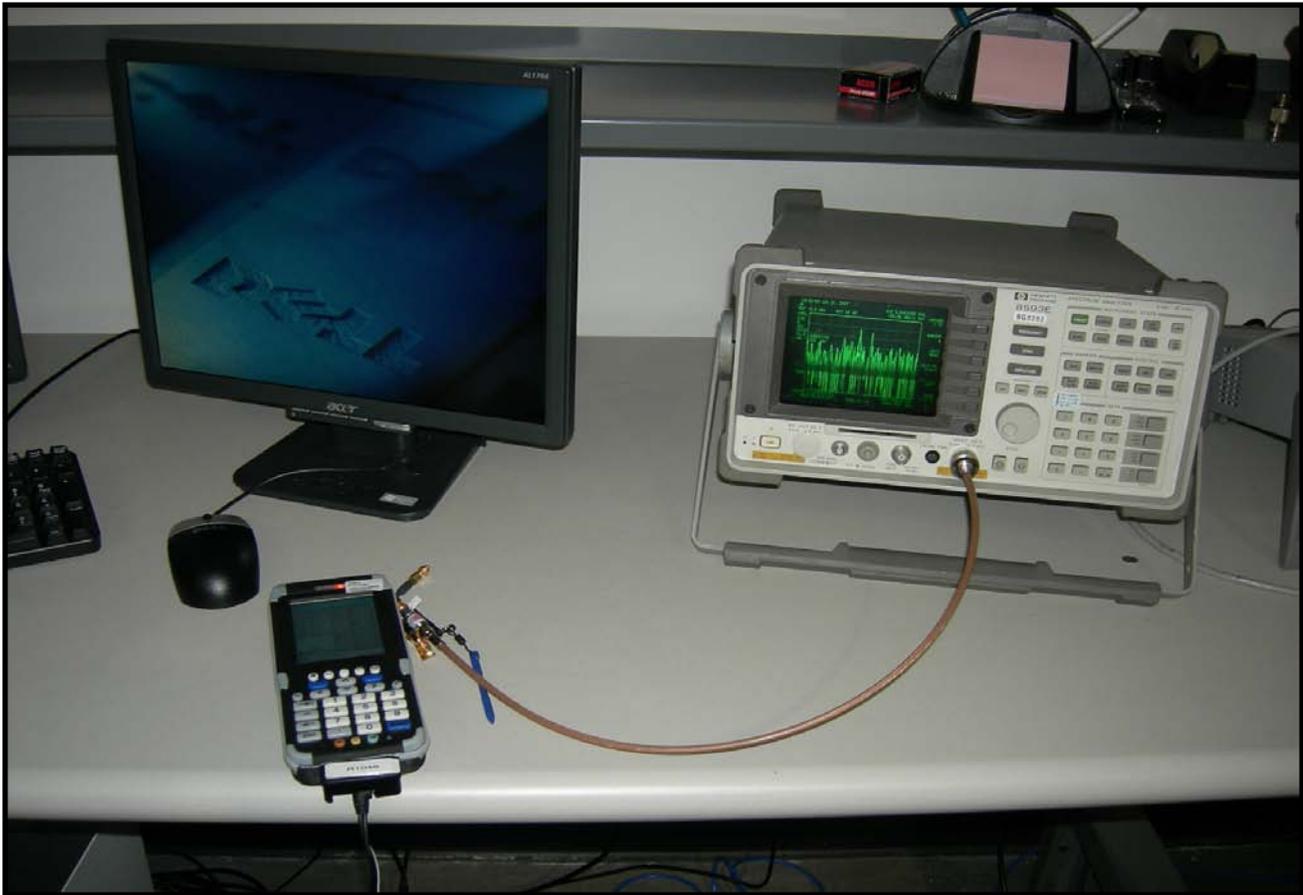

BLUETOOTH APPROVALS

FCC Procedure Received from Joe Dichoso on 2-15-02

The following exhibit indicates the FCC Spread Spectrum requirements in Section 15.247 for devices meeting the Bluetooth Specifications in the 2.4 GHz band as of February 2001 operating in the USA. The purpose of this exhibit is to help expedite the approval process for Bluetooth devices. This exhibit provides items that vary for each device and also provides a list of items that are common to Bluetooth devices that explains the remaining requirements. The list of common items can be submitted for each application for equipment authorization. This exhibit only specifies requirements in Section 15.247, requirements in other rule Sections for intentional radiators such as in Section 15.203 or 15.207 must be also be addressed. A Bluetooth device is a FHSS transmitter in the data mode and applies as a Hybrid spread spectrum device in the acquisition mode.

For each individual device, the following items, 1-7 will vary from one device to another and must be submitted.

- 1) The occupied bandwidth in Section 15.247(a)(1)(ii).
- 2) Conducted output power specified in Section 15.247(b)(1).
- 3) EIRP limit in Section 15.247(b)(3).
- 4) RF safety requirement in Section 15.247(b)(4)
- 5) Spurious emission limits in Section 15.247(c).
- 6) Processing gain and requirements for Hybrids in Section 15.247(f) in the acquisition mode.
- 7) Power spectral density requirement in Section 15.247(f) in the acquisition mode.

For all devices, the following items, 1-12, are common to all Bluetooth devices and will not vary from one device to another. This list can be copied into the filing.

1 Output power and channel separation of a Bluetooth device in the different operating modes:

The different operating modes (data-mode, acquisition-mode) of a Bluetooth device don't influence the output power and the channel spacing. There is only one transmitter which is driven by identical input parameters concerning these two parameters.

Only a different hopping sequence will be used. For this reason, the RF parameters in one op-mode is sufficient.

2 Frequency range of a Bluetooth device:

The maximum frequency of the device is: **2402 – 2480 MHz**.

This is according the Bluetooth Core Specification V 1.0B (+ critical errata) for devices which will be operated in the USA. Other frequency ranges (e.g. for Spain, France, Japan) which are allowed according the Core Specification must **not be** supported by the device.

3 Co-ordination of the hopping sequence in data mode to avoid simultaneous occupancy by multiple transmitters:

Bluetooth units which want to communicate with other units must be organized in a structure called piconet. This piconet consist of max. 8 Bluetooth units. One unit is the master the other seven are the slaves. The master co-ordinates frequency occupation in this piconet for all units. As the master hop sequence is derived from it's BD address which is unique for every Bluetooth device, additional masters intending to establish new piconets will always use different hop sequences.

4 Example of a hopping sequence in data mode:

Example of a 79 hopping sequence in data mode:

40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67,
56, 37, 60, 39, 58, 69, 62, 71, 64, 25, 68, 27, 66, 57, 70, 59,
72, 29, 76, 31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75,
09, 45, 13, 47, 11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06,
01, 51, 03, 55, 05, 04

5 Equally average use of frequencies in data mode and short transmissions:

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection
2. Internal master clock

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD_ADDRESS. The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronization with other units, only the offsets are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5 μ s. The clock has a cycle of about one day (23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions, the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence is generated. For transmitting the wanted data, the complete hopping sequence is not used and the connection ends. The second connection will be established. A new hopping sequence is generated. Due to the fact that the Bluetooth clock has a different value, because the period between the two transmission is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5 μ s). The hopping sequence will always differ from the first one.

6 Receiver input bandwidth, synchronization and repeated single or multiple packets:

The input bandwidth of the receiver is 1 MHz.

In every connection, one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence (see chapter 5). The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single or multi-slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing is according to the packet type of the connection. Also, the slave of the connection uses these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence

7 Dwell time in data mode

The dwell time of 0.3797s within a 30 second period in data mode is independent from the packet type (packet length). The calculation for a 30 second period is a follows:

Dwell time = time slot length * hop rate / number of hopping channels *30s

Example for a DH1 packet (with a maximum length of one time slot)

Dwell time = 625 μ s * 1600 1/s / 79 * 30s = 0.3797s (in a 30s period)

For multi-slot packet the hopping is reduced according to the length of the packet. Example for a DH5 packet (with a maximum length of five time slots)
Dwell time = $5 * 625 \mu s * 1600 * 1/5 * 1/s / 79 * 30s = 0.3797s$ (in a 30s period)
This is according the Bluetooth Core Specification V 1.0B (+ critical errata) for all Bluetooth devices. Therefore, all Bluetooth devices **comply** with the FCC dwell time requirement in the data mode.

This was checked during the Bluetooth Qualification tests.

The Dwell time in hybrid mode is approximately 2.6 mS (in a 12.8s period)

8 Channel Separation in hybrid mode

The nominal channel spacing of the Bluetooth system is 1Mhz independent of the operating mode.

The maximum "initial carrier frequency tolerance" which is allowed for Bluetooth is fcenter = 75 kHz.

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/07-E) for three frequencies (2402, 2441, 2480 MHz).

9 Derivation and examples for a hopping sequence in hybrid mode

For the generation of the inquiry and page hop sequences the same procedures as described for the data mode are used (see item 5), but this time with different input vectors:

**For the inquiry hop sequence, a predefined fixed address is always used. This results in the same 32 frequencies used by all devices doing an inquiry but every time with a different start frequency and phase in this sequence.

**For the page hop sequence, the device address of the paged unit is used as the input vector. This results in the use of a subset of 32 frequencies which is specific for that initial state of the connection establishment between the two units. A page to different devices would result in a different subset of 32 frequencies.

So it is ensured that also in hybrid mode, the frequency is used equally on average.

Example of a hopping sequence in inquiry mode:

48, 50, 09, 13, 52, 54,41, 45, 56, 58, 11, 15, 60, 62, 43, 47, 00, 02, 64, 68, 04, 06, 17, 21, 08, 10, 66, 70, 12, 14, 19, 23

Example of a hopping sequence in paging mode:

08, 57, 68, 70, 51, 02, 42, 40, 04, 61, 44, 46, 63, 14, 50, 48, 16, 65, 52, 54, 67, 18, 58, 56, 20, 53, 60, 62, 55, 06, 66, 64

10 Receiver input bandwidth and synchronization in hybrid mode:

The receiver input bandwidth is the same as in the data mode (1 MHz). When two Bluetooth devices establish contact for the first time, one device sends an inquiry access code and the other device is scanning for this inquiry access code. If two devices have been connected previously and want to start a new transmission, a similar procedure takes place. The only difference is, instead of the inquiry access code, a special access code, derived from the BD_ADDRESS of the paged device will be, will be sent by the master of this connection. Due to the fact that both units have been connected before (in the inquiry procedure) the paging unit has timing and frequency information about the page scan of the paged unit. For this reason the time to establish the connection is reduced.

11 Spread rate / data rate of the direct sequence signal

The Spread rate / Data rate in inquiry and paging mode can be defined via the access code. The access code is the only criterion for the system to check if there is a valid transmission or not. If you regard the presence of a valid access code as one bit of information, and compare it with the length of the access code of 68 bits, the Spread rate / Data rate will be 68/1.

12 Spurious emission in hybrid mode

The Dwell in hybrid mode is shorter than in data mode. For this reason the spurious emissions average level in data mode is worst case. The spurious emissions peak level is the same for both modes.