

APPENDIX B PLOTS OF THE SAR MEASUREMENTS

Plots of the measured SAR distributions inside the phantom are given in this Appendix for all tested configurations.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz GPRS FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 29-10-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 850 MHz GSM; Frequency: 824.2 MHz; Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33

Medium Parameters used: $f=824$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 55.6$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 128 Test/Area Scan (81x101x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.569 W/kg**Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 128 Test/Zoom Scan (21x21x36)/Cube 0:**Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 17.927 V/m; **Power Drift = 0.01 dB****Averaged SAR: SAR(1g) = 0.557 W/kg; SAR(10g) = 0.389 W/kg**

Maximum value of SAR (interpolated) = 0.703 W/kg

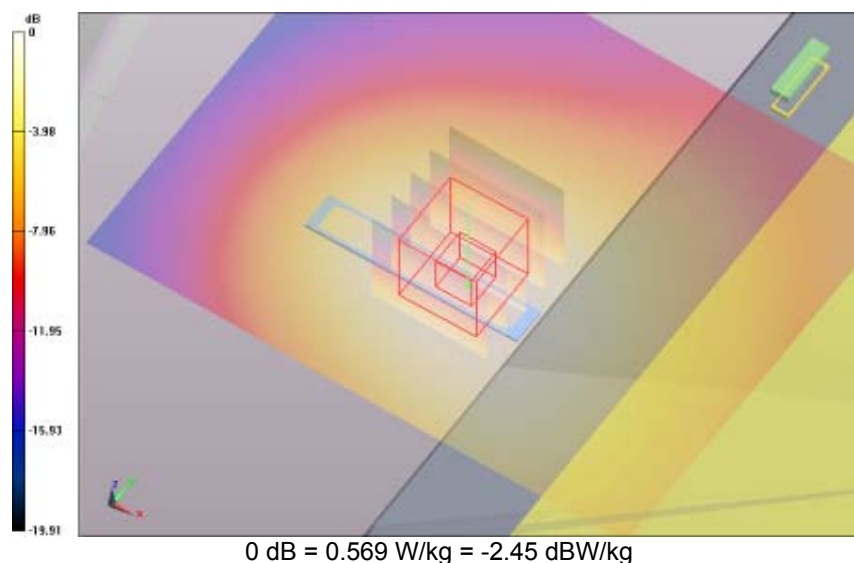


SAR Measurement Plot 1



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

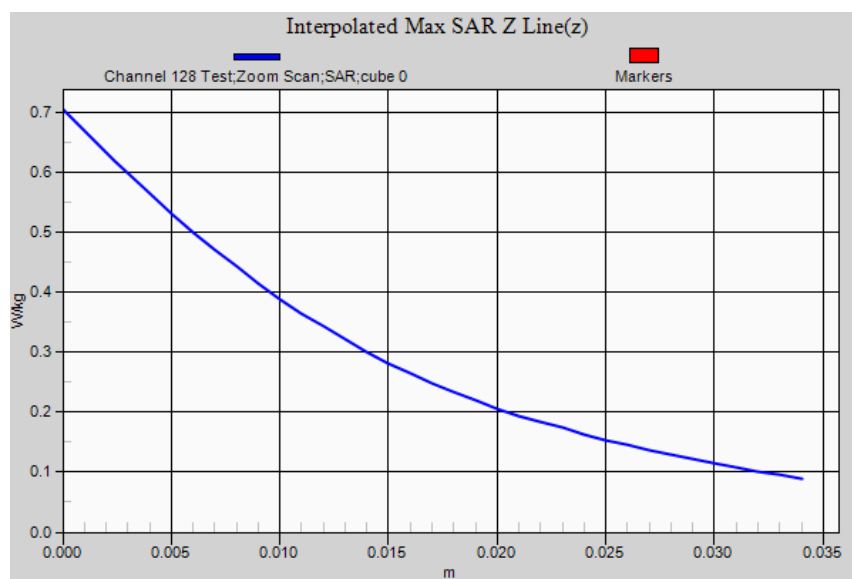

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz GPRS FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 29-10-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 850 MHz GSM; Frequency: 836.6 MHz, Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33

Medium Parameters used: $f=836.5$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.5$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 190 Test/Area Scan 2 (81x101x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.551 W/kg**Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 190 Test/Zoom Scan (21x21x36)/Cube 0:**Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 17.451 V/m; **Power Drift = 0.05 dB****Averaged SAR: SAR(1g) = 0.535 W/kg; SAR(10g) = 0.374 W/kg**

Maximum value of SAR (interpolated) = 0.682 W/kg

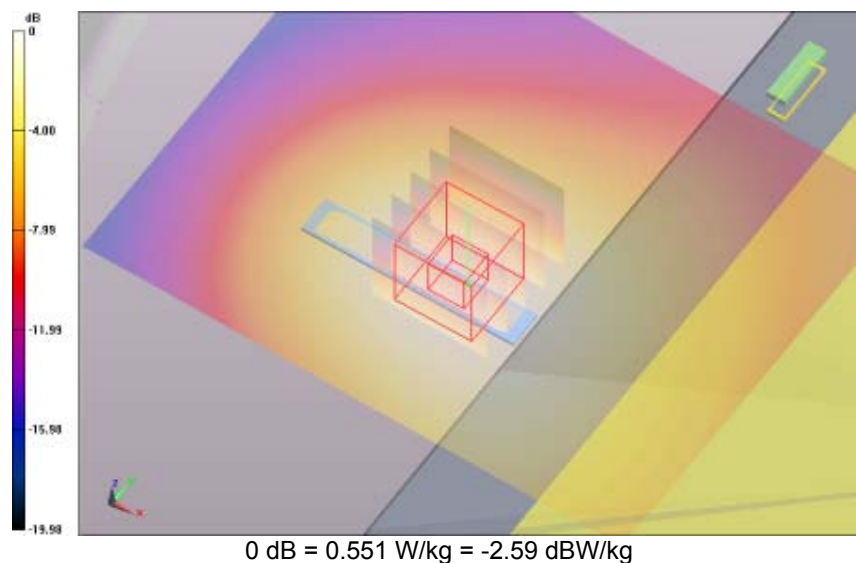


SAR Measurement Plot 2



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

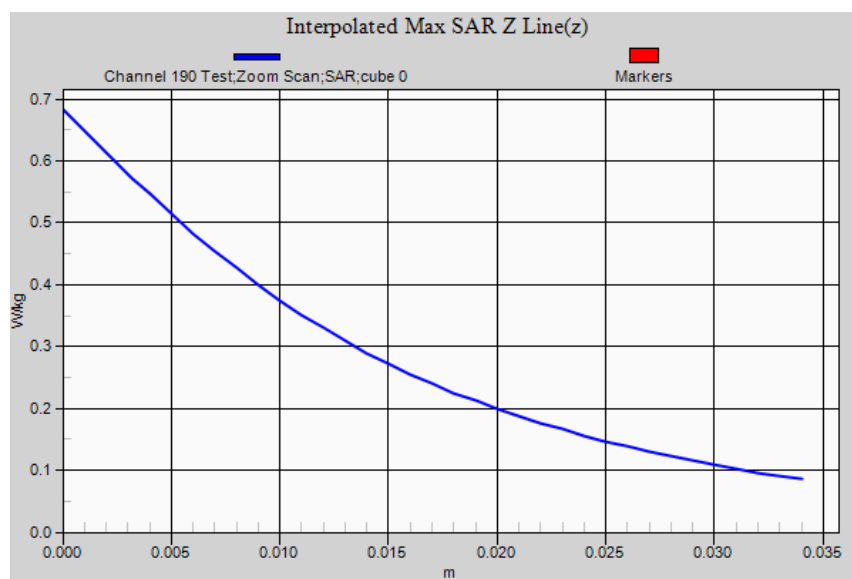

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz GPRS FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 29-10-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 850 MHz GSM; Frequency: 848.6 MHz, Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33

Medium Parameters used: $f=848.5$ MHz; $\sigma = 1.00$ S/m; $\epsilon_r = 55.3$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 251 Test/Area Scan 2 (81x101x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.473 W/kg**Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 251 Test/Zoom Scan (21x21x36)/Cube 0:**Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 16.404 V/m; **Power Drift = -0.04 dB****Averaged SAR: SAR(1g) = 0.462 W/kg; SAR(10g) = 0.323 W/kg**

Maximum value of SAR (interpolated) = 0.579 W/kg

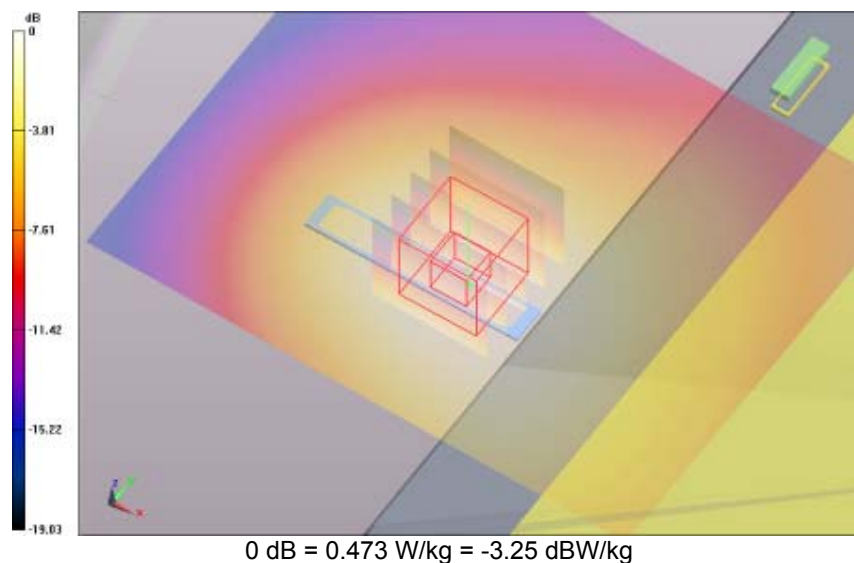


SAR Measurement Plot 3



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

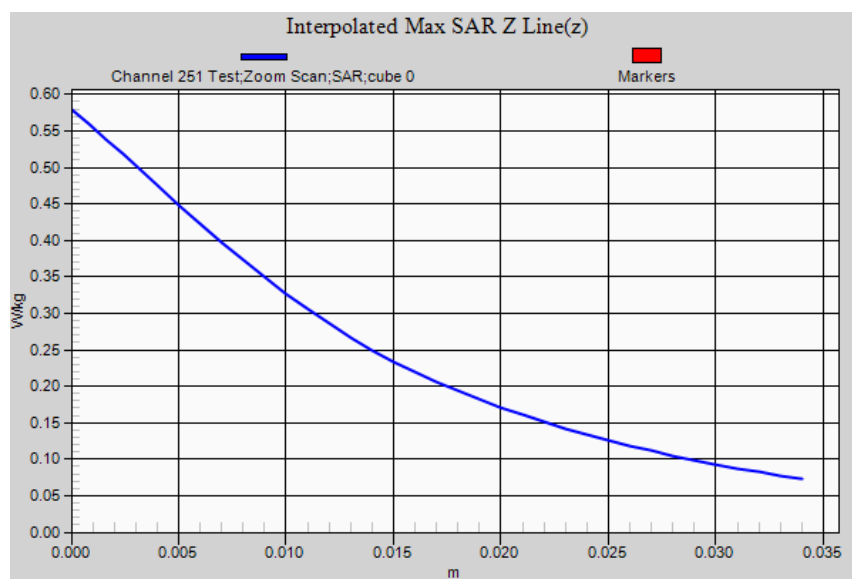

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz GPRS FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 29-10-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 850 MHz GSM; Frequency: 824.2 MHz, Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=824$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 55.6$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 29-10-14/Channel 128 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 1.000 W/kg

Lap Held Antenna OUT 29-10-14/Channel 128 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 25.959 V/m; **Power Drift = 0.07 dB**

Averaged SAR: SAR(1g) = 1.030 W/kg; SAR(10g) = 0.677 W/kg

Maximum value of SAR (interpolated) = 1.400 W/kg

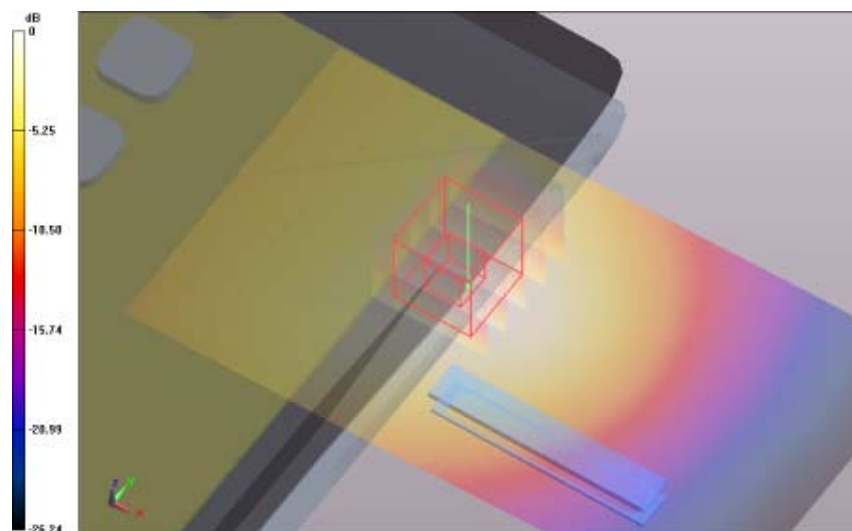


0 dB = 1.00 W/kg = 0.00 dBW/kg

SAR Measurement Plot 4



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

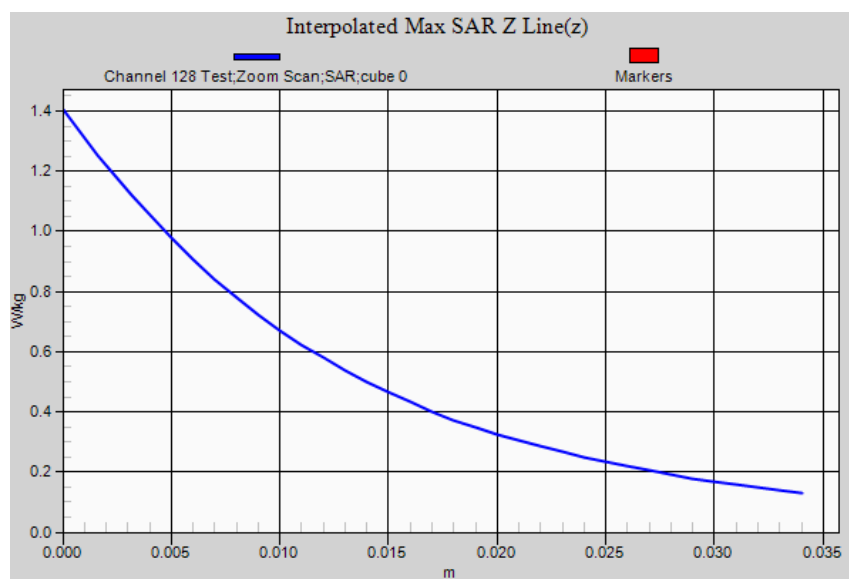

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz GPRS FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 29-10-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 850 MHz GSM; Frequency: 836.6 MHz, Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=836.5$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.5$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 29-10-14/Channel 190 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.980 W/kg

Lap Held Antenna OUT 29-10-14/Channel 190 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 25.567 V/m; **Power Drift = -0.02 dB**

Averaged SAR: SAR(1g) = 0.993 W/kg; SAR(10g) = 0.651 W/kg

Maximum value of SAR (interpolated) = 1.340 W/kg

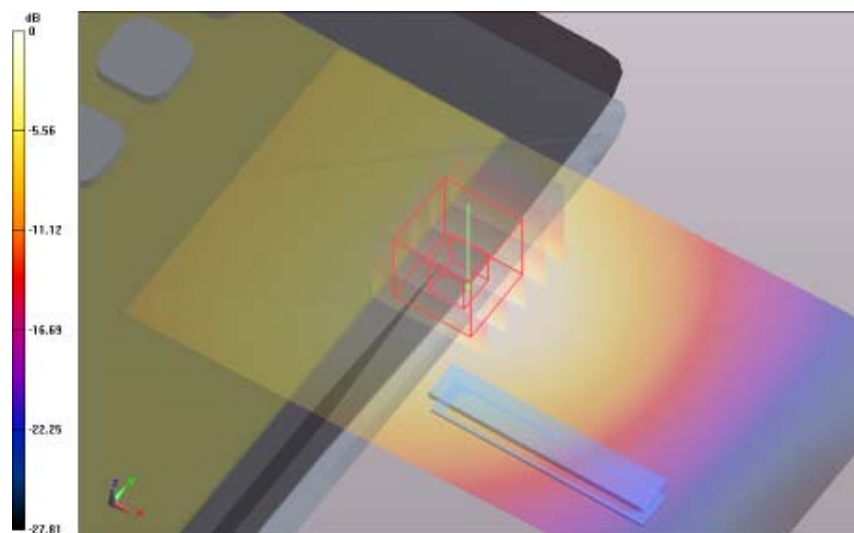


0 dB = 0.980 W/kg = -0.09 dBW/kg

SAR Measurement Plot 5



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

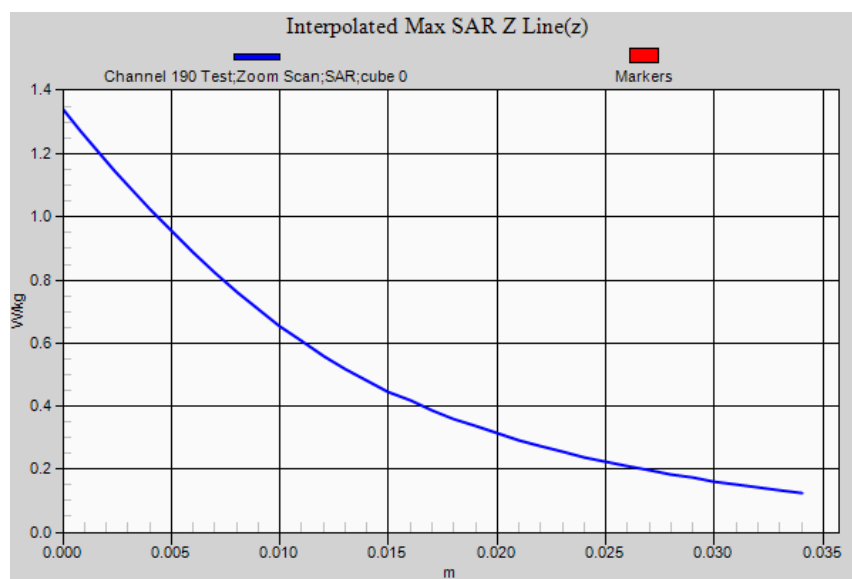

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz GPRS FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 29-10-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 850 MHz GSM; Frequency: 848.6 MHz, Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=848.5$ MHz; $\sigma = 1.00$ S/m; $\epsilon_r = 55.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 29-10-14/Channel 251 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.850 W/kg

Lap Held Antenna OUT 29-10-14/Channel 251 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 23.845 V/m; **Power Drift = 0.00 dB**

Averaged SAR: SAR(1g) = 0.852 W/kg; SAR(10g) = 0.560 W/kg

Maximum value of SAR (interpolated) = 1.160 W/kg

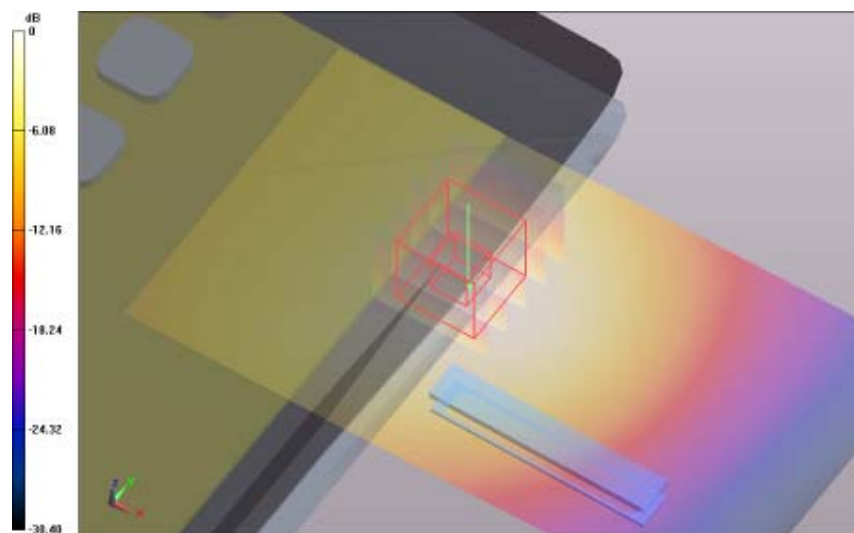


0 dB = 0.850 W/kg = -0.71 dBW/kg

SAR Measurement Plot 6



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

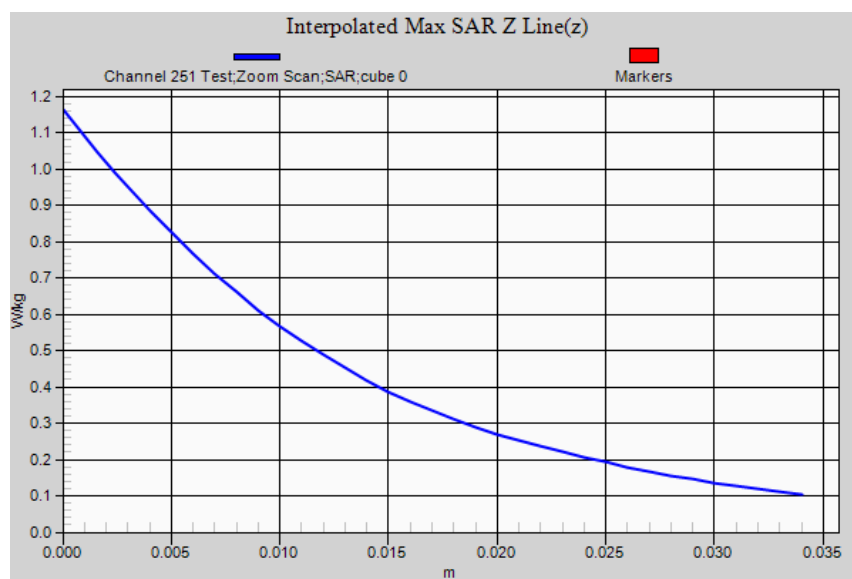

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz GPRS FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 29-10-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 850 MHz GSM; Frequency: 824.2 MHz; Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=824$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 55.6$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 29-10-14/Channel 128 Test 2 Variability/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 1.110 W/kg

Lap Held Antenna OUT 29-10-14/Channel 128 Test 2 Variability/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 23.484 V/m; **Power Drift = -0.21 dB**

Averaged SAR: SAR(1g) = 1.090 W/kg; SAR(10g) = 0.715 W/kg

Maximum value of SAR (interpolated) = 1.420 W/kg

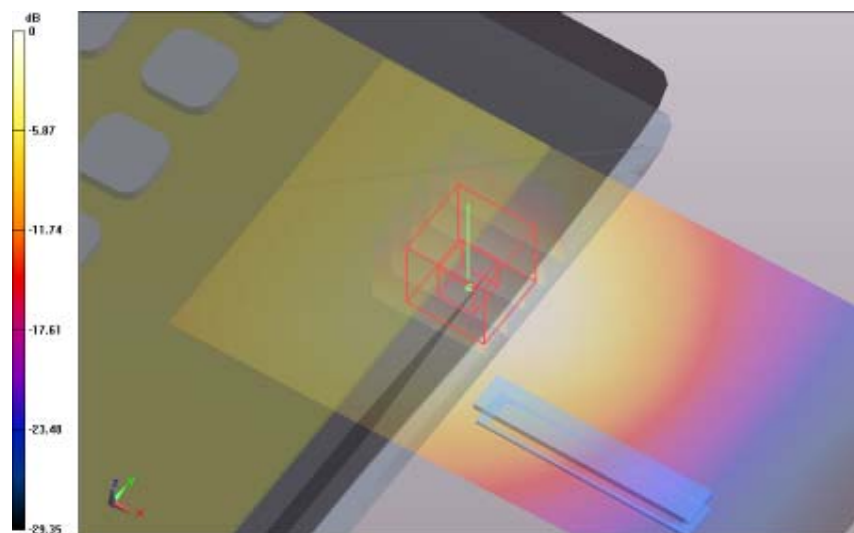


0 dB = 1.11 W/kg = 0.45 dBW/kg

SAR Measurement Plot 7



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

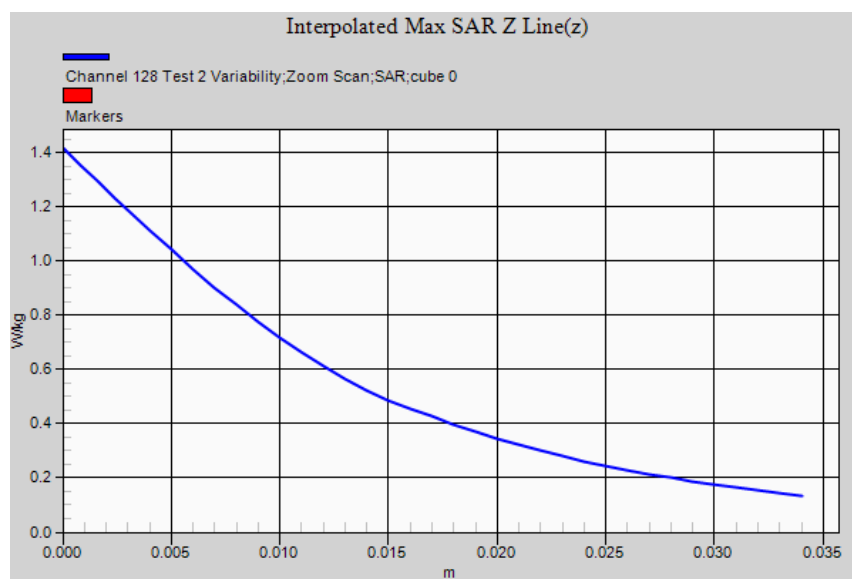

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz GPRS FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 29-10-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 850 MHz GSM; Frequency: 824.2 MHz; Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=824$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 55.6$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 29-10-14/Channel 128 Test/Area Scan (111x61x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;
Maximum value of SAR (interpolated) = 0.339 W/kg

Edge 2 Antenna IN 29-10-14/Channel 128 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 13.926 V/m; **Power Drift = -0.18 dB**

Averaged SAR: SAR(1g) = 0.377 W/kg; SAR(10g) = 0.143 W/kg

Maximum value of SAR (interpolated) = 1.330 W/kg

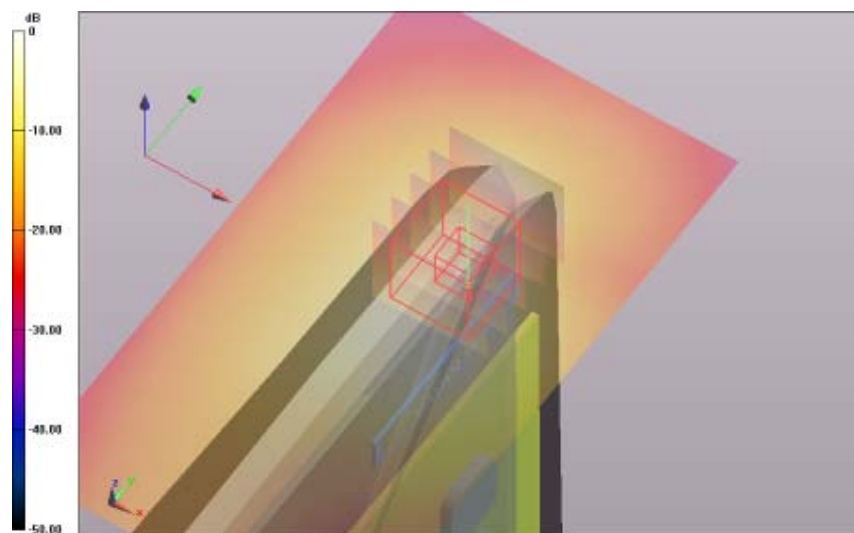


0 dB = 0.339 W/kg = -4.70 dBW/kg

SAR Measurement Plot 8



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

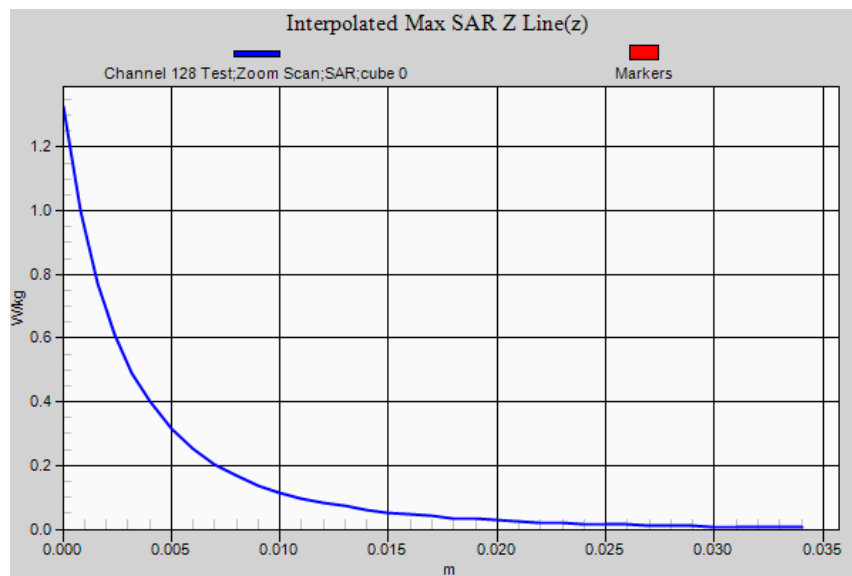

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz GPRS FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 29-10-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 850 MHz GSM; Frequency: 836.6 MHz; Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=836.5$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.5$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 29-10-14/Channel 190 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm;
Maximum value of SAR (interpolated) = 0.276 W/kg

Edge 2 Antenna IN 29-10-14/Channel 190 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 12.436 V/m; **Power Drift = -0.19 dB**

Averaged SAR: SAR(1g) = 0.285 W/kg; SAR(10g) = 0.110 W/kg

Maximum value of SAR (interpolated) = 0.994 W/kg

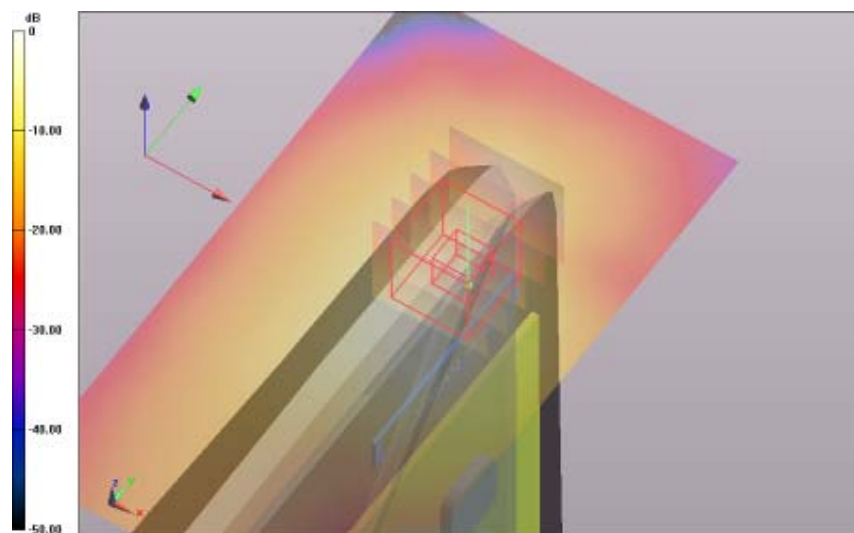


0 dB = 0.276 W/kg = -5.59 dBW/kg

SAR Measurement Plot 9



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

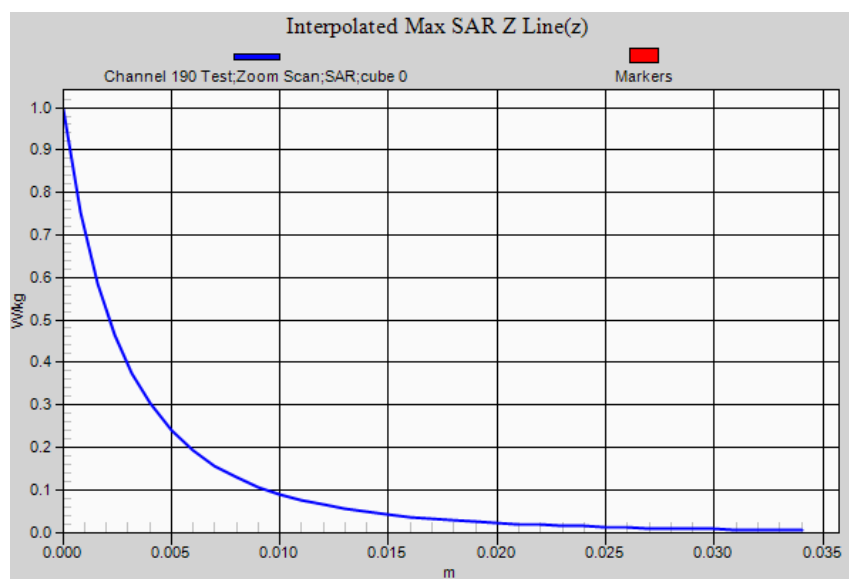

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz GPRS FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 29-10-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 850 MHz GSM; Frequency: 848.6 MHz, Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=848.5$ MHz; $\sigma = 1.00$ S/m; $\epsilon_r = 55.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 29-10-14/Channel 251 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm;
Maximum value of SAR (interpolated) = 0.232 W/kg


Edge 2 Antenna IN 29-10-14/Channel 251 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 11.777 V/m; **Power Drift = -0.14 dB**

Averaged SAR: SAR(1g) = 0.252 W/kg; SAR(10g) = 0.098 W/kg

Maximum value of SAR (interpolated) = 0.873 W/kg

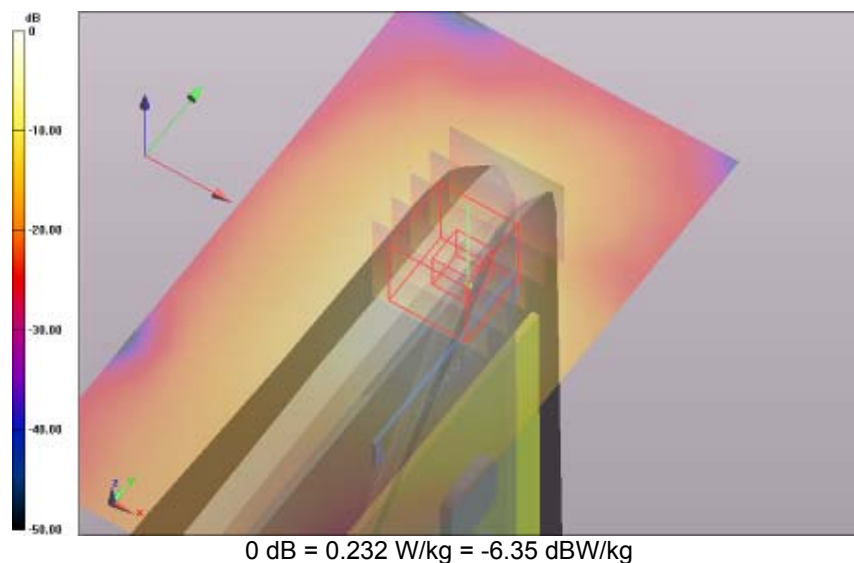

SAR Measurement Plot 10

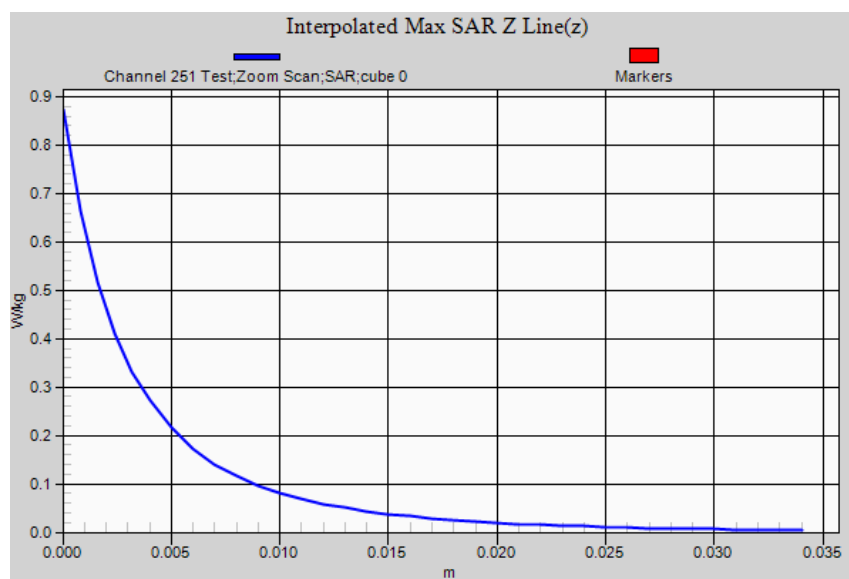

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz GPRS FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 29-10-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 850 MHz GSM; Frequency: 824.2 MHz; Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=824$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 55.6$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 29-10-14/Channel 128 Test/Area Scan (111x61x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.165 W/kg

Edge 3 Antenna OUT 29-10-14/Channel 128 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 7.635 V/m; **Power Drift = -0.02 dB**


Averaged SAR: SAR(1g) = 0.168 W/kg; SAR(10g) = 0.113 W/kg

Maximum value of SAR (interpolated) = 0.226 W/kg

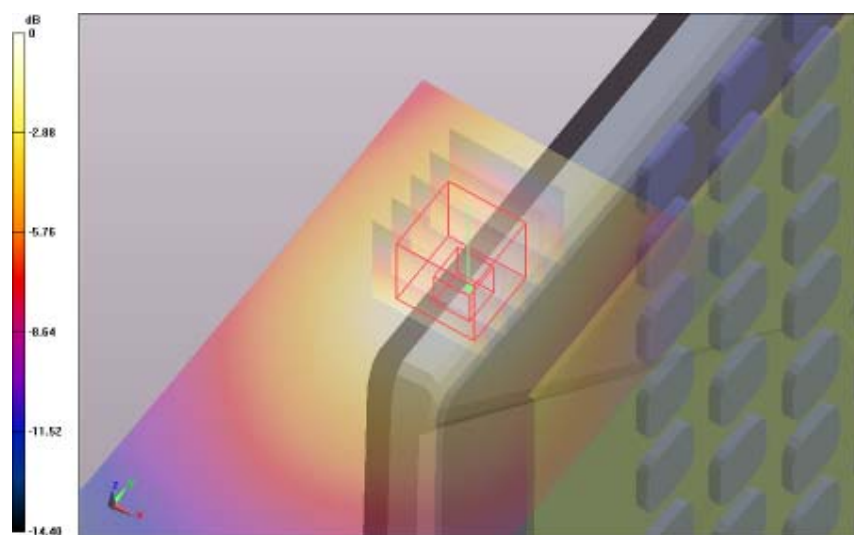

0 dB = 0.165 W/kg = -7.83 dBW/kg

SAR Measurement Plot 11

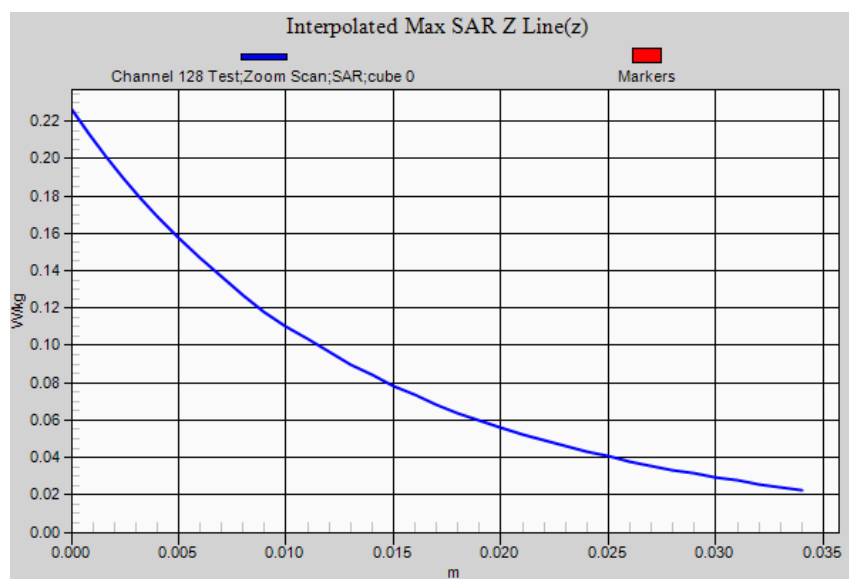

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz GPRS FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 29-10-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 850 MHz GSM; Frequency: 836.6 MHz; Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=836.5$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.5$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 29-10-14/Channel 190 Test/Area Scan (111x61x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.188 W/kg

Edge 3 Antenna OUT 29-10-14/Channel 190 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 7.675 V/m; **Power Drift = 0.06 dB**

Averaged SAR: SAR(1g) = 0.188 W/kg; SAR(10g) = 0.127 W/kg

Maximum value of SAR (interpolated) = 0.255 W/kg

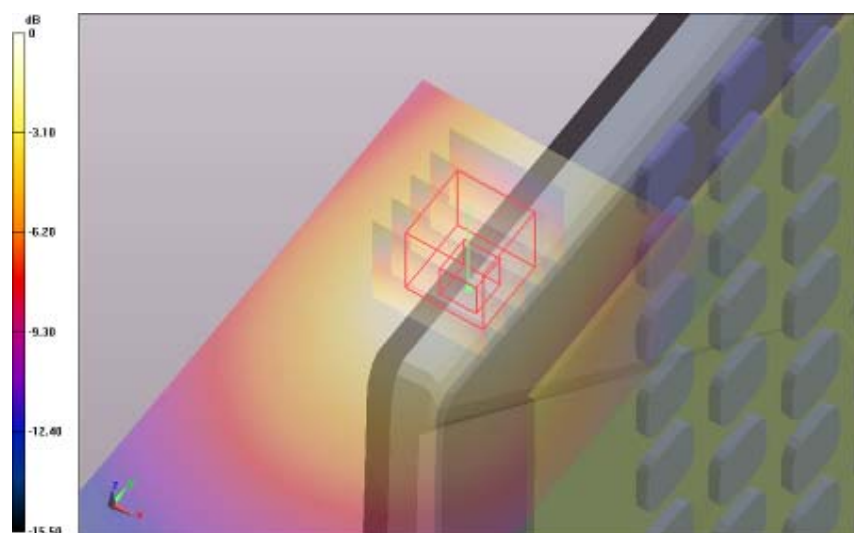


0 dB = 0.188 W/kg = -7.26 dBW/kg

SAR Measurement Plot 12



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

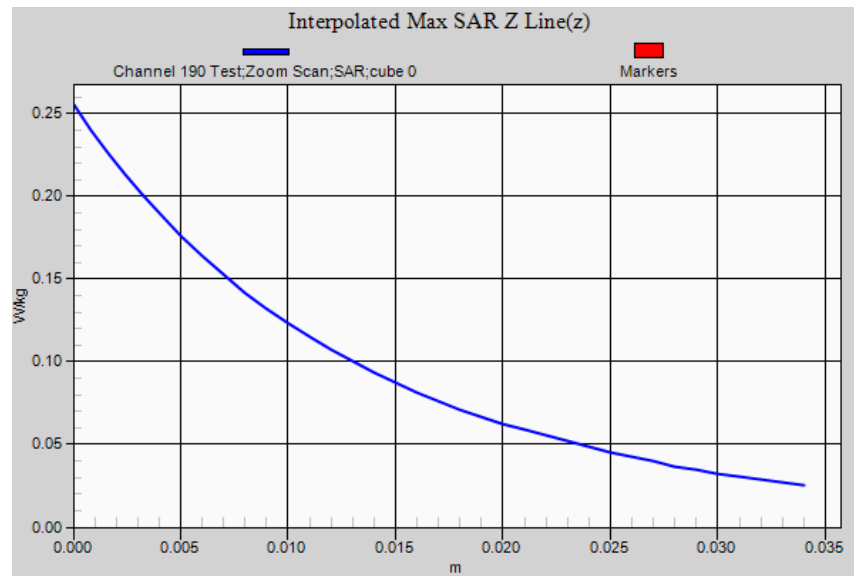

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz GPRS FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 29-10-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 850 MHz GSM; Frequency: 848.6 MHz; Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=848.5$ MHz; $\sigma = 1.00$ S/m; $\epsilon_r = 55.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 29-10-14/Channel 251 Test/Area Scan (111x61x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.188 W/kg

Edge 3 Antenna OUT 29-10-14/Channel 251 Test/Zoom Scan (26x26x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 7.573 V/m; **Power Drift = 0.02 dB**


Averaged SAR: SAR(1g) = 0.185 W/kg; SAR(10g) = 0.126 W/kg

Maximum value of SAR (interpolated) = 0.253 W/kg

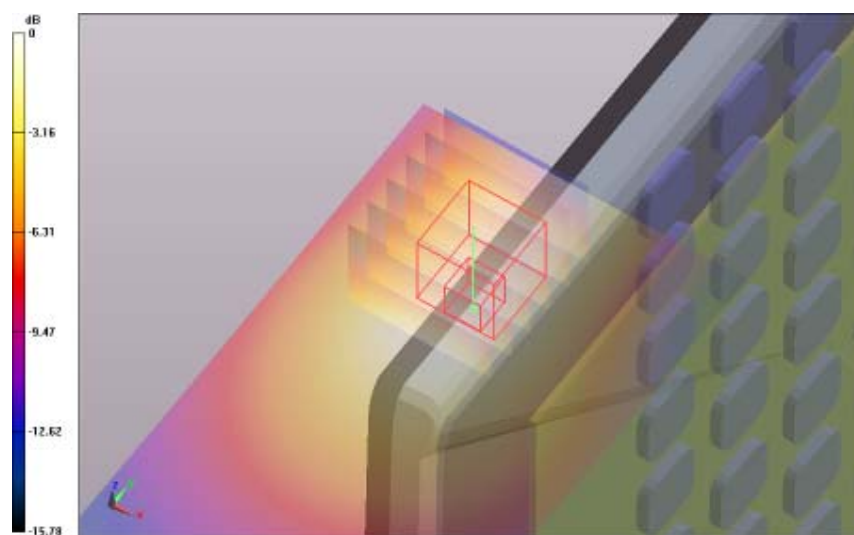

0 dB = 0.188 W/kg = -7.26 dBW/kg

SAR Measurement Plot 13

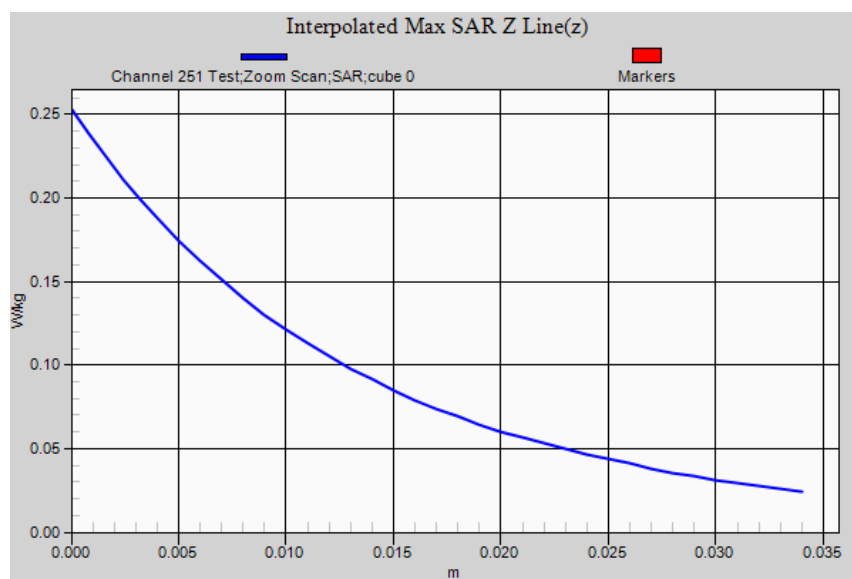

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz GPRS FCC.da52:7

DUT Name: Dipole 900 MHz, Type: DV900V2, Serial: 047**Configuration: System Check 29-10-14**

Communication System: 0 - CW; Communication System Band: 900 MHz; Frequency: 900.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=900$ MHz; $\sigma = 1.06$ S/m; $\epsilon_r = 54.9$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Check 29-10-14/Channel 1 Test/Area Scan (51x51x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;


Maximum value of SAR (interpolated) = 3.160 W/kg

System Check 29-10-14/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 57.045 V/m; **Power Drift = 0.00 dB****Averaged SAR: SAR(1g) = 2.910 W/kg; SAR(10g) = 1.900 W/kg**

Maximum value of SAR (interpolated) = 4.170 W/kg

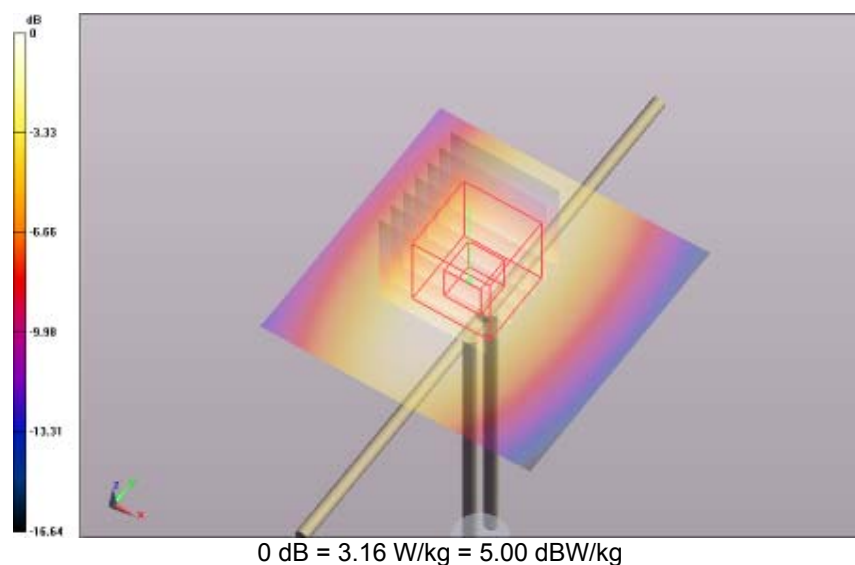

SAR Measurement Plot 14

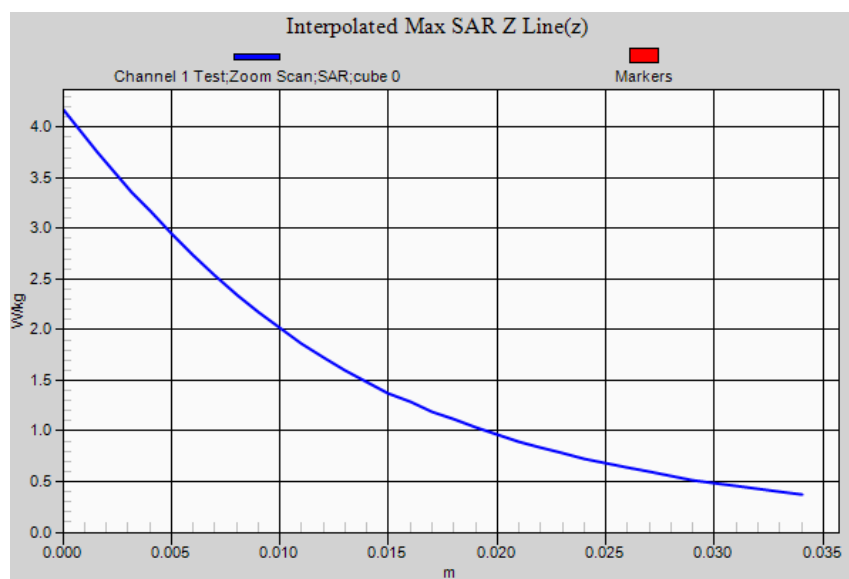

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz GPRS FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 25-11-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 1900 MHz GSM; Frequency: 1850 MHz, Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33

Medium Parameters used: $f=1850$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 25-11-14/Channel 512 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.218 W/kg**Bystander 25mm Spacing Antenna OUT 25-11-14/Channel 512 Test/Zoom Scan (21x21x36)/Cube 0:**Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 8.888 V/m; **Power Drift = 0.11 dB****Averaged SAR: SAR(1g) = 0.209 W/kg; SAR(10g) = 0.127 W/kg**

Maximum value of SAR (interpolated) = 0.323 W/kg

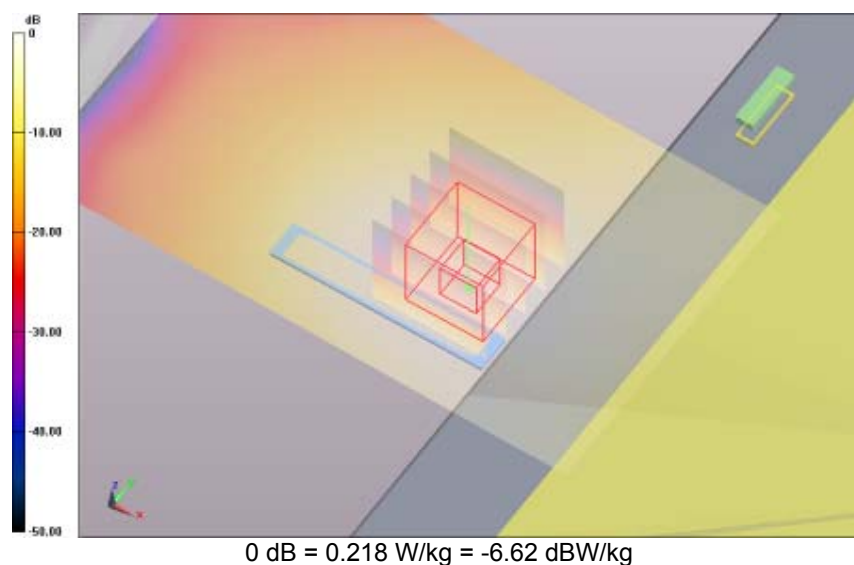

SAR Measurement Plot 15

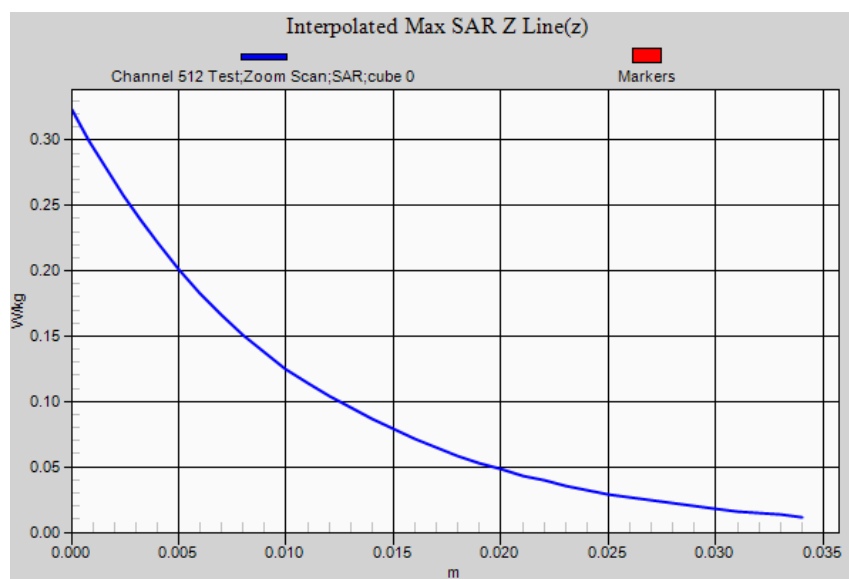

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz GPRS FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 25-11-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 1900 MHz GSM; Frequency: 1880 MHz; Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=1880$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 51.7$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Bystander 25mm Spacing Antenna OUT 25-11-14/Channel 661 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.203 W/kg

Bystander 25mm Spacing Antenna OUT 25-11-14/Channel 661 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 8.873 V/m; **Power Drift = -0.13 dB**

Averaged SAR: SAR(1g) = 0.198 W/kg; SAR(10g) = 0.120 W/kg

Maximum value of SAR (interpolated) = 0.311 W/kg

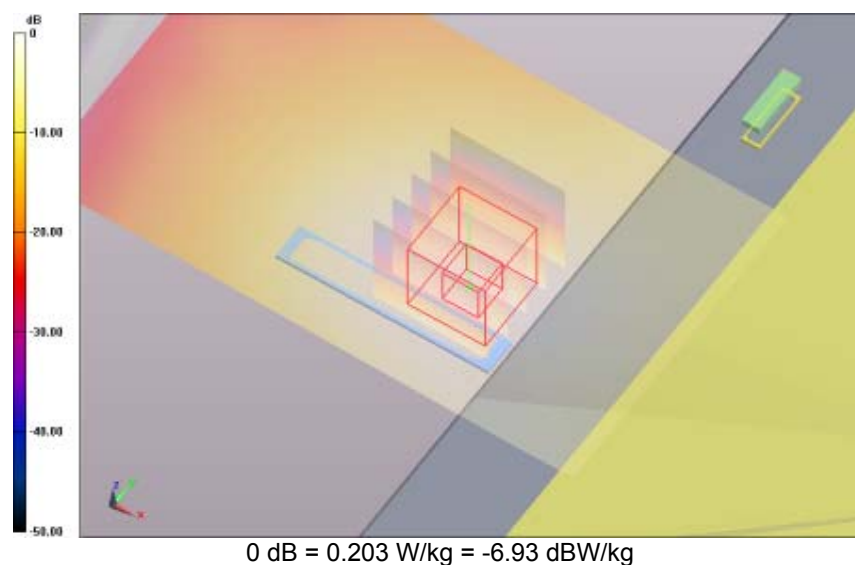


SAR Measurement Plot 16



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

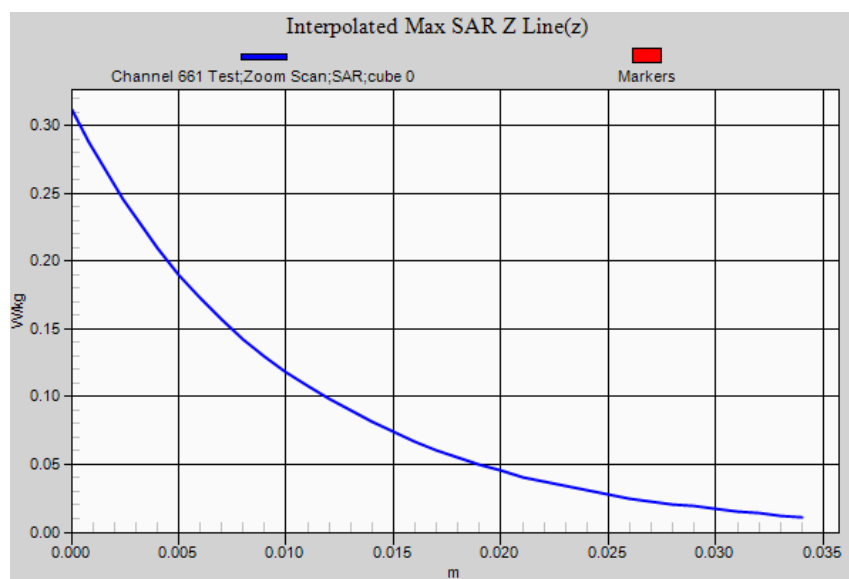

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz GPRS FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 25-11-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 1900 MHz GSM; Frequency: 1910 MHz, Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=1910$ MHz; $\sigma = 1.58$ S/m; $\epsilon_r = 51.6$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 25-11-14/Channel 810 Test/Area Scan (61x111x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.225 W/kg

Bystander 25mm Spacing Antenna OUT 25-11-14/Channel 810 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 9.321 V/m; **Power Drift = -0.10 dB**

Averaged SAR: SAR(1g) = 0.215 W/kg; SAR(10g) = 0.131 W/kg

Maximum value of SAR (interpolated) = 0.343 W/kg

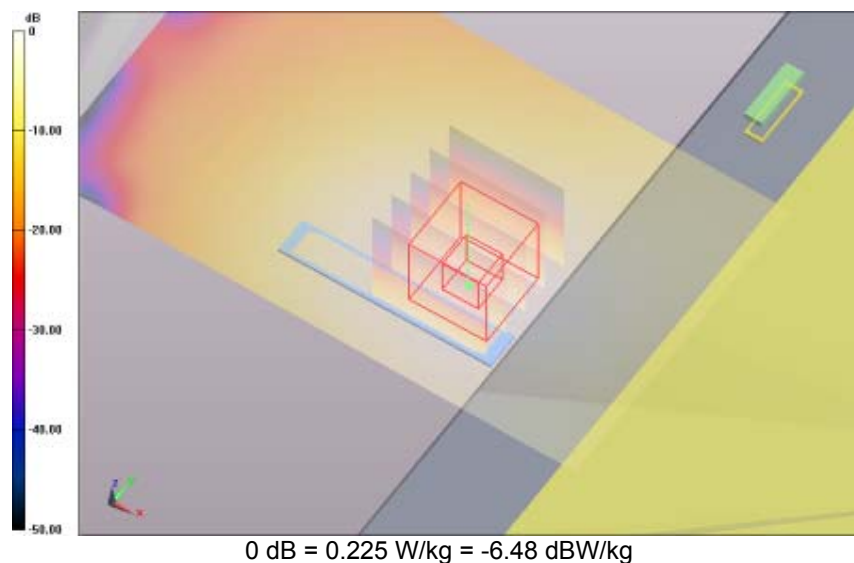


SAR Measurement Plot 17



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

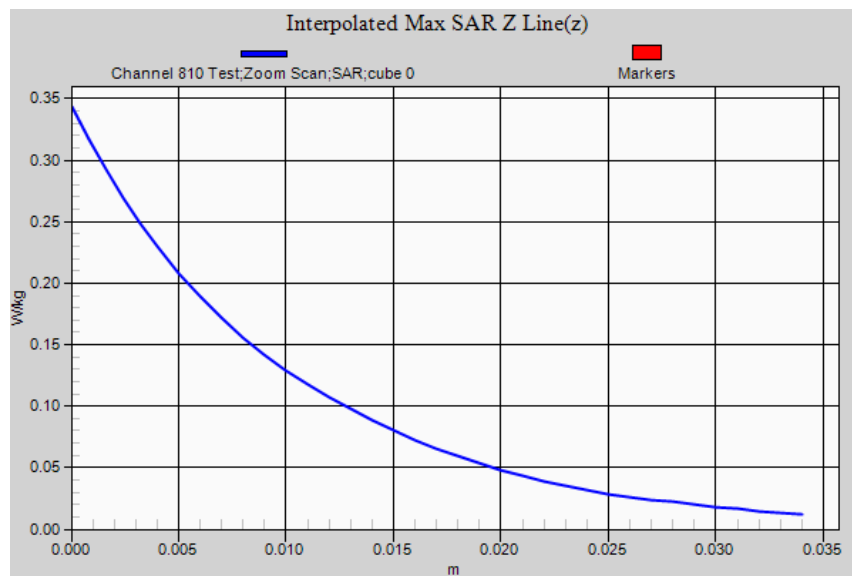

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz GPRS FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 25-11-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 1900 MHz GSM; Frequency: 1850 MHz, Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=1850$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 25-11-14/Channel 512 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.401 W/kg

Lap Held Antenna OUT 25-11-14/Channel 512 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 12.410 V/m; **Power Drift = 0.01 dB**

Averaged SAR: SAR(1g) = 0.390 W/kg; SAR(10g) = 0.229 W/kg

Maximum value of SAR (interpolated) = 0.615 W/kg

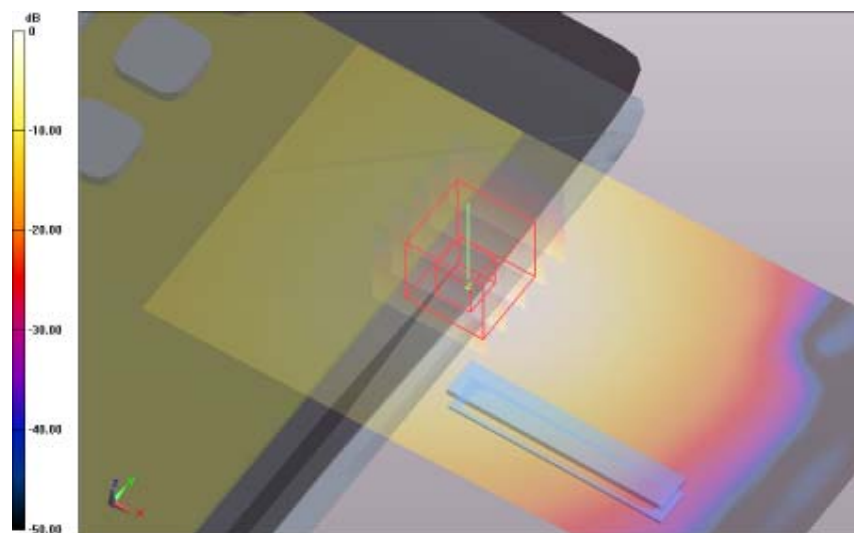


0 dB = 0.401 W/kg = -3.97 dBW/kg

SAR Measurement Plot 18



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

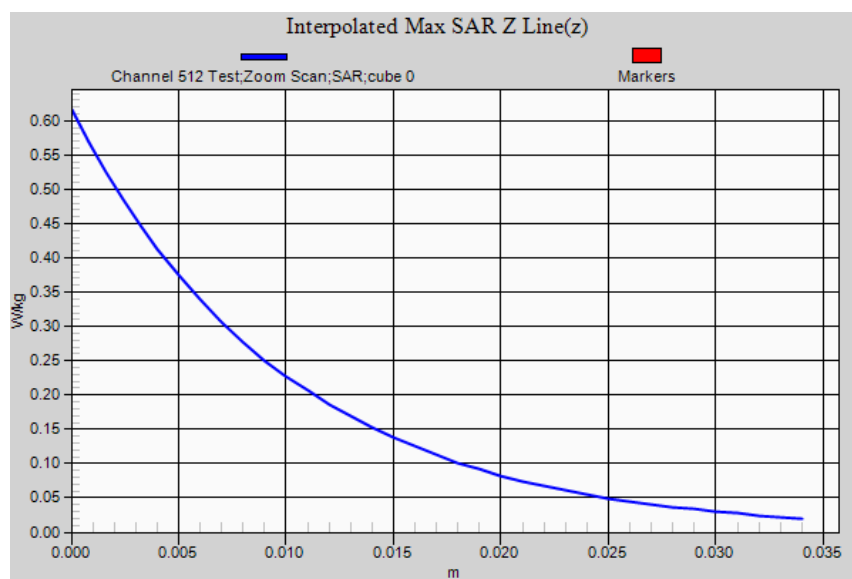

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz GPRS FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 25-11-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 1900 MHz GSM; Frequency: 1880 MHz, Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=1880$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 51.7$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 25-11-14/Channel 661 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.373 W/kg

Lap Held Antenna OUT 25-11-14/Channel 661 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 12.257 V/m; **Power Drift = -0.03 dB**

Averaged SAR: SAR(1g) = 0.357 W/kg; SAR(10g) = 0.212 W/kg

Maximum value of SAR (interpolated) = 0.550 W/kg

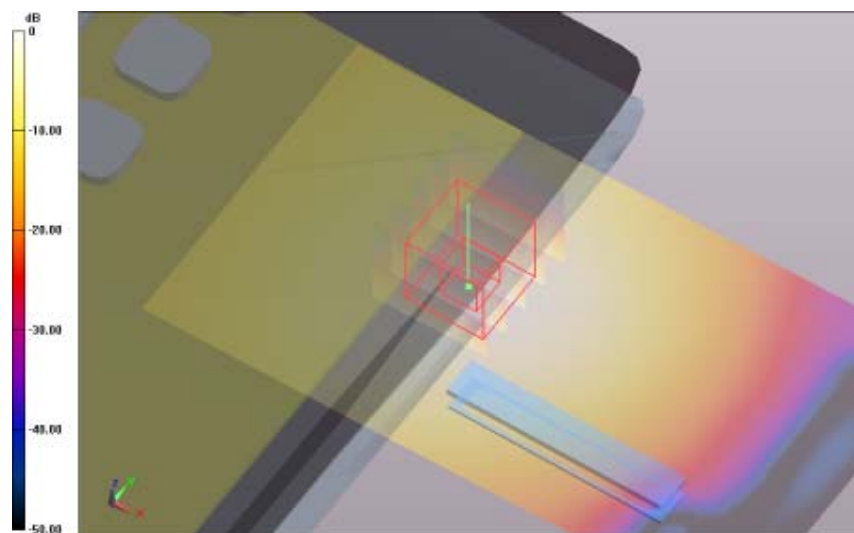


0 dB = 0.373 W/kg = -4.28 dBW/kg

SAR Measurement Plot 19



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

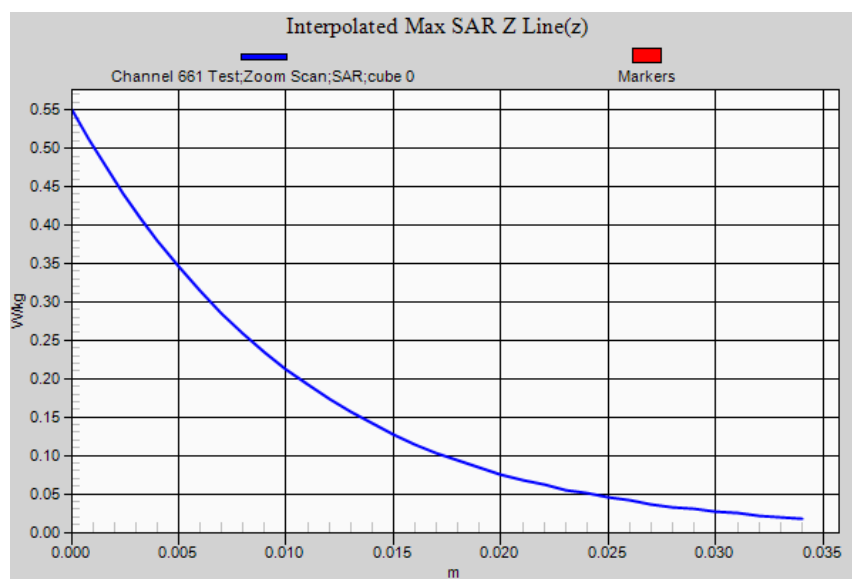

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz GPRS FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 25-11-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 1900 MHz GSM; Frequency: 1910 MHz, Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=1910$ MHz; $\sigma = 1.58$ S/m; $\epsilon_r = 51.6$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 25-11-14/Channel 810 Test/Area Scan (61x111x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.372 W/kg

Lap Held Antenna OUT 25-11-14/Channel 810 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 12.468 V/m; **Power Drift = -0.10 dB**

Averaged SAR: SAR(1g) = 0.363 W/kg; SAR(10g) = 0.214 W/kg

Maximum value of SAR (interpolated) = 0.595 W/kg

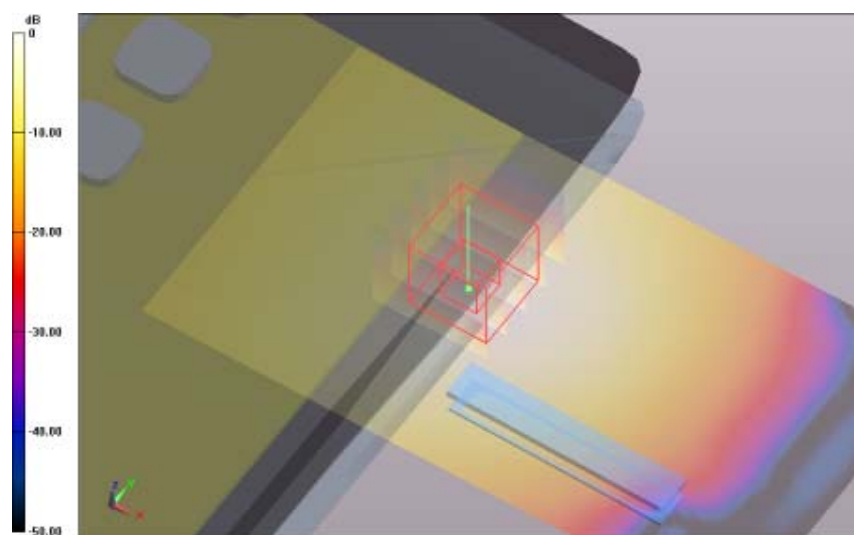


0 dB = 0.372 W/kg = -4.29 dBW/kg

SAR Measurement Plot 20



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

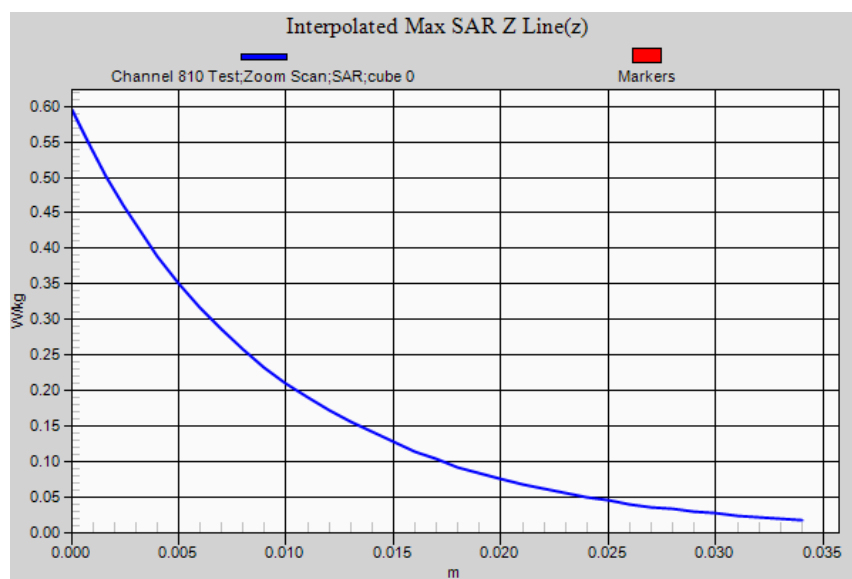

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz GPRS FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 25-11-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 1900 MHz GSM; Frequency: 1850 MHz, Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=1850$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 25-11-14/Channel 512 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm;
Maximum value of SAR (interpolated) = 0.508 W/kg

Edge 2 Antenna IN 25-11-14/Channel 512 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 10.839 V/m; **Power Drift = 0.09 dB**

Averaged SAR: SAR(1g) = 0.525 W/kg; SAR(10g) = 0.194 W/kg

Maximum value of SAR (interpolated) = 1.220 W/kg

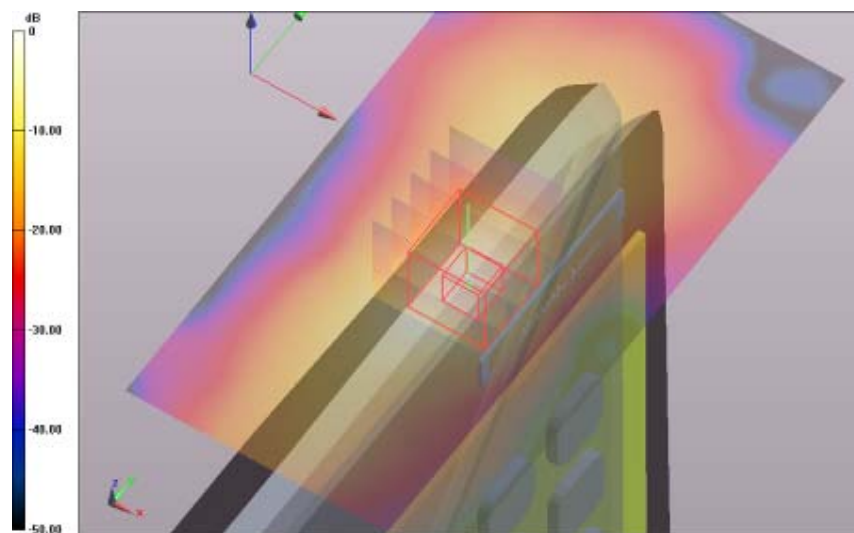


0 dB = 0.508 W/kg = -2.94 dBW/kg

SAR Measurement Plot 21



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

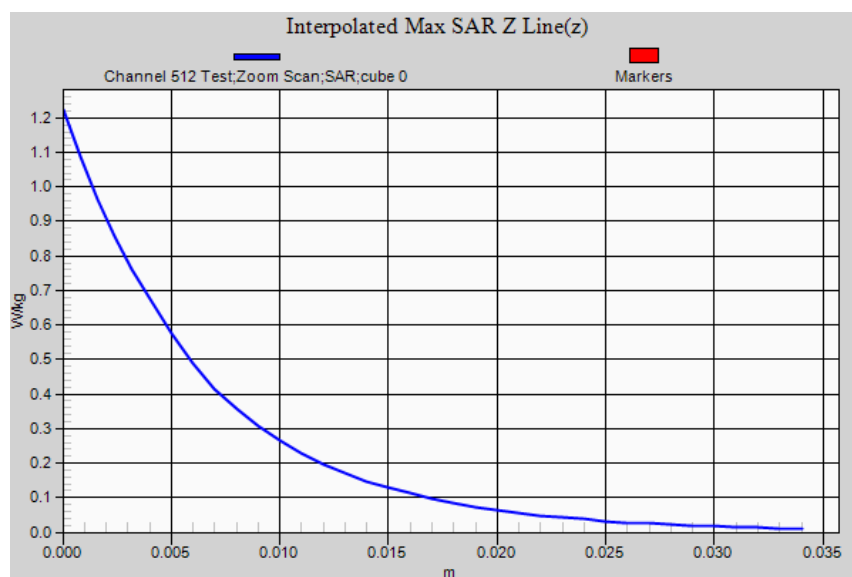

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz GPRS FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 25-11-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 1900 MHz GSM; Frequency: 1880 MHz; Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=1880$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 51.7$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 25-11-14/Channel 661 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm;
Maximum value of SAR (interpolated) = 0.472 W/kg


Edge 2 Antenna IN 25-11-14/Channel 661 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 13.451 V/m; **Power Drift = 0.12 dB**

Averaged SAR: SAR(1g) = 0.512 W/kg; SAR(10g) = 0.195 W/kg

Maximum value of SAR (interpolated) = 1.200 W/kg

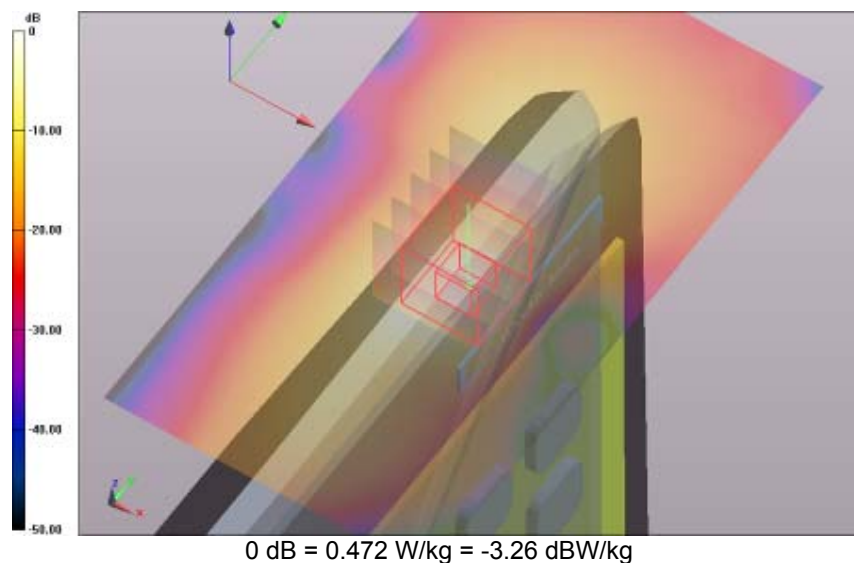

SAR Measurement Plot 22

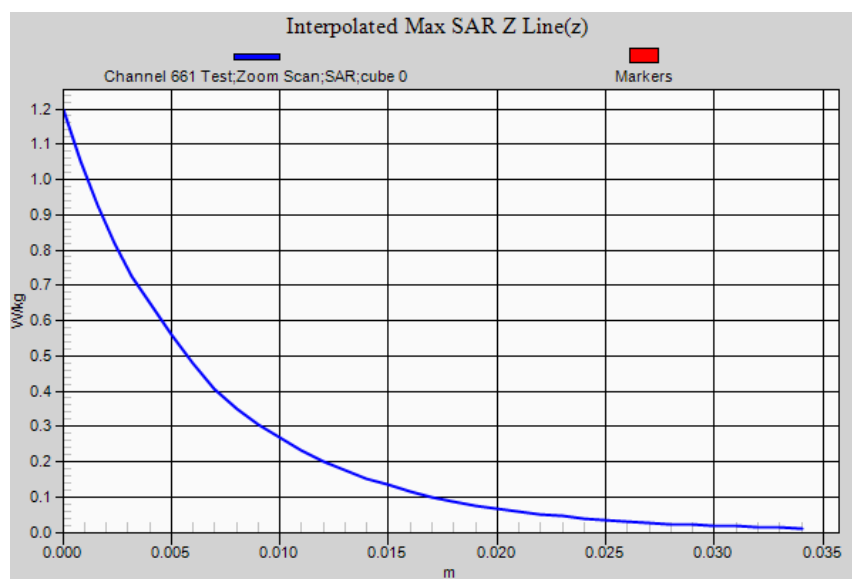

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz GPRS FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 25-11-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 1900 MHz GSM; Frequency: 1910 MHz; Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=1910$ MHz; $\sigma = 1.58$ S/m; $\epsilon_r = 51.6$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 25-11-14/Channel 810 Test/Area Scan (111x61x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;
Maximum value of SAR (interpolated) = 0.456 W/kg

Edge 2 Antenna IN 25-11-14/Channel 810 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 13.260 V/m; **Power Drift = -0.05 dB**

Averaged SAR: SAR(1g) = 0.518 W/kg; SAR(10g) = 0.193 W/kg

Maximum value of SAR (interpolated) = 1.210 W/kg

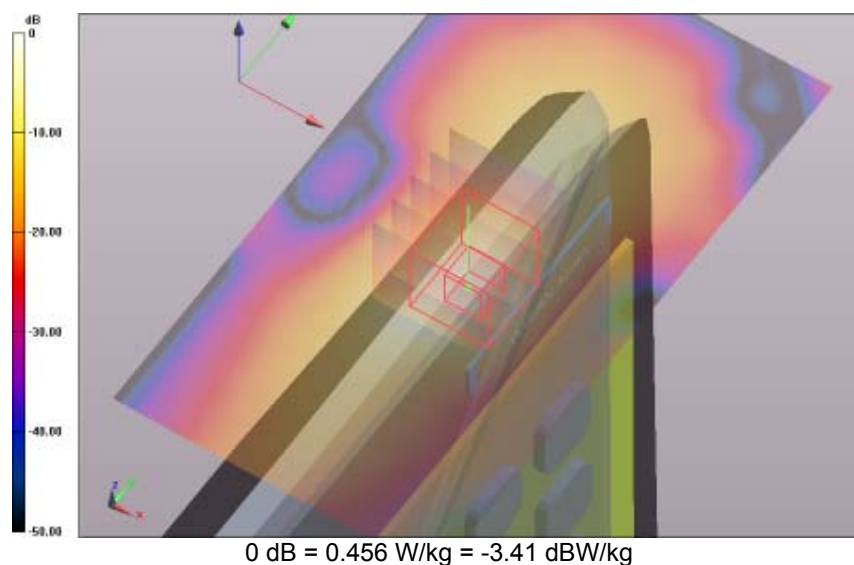


SAR Measurement Plot 23



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

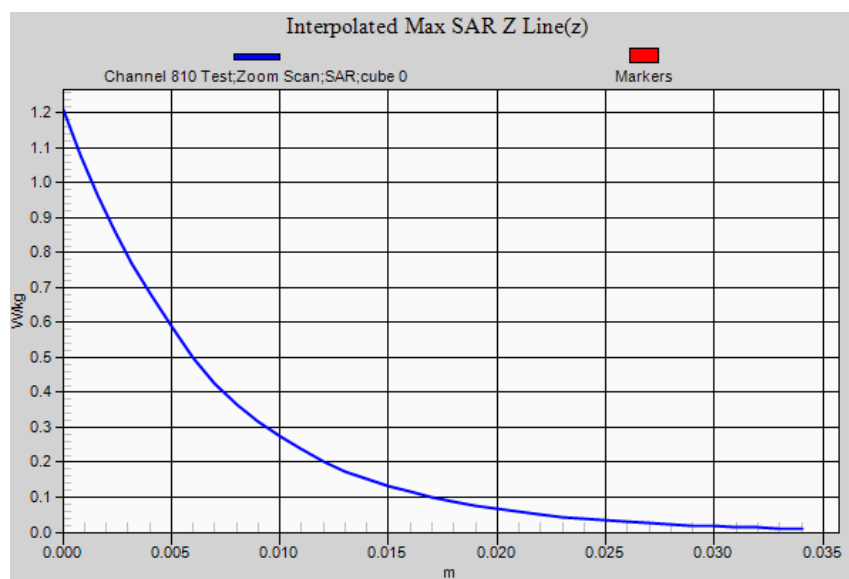

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz GPRS FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 25-11-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 1900 MHz GSM; Frequency: 1850 MHz, Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=1850$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 25-11-14/Channel 512 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.406 W/kg

Edge 3 Antenna OUT 25-11-14/Channel 512 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.306 V/m; **Power Drift = -0.03 dB**

Averaged SAR: SAR(1g) = 0.343 W/kg; SAR(10g) = 0.203 W/kg

Maximum value of SAR (interpolated) = 0.542 W/kg

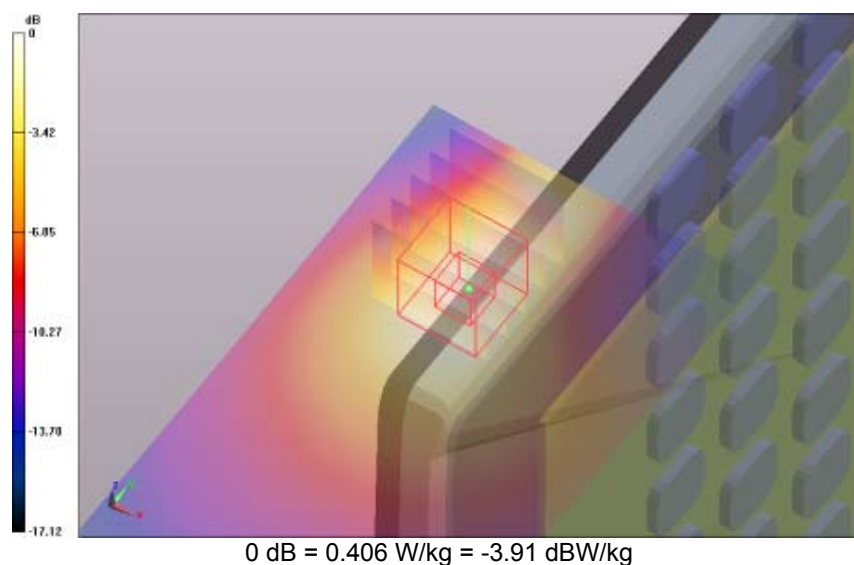


SAR Measurement Plot 24



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

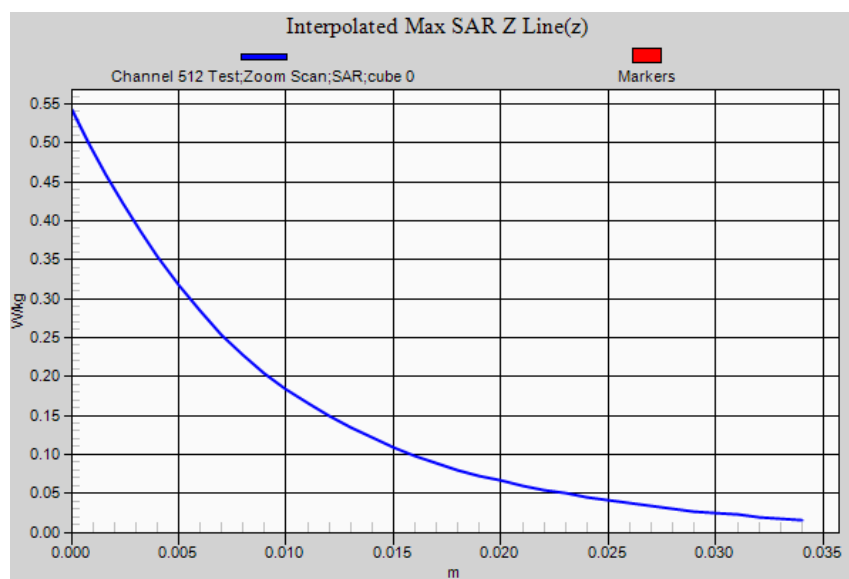

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz GPRS FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 25-11-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 1900 MHz GSM; Frequency: 1880 MHz, Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=1880$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 51.7$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 25-11-14/Channel 661 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.278 W/kg

Edge 3 Antenna OUT 25-11-14/Channel 661 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.374 V/m; **Power Drift = -0.06 dB**

Averaged SAR: SAR(1g) = 0.267 W/kg; SAR(10g) = 0.162 W/kg

Maximum value of SAR (interpolated) = 0.457 W/kg

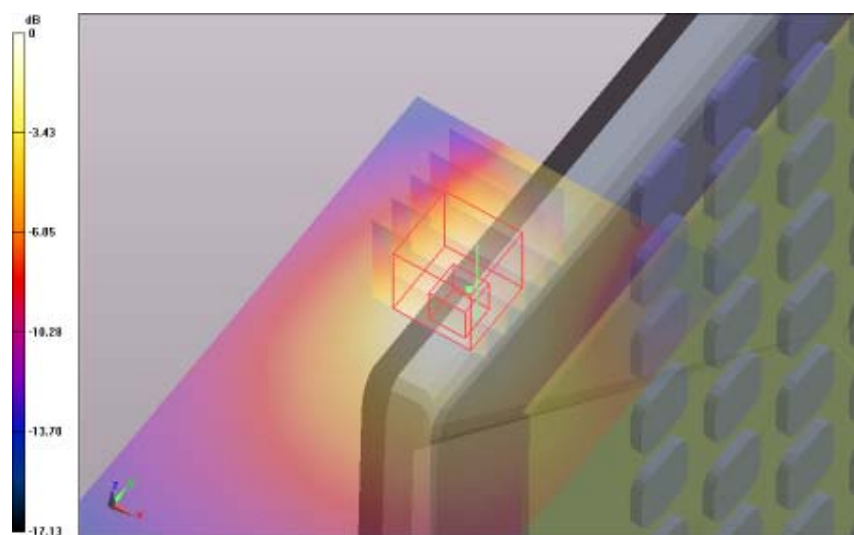


0 dB = 0.278 W/kg = -5.56 dBW/kg

SAR Measurement Plot 25



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

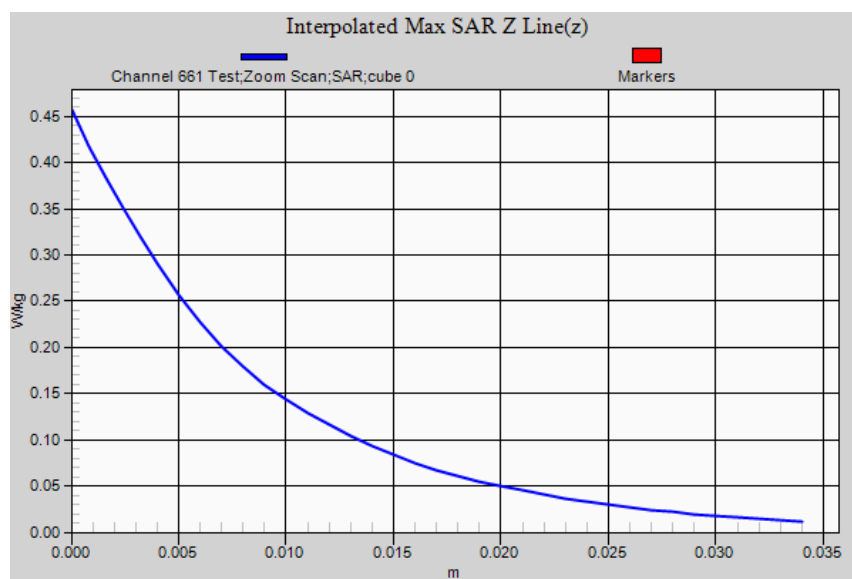

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz GPRS FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 25-11-14**

Communication System: 0 - GPRS Class 10 (0); Communication System Band: 1900 MHz GSM; Frequency: 1910 MHz; Communication System PAR: 6.37 dB; PMF: 2.08; Duty Cycle: 1:4.33
Medium Parameters used: $f=1910$ MHz; $\sigma = 1.58$ S/m; $\epsilon_r = 51.6$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 25-11-14/Channel 810 Test/Area Scan (111x61x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.341 W/kg

Edge 3 Antenna OUT 25-11-14/Channel 810 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 6.668 V/m; **Power Drift = -0.15 dB**

Averaged SAR: SAR(1g) = 0.284 W/kg; SAR(10g) = 0.167 W/kg

Maximum value of SAR (interpolated) = 0.469 W/kg

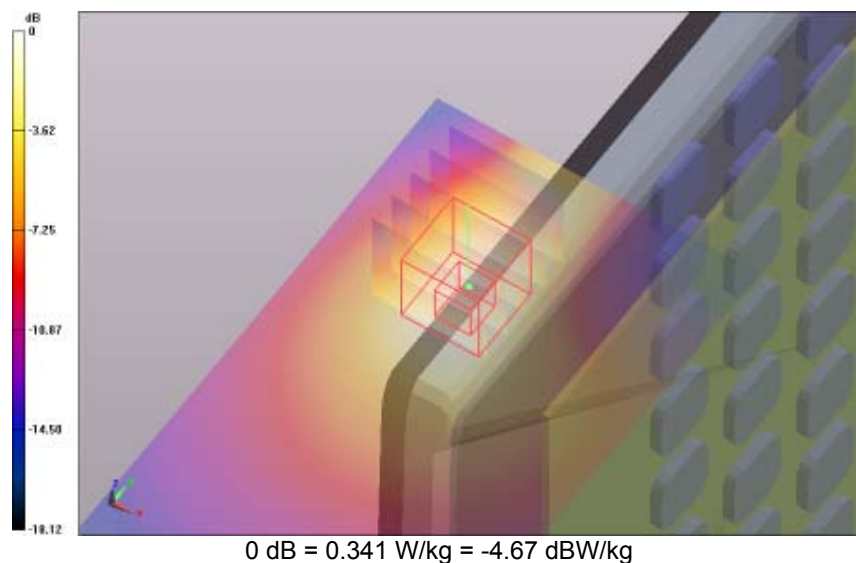


SAR Measurement Plot 26



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

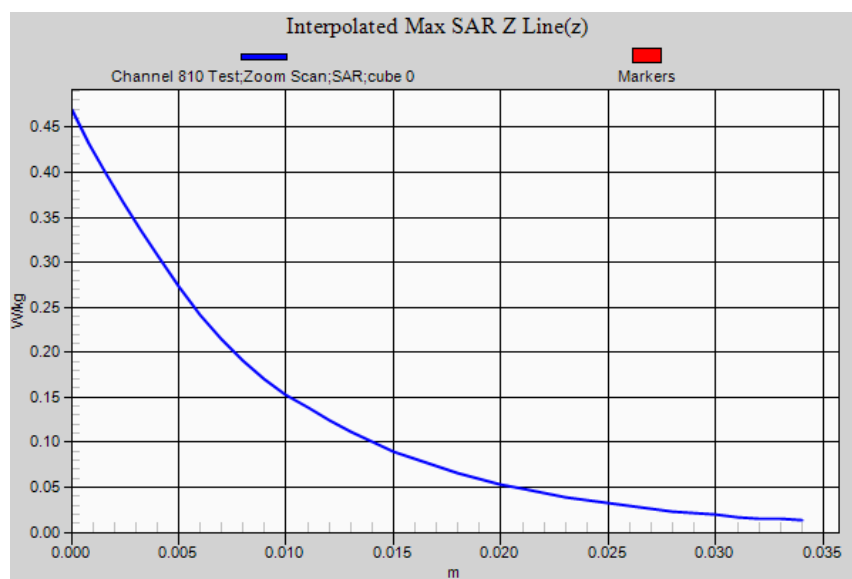

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz 3G FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 28-10-14**

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 5 850 MHz; Frequency:

826.4 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=826.5$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 28-10-14/Channel 4132 Test/Area Scan (61x111x1): Interpolated grid:


dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.494 W/kg

Bystander 25mm Spacing Antenna OUT 28-10-14/Channel 4132 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 17.420 V/m; Power Drift = 0.05 dB

Averaged SAR: SAR(1g) = 0.483 W/kg; SAR(10g) = 0.327 W/kg

Maximum value of SAR (interpolated) = 0.624 W/kg

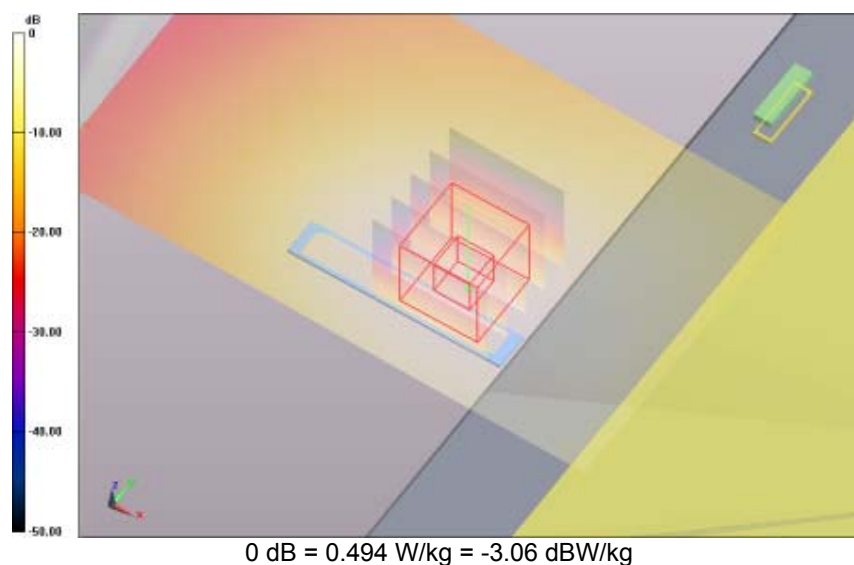


SAR Measurement Plot 27



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

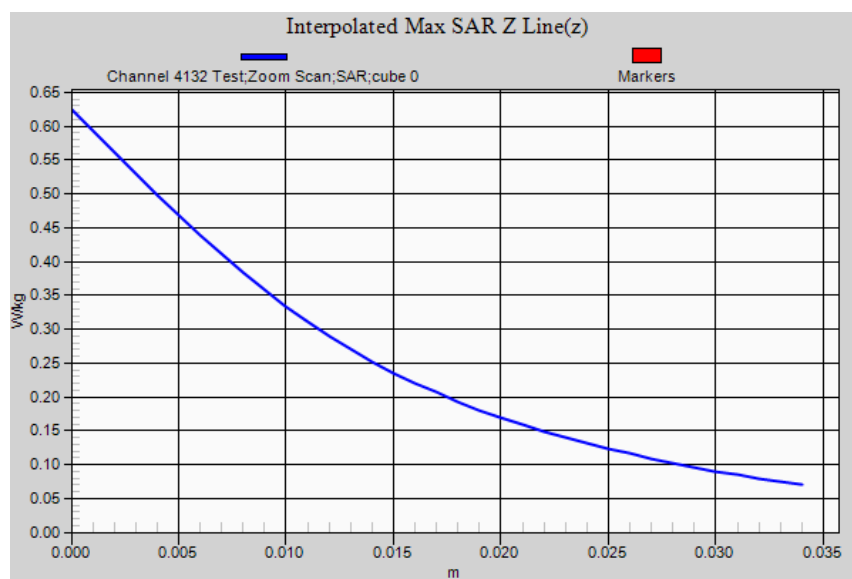

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz 3G FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 28-10-14**

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 5 850 MHz; Frequency: 836.6 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=836.5$ MHz; $\sigma = 1.00$ S/m; $\epsilon_r = 55.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 28-10-14/Channel 4183 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.499 W/kg

Bystander 25mm Spacing Antenna OUT 28-10-14/Channel 4183 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 17.392 V/m; **Power Drift = 0.01 dB**

Averaged SAR: SAR(1g) = 0.479 W/kg; SAR(10g) = 0.324 W/kg

Maximum value of SAR (interpolated) = 0.627 W/kg

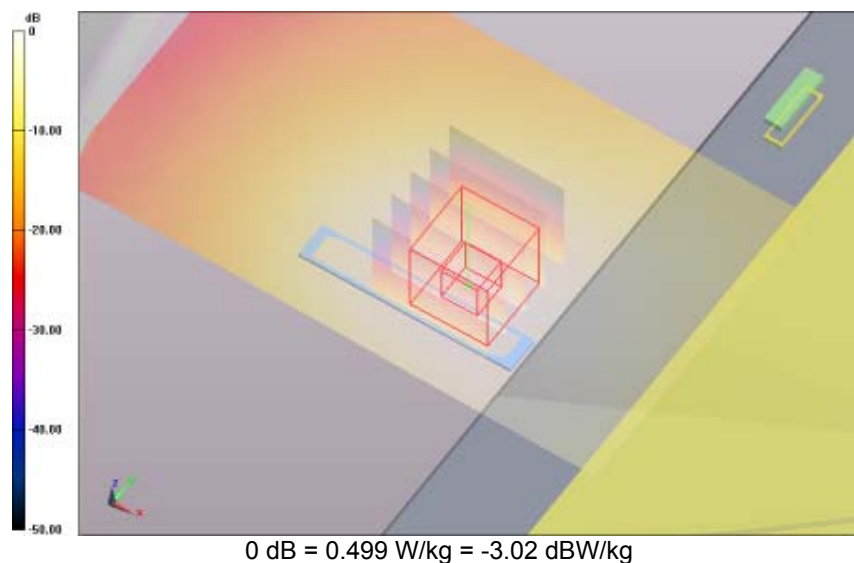


SAR Measurement Plot 28



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

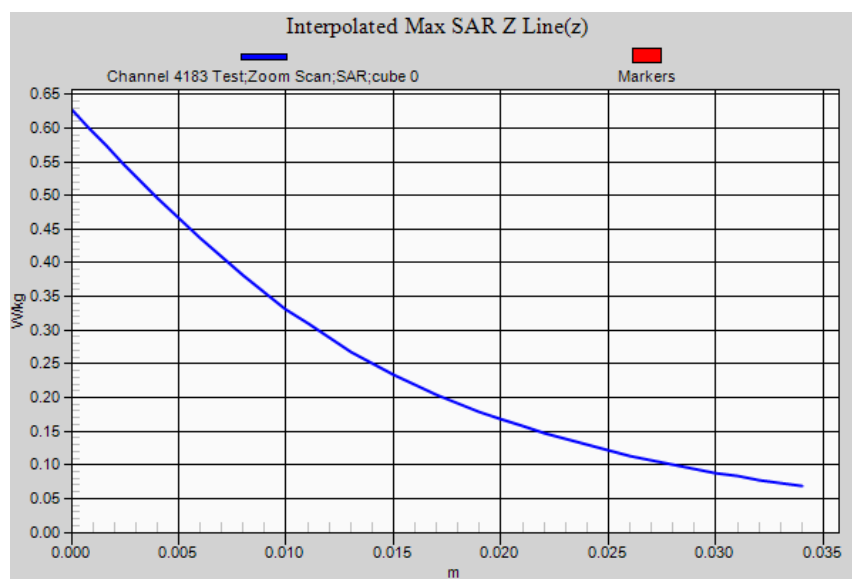

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz 3G FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 28-10-14**

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 5 850 MHz; Frequency: 846.6 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=846.5$ MHz; $\sigma = 1.01$ S/m; $\epsilon_r = 55.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 28-10-14/Channel 4233 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.473 W/kg

Bystander 25mm Spacing Antenna OUT 28-10-14/Channel 4233 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 16.868 V/m; Power Drift = 0.02 dB

Averaged SAR: SAR(1g) = 0.446 W/kg; SAR(10g) = 0.301 W/kg

Maximum value of SAR (interpolated) = 0.585 W/kg

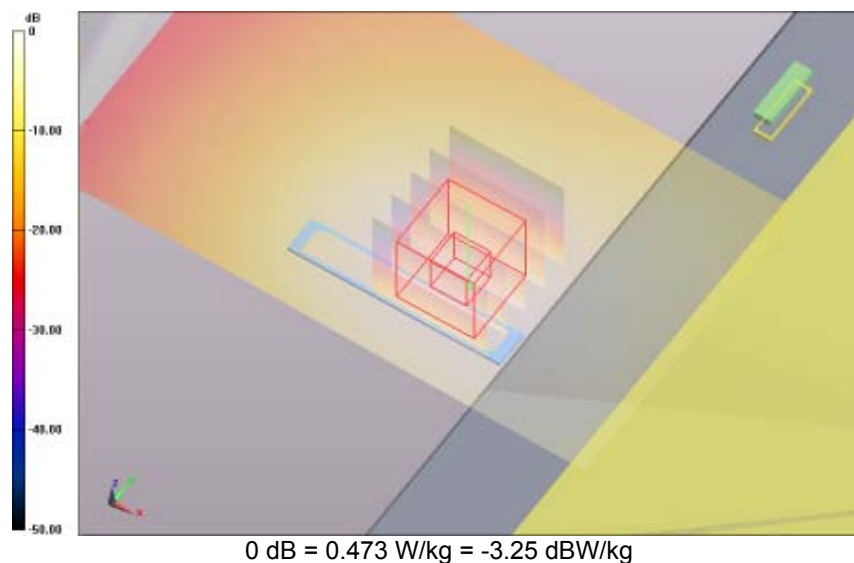


SAR Measurement Plot 29



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

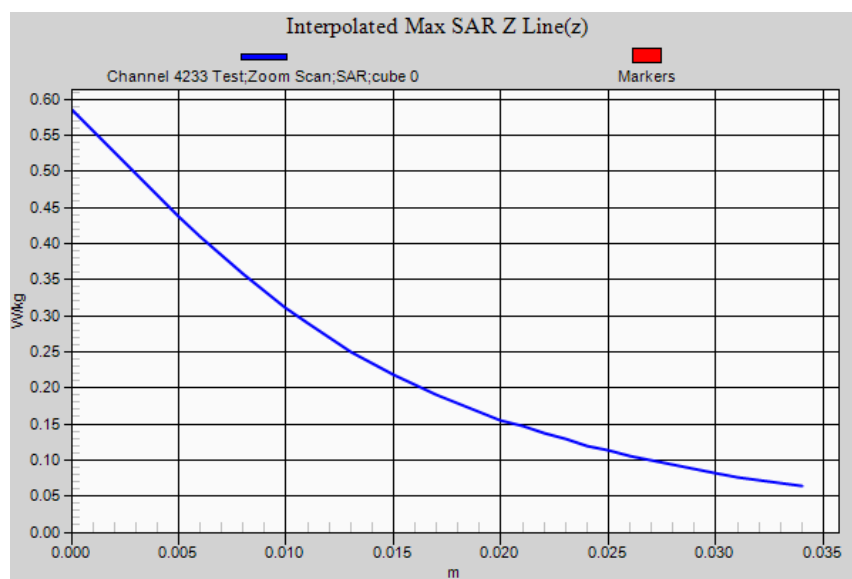

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz 3G FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 28-10-14**

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 5 850 MHz; Frequency: 826.4 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=826.5$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 28-10-14/Channel 4132 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.469 W/kg

Lap Held Antenna OUT 28-10-14/Channel 4132 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 18.310 V/m; **Power Drift = 0.02 dB**

Averaged SAR: SAR(1g) = 0.481 W/kg; SAR(10g) = 0.319 W/kg

Maximum value of SAR (interpolated) = 0.646 W/kg

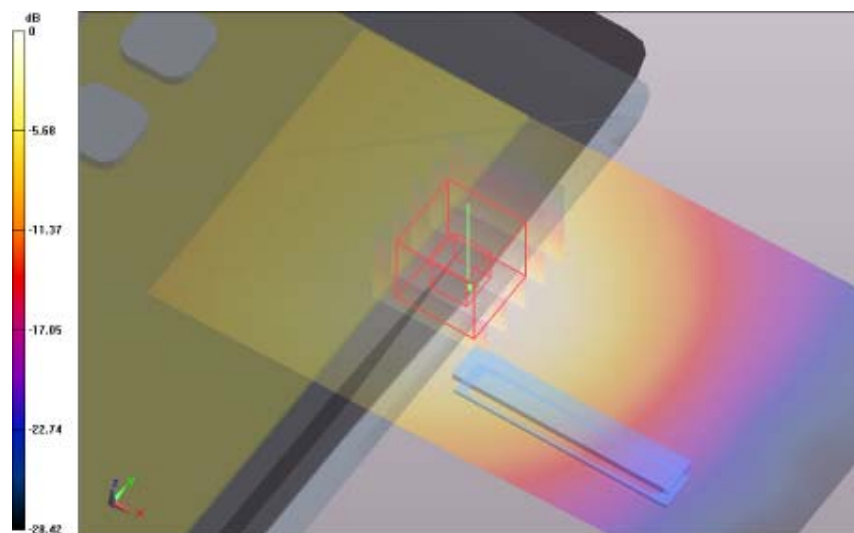


0 dB = 0.469 W/kg = -3.29 dBW/kg

SAR Measurement Plot 30



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

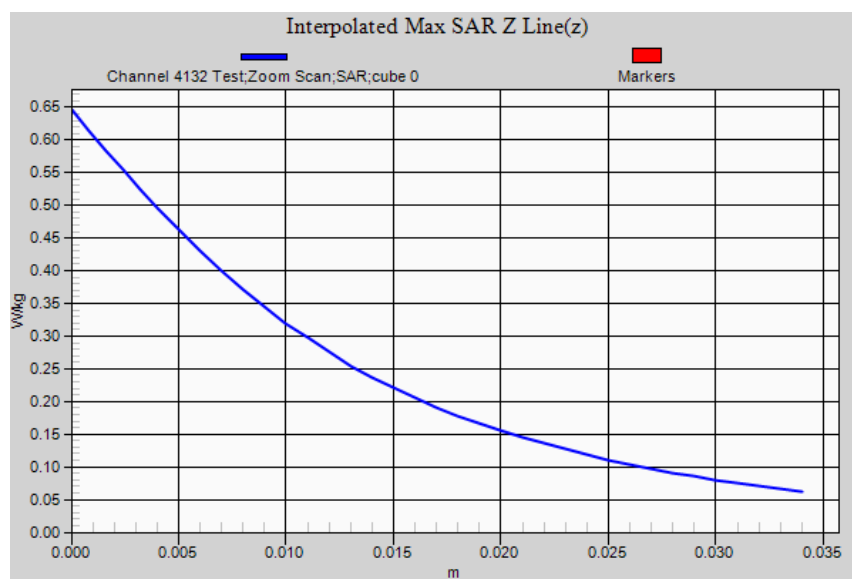

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz 3G FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 28-10-14**

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 5 850 MHz; Frequency: 836.6 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=836.5$ MHz; $\sigma = 1.00$ S/m; $\epsilon_r = 55.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 28-10-14/Channel 4183 Test/Area Scan (61x111x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.479 W/kg

Lap Held Antenna OUT 28-10-14/Channel 4183 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 18.599 V/m; **Power Drift = -0.19 dB**

Averaged SAR: SAR(1g) = 0.476 W/kg; SAR(10g) = 0.315 W/kg

Maximum value of SAR (interpolated) = 0.642 W/kg

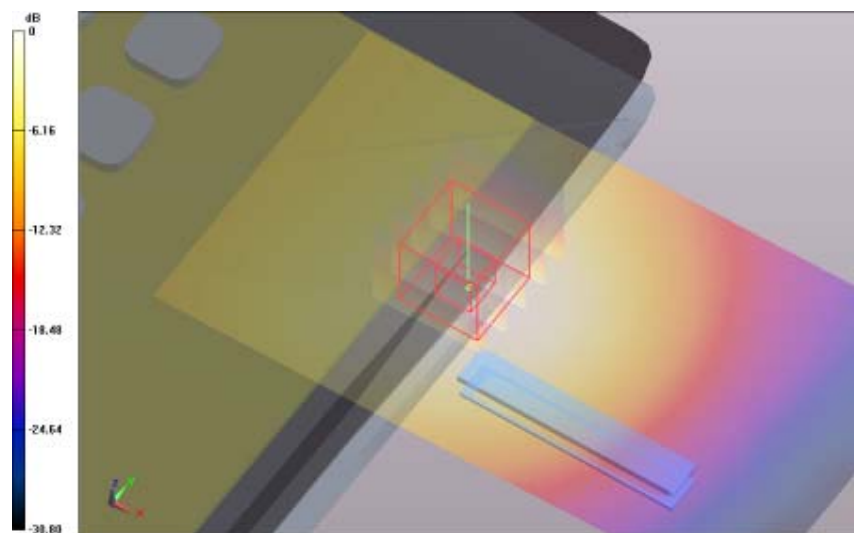


0 dB = 0.479 W/kg = -3.20 dBW/kg

SAR Measurement Plot 31



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

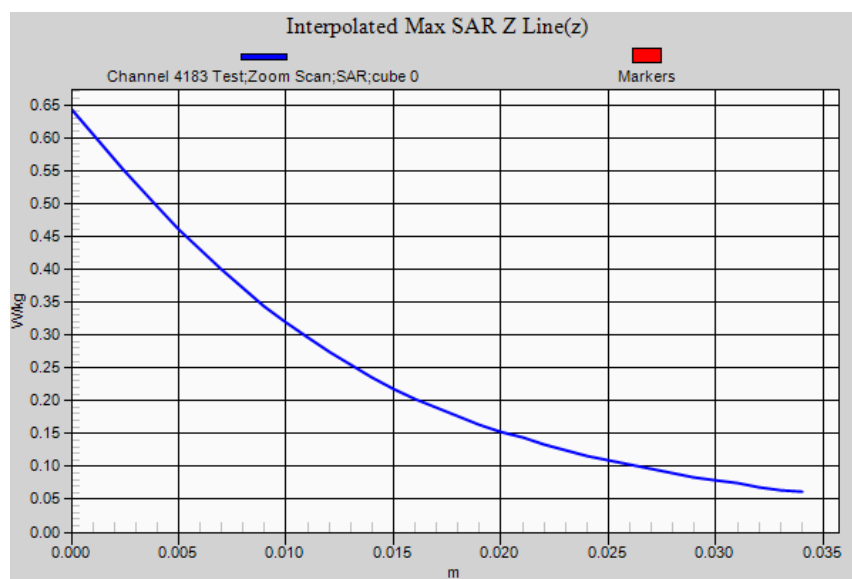

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz 3G FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 28-10-14**

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 5 850 MHz; Frequency: 846.6 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=846.5$ MHz; $\sigma = 1.01$ S/m; $\epsilon_r = 55.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 28-10-14/Channel 4233 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.454 W/kg

Lap Held Antenna OUT 28-10-14/Channel 4233 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 17.657 V/m; **Power Drift = 0.10 dB**

Averaged SAR: SAR(1g) = 0.451 W/kg; SAR(10g) = 0.296 W/kg

Maximum value of SAR (interpolated) = 0.624 W/kg

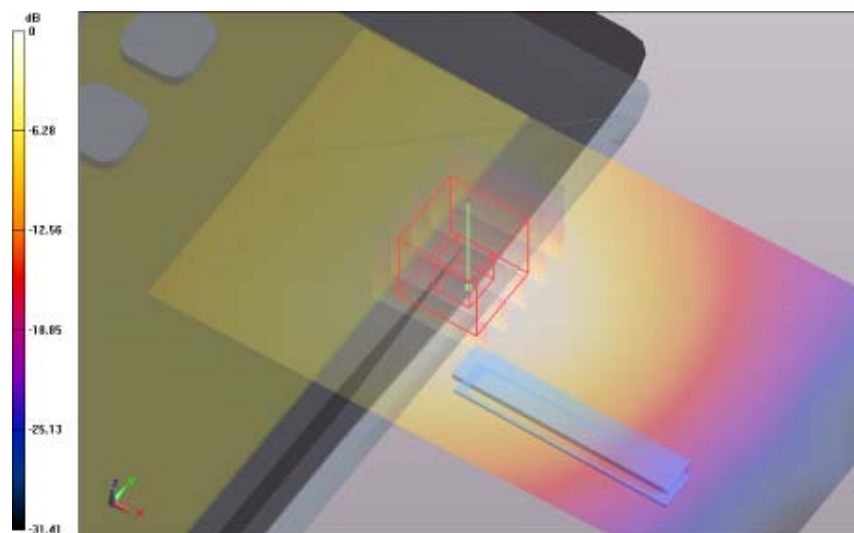


0 dB = 0.454 W/kg = -3.43 dBW/kg

SAR Measurement Plot 32



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

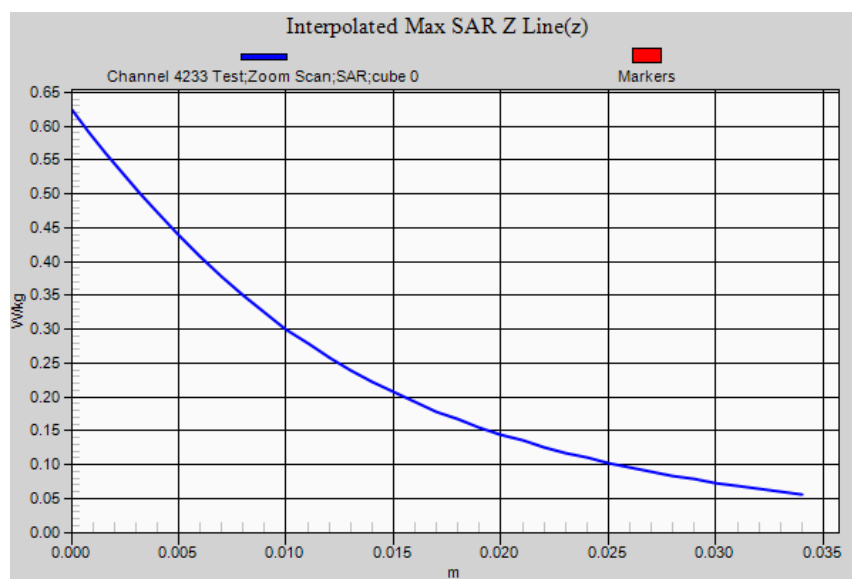

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz 3G FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 28-10-14**

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 5 850 MHz; Frequency: 826.4 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=826.5$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 28-10-14/Channel 4132 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.201 W/kg


Edge 2 Antenna IN 28-10-14/Channel 4132 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 9.388 V/m; **Power Drift = 0.10 dB**

Averaged SAR: SAR(1g) = 0.191 W/kg; SAR(10g) = 0.071 W/kg

Maximum value of SAR (interpolated) = 0.679 W/kg

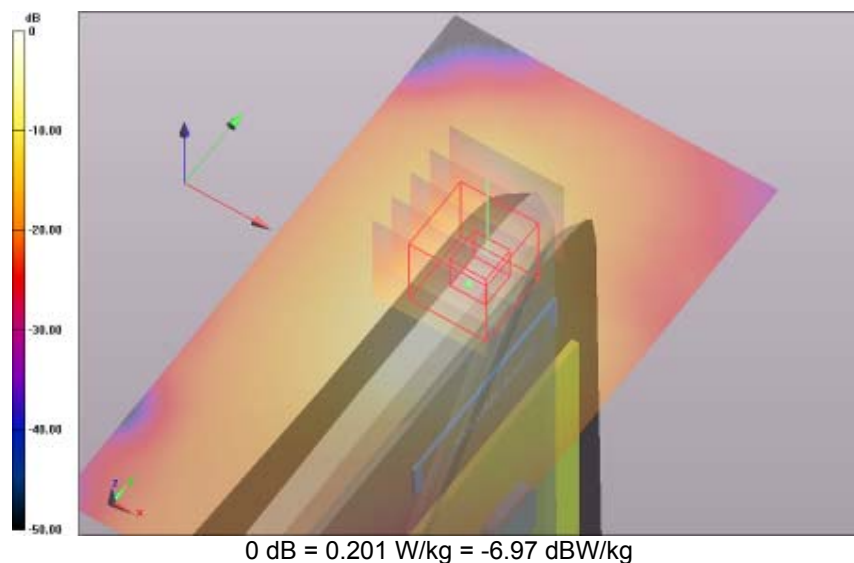

SAR Measurement Plot 33

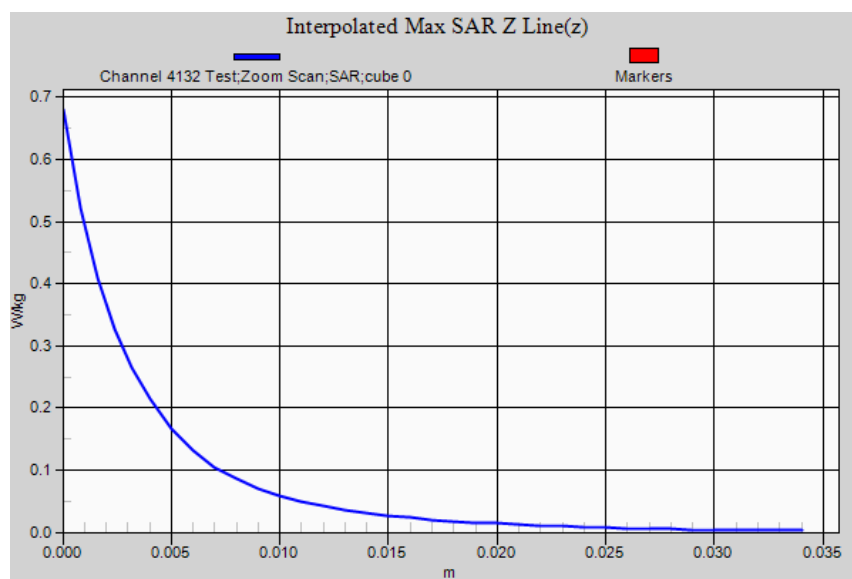

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz 3G FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 28-10-14**

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 5 850 MHz; Frequency: 836.6 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=836.5$ MHz; $\sigma = 1.00$ S/m; $\epsilon_r = 55.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 28-10-14/Channel 4183 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.218 W/kg

Edge 2 Antenna IN 28-10-14/Channel 4183 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 9.905 V/m; **Power Drift = -0.05 dB**

Averaged SAR: SAR(1g) = 0.199 W/kg; SAR(10g) = 0.074 W/kg

Maximum value of SAR (interpolated) = 0.714 W/kg

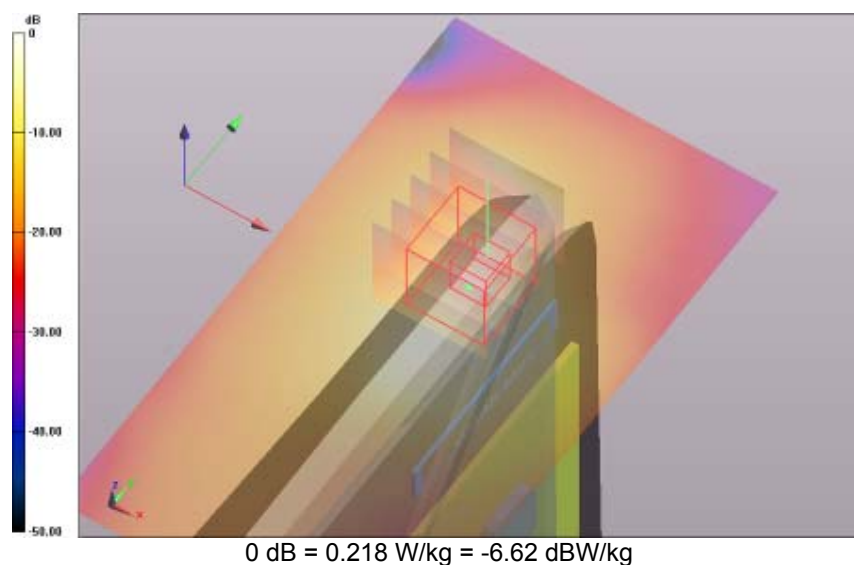


SAR Measurement Plot 34



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

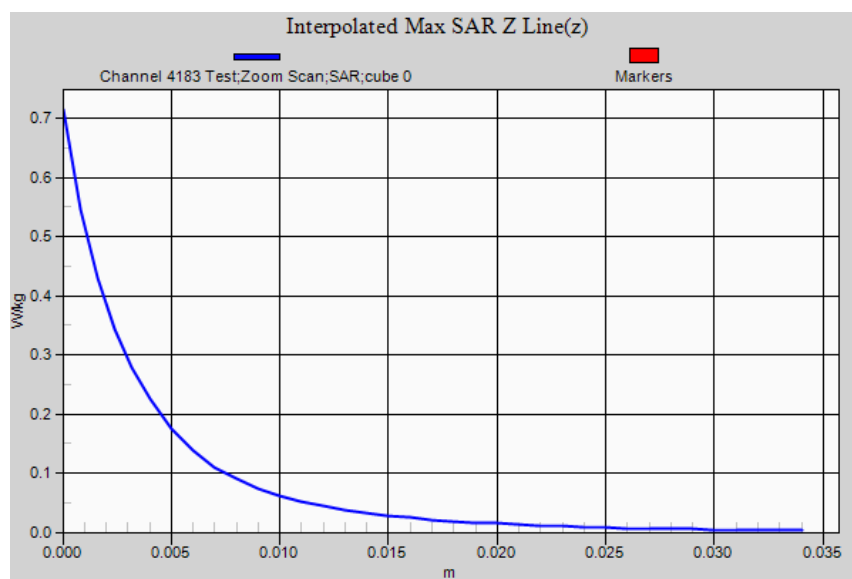

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz 3G FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 28-10-14**

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 5 850 MHz; Frequency: 846.6 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=846.5$ MHz; $\sigma = 1.01$ S/m; $\epsilon_r = 55.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 28-10-14/Channel 4233 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.230 W/kg

Edge 2 Antenna IN 28-10-14/Channel 4233 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 10.240 V/m; **Power Drift = -0.03 dB**

Averaged SAR: SAR(1g) = 0.207 W/kg; SAR(10g) = 0.078 W/kg

Maximum value of SAR (interpolated) = 0.746 W/kg

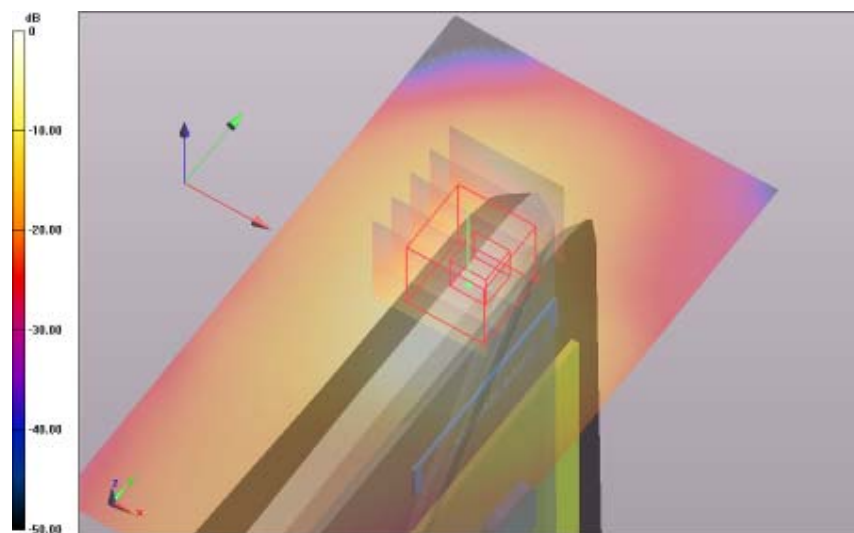


0 dB = 0.230 W/kg = -6.38 dBW/kg

SAR Measurement Plot 35



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

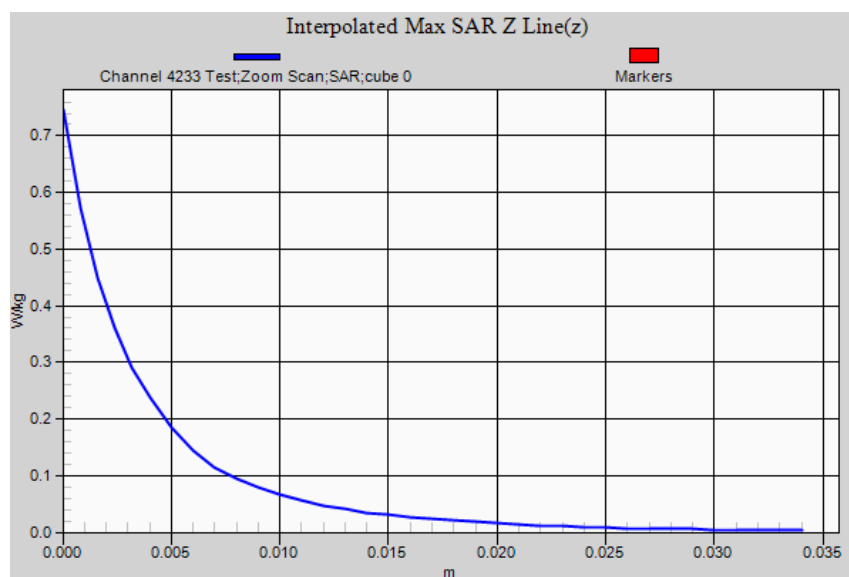

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 850 MHz 3G FCC.da52:7

DUT Name: Dipole 900 MHz, Type: DV900V2, Serial: 047

Configuration: System Check 28-10-14

Communication System: 0 - CW; Communication System Band: 900 MHz; Frequency: 900.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=900$ MHz; $\sigma = 1.07$ S/m; $\epsilon_r = 54.5$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Check 28-10-14/Channel 1 Test/Area Scan (51x51x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;
Maximum value of SAR (interpolated) = 3.130 W/kg

System Check 28-10-14/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 56.857 V/m; **Power Drift = -0.01 dB**

Averaged SAR: SAR(1g) = 2.890 W/kg; SAR(10g) = 1.890 W/kg

Maximum value of SAR (interpolated) = 4.130 W/kg

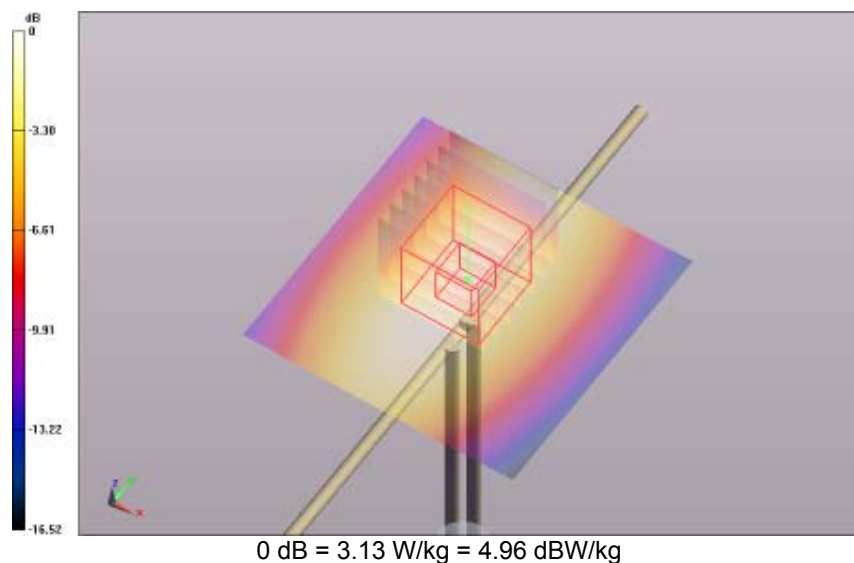


SAR Measurement Plot 36



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

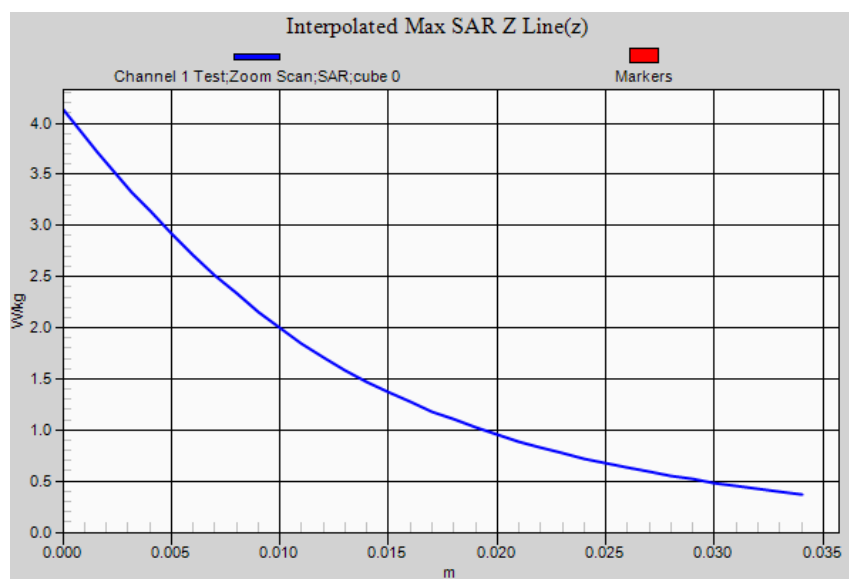

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz 3G FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 21-11-14**

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 4 1735 MHz; Frequency: 1712 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=1712.5$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 21-11-14/Channel 1312 Test/Area Scan (61x111x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.142 W/kg**Bystander 25mm Spacing Antenna OUT 21-11-14/Channel 1312 Test/Zoom Scan (21x21x36)/Cube 0:**Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 5.916 V/m; **Power Drift = -0.13 dB****Averaged SAR: SAR(1g) = 0.131 W/kg; SAR(10g) = 0.084 W/kg**

Maximum value of SAR (interpolated) = 0.185 W/kg

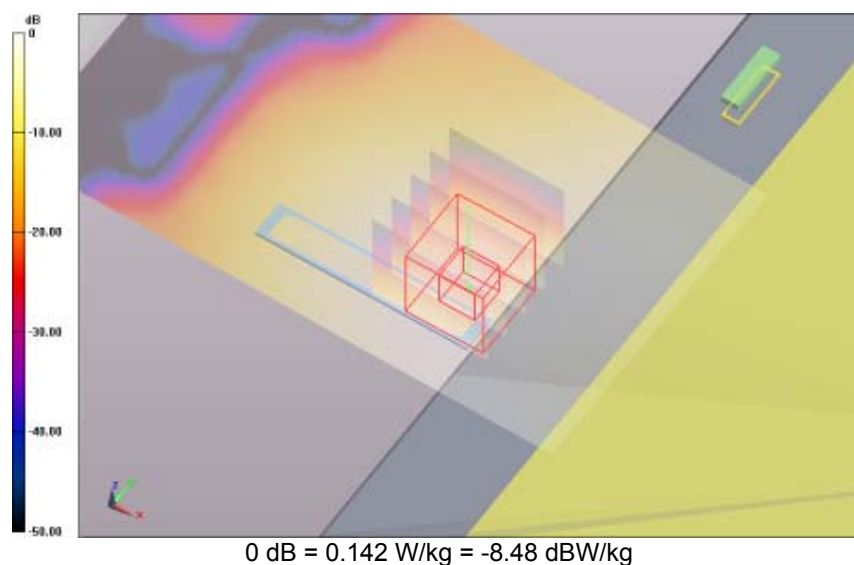

SAR Measurement Plot 37

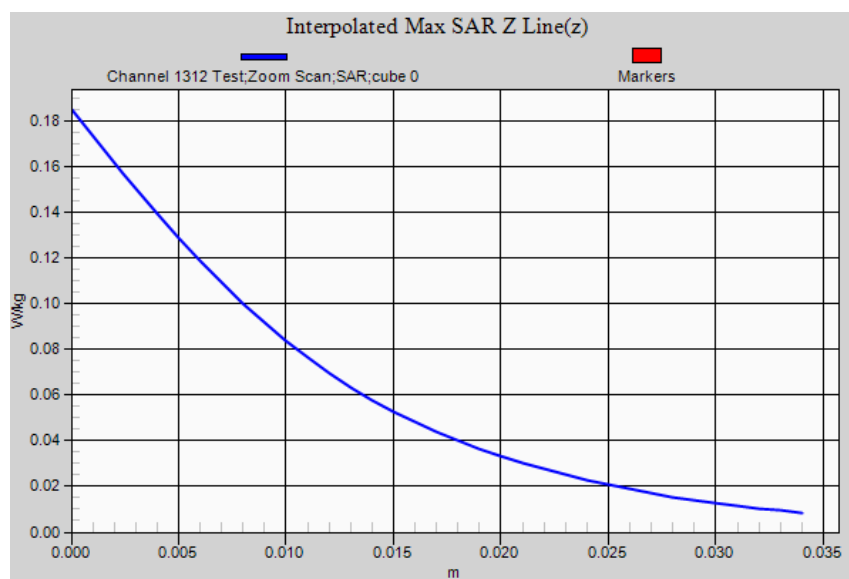

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 1700 MHz 3G FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429

Configuration: Bystander 25mm Spacing Antenna OUT 21-11-14

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 4 1735 MHz; Frequency: 1735 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1735.5$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Bystander 25mm Spacing Antenna OUT 21-11-14/Channel 1427 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.162 W/kg

Bystander 25mm Spacing Antenna OUT 21-11-14/Channel 1427 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.499 V/m; **Power Drift = -0.06 dB**

Averaged SAR: SAR(1g) = 0.151 W/kg; SAR(10g) = 0.095 W/kg

Maximum value of SAR (interpolated) = 0.216 W/kg

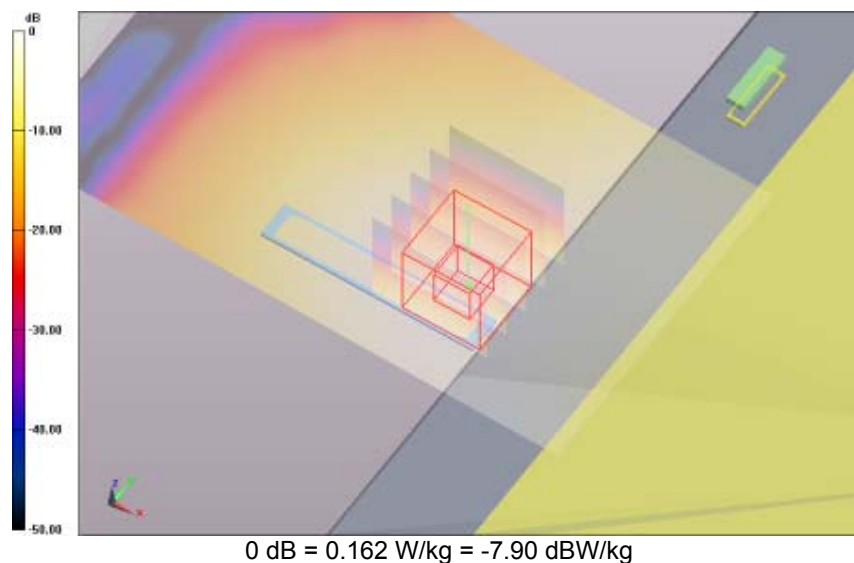


SAR Measurement Plot 38



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

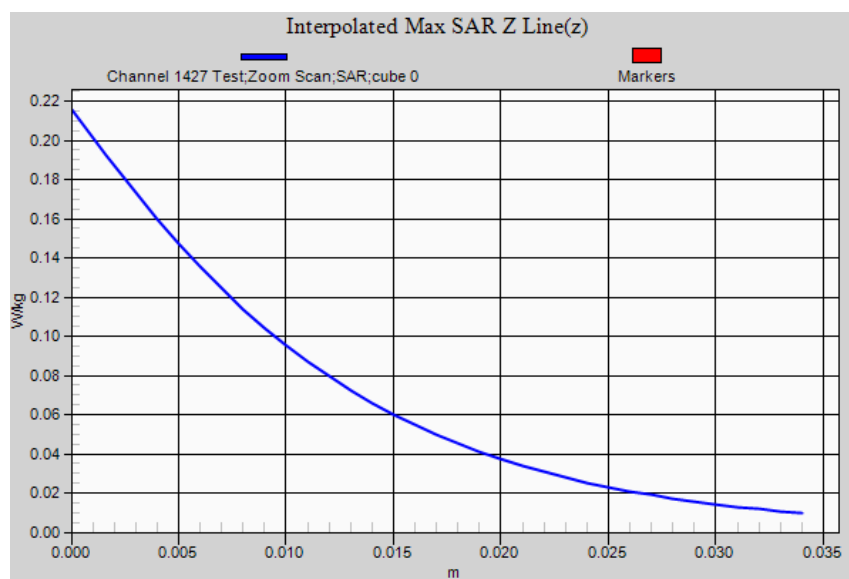

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 1700 MHz 3G FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429

Configuration: Bystander 25mm Spacing Antenna OUT 21-11-14

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 4 1735 MHz; Frequency: 1753 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1752.5$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 51.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Bystander 25mm Spacing Antenna OUT 21-11-14/Channel 1513 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.170 W/kg

Bystander 25mm Spacing Antenna OUT 21-11-14/Channel 1513 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.785 V/m; **Power Drift = -0.01 dB**

Averaged SAR: SAR(1g) = 0.162 W/kg; SAR(10g) = 0.101 W/kg

Maximum value of SAR (interpolated) = 0.234 W/kg

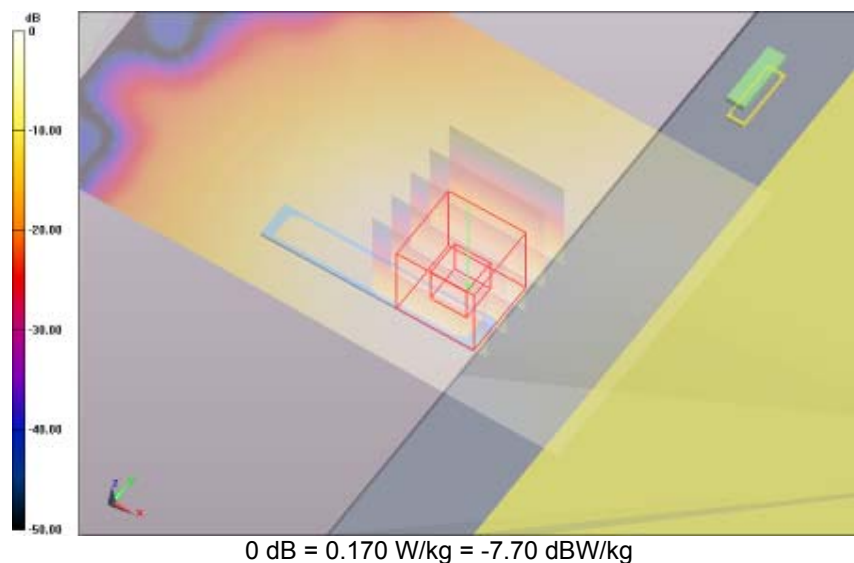


SAR Measurement Plot 39



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

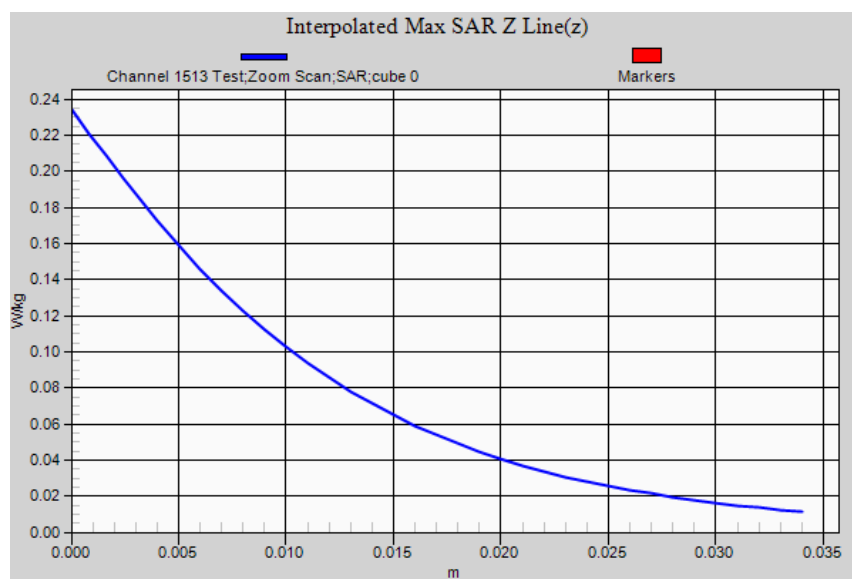

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz 3G FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 21-11-14**

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 4 1735 MHz; Frequency: 1712 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1712.5$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 21-11-14/Channel 1312 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.384 W/kg

Lap Held Antenna OUT 21-11-14/Channel 1312 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 11.020 V/m; **Power Drift = -0.00 dB**

Averaged SAR: SAR(1g) = 0.359 W/kg; SAR(10g) = 0.216 W/kg

Maximum value of SAR (interpolated) = 0.534 W/kg

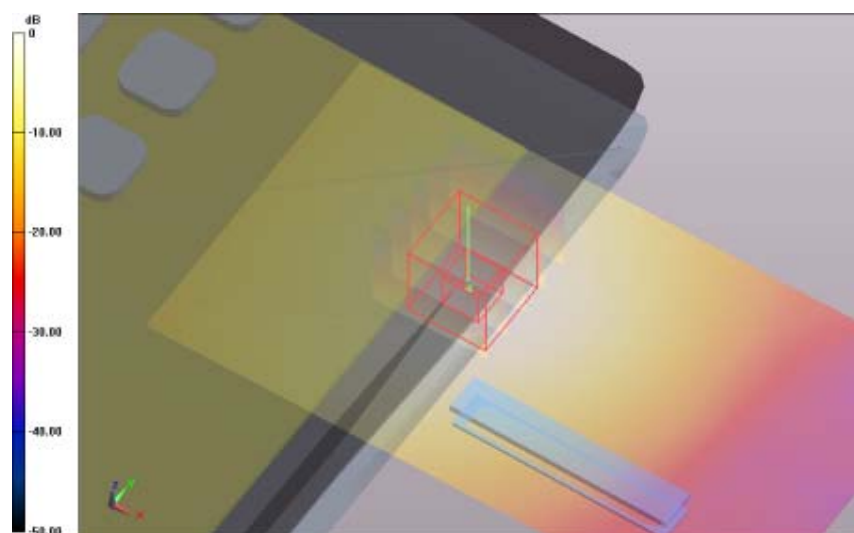


0 dB = 0.384 W/kg = -4.16 dBW/kg

SAR Measurement Plot 40



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

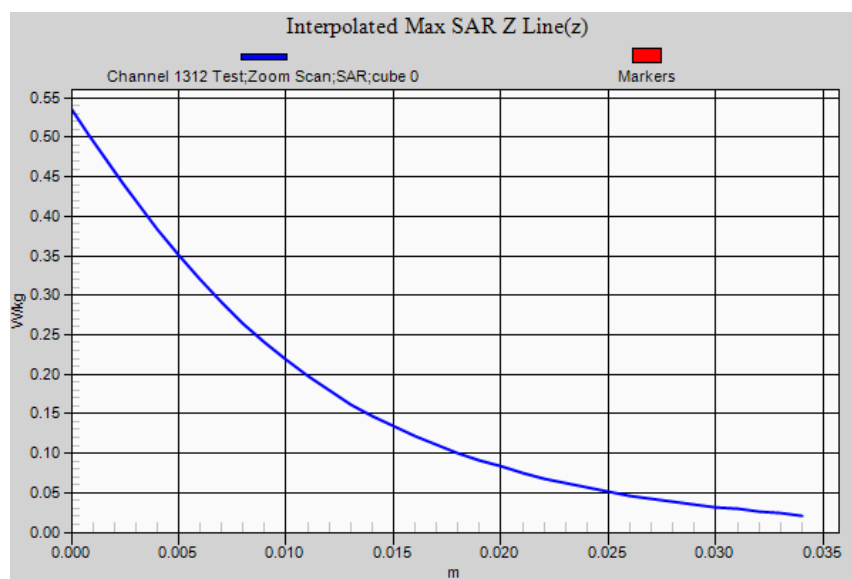

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz 3G FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 21-11-14**

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 4 1735 MHz; Frequency: 1735 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1735.5$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 21-11-14/Channel 1427 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.412 W/kg

Lap Held Antenna OUT 21-11-14/Channel 1427 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 11.725 V/m; **Power Drift = -0.13 dB**

Averaged SAR: SAR(1g) = 0.388 W/kg; SAR(10g) = 0.232 W/kg

Maximum value of SAR (interpolated) = 0.587 W/kg

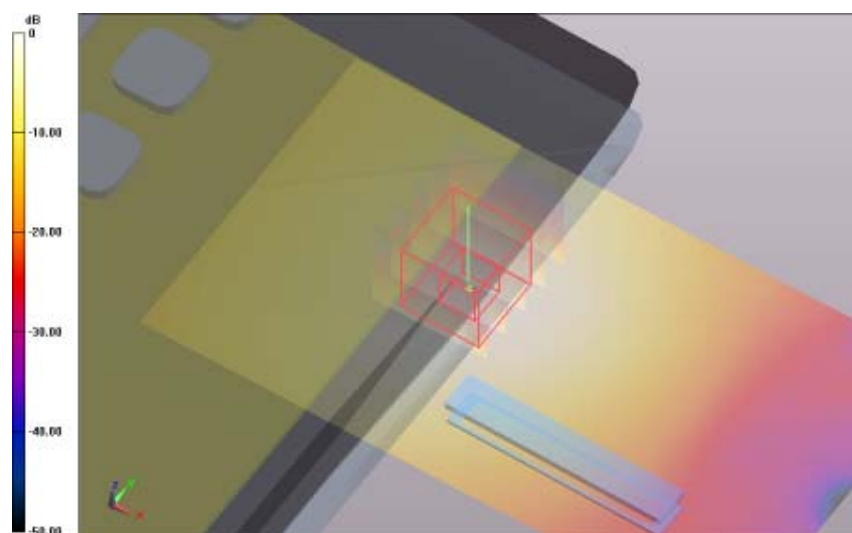


0 dB = 0.412 W/kg = -3.85 dBW/kg

SAR Measurement Plot 41



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

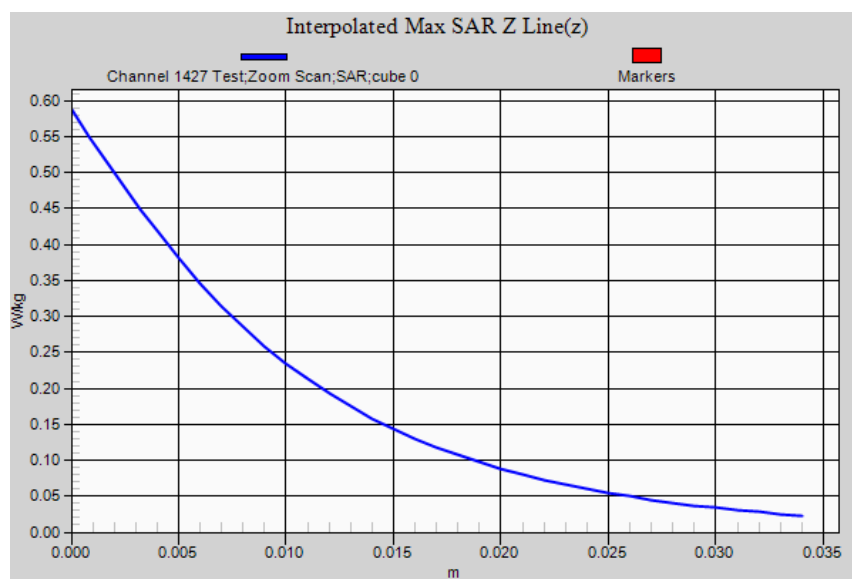

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 1700 MHz 3G FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429

Configuration: Lap Held Antenna OUT 21-11-14

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 4 1735 MHz; Frequency: 1753 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1752.5$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 51.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 21-11-14/Channel 1513 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.403 W/kg

Lap Held Antenna OUT 21-11-14/Channel 1513 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 11.584 V/m; **Power Drift = -0.07 dB**

Averaged SAR: SAR(1g) = 0.390 W/kg; SAR(10g) = 0.232 W/kg

Maximum value of SAR (interpolated) = 0.597 W/kg

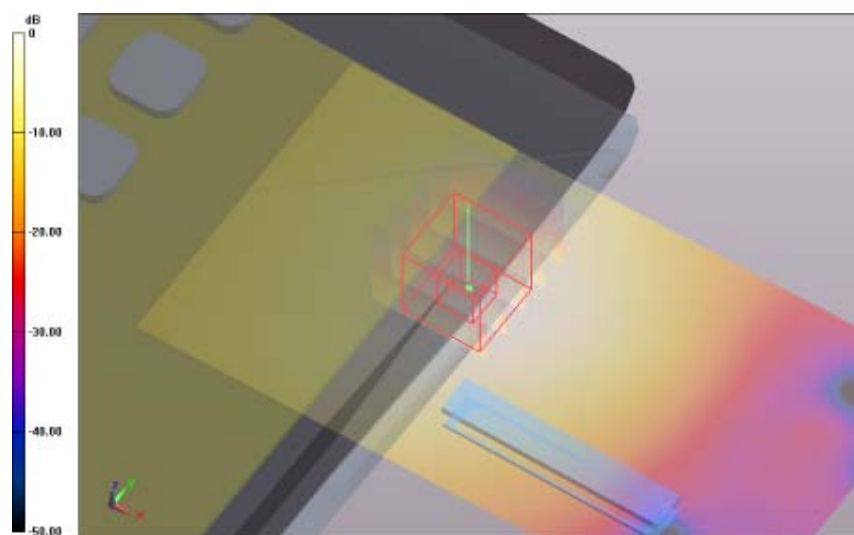


0 dB = 0.403 W/kg = -3.95 dBW/kg

SAR Measurement Plot 42



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

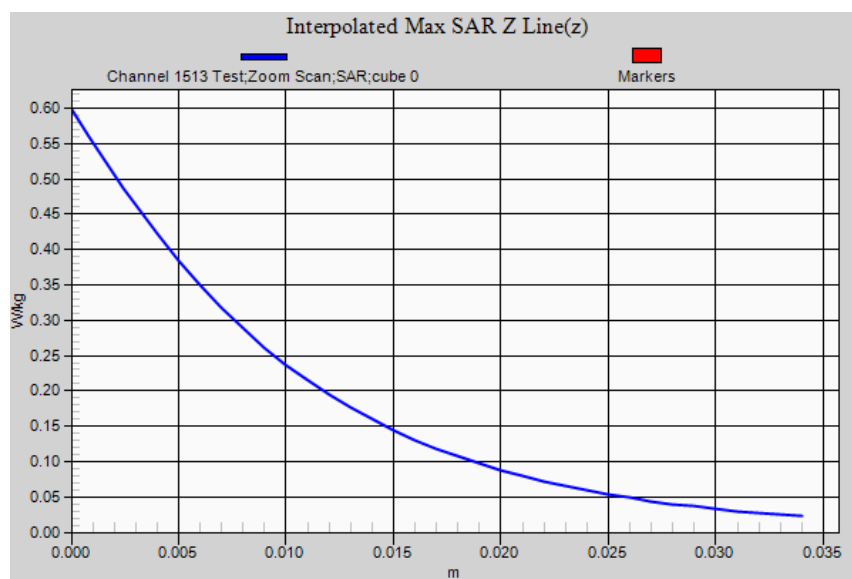

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 1700 MHz 3G FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429

Configuration: Edge 2 Antenna IN 21-11-14

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 4 1735 MHz; Frequency: 1712 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1712.5$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 21-11-14/Channel 1312 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm;
Maximum value of SAR (interpolated) = 0.801 W/kg

Edge 2 Antenna IN 21-11-14/Channel 1312 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 18.359 V/m; **Power Drift = 0.06 dB**

Averaged SAR: SAR(1g) = 0.760 W/kg; SAR(10g) = 0.307 W/kg

Maximum value of SAR (interpolated) = 1.640 W/kg

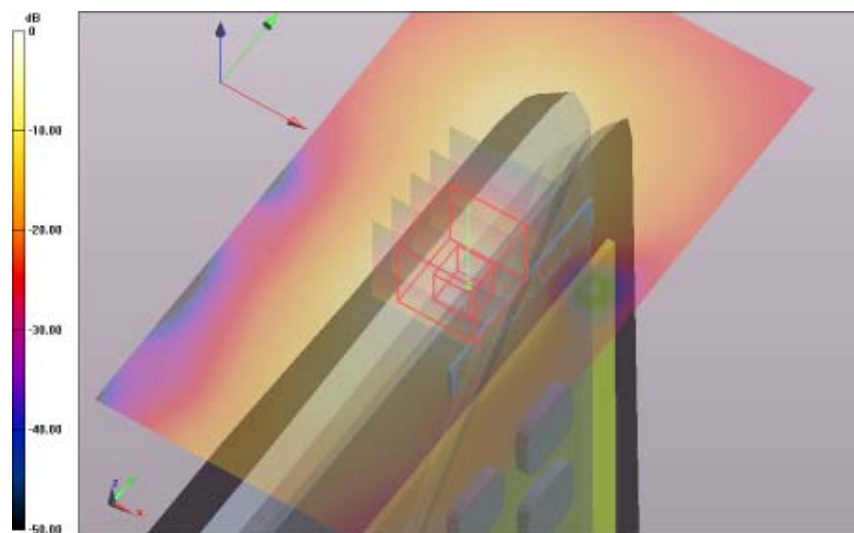


0 dB = 0.801 W/kg = -0.96 dBW/kg

SAR Measurement Plot 43



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

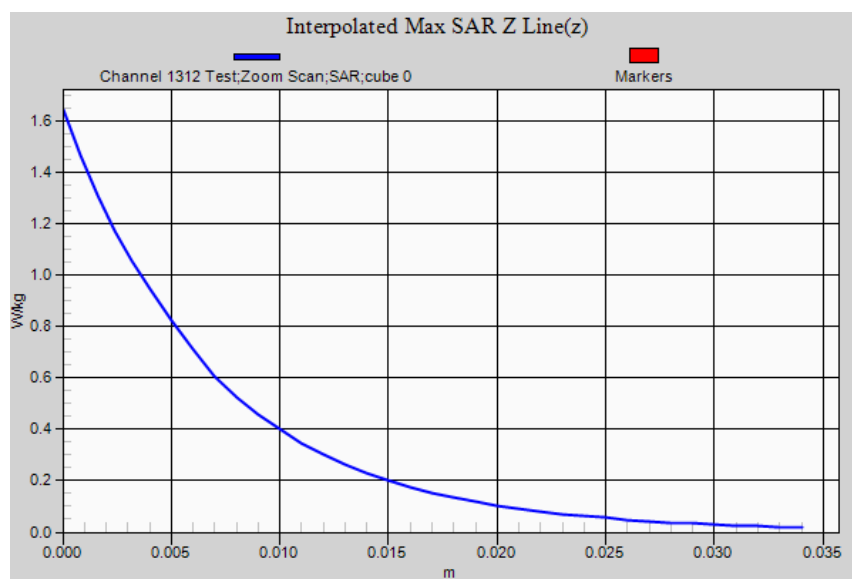

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 1700 MHz 3G FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429

Configuration: Edge 2 Antenna IN 21-11-14

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 4 1735 MHz; Frequency: 1735 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1735.5$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 21-11-14/Channel 1427 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm;
Maximum value of SAR (interpolated) = 0.733 W/kg

Edge 2 Antenna IN 21-11-14/Channel 1427 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 17.967 V/m; **Power Drift = -0.06 dB**


Averaged SAR: SAR(1g) = 0.712 W/kg; SAR(10g) = 0.285 W/kg

Maximum value of SAR (interpolated) = 1.550 W/kg

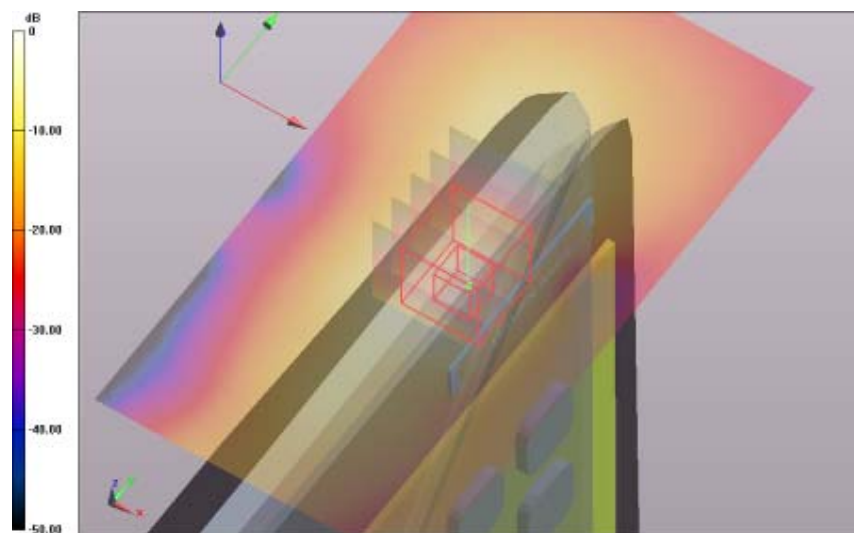

0 dB = 0.733 W/kg = -1.35 dBW/kg

SAR Measurement Plot 44

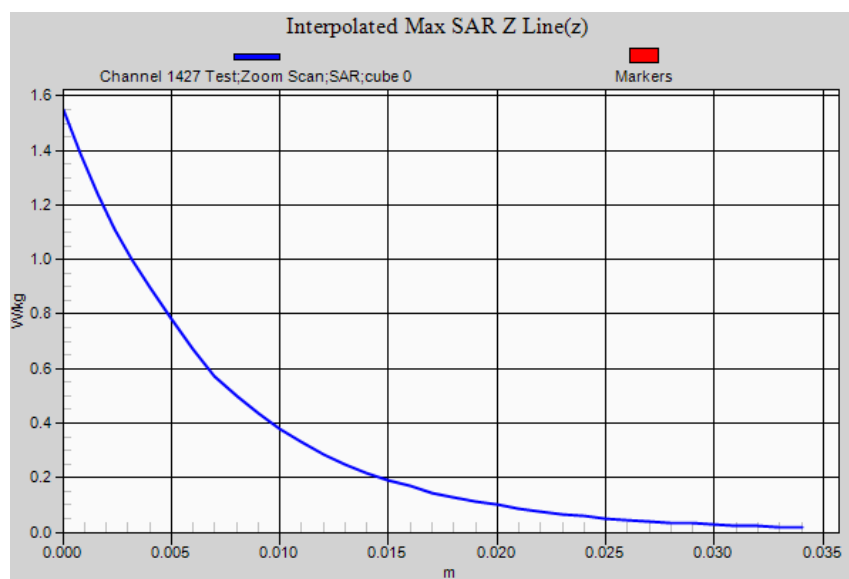

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 1700 MHz 3G FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429

Configuration: Edge 2 Antenna IN 21-11-14

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 4 1735 MHz; Frequency: 1753 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1752.5$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 51.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 21-11-14/Channel 1513 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm;
Maximum value of SAR (interpolated) = 0.711 W/kg

Edge 2 Antenna IN 21-11-14/Channel 1513 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 17.582 V/m; **Power Drift = -0.08 dB**

Averaged SAR: SAR(1g) = 0.698 W/kg; SAR(10g) = 0.278 W/kg

Maximum value of SAR (interpolated) = 1.520 W/kg

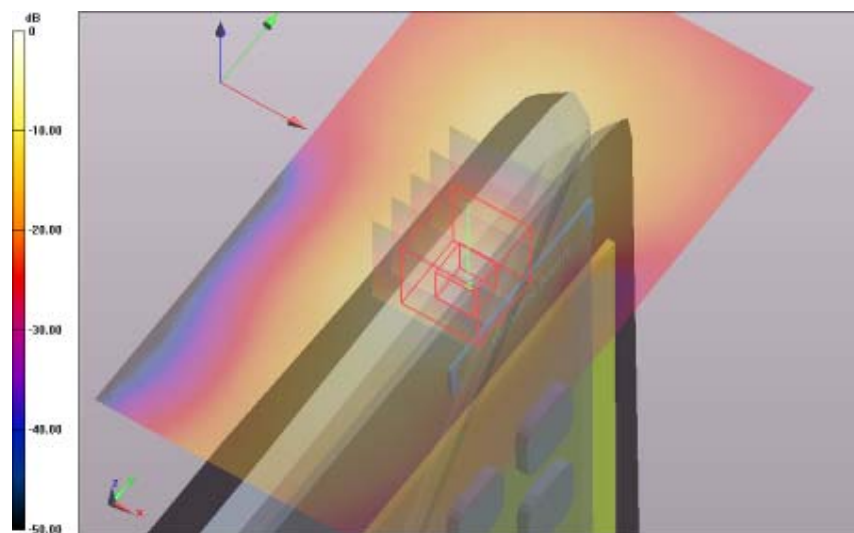


0 dB = 0.711 W/kg = -1.48 dBW/kg

SAR Measurement Plot 45



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

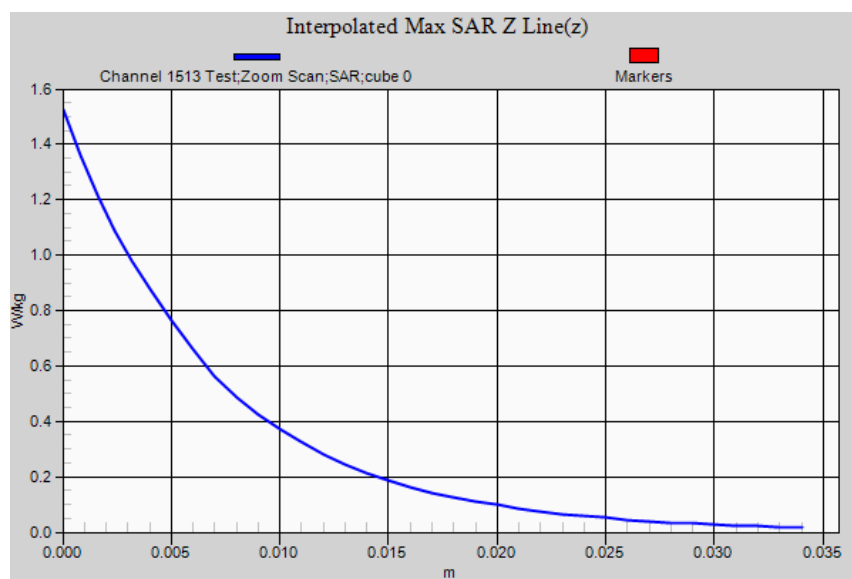

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 1700 MHz 3G FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429

Configuration: Edge 3 Antenna OUT 21-11-14

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 4 1735 MHz; Frequency: 1712 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1712.5$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 21-11-14/Channel 1312 Test/Area Scan (111x61x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.315 W/kg

Edge 3 Antenna OUT 21-11-14/Channel 1312 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 8.455 V/m; **Power Drift = -0.02 dB**

Averaged SAR: SAR(1g) = 0.305 W/kg; SAR(10g) = 0.194 W/kg

Maximum value of SAR (interpolated) = 0.459 W/kg

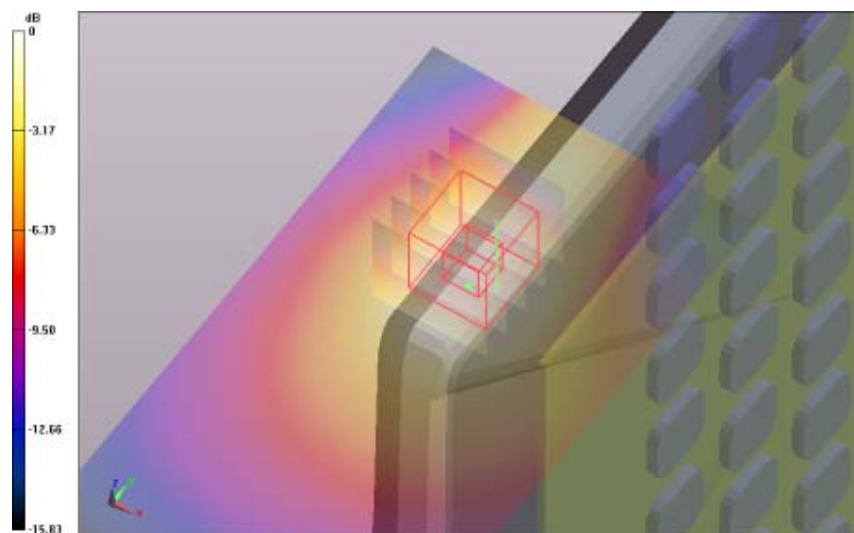


0 dB = 0.315 W/kg = -5.02 dBW/kg

SAR Measurement Plot 46



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

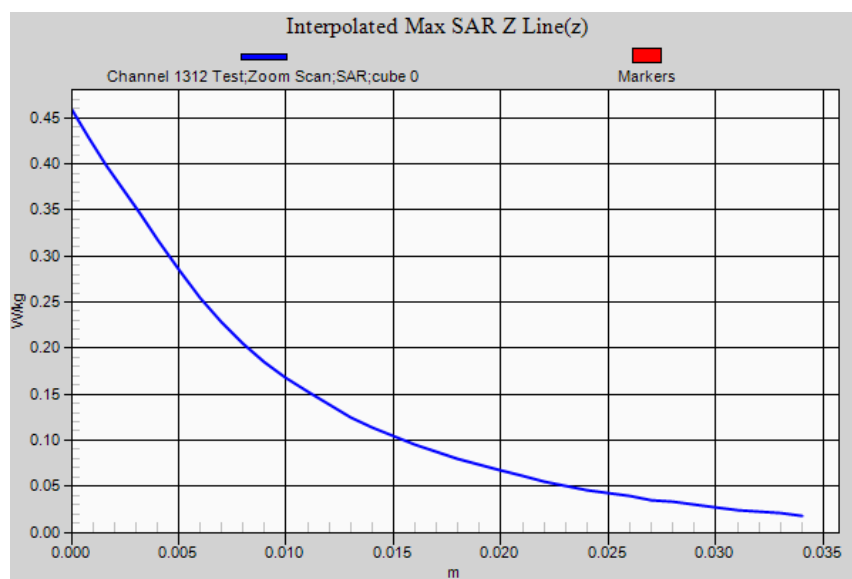

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 1700 MHz 3G FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429

Configuration: Edge 3 Antenna OUT 21-11-14

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 4 1735 MHz; Frequency: 1735 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1735.5$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 21-11-14/Channel 1427 Test/Area Scan (111x61x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.350 W/kg

Edge 3 Antenna OUT 21-11-14/Channel 1427 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 8.853 V/m; **Power Drift = -0.04 dB**

Averaged SAR: SAR(1g) = 0.343 W/kg; SAR(10g) = 0.215 W/kg

Maximum value of SAR (interpolated) = 0.501 W/kg

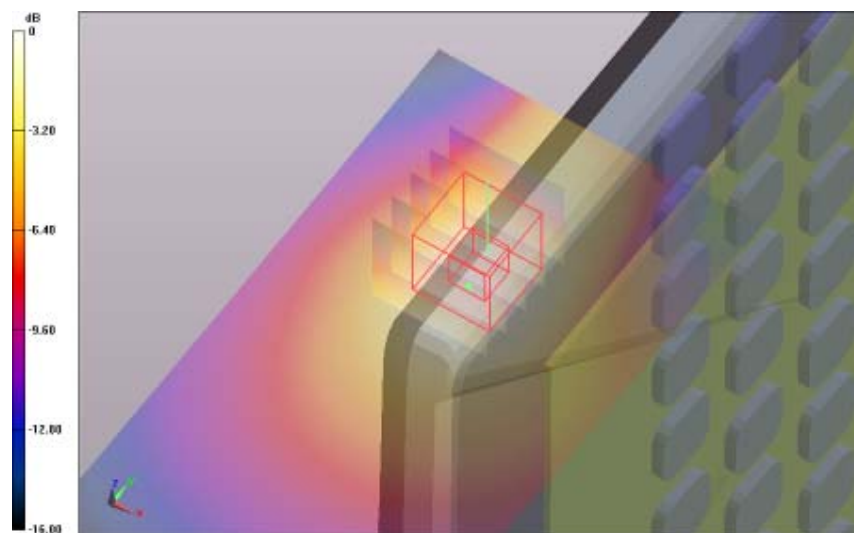


0 dB = 0.350 W/kg = -4.56 dBW/kg

SAR Measurement Plot 47



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

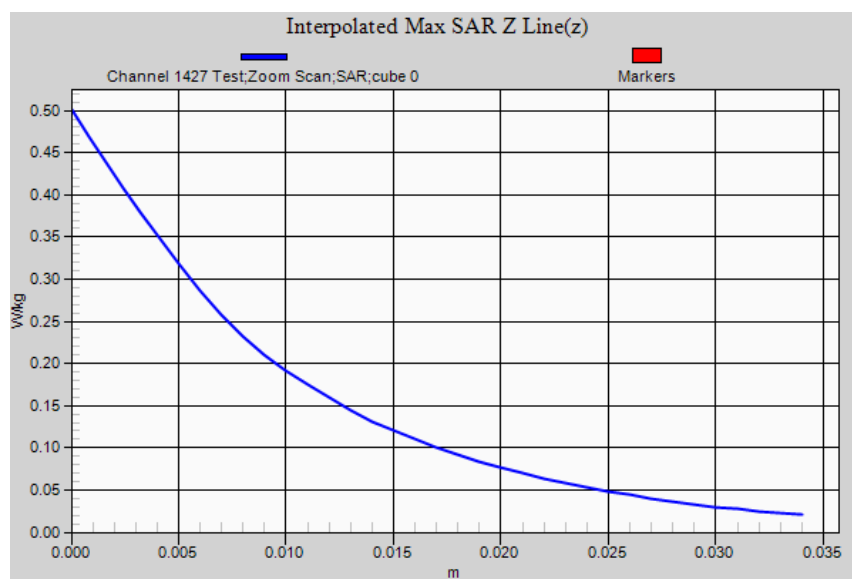

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 1700 MHz 3G FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429

Configuration: Edge 3 Antenna OUT 21-11-14

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 4 1735 MHz; Frequency: 1753 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1752.5$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 51.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 21-11-14/Channel 1513 Test/Area Scan (111x61x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.358 W/kg

Edge 3 Antenna OUT 21-11-14/Channel 1513 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 8.983 V/m; **Power Drift = -0.07 dB**


Averaged SAR: SAR(1g) = 0.357 W/kg; SAR(10g) = 0.222 W/kg

Maximum value of SAR (interpolated) = 0.519 W/kg

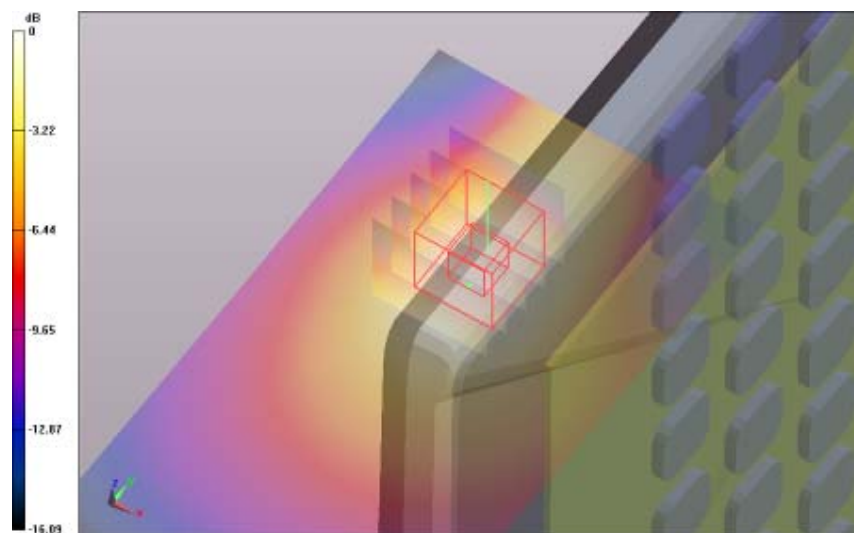

0 dB = 0.358 W/kg = -4.46 dBW/kg

SAR Measurement Plot 48

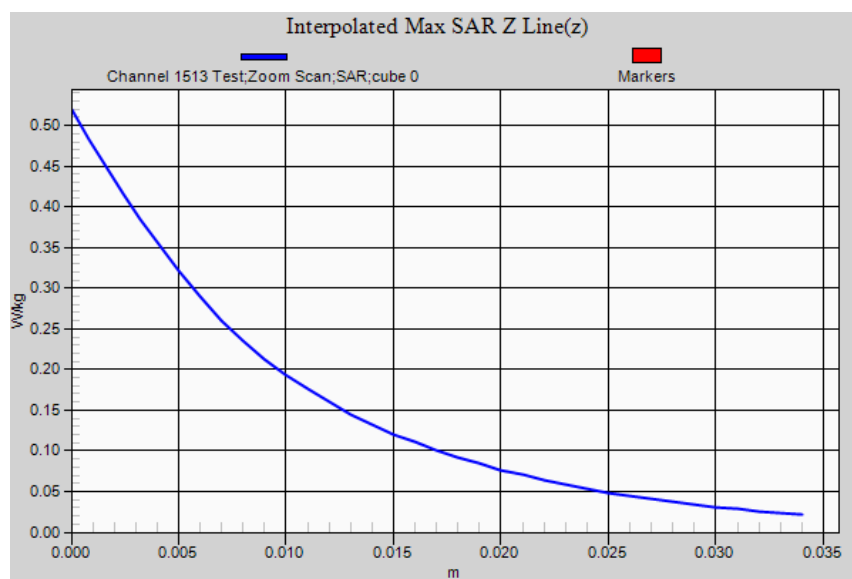

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 1700 MHz 3G FCC.da52:7

DUT Name: Dipole 1800 MHz, Type: DV1800V2, Serial: 242

Configuration: System Check 21-11-14

Communication System: 0 - CW (0); Communication System Band: 1800 MHz; Frequency: 1800 MHz,
Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1800$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 50.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Check 21-11-14/Channel 1 Test/Area Scan (51x51x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;
Maximum value of SAR (interpolated) = 12.100 W/kg

System Check 21-11-14/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 91.817 V/m; **Power Drift = -0.06 dB**

Averaged SAR: SAR(1g) = 9.640 W/kg; SAR(10g) = 5.150 W/kg

Maximum value of SAR (interpolated) = 16.000 W/kg

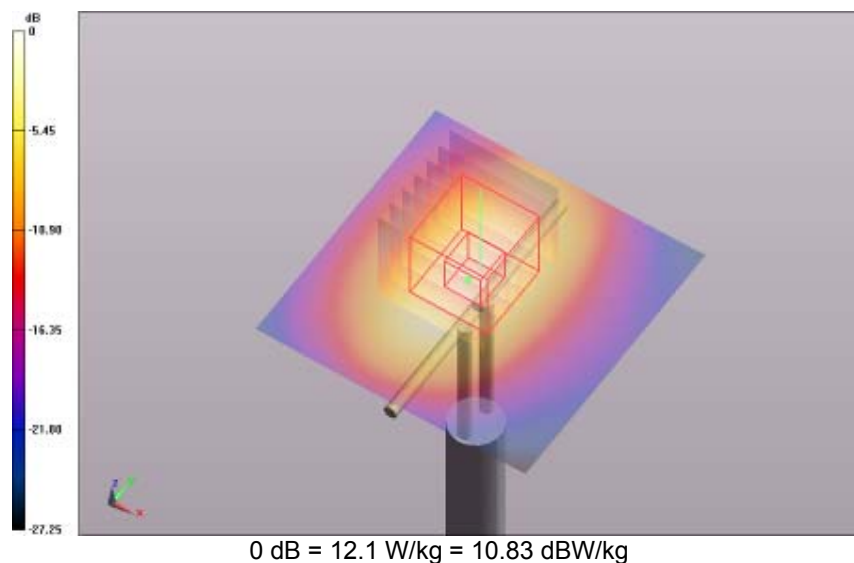


SAR Measurement Plot 49



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

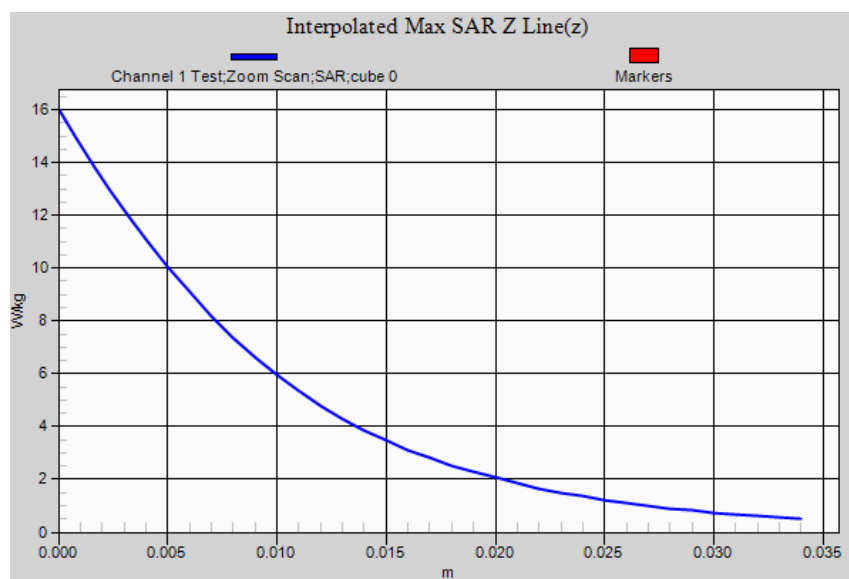

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz 3G FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 24-11-14**

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 2 1850 MHz; Frequency: 1852 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=1852.5$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 53.9$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 24-11-14/Channel 9262 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.239 W/kg**Bystander 25mm Spacing Antenna OUT 24-11-14/Channel 9262 Test/Zoom Scan (21x21x36)/Cube 0:** Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 8.801 V/m; **Power Drift = 0.06 dB****Averaged SAR: SAR(1g) = 0.228 W/kg; SAR(10g) = 0.138 W/kg**

Maximum value of SAR (interpolated) = 0.338 W/kg

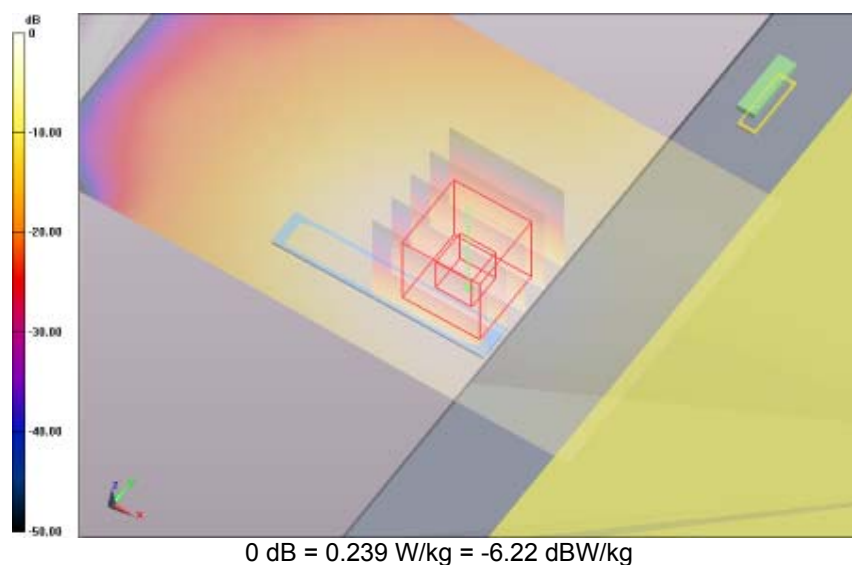


SAR Measurement Plot 50



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

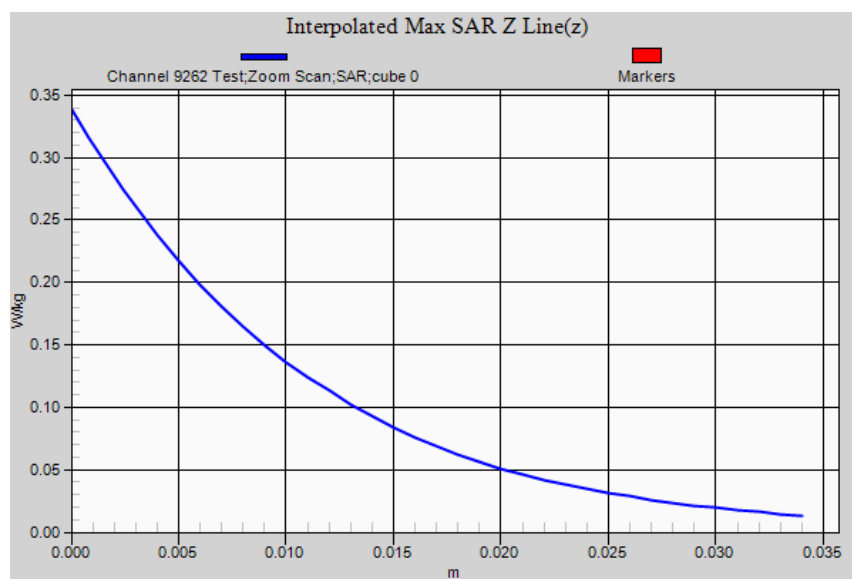

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz 3G FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 24-11-14**


Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 2 1850 MHz; Frequency: 1880 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1880$ MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 53.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 24-11-14/Channel 9400 Test/Area Scan (61x111x1): Interpolated grid:
dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.244 W/kg

Bystander 25mm Spacing Antenna OUT 24-11-14/Channel 9400 Test/Zoom Scan (21x21x36)/Cube 0:
Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 9.104 V/m; **Power Drift = -0.10 dB**
Averaged SAR: SAR(1g) = 0.234 W/kg; SAR(10g) = 0.142 W/kg
Maximum value of SAR (interpolated) = 0.357 W/kg

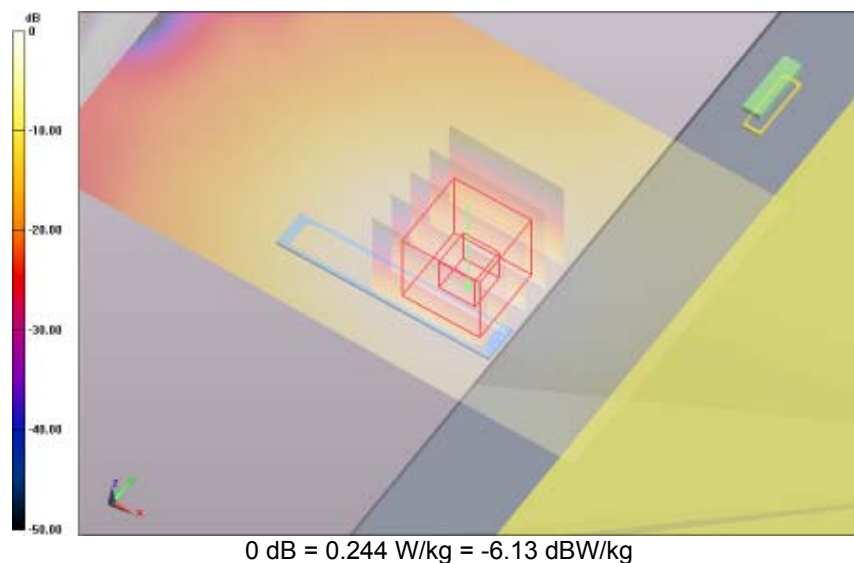


SAR Measurement Plot 51



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

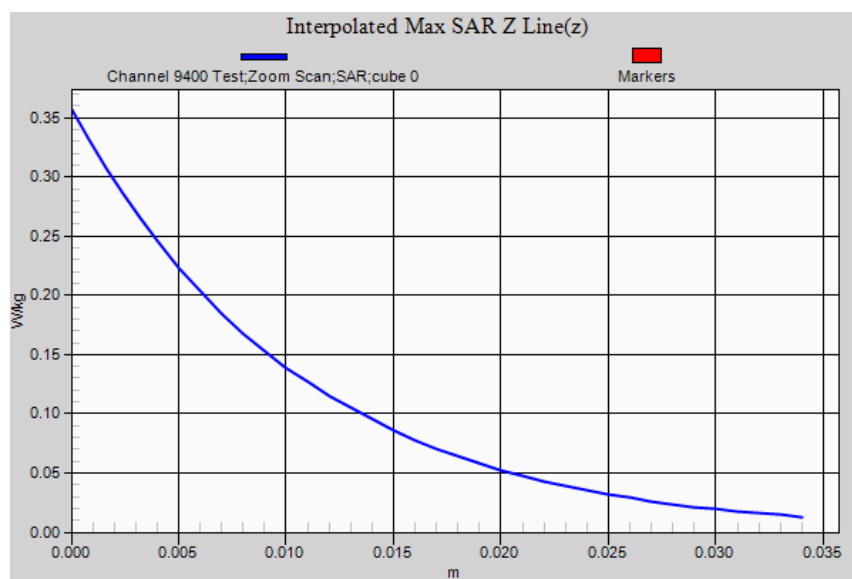

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz 3G FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 24-11-14**

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 2 1850 MHz; Frequency: 1908 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1907.5$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 53.7$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 24-11-14/Channel 9538 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.271 W/kg

Bystander 25mm Spacing Antenna OUT 24-11-14/Channel 9538 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 9.637 V/m; **Power Drift = 0.03 dB**

Averaged SAR: SAR(1g) = 0.258 W/kg; SAR(10g) = 0.155 W/kg

Maximum value of SAR (interpolated) = 0.399 W/kg

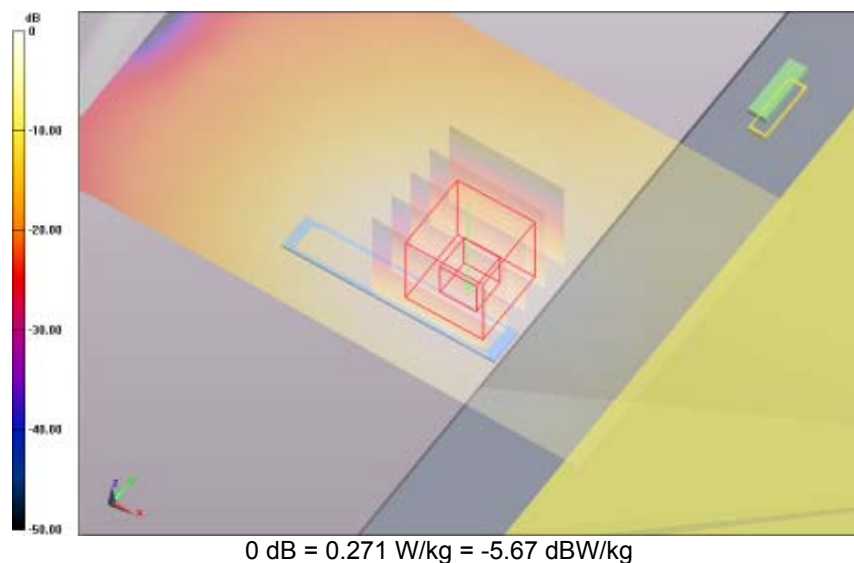


SAR Measurement Plot 52



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

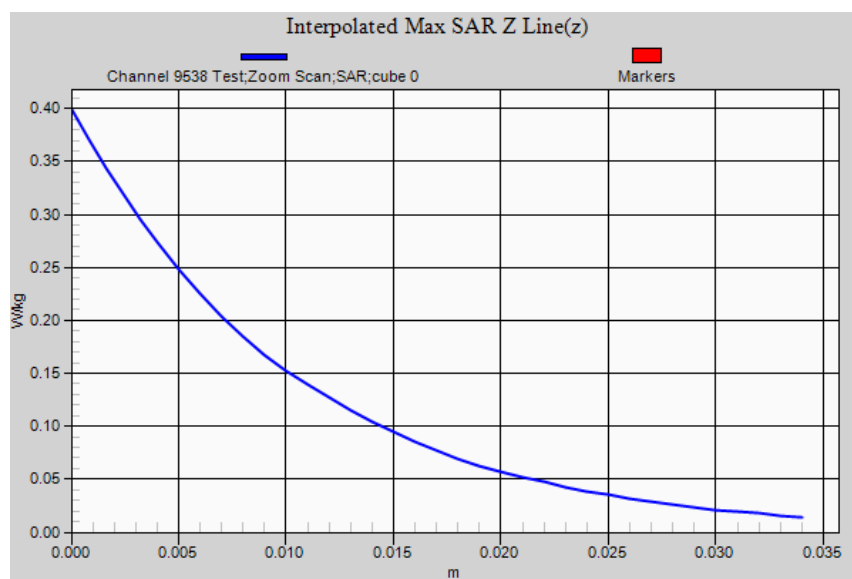

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 1900 MHz 3G FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429

Configuration: Lap Held Antenna OUT 24-11-14

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 2 1850 MHz; Frequency: 1852 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1852.5$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 53.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 24-11-14/Channel 9262 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.378 W/kg

Lap Held Antenna OUT 24-11-14/Channel 9262 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.889 V/m; **Power Drift = -0.13 dB**

Averaged SAR: SAR(1g) = 0.370 W/kg; SAR(10g) = 0.218 W/kg

Maximum value of SAR (interpolated) = 0.568 W/kg

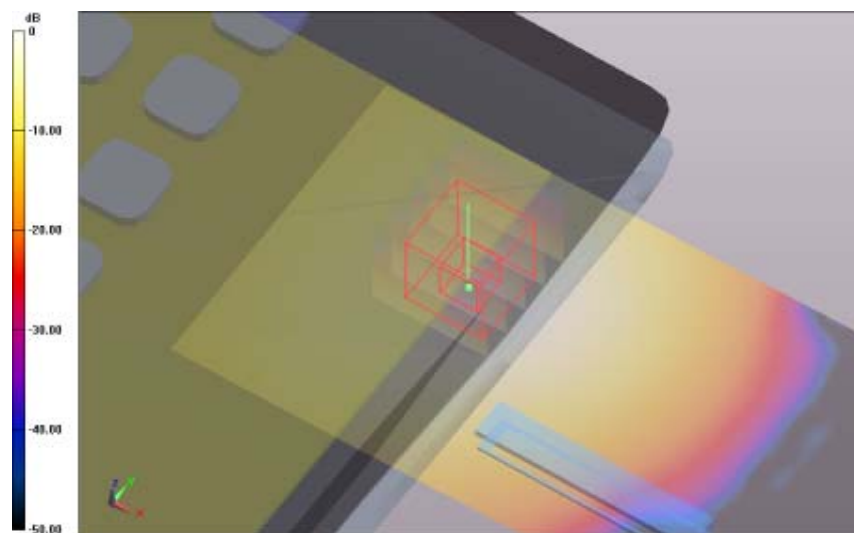


0 dB = 0.378 W/kg = -4.23 dBW/kg

SAR Measurement Plot 53



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

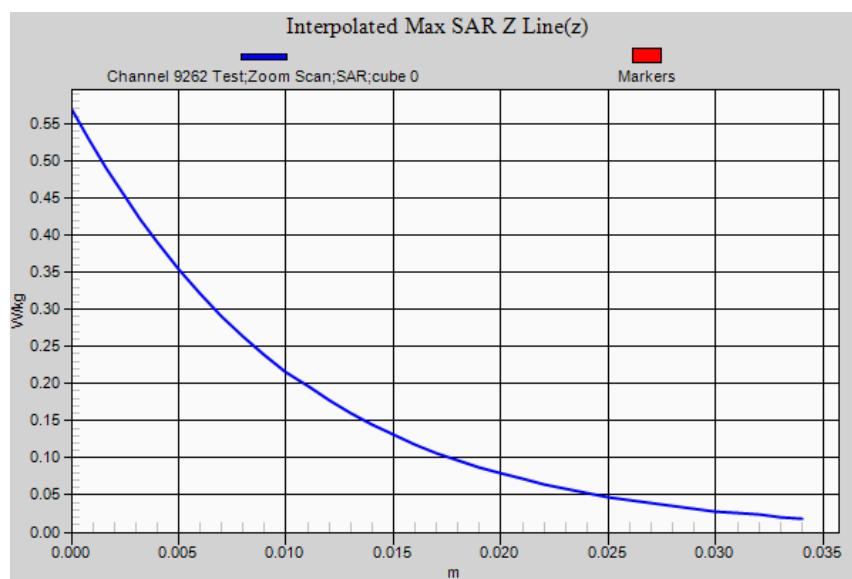

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz 3G FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 24-11-14**

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 2 1850 MHz; Frequency: 1880 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1880$ MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 53.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 24-11-14/Channel 9400 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.369 W/kg

Lap Held Antenna OUT 24-11-14/Channel 9400 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.921 V/m; **Power Drift = -0.01 dB**

Averaged SAR: SAR(1g) = 0.366 W/kg; SAR(10g) = 0.217 W/kg

Maximum value of SAR (interpolated) = 0.568 W/kg

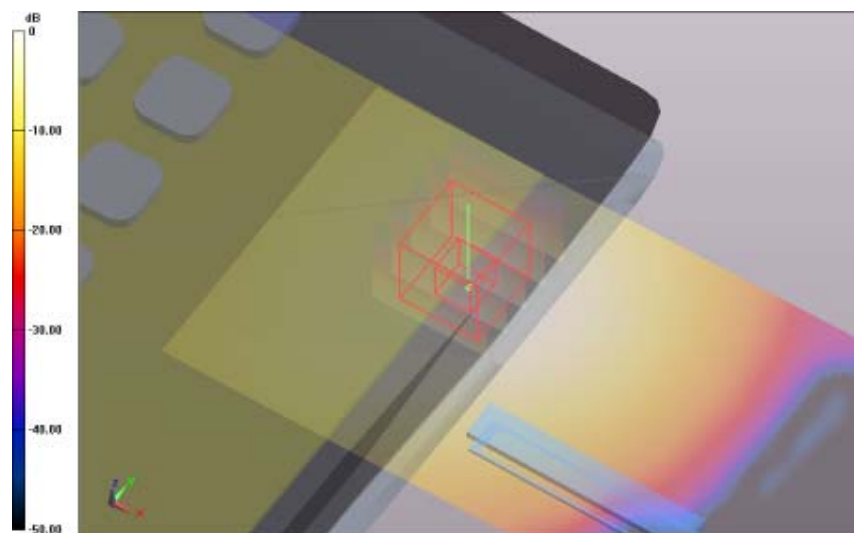


0 dB = 0.369 W/kg = -4.33 dBW/kg

SAR Measurement Plot 54



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

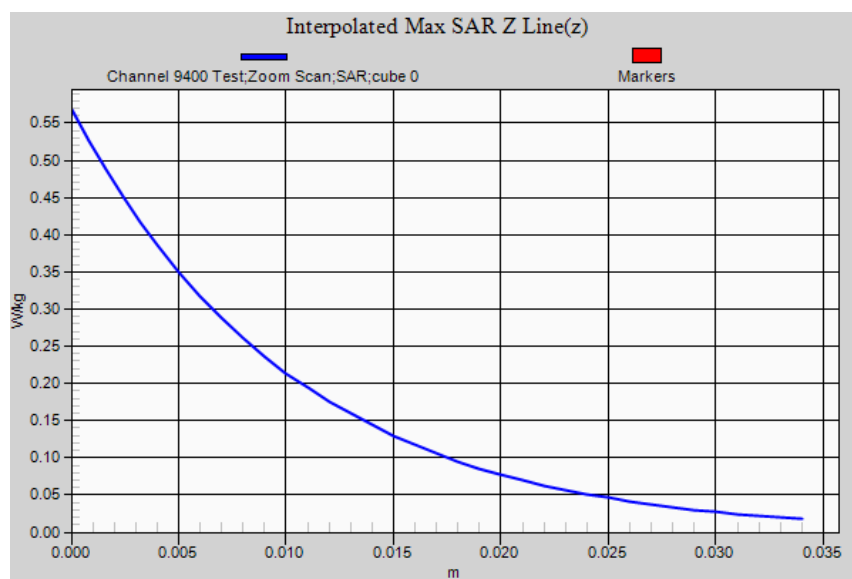

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz 3G FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 24-11-14**

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 2 1850 MHz; Frequency: 1908 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1907.5$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 53.7$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 24-11-14/Channel 9538 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.367 W/kg

Lap Held Antenna OUT 24-11-14/Channel 9538 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 8.072 V/m; **Power Drift = -0.10 dB**

Averaged SAR: SAR(1g) = 0.360 W/kg; SAR(10g) = 0.212 W/kg

Maximum value of SAR (interpolated) = 0.572 W/kg

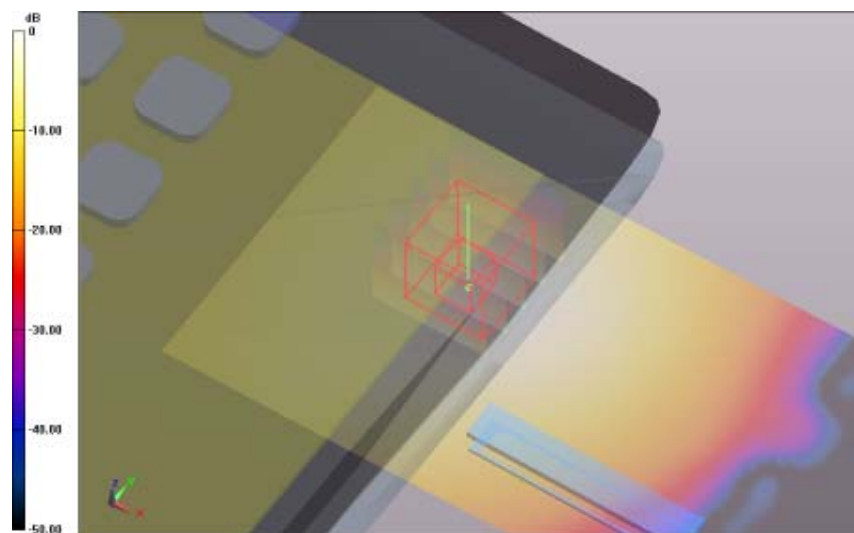


0 dB = 0.367 W/kg = -4.35 dBW/kg

SAR Measurement Plot 55



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

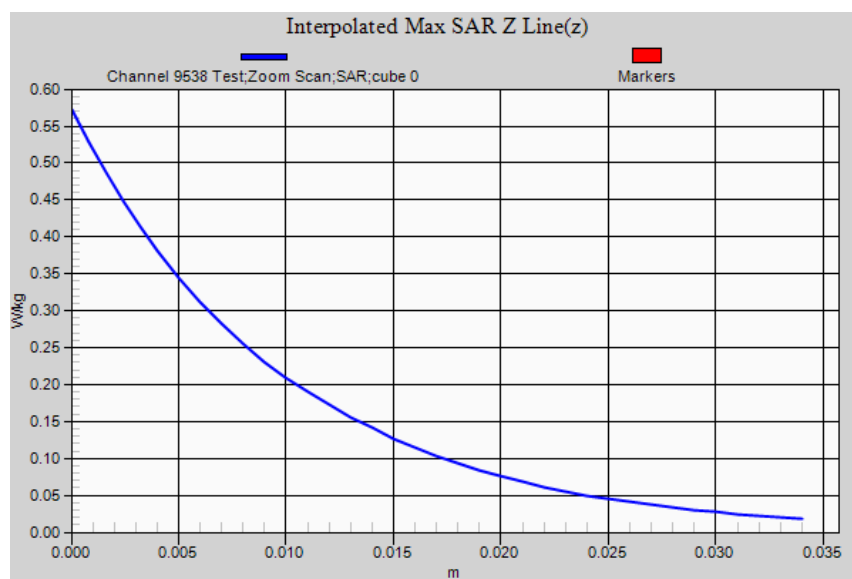

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 1900 MHz 3G FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429

Configuration: Edge 2 Antenna IN 24-11-14

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 2 1850 MHz; Frequency: 1852 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1852.5$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 53.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 24-11-14/Channel 9262 Test/Area Scan (111x61x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.602 W/kg

Edge 2 Antenna IN 24-11-14/Channel 9262 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 16.342 V/m; **Power Drift = -0.19 dB**


Averaged SAR: SAR(1g) = 0.675 W/kg; SAR(10g) = 0.254 W/kg

Maximum value of SAR (interpolated) = 1.480 W/kg

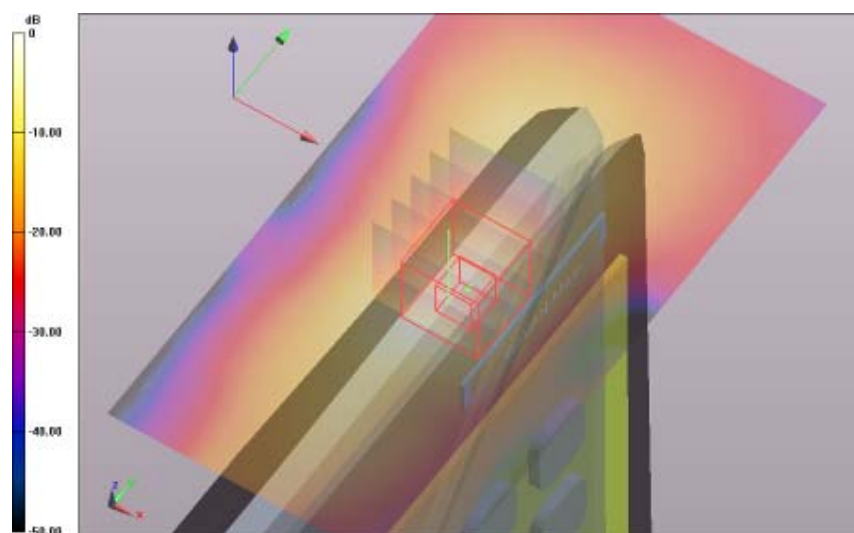

0 dB = 0.602 W/kg = -2.20 dBW/kg

SAR Measurement Plot 56

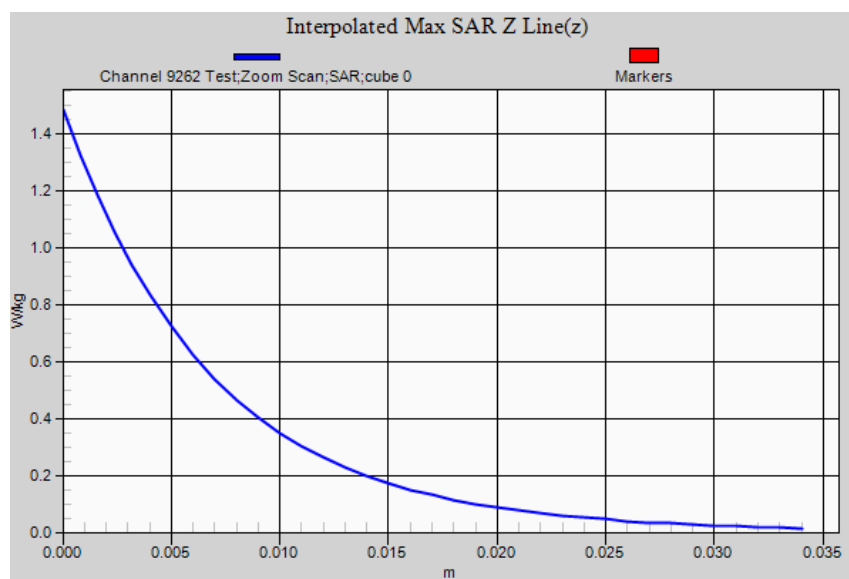

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 1900 MHz 3G FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429

Configuration: Edge 2 Antenna IN 24-11-14

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 2 1850 MHz; Frequency: 1880 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1880$ MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 53.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 24-11-14/Channel 9400 Test/Area Scan (111x61x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.537 W/kg

Edge 2 Antenna IN 24-11-14/Channel 9400 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 14.910 V/m; **Power Drift = -0.21 dB**

Averaged SAR: SAR(1g) = 0.577 W/kg; SAR(10g) = 0.217 W/kg

Maximum value of SAR (interpolated) = 1.300 W/kg

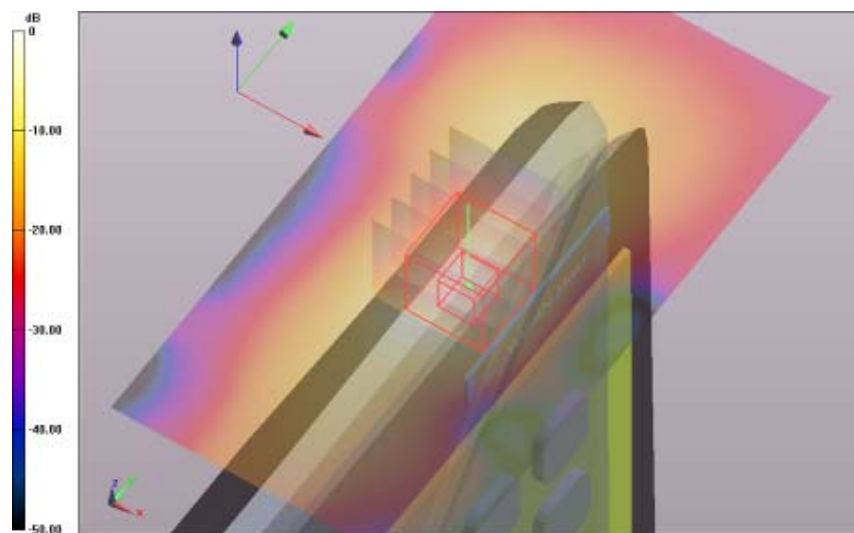


0 dB = 0.537 W/kg = -2.70 dBW/kg

SAR Measurement Plot 57



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

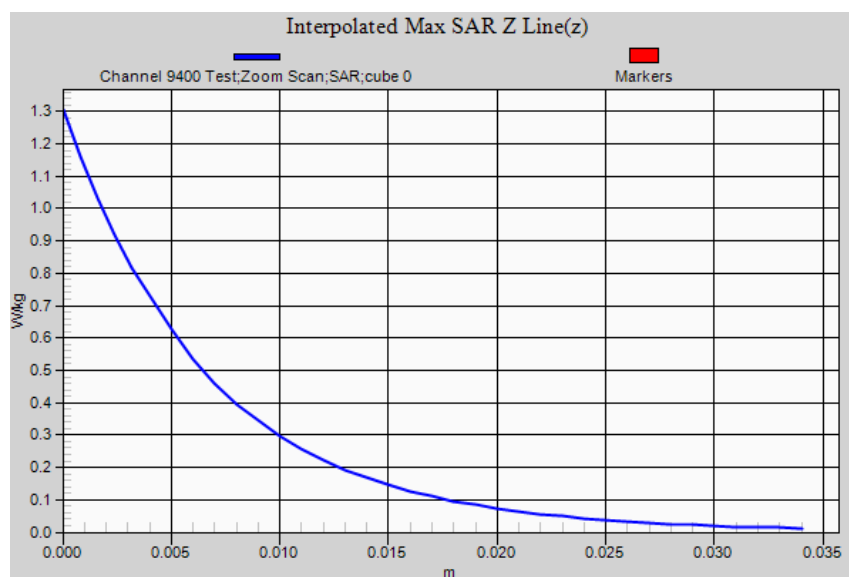

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 1900 MHz 3G FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429

Configuration: Edge 2 Antenna IN 24-11-14

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 2 1850 MHz; Frequency: 1908 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1907.5$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 53.7$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 24-11-14/Channel 9538 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.561 W/kg

Edge 2 Antenna IN 24-11-14/Channel 9538 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 15.003 V/m; **Power Drift = -0.03 dB**


Averaged SAR: SAR(1g) = 0.623 W/kg; SAR(10g) = 0.233 W/kg

Maximum value of SAR (interpolated) = 1.420 W/kg

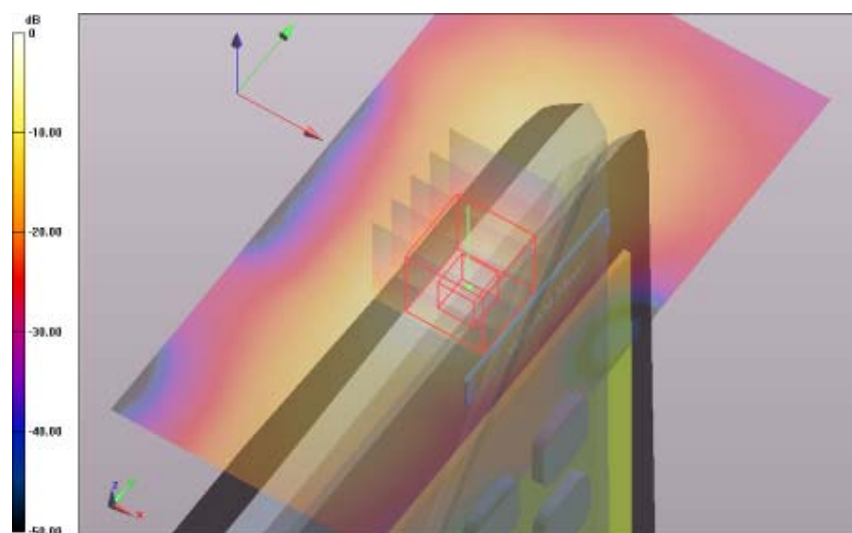

0 dB = 0.561 W/kg = -2.51 dBW/kg

SAR Measurement Plot 58

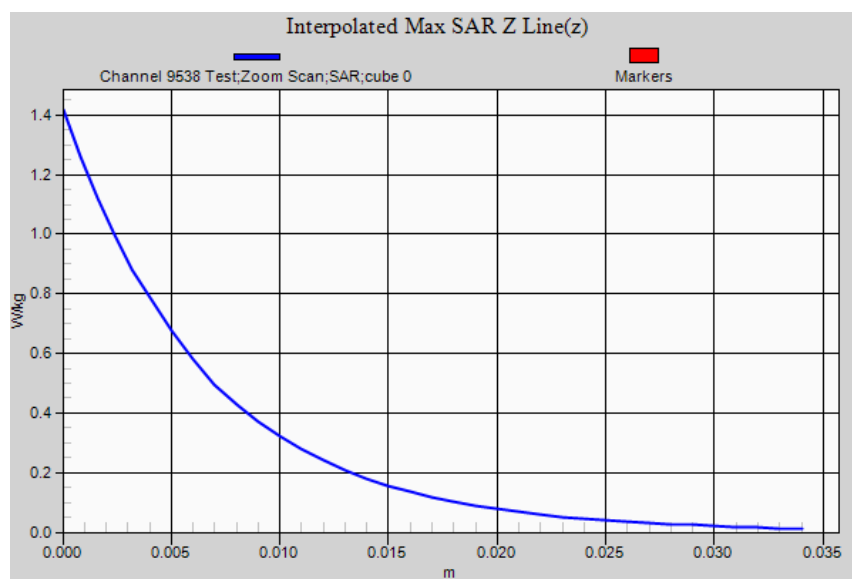

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 1900 MHz 3G FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429

Configuration: Edge 3 Antenna OUT 24-11-14

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 2 1850 MHz; Frequency: 1852 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1852.5$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 53.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 24-11-14/Channel 9262 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.328 W/kg

Edge 3 Antenna OUT 24-11-14/Channel 9262 Test/Zoom Scan (21x26x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.783 V/m; **Power Drift = 0.02 dB**


Averaged SAR: SAR(1g) = 0.328 W/kg; SAR(10g) = 0.192 W/kg

Maximum value of SAR (interpolated) = 0.473 W/kg

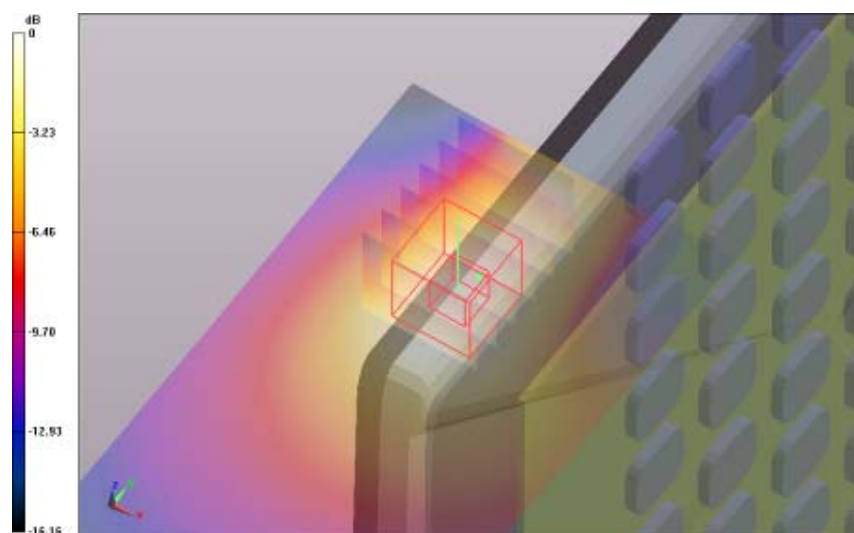

0 dB = 0.328 W/kg = -4.84 dBW/kg

SAR Measurement Plot 59

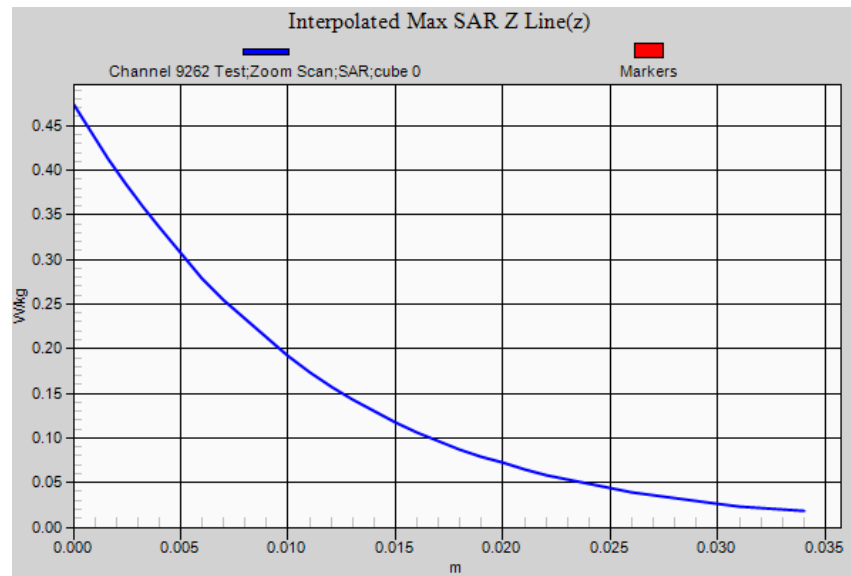

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz 3G FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 24-11-14**

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 2 1850 MHz; Frequency: 1880 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1880$ MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 53.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 24-11-14/Channel 9400 Test/Area Scan (111x61x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.297 W/kg

Edge 3 Antenna OUT 24-11-14/Channel 9400 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 7.399 V/m; **Power Drift = -0.06 dB**

Averaged SAR: SAR(1g) = 0.294 W/kg; SAR(10g) = 0.173 W/kg

Maximum value of SAR (interpolated) = 0.424 W/kg

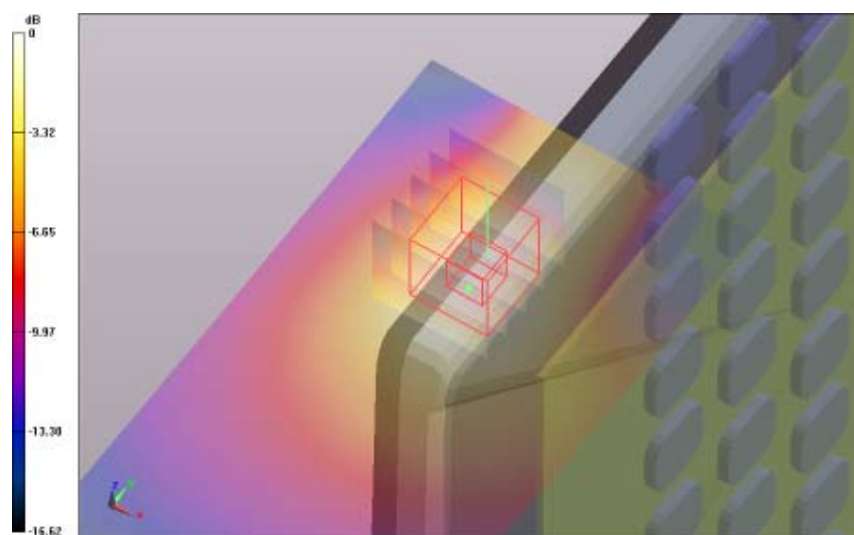


0 dB = 0.297 W/kg = -5.27 dBW/kg

SAR Measurement Plot 60



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

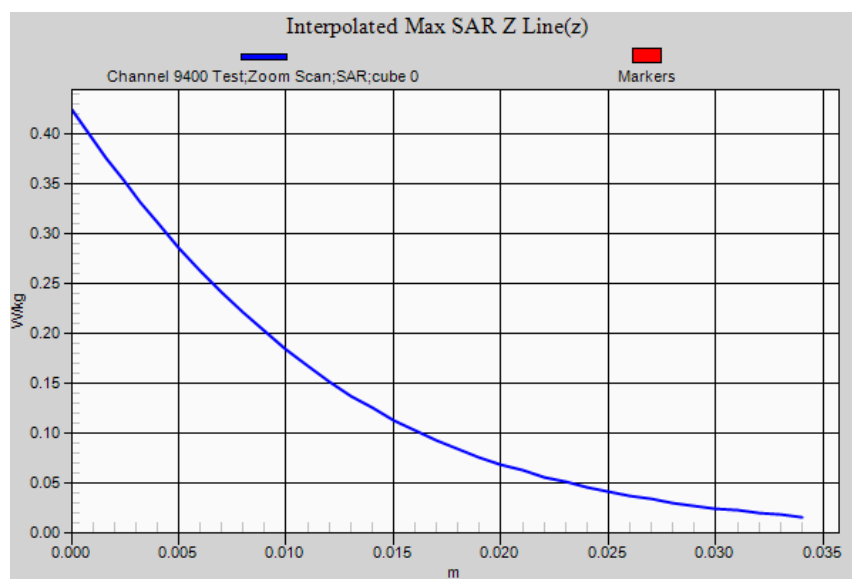

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 1900 MHz 3G FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429

Configuration: Edge 3 Antenna OUT 24-11-14

Communication System: 0 - WCDMA - UMTS (0); Communication System Band: Band 2 1850 MHz; Frequency: 1908 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1907.5$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 53.7$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 24-11-14/Channel 9538 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.289 W/kg

Edge 3 Antenna OUT 24-11-14/Channel 9538 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.358 V/m; **Power Drift = -0.04 dB**

Averaged SAR: SAR(1g) = 0.279 W/kg; SAR(10g) = 0.165 W/kg

Maximum value of SAR (interpolated) = 0.416 W/kg

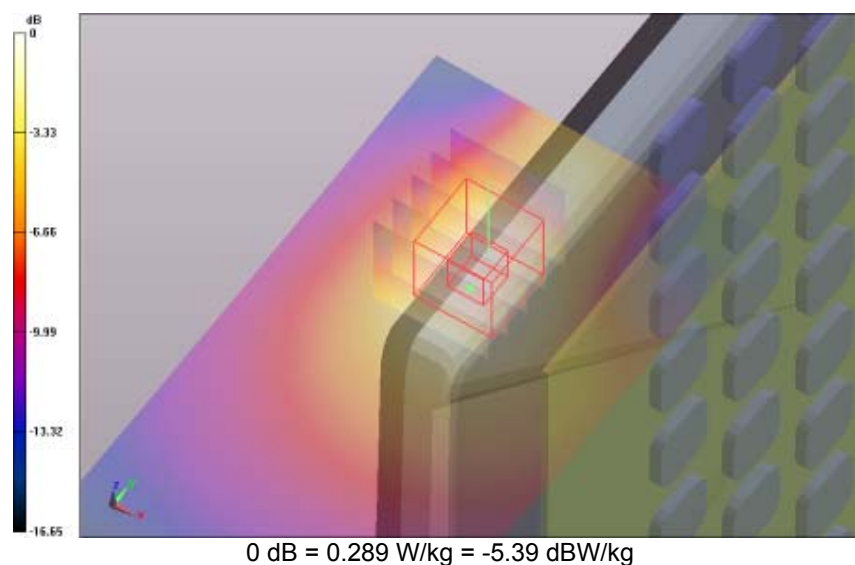


SAR Measurement Plot 61



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

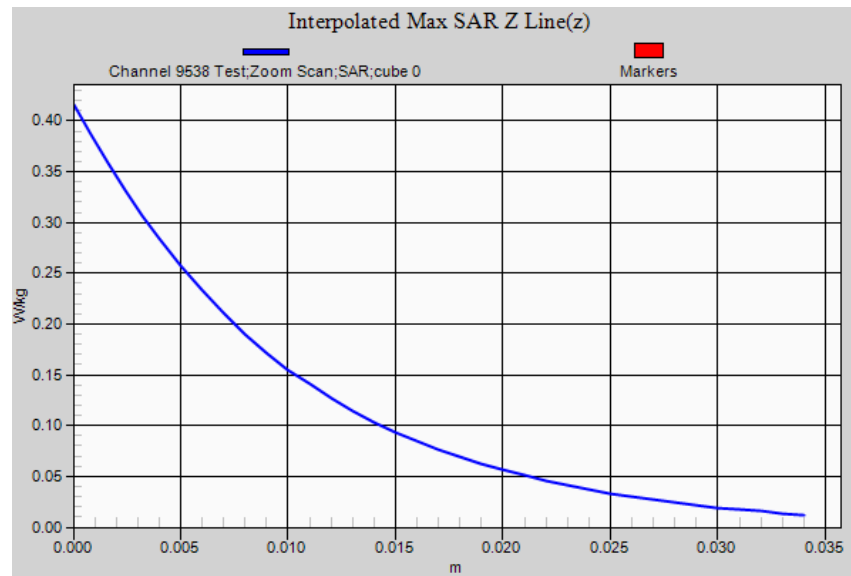

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 1900 MHz 3G FCC.da52:7

DUT Name: Dipole 1950 MHz, Type: DV1950V3, Serial: 1113

Configuration: System Check 24-11-14

Communication System: 0 - CW (0); Communication System Band: 1950 MHz; Frequency: 1950 MHz,
Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1950$ MHz; $\sigma = 1.58$ S/m; $\epsilon_r = 53.6$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.67,4.67,4.67); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Check 24-11-14/Channel 1 Test/Area Scan (51x51x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;
Maximum value of SAR (interpolated) = 12.800 W/kg

System Check 24-11-14/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 89.895 V/m; **Power Drift = 0.00 dB**

Averaged SAR: SAR(1g) = 10.100 W/kg; SAR(10g) = 5.210 W/kg

Maximum value of SAR (interpolated) = 17.500 W/kg

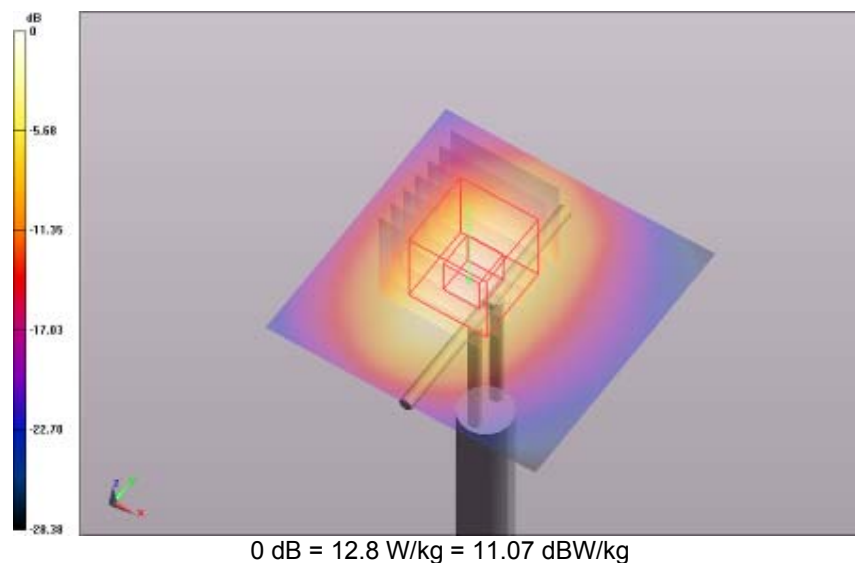


0 dB = 12.8 W/kg = 11.07 dBW/kg

SAR Measurement Plot 62



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

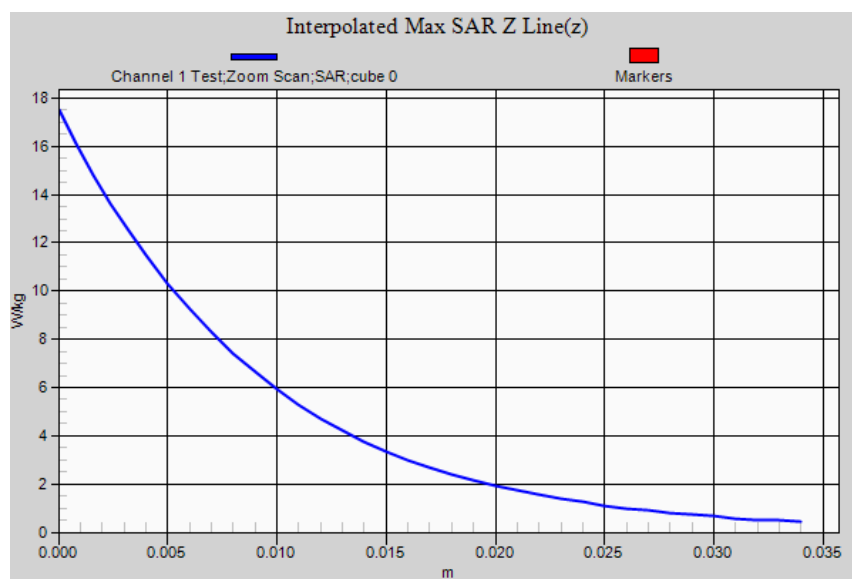

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz EVDO FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 0 (836 MHz); Frequency: 824.7 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=824.5$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 56.9$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 1013 Test/Area Scan (61x111x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.407 W/kg**Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 1013 Test/Zoom Scan (21x21x36)/Cube 0:**Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 16.187 V/m; Power Drift = -0.04 dB**Averaged SAR: SAR(1g) = 0.397 W/kg; SAR(10g) = 0.274 W/kg**

Maximum value of SAR (interpolated) = 0.495 W/kg

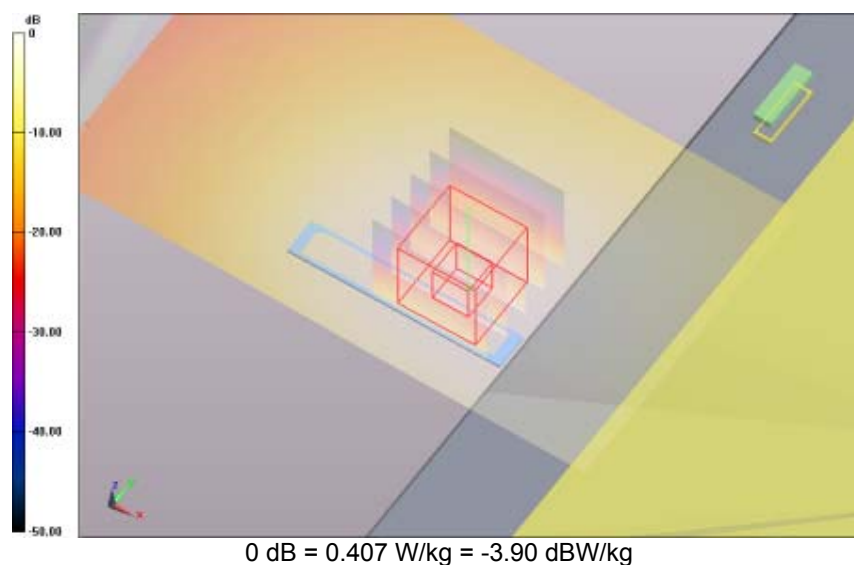

SAR Measurement Plot 63

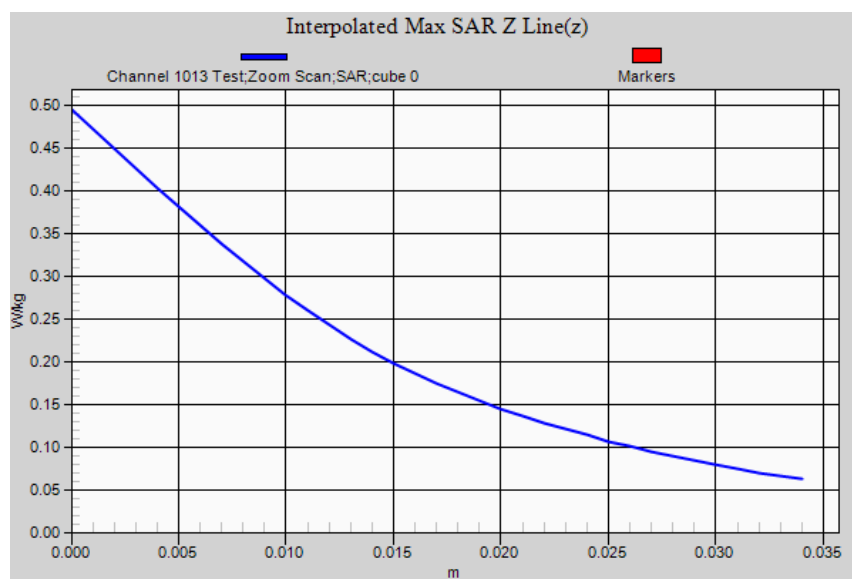

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz EVDO FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 0 (836 MHz); Frequency: 836.5 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=836.5$ MHz; $\sigma = 1.00$ S/m; $\epsilon_r = 56.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 0384 Test/Area Scan (61x111x1): Interpolated grid:
dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.408 W/kg

Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 0384 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 16.298 V/m; **Power Drift = -0.02 dB**

Averaged SAR: SAR(1g) = 0.401 W/kg; SAR(10g) = 0.277 W/kg

Maximum value of SAR (interpolated) = 0.505 W/kg

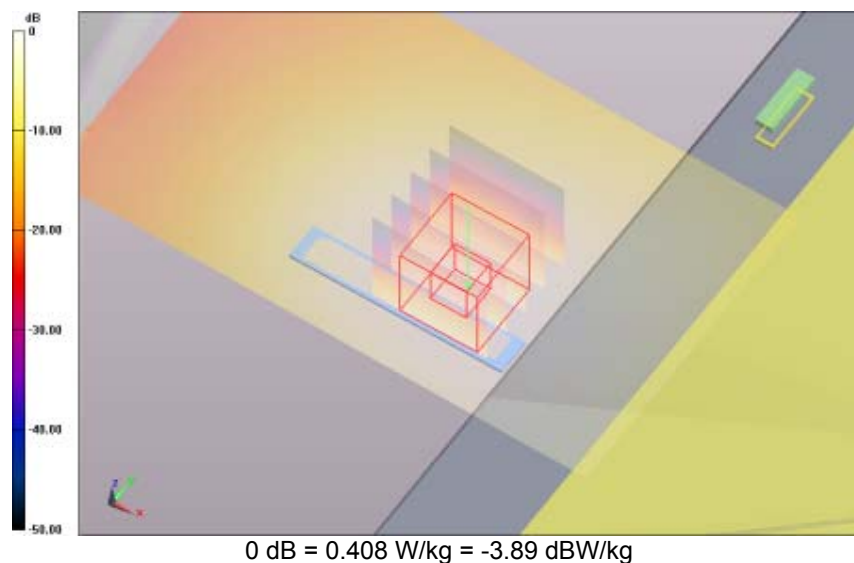


SAR Measurement Plot 64



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

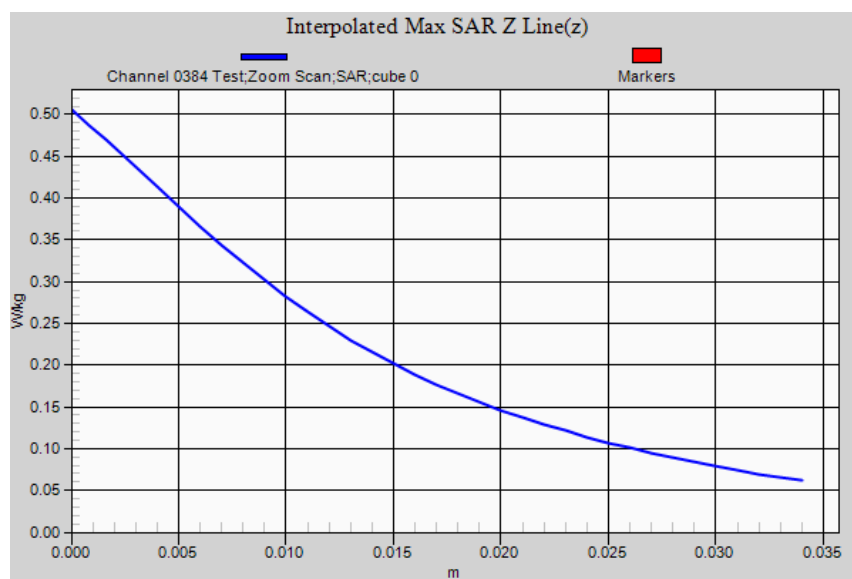

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz EVDO FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 0 (836 MHz); Frequency: 848.3 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=848.5$ MHz; $\sigma = 1.01$ S/m; $\epsilon_r = 56.7$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 0777 Test/Area Scan (61x111x1): Interpolated grid:
dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.365 W/kg

Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 0777 Test/Zoom Scan (21x21x36)/Cube 0:
Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 15.333 V/m; **Power Drift = 0.00 dB**

Averaged SAR: SAR(1g) = 0.353 W/kg; SAR(10g) = 0.243 W/kg

Maximum value of SAR (interpolated) = 0.447 W/kg

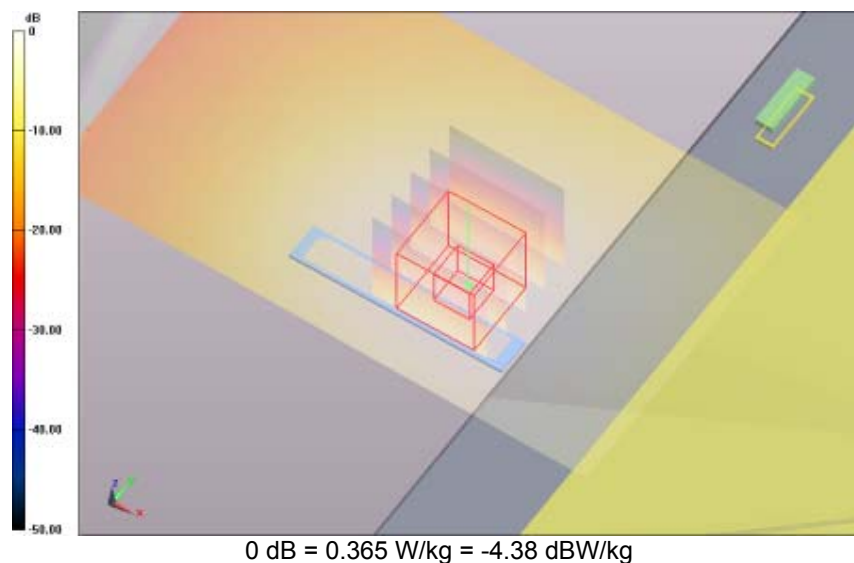


SAR Measurement Plot 65



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

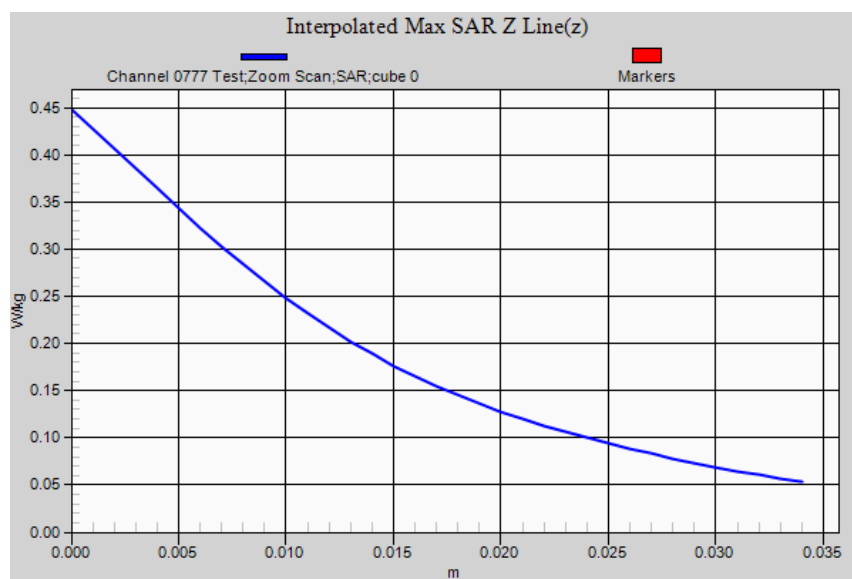

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz EVDO FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 0 (836 MHz); Frequency: 824.7 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=824.5$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 56.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 29-10-14/Channel 1013 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.584 W/kg

Lap Held Antenna OUT 29-10-14/Channel 1013 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 24.223 V/m; **Power Drift = -0.10 dB**

Averaged SAR: SAR(1g) = 0.578 W/kg; SAR(10g) = 0.380 W/kg

Maximum value of SAR (interpolated) = 0.773 W/kg

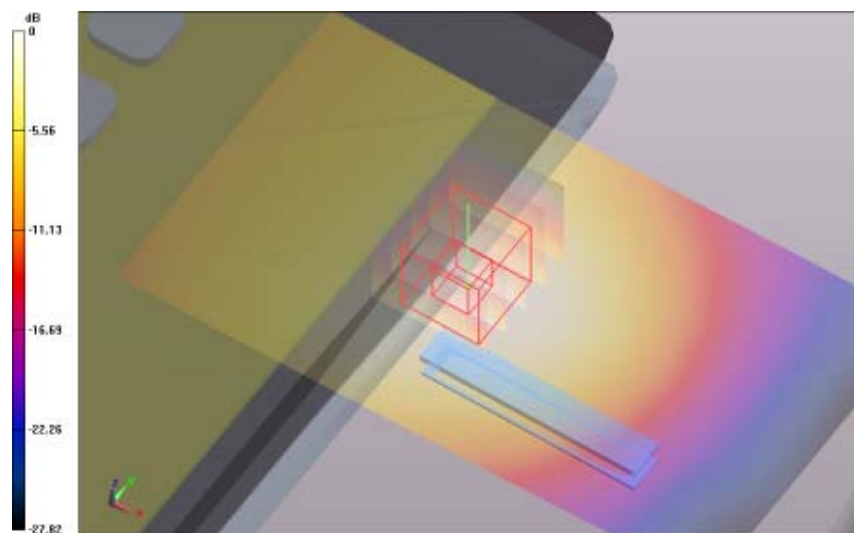


0 dB = 0.584 W/kg = -2.34 dBW/kg

SAR Measurement Plot 66



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

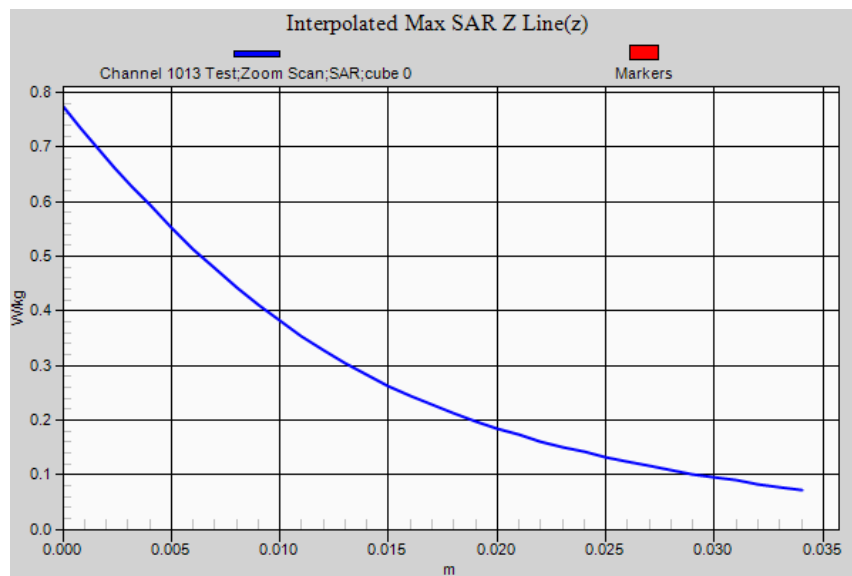

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz EVDO FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 0 (836 MHz); Frequency: 836.5 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=836.5$ MHz; $\sigma = 1.00$ S/m; $\epsilon_r = 56.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 29-10-14/Channel 0384 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.598 W/kg

Lap Held Antenna OUT 29-10-14/Channel 0384 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 24.428 V/m; **Power Drift = -0.02 dB**

Averaged SAR: SAR(1g) = 0.588 W/kg; SAR(10g) = 0.387 W/kg

Maximum value of SAR (interpolated) = 0.780 W/kg

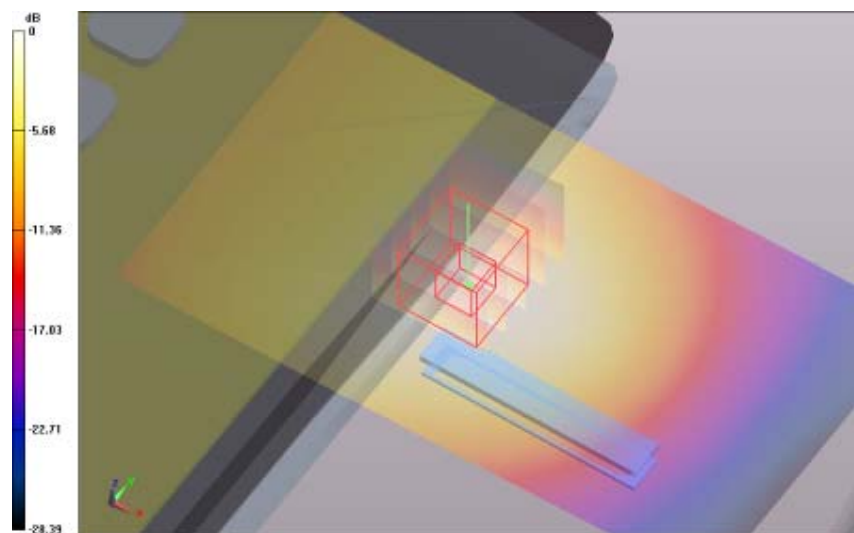


0 dB = 0.598 W/kg = -2.23 dBW/kg

SAR Measurement Plot 67



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

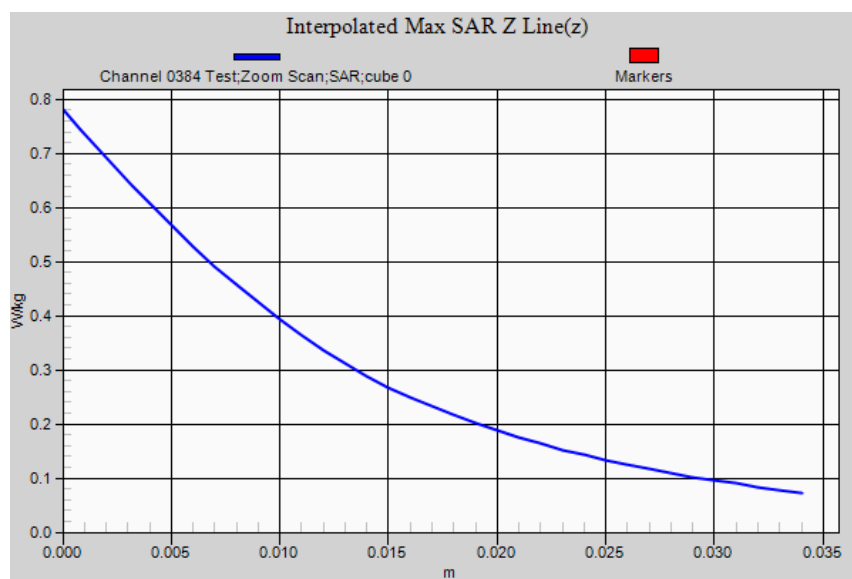

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz EVDO FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 0 (836 MHz); Frequency: 848.3 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=848.5$ MHz; $\sigma = 1.01$ S/m; $\epsilon_r = 56.7$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 29-10-14/Channel 0777 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.532 W/kg

Lap Held Antenna OUT 29-10-14/Channel 0777 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 23.023 V/m; **Power Drift = -0.01 dB**

Averaged SAR: SAR(1g) = 0.524 W/kg; SAR(10g) = 0.345 W/kg

Maximum value of SAR (interpolated) = 0.703 W/kg

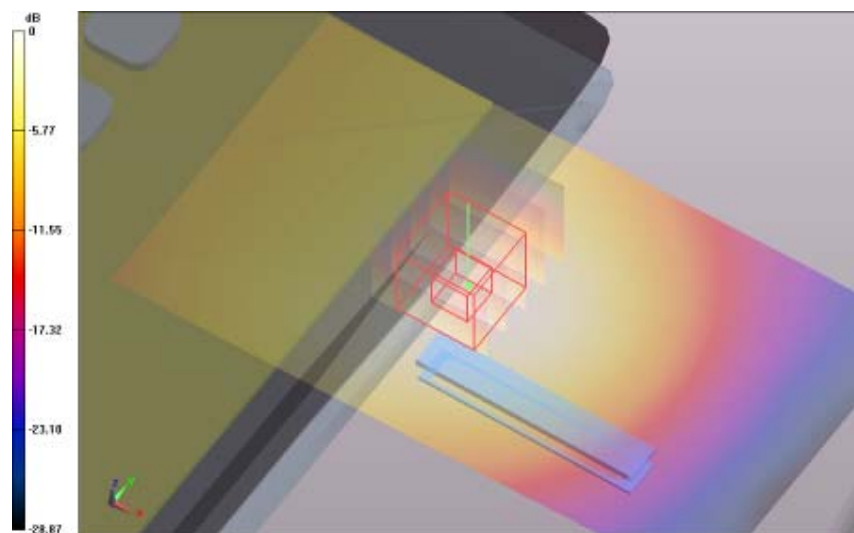


0 dB = 0.532 W/kg = -2.74 dBW/kg

SAR Measurement Plot 68



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

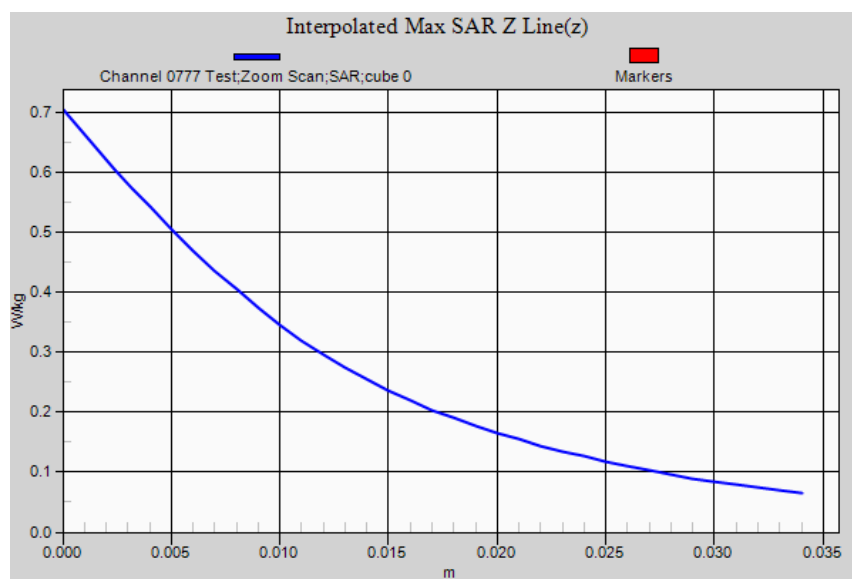

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz EVDO FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 0 (836 MHz); Frequency: 824.7 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=824.5$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 56.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 29-10-14/Channel 1013 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.145 W/kg

Edge 2 Antenna IN 29-10-14/Channel 1013 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 11.041 V/m; **Power Drift = -0.11 dB**

Averaged SAR: SAR(1g) = 0.178 W/kg; SAR(10g) = 0.066 W/kg

Maximum value of SAR (interpolated) = 0.637 W/kg

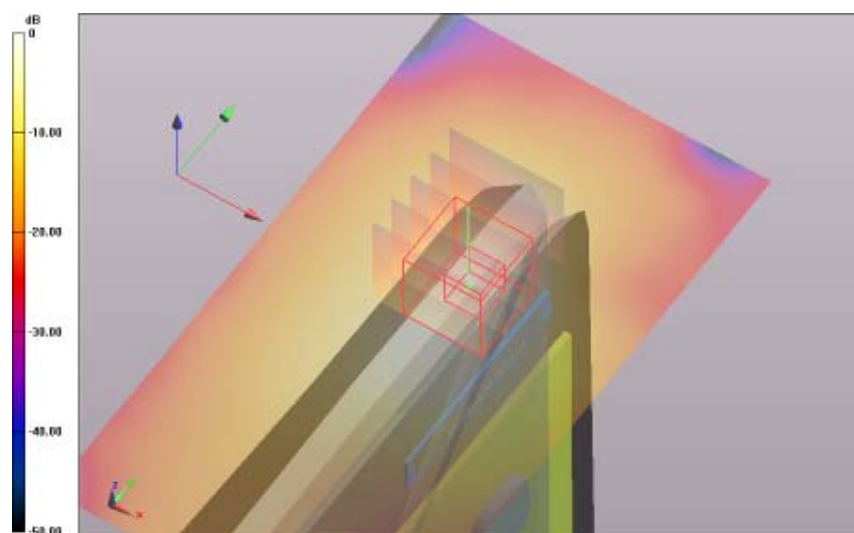


0 dB = 0.145 W/kg = -8.39 dBW/kg

SAR Measurement Plot 69



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

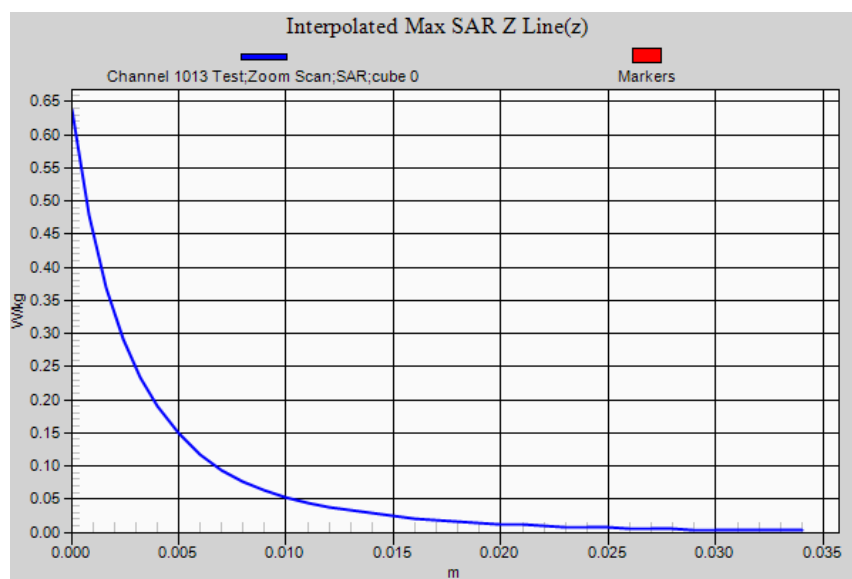

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz EVDO FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 0 (836 MHz); Frequency: 836.5 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=836.5$ MHz; $\sigma = 1.00$ S/m; $\epsilon_r = 56.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 29-10-14/Channel 0384 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.156 W/kg

Edge 2 Antenna IN 29-10-14/Channel 0384 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 11.491 V/m; **Power Drift = -0.01 dB**

Averaged SAR: SAR(1g) = 0.186 W/kg; SAR(10g) = 0.071 W/kg

Maximum value of SAR (interpolated) = 0.641 W/kg

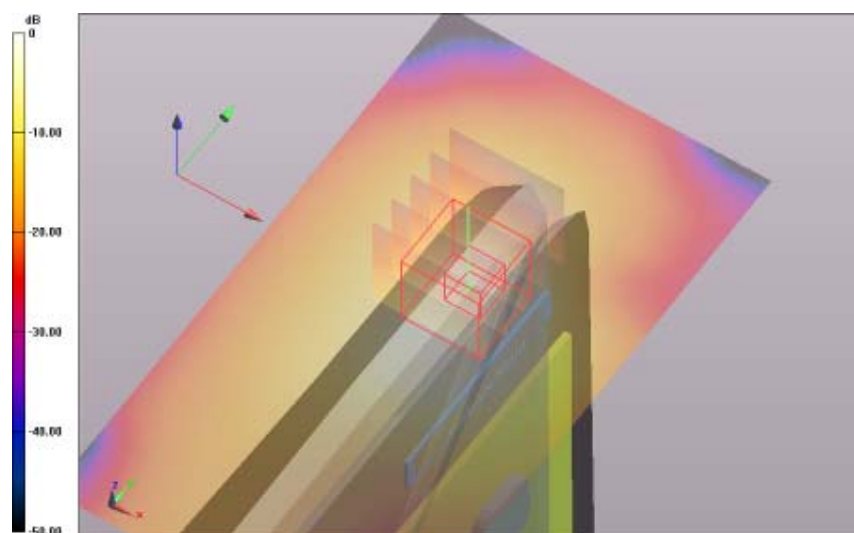


0 dB = 0.156 W/kg = -8.07 dBW/kg

SAR Measurement Plot 70



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

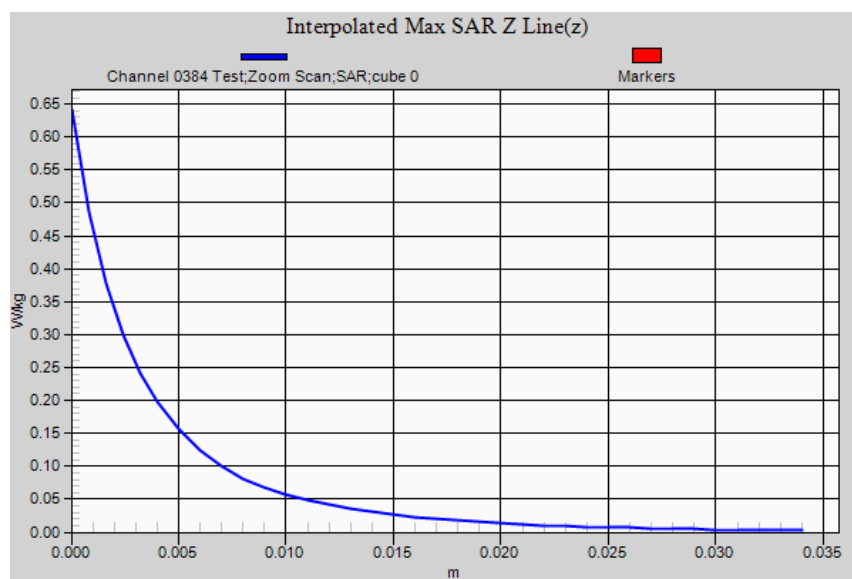

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz EVDO FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 0 (836 MHz); Frequency: 848.3 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=848.5$ MHz; $\sigma = 1.01$ S/m; $\epsilon_r = 56.7$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 29-10-14/Channel 0777 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.149 W/kg

Edge 2 Antenna IN 29-10-14/Channel 0777 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 11.081 V/m; **Power Drift = 0.15 dB**

Averaged SAR: SAR(1g) = 0.178 W/kg; SAR(10g) = 0.068 W/kg

Maximum value of SAR (interpolated) = 0.631 W/kg

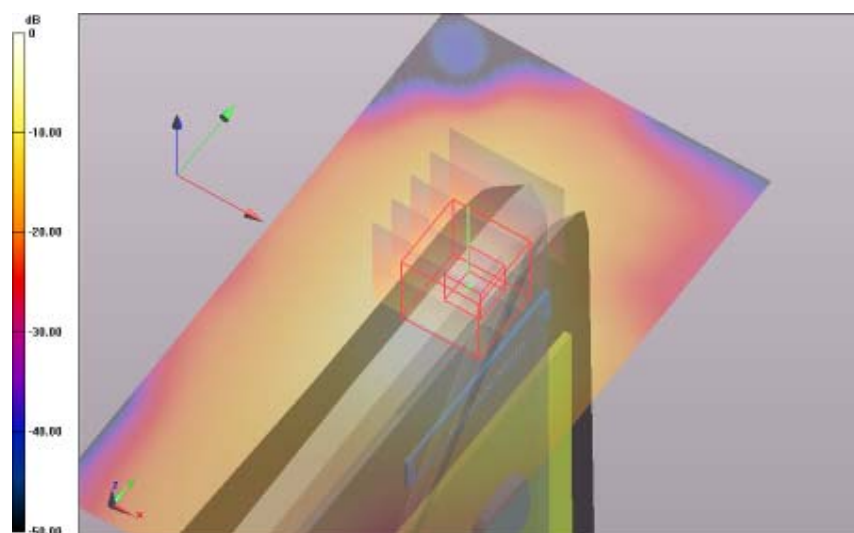


0 dB = 0.149 W/kg = -8.27 dBW/kg

SAR Measurement Plot 71



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

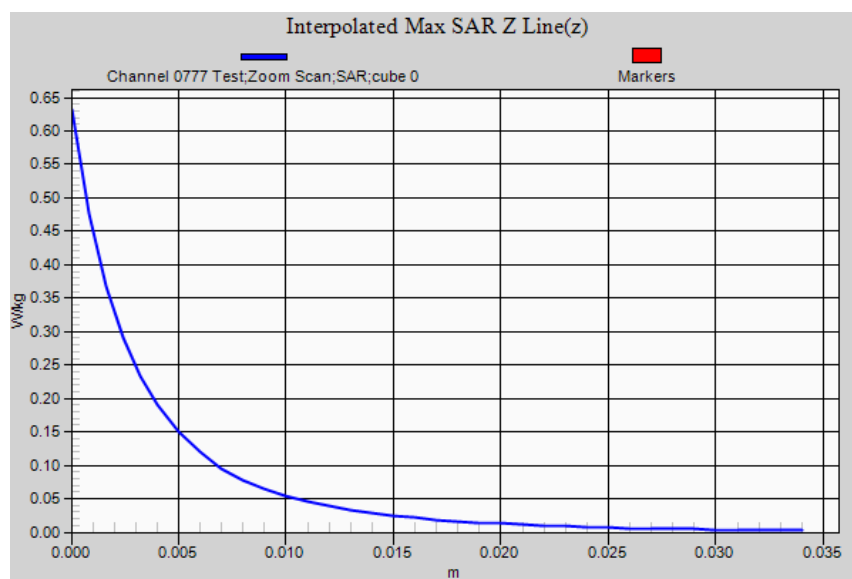

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz EVDO FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 0 (836 MHz); Frequency: 824.7 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=824.5$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 56.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 29-10-14/Channel 1013 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.097 W/kg

Edge 3 Antenna OUT 29-10-14/Channel 1013 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 5.882 V/m; **Power Drift = 0.00 dB**

Averaged SAR: SAR(1g) = 0.101 W/kg; SAR(10g) = 0.068 W/kg

Maximum value of SAR (interpolated) = 0.136 W/kg

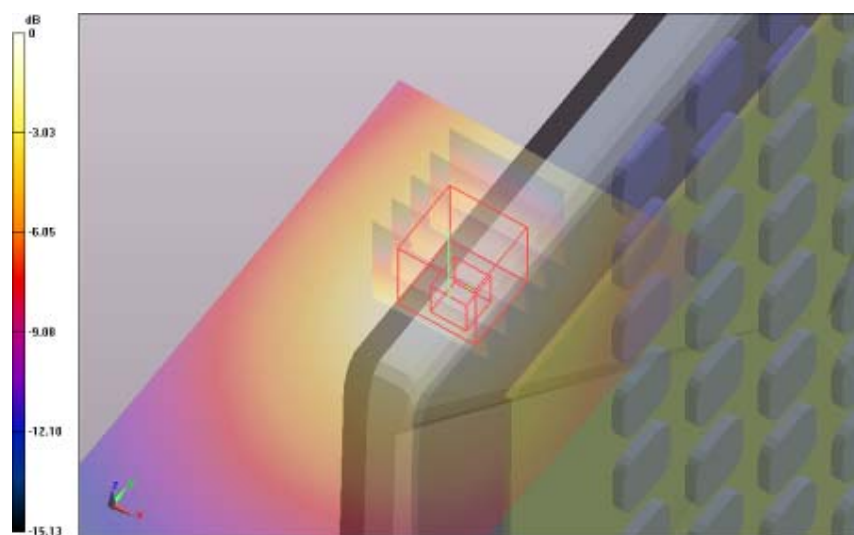


0 dB = 0.0969 W/kg = -10.14 dBW/kg

SAR Measurement Plot 72



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

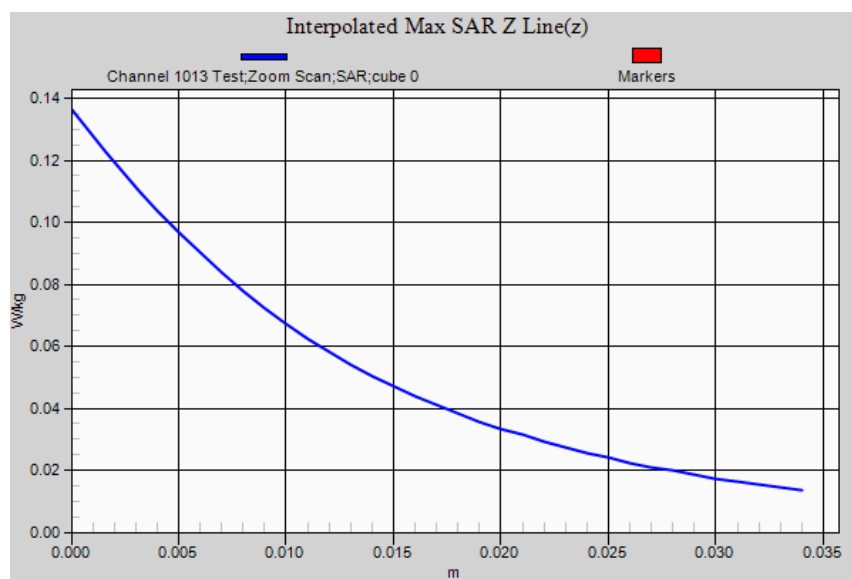

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz EVDO FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 0 (836 MHz); Frequency: 836.5 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=836.5$ MHz; $\sigma = 1.00$ S/m; $\epsilon_r = 56.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 29-10-14/Channel 0384 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.110 W/kg

Edge 3 Antenna OUT 29-10-14/Channel 0384 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 5.999 V/m; **Power Drift = 0.05 dB**

Averaged SAR: SAR(1g) = 0.114 W/kg; SAR(10g) = 0.077 W/kg

Maximum value of SAR (interpolated) = 0.158 W/kg

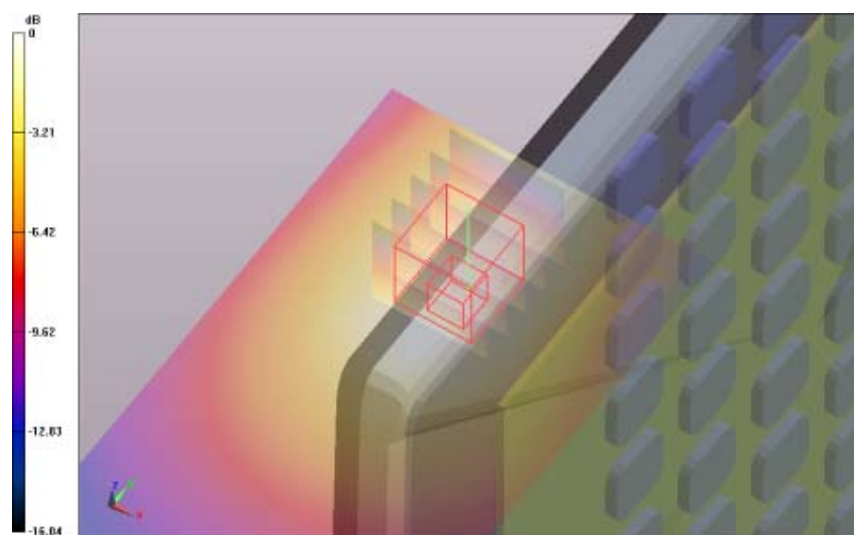


0 dB = 0.110 W/kg = -9.59 dBW/kg

SAR Measurement Plot 73



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

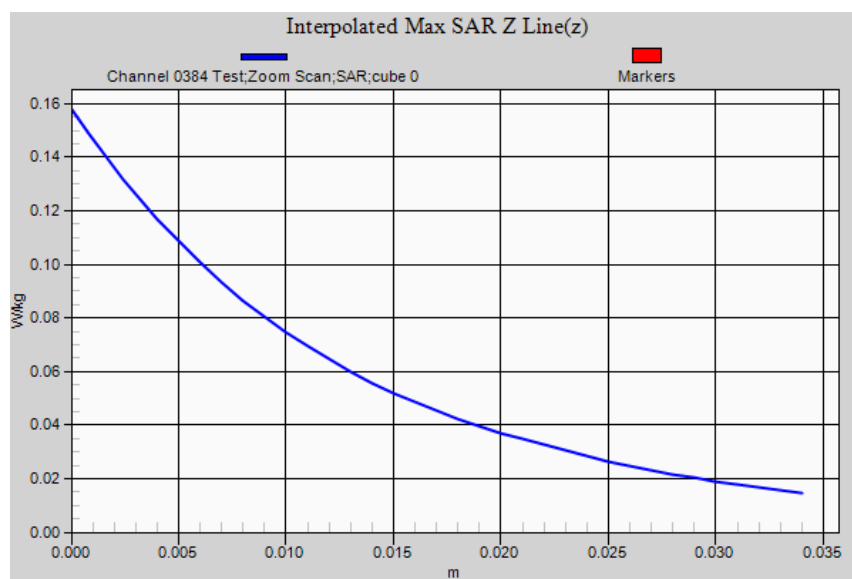

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 850 MHz EVDO FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 0 (836 MHz); Frequency: 848.3 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=848.5$ MHz; $\sigma = 1.01$ S/m; $\epsilon_r = 56.7$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 29-10-14/Channel 0777 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.105 W/kg

Edge 3 Antenna OUT 29-10-14/Channel 0777 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 5.834 V/m; **Power Drift = 0.02 dB**

Averaged SAR: SAR(1g) = 0.109 W/kg; SAR(10g) = 0.073 W/kg

Maximum value of SAR (interpolated) = 0.151 W/kg

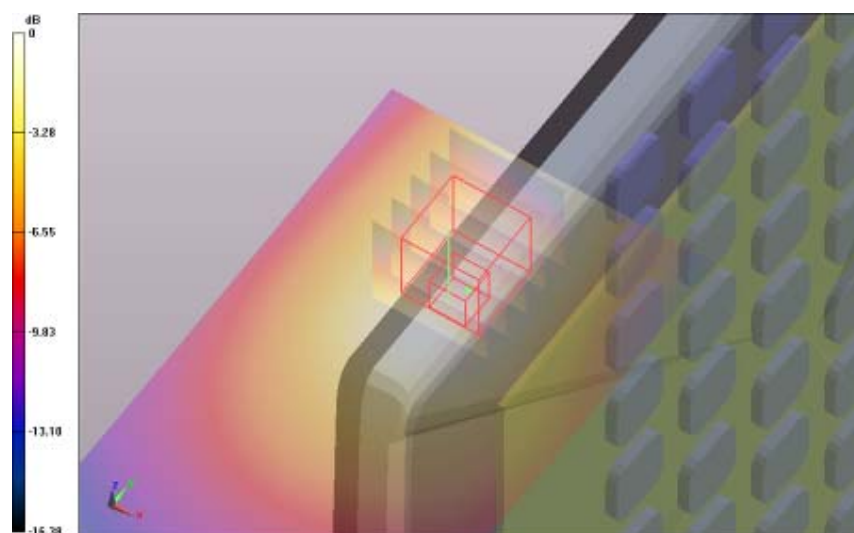


0 dB = 0.105 W/kg = -9.79 dBW/kg

SAR Measurement Plot 74



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

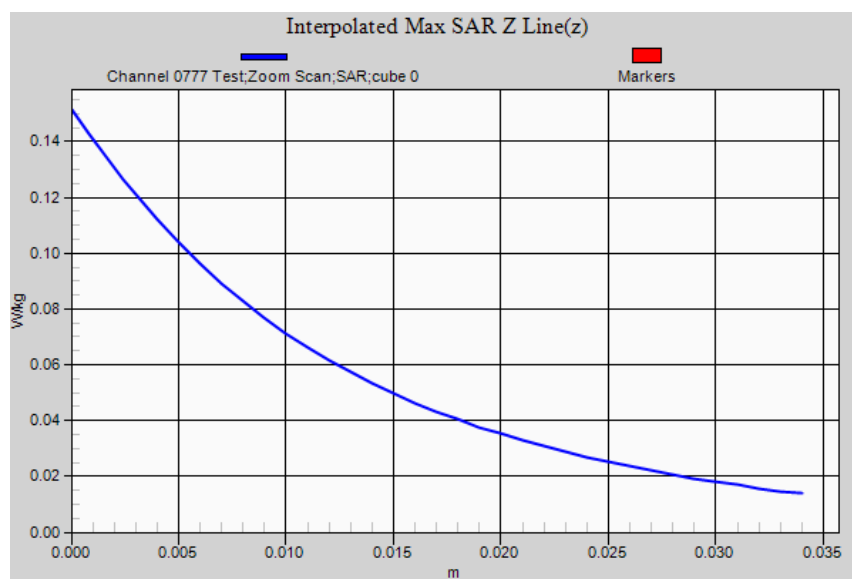

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 810 MHz EVDO FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 10 (810 MHz); Frequency: 817.9 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=818$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 57.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 476 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.409 W/kg**Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 476 Test/Zoom Scan (21x21x36)/Cube 0:**

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 15.512 V/m; Power Drift = -0.00 dB

Averaged SAR: SAR(1g) = 0.408 W/kg; SAR(10g) = 0.283 W/kg

Maximum value of SAR (interpolated) = 0.506 W/kg

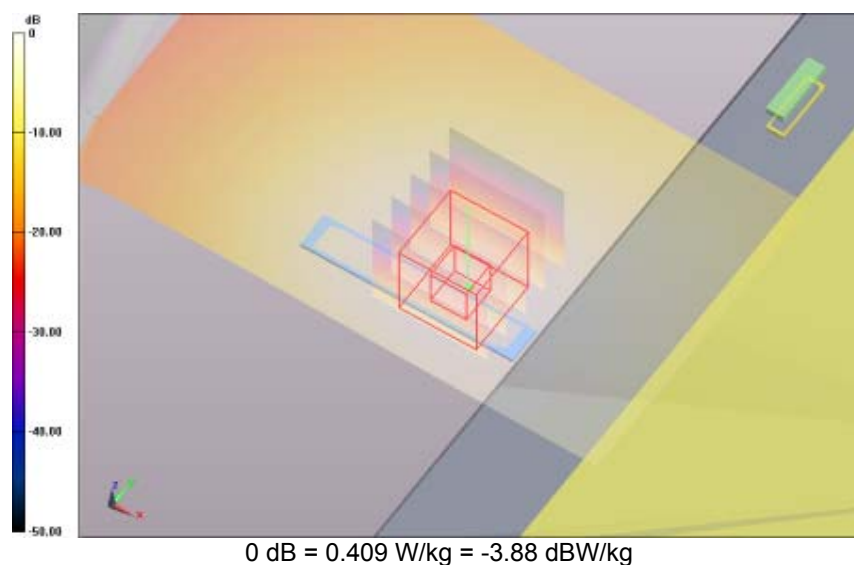


SAR Measurement Plot 75



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

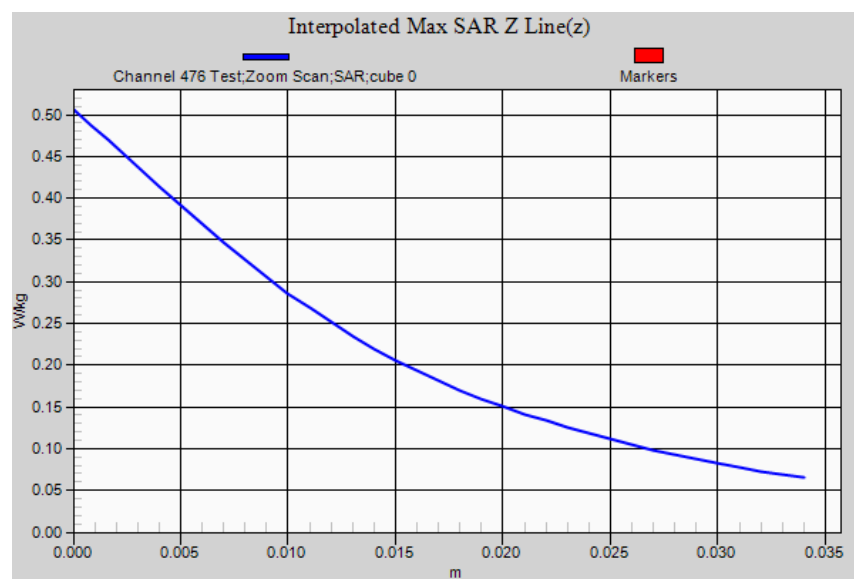

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 810 MHz EVDO FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 10 (810 MHz); Frequency: 820.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=820$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 57.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 560 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.411 W/kg

Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 560 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 15.528 V/m; **Power Drift = 0.01 dB**

Averaged SAR: SAR(1g) = 0.411 W/kg; SAR(10g) = 0.284 W/kg

Maximum value of SAR (interpolated) = 0.515 W/kg

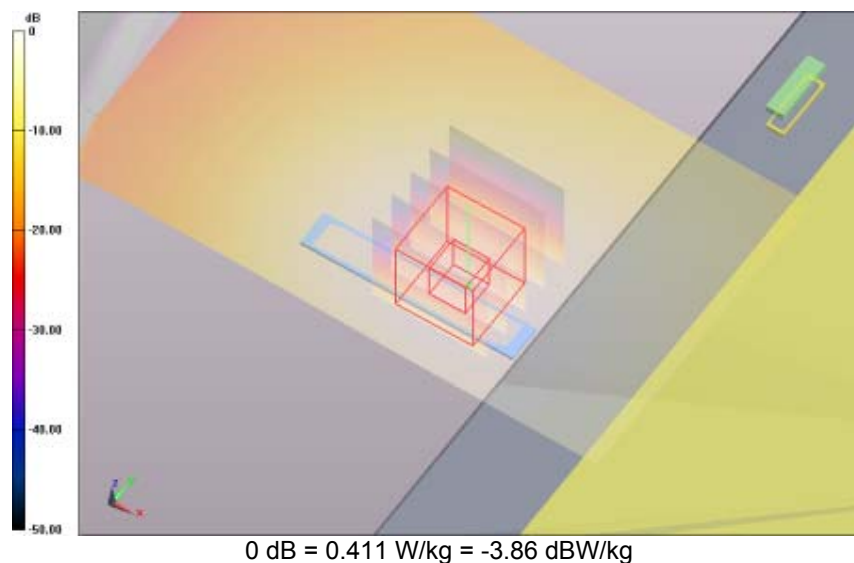


SAR Measurement Plot 76



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

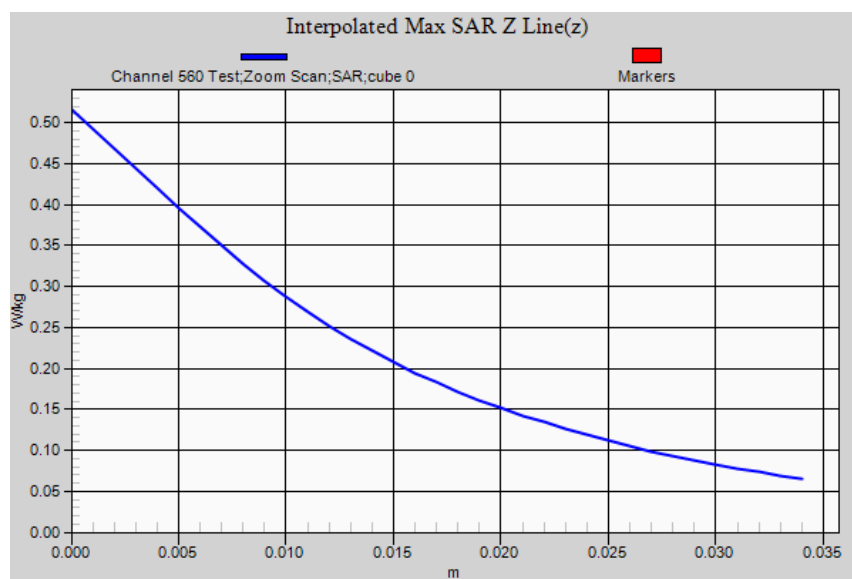

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 810 MHz EVDO FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 10 (810 MHz); Frequency: 823.1 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=823$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 56.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 684 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.409 W/kg

Bystander 25mm Spacing Antenna OUT 29-10-14/Channel 684 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 15.344 V/m; **Power Drift = 0.07 dB**

Averaged SAR: SAR(1g) = 0.404 W/kg; SAR(10g) = 0.279 W/kg

Maximum value of SAR (interpolated) = 0.508 W/kg

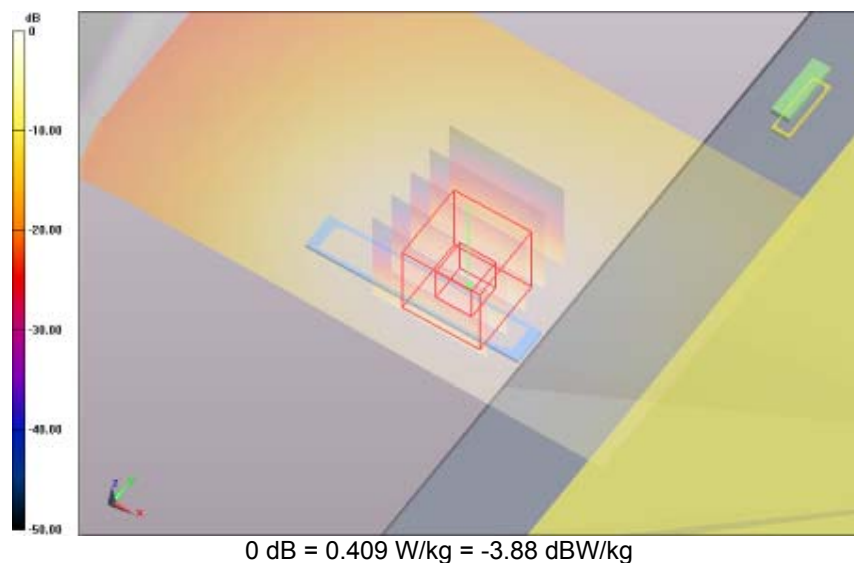


SAR Measurement Plot 77



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

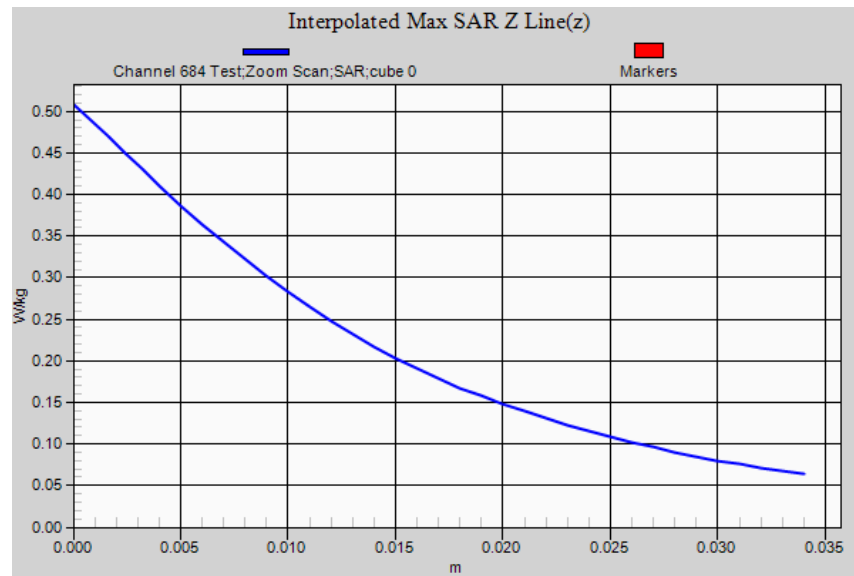

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 810 MHz EVDO FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 10 (810 MHz); Frequency: 817.9 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=818$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 57.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 29-10-14/Channel 476 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.638 W/kg

Lap Held Antenna OUT 29-10-14/Channel 476 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 20.723 V/m; **Power Drift = -0.01 dB**

Averaged SAR: SAR(1g) = 0.625 W/kg; SAR(10g) = 0.413 W/kg

Maximum value of SAR (interpolated) = 0.841 W/kg

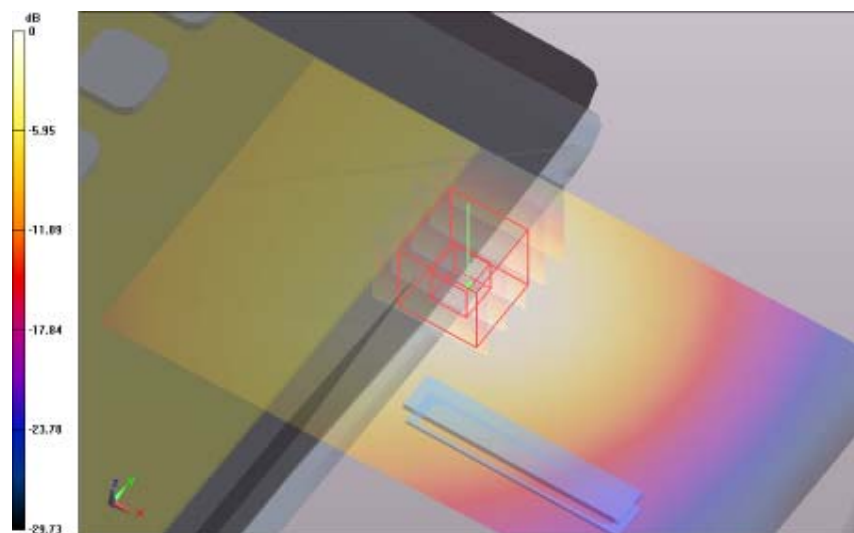


0 dB = 0.638 W/kg = -1.95 dBW/kg

SAR Measurement Plot 78



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

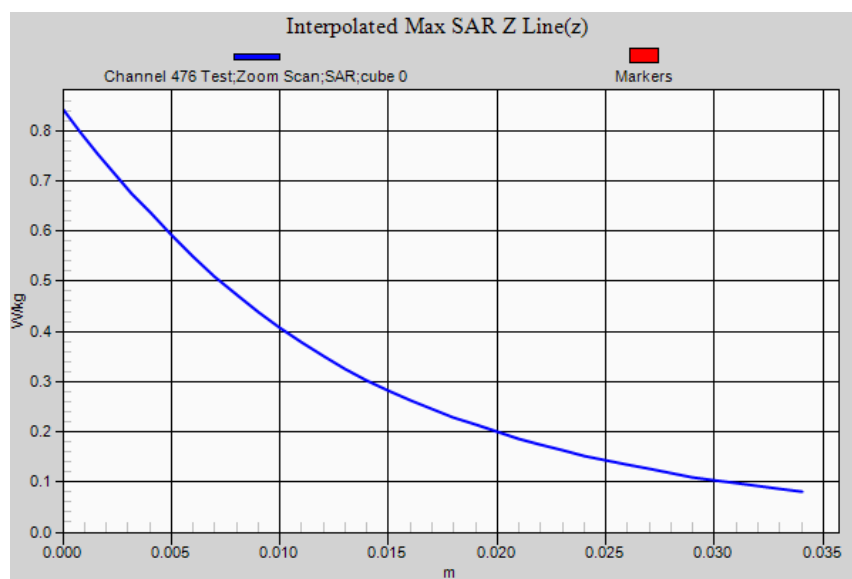

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 810 MHz EVDO FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 10 (810 MHz); Frequency: 820.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=820$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 57.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 29-10-14/Channel 560 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.639 W/kg

Lap Held Antenna OUT 29-10-14/Channel 560 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 20.910 V/m; **Power Drift = -0.06 dB**

Averaged SAR: SAR(1g) = 0.630 W/kg; SAR(10g) = 0.415 W/kg

Maximum value of SAR (interpolated) = 0.837 W/kg

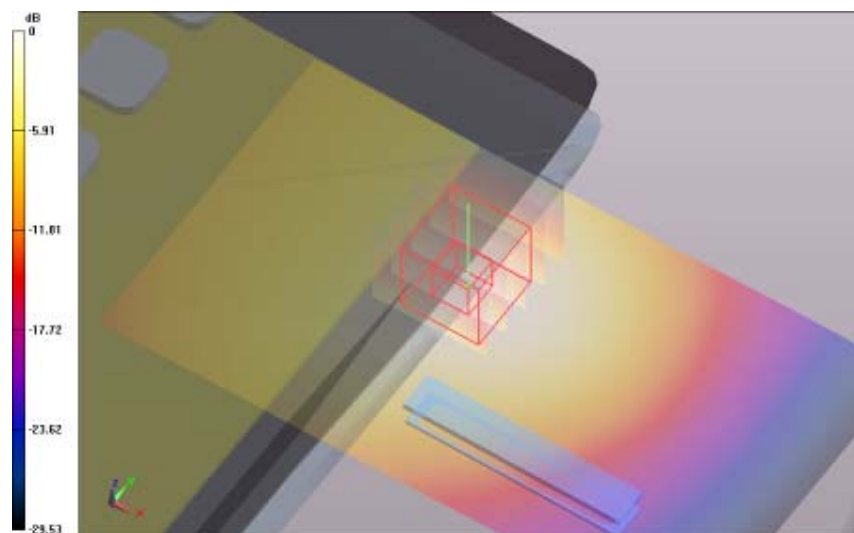


0 dB = 0.639 W/kg = -1.94 dBW/kg

SAR Measurement Plot 79



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

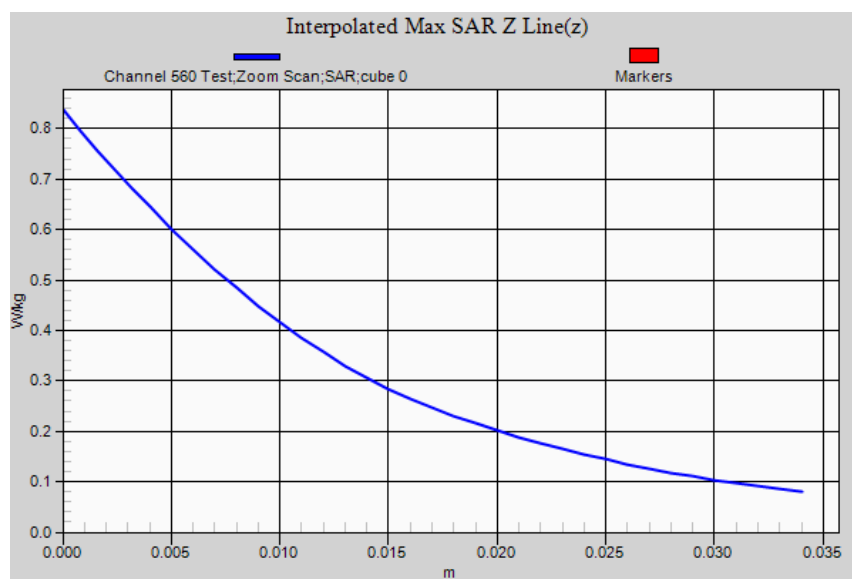

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 810 MHz EVDO FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 10 (810 MHz); Frequency: 823.1 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=823$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 56.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 29-10-14/Channel 684 Test/Area Scan (61x111x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.625 W/kg

Lap Held Antenna OUT 29-10-14/Channel 684 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 20.851 V/m; **Power Drift = -0.21 dB**

Averaged SAR: SAR(1g) = 0.615 W/kg; SAR(10g) = 0.408 W/kg

Maximum value of SAR (interpolated) = 0.807 W/kg

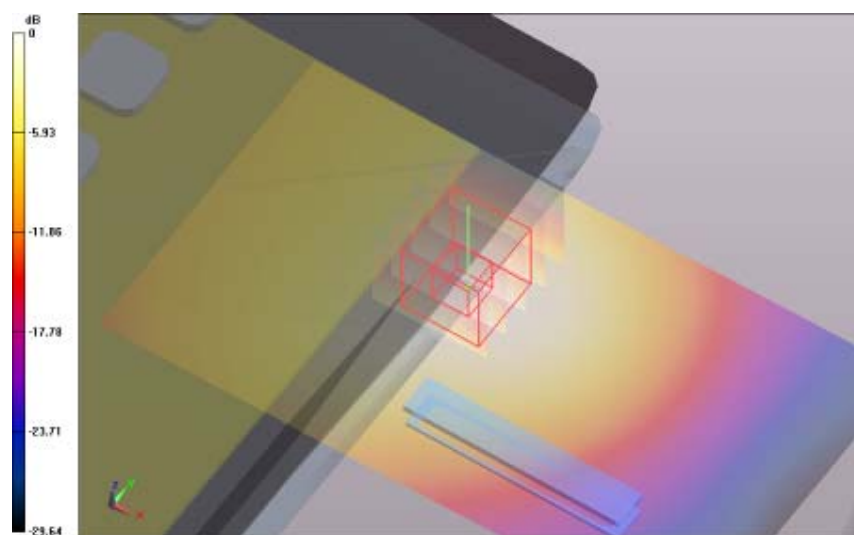


0 dB = 0.625 W/kg = -2.04 dBW/kg

SAR Measurement Plot 80



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

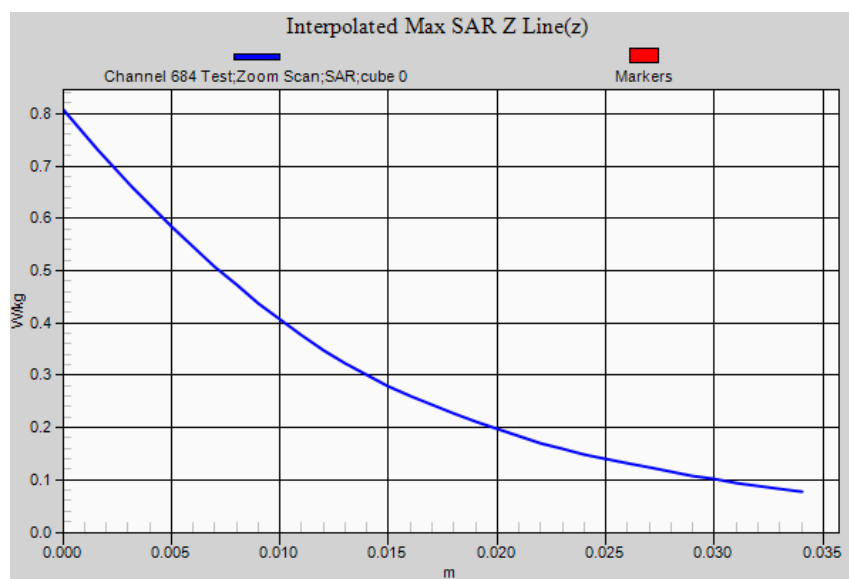

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 810 MHz EVDO FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 10 (810 MHz); Frequency: 817.9 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=818$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 57.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 29-10-14/Channel 476 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm;
Maximum value of SAR (interpolated) = 0.164 W/kg

Edge 2 Antenna IN 29-10-14/Channel 476 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 9.394 V/m; **Power Drift = 0.19 dB**

Averaged SAR: SAR(1g) = 0.147 W/kg; SAR(10g) = 0.058 W/kg

Maximum value of SAR (interpolated) = 0.485 W/kg

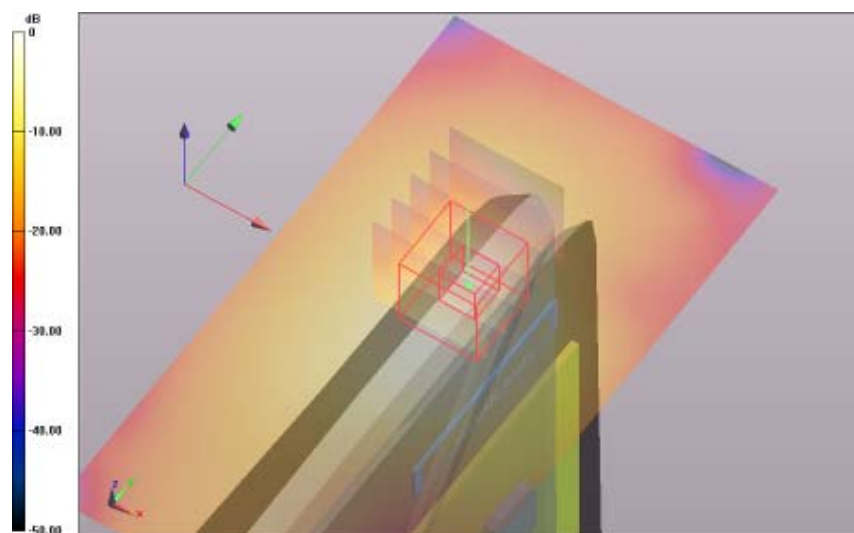


0 dB = 0.164 W/kg = -7.85 dBW/kg

SAR Measurement Plot 81



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

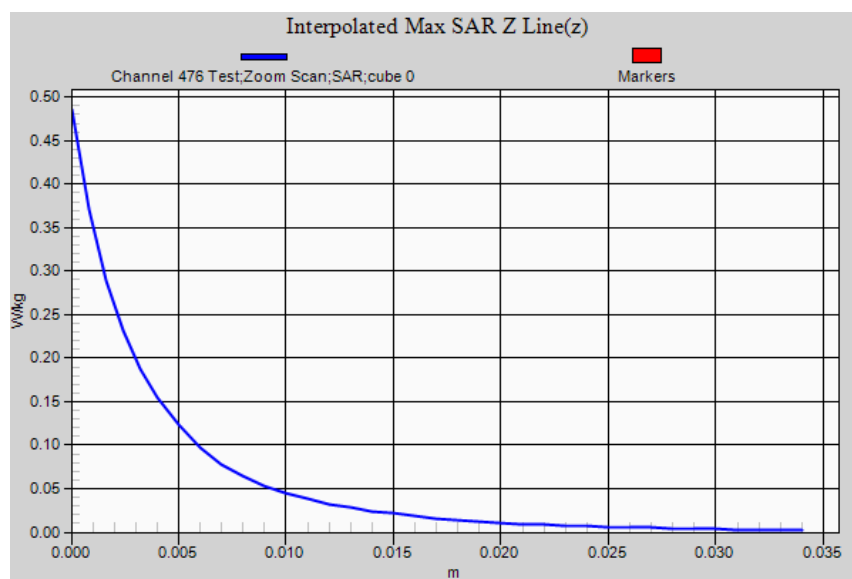

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 810 MHz EVDO FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 10 (810 MHz); Frequency: 820.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=820$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 57.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 29-10-14/Channel 560 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.166 W/kg**Edge 2 Antenna IN 29-10-14/Channel 560 Test/Zoom Scan (21x21x36)/Cube 0:** Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 9.593 V/m; **Power Drift = -0.01 dB****Averaged SAR: SAR(1g) = 0.146 W/kg; SAR(10g) = 0.058 W/kg**

Maximum value of SAR (interpolated) = 0.479 W/kg

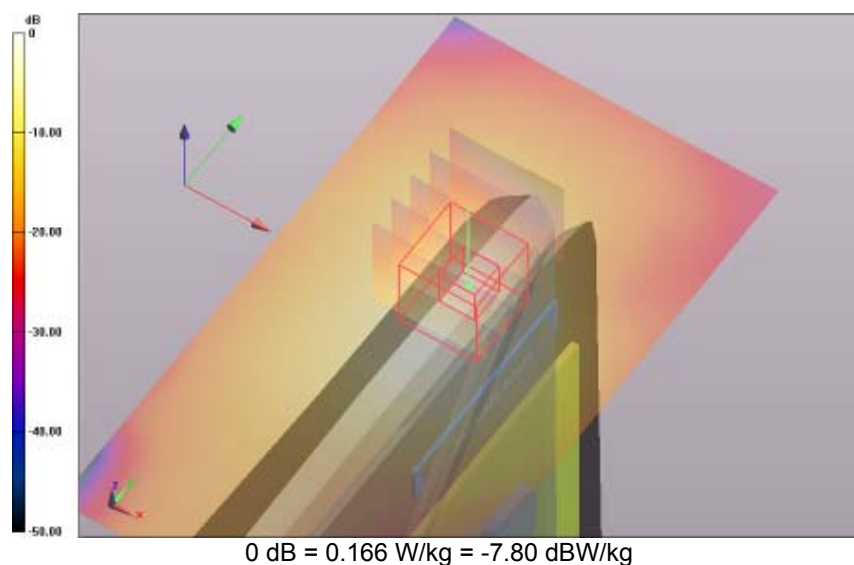


SAR Measurement Plot 82



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

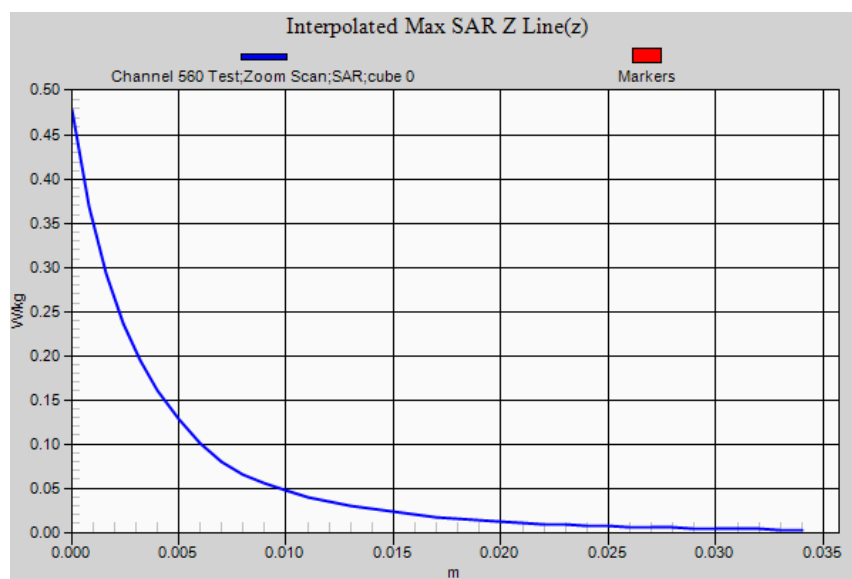

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 810 MHz EVDO FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 10 (810 MHz); Frequency: 823.1 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=823$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 56.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 29-10-14/Channel 684 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm;
Maximum value of SAR (interpolated) = 0.157 W/kg

Edge 2 Antenna IN 29-10-14/Channel 684 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 9.448 V/m; **Power Drift = -0.09 dB**

Averaged SAR: SAR(1g) = 0.138 W/kg; SAR(10g) = 0.055 W/kg

Maximum value of SAR (interpolated) = 0.446 W/kg

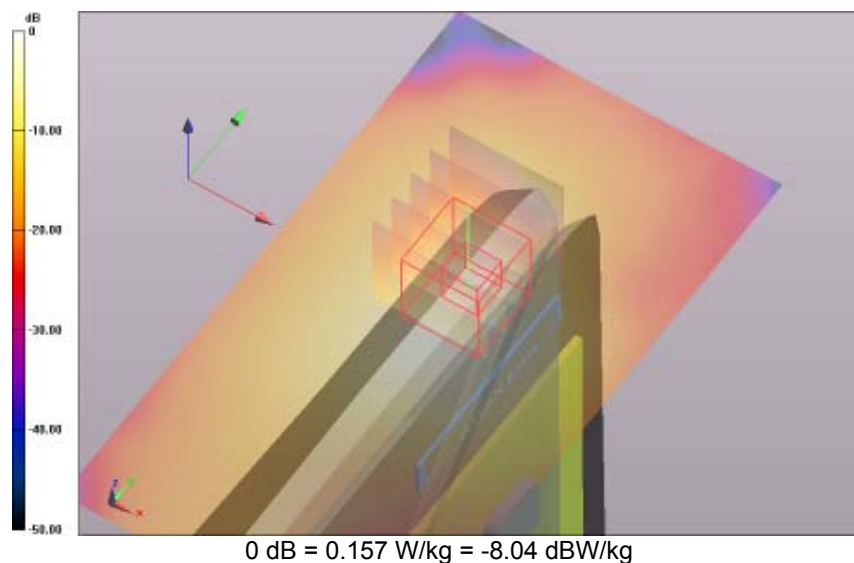


SAR Measurement Plot 83



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

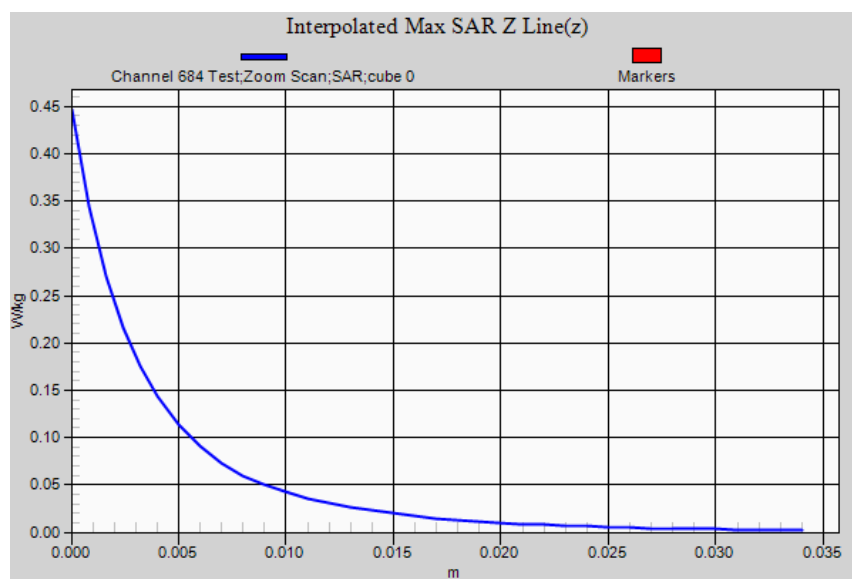

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 810 MHz EVDO FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 10 (810 MHz); Frequency: 817.9 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=818$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 57.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 29-10-14/Channel 476 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.109 W/kg

Edge 3 Antenna OUT 29-10-14/Channel 476 Test/Zoom Scan (26x26x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.730 V/m; **Power Drift = -0.04 dB**

Averaged SAR: SAR(1g) = 0.124 W/kg; SAR(10g) = 0.079 W/kg

Maximum value of SAR (interpolated) = 0.185 W/kg

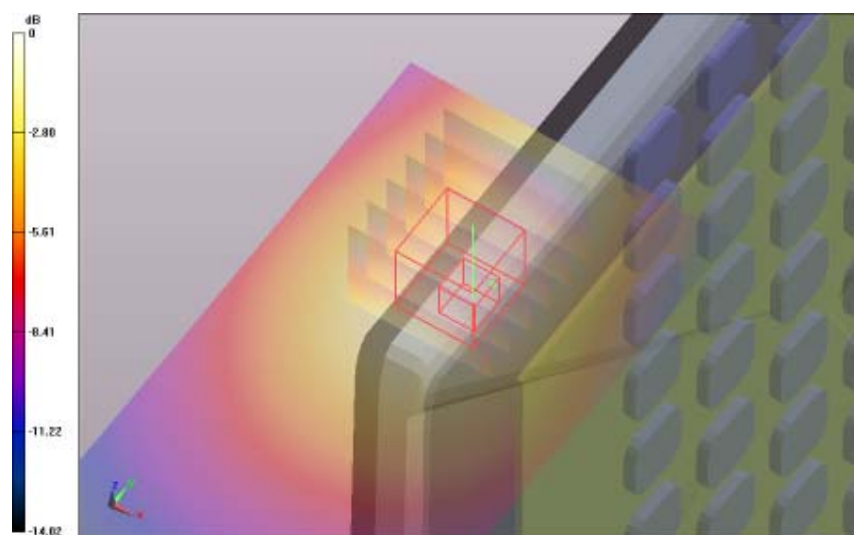


0 dB = 0.109 W/kg = -9.63 dBW/kg

SAR Measurement Plot 84



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

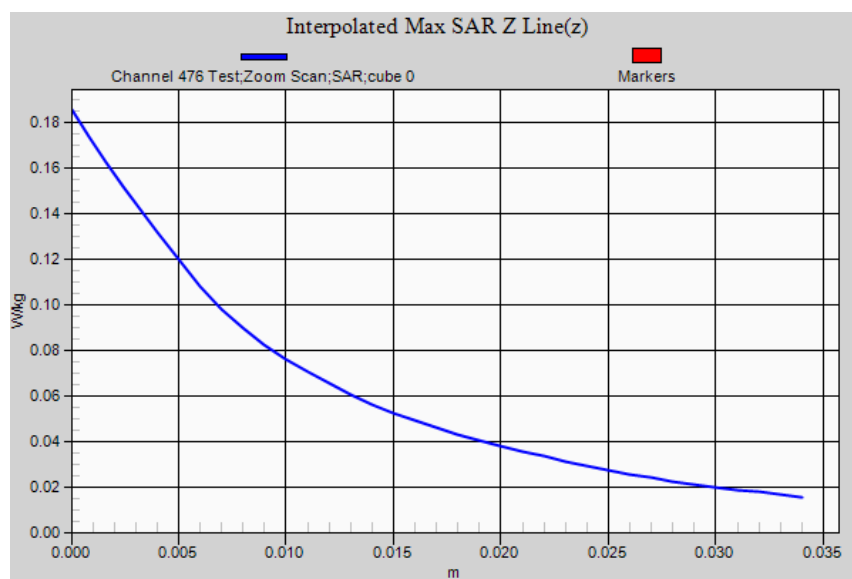

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 810 MHz EVDO FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 10 (810 MHz); Frequency: 820.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=820$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 57.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 29-10-14/Channel 560 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.113 W/kg

Edge 3 Antenna OUT 29-10-14/Channel 560 Test/Zoom Scan (26x26x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.812 V/m; **Power Drift = -0.03 dB**

Averaged SAR: SAR(1g) = 0.126 W/kg; SAR(10g) = 0.082 W/kg

Maximum value of SAR (interpolated) = 0.188 W/kg

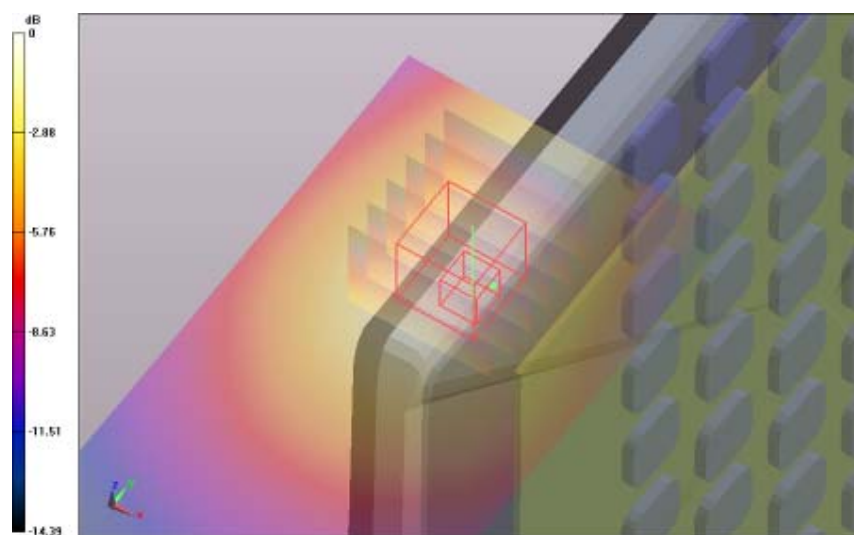


SAR Measurement Plot 85



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

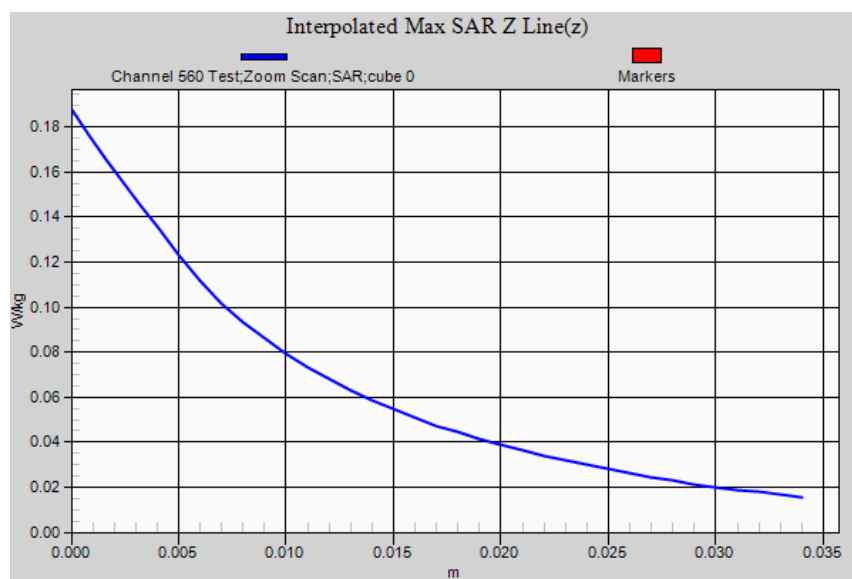

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 810 MHz EVDO FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 29-10-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 10 (810 MHz); Frequency: 823.1 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=823$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 56.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 29-10-14/Channel 684 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.111 W/kg

Edge 3 Antenna OUT 29-10-14/Channel 684 Test/Zoom Scan (26x26x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.725 V/m; **Power Drift = 0.12 dB**

Averaged SAR: SAR(1g) = 0.128 W/kg; SAR(10g) = 0.082 W/kg

Maximum value of SAR (interpolated) = 0.193 W/kg

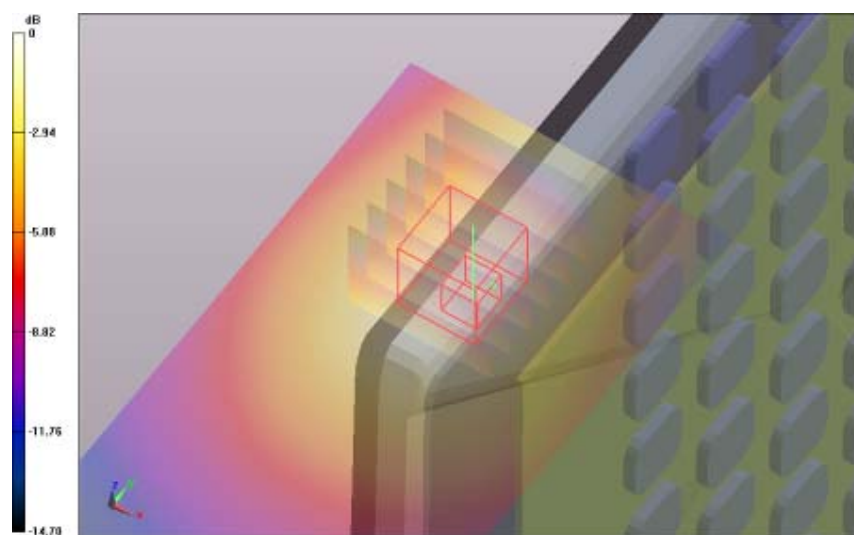


SAR Measurement Plot 86



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

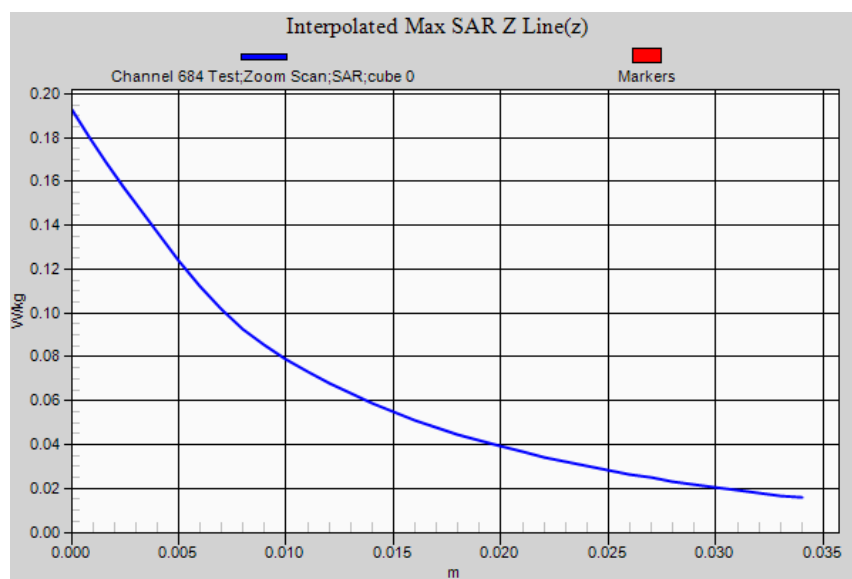

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 810 MHz EVDO FCC.da52:7

DUT Name: Dipole 900 MHz, Type: DV900V2, Serial: 047

Configuration: System Check

Communication System: 0 - CW; Communication System Band: 900 MHz; Frequency: 900.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=900$ MHz; $\sigma = 1.07$ S/m; $\epsilon_r = 56.2$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.86,5.86,5.86); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Check/Channel 1 Test/Area Scan (51x51x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 3.150 W/kg

System Check/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 57.162 V/m; **Power Drift = -0.00 dB**

Averaged SAR: SAR(1g) = 2.930 W/kg; SAR(10g) = 1.910 W/kg

Maximum value of SAR (interpolated) = 4.210 W/kg

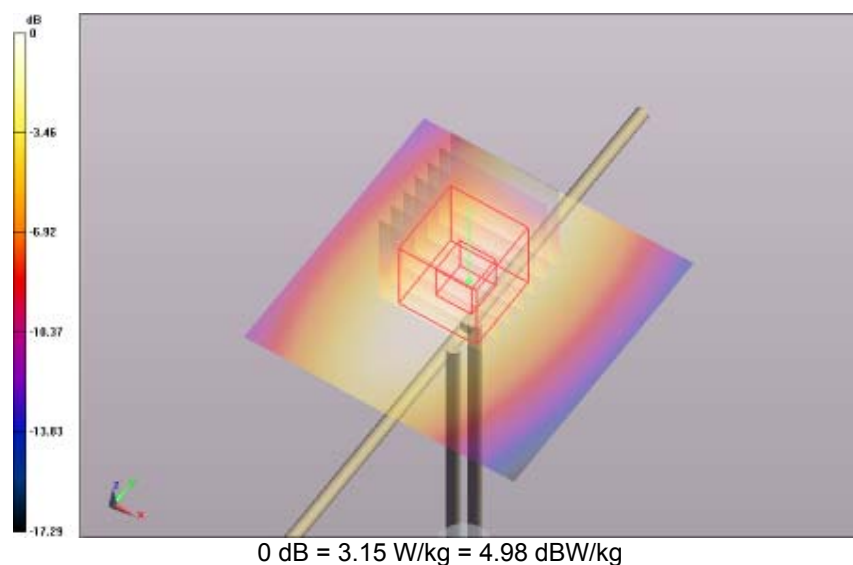


SAR Measurement Plot 87



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

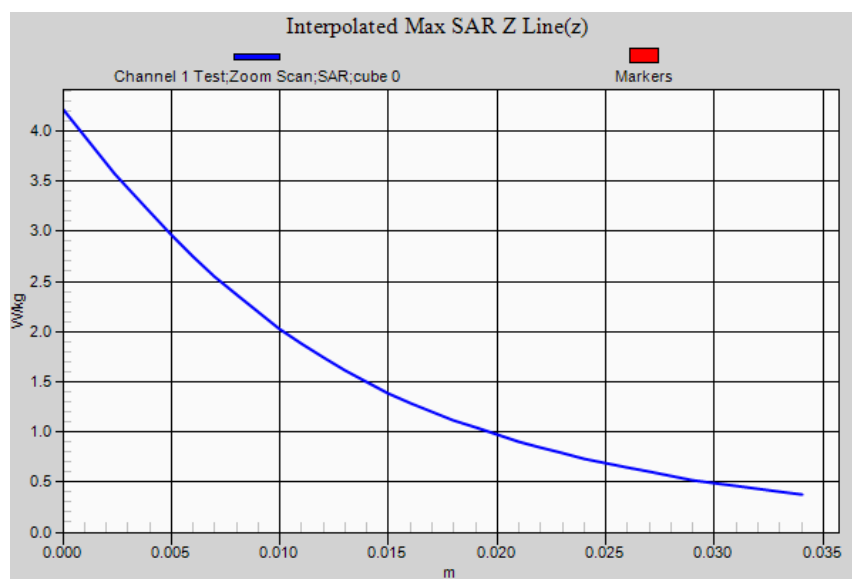

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz EVDO FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 25-11-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 1 (1880 MHz); Frequency: 1851 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=1851$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 25-11-14/Channel 0025 Test/Area Scan (61x111x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.206 W/kg**Bystander 25mm Spacing Antenna OUT 25-11-14/Channel 0025 Test/Zoom Scan (21x21x36)/Cube 0:**Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 9.004 V/m; **Power Drift = -0.09 dB****Averaged SAR: SAR(1g) = 0.196 W/kg; SAR(10g) = 0.121 W/kg**

Maximum value of SAR (interpolated) = 0.294 W/kg

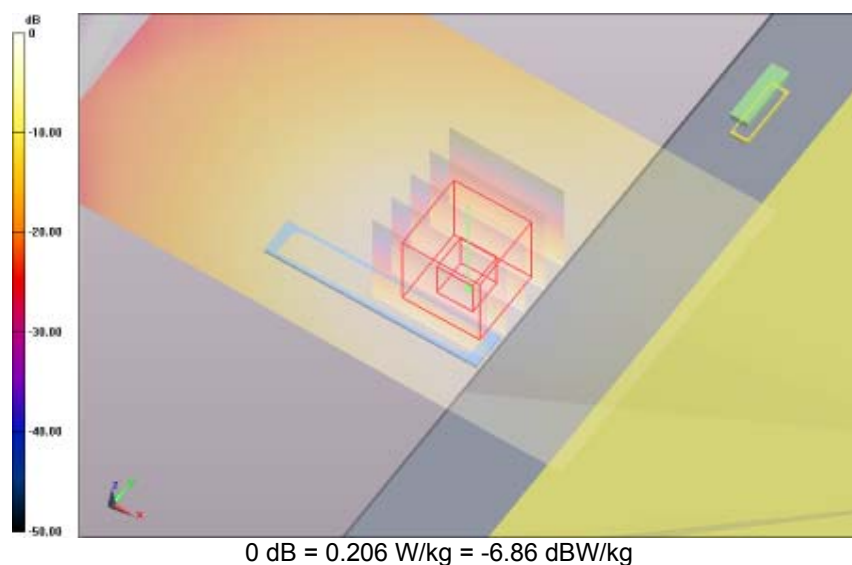


SAR Measurement Plot 88



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

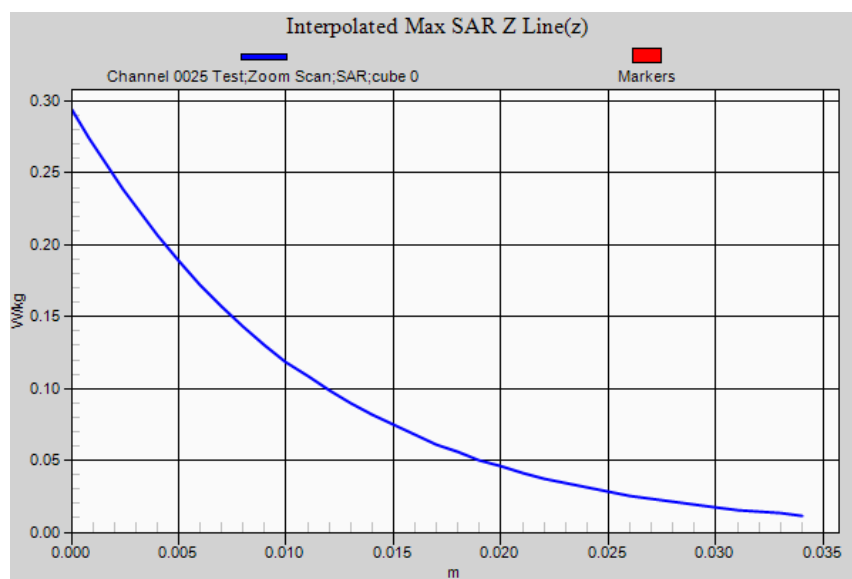

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz EVDO FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 25-11-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 1 (1880 MHz); Frequency: 1880 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1880$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 51.7$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 25-11-14/Channel 0600 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.210 W/kg

Bystander 25mm Spacing Antenna OUT 25-11-14/Channel 0600 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 9.151 V/m; **Power Drift = -0.11 dB**

Averaged SAR: SAR(1g) = 0.197 W/kg; SAR(10g) = 0.121 W/kg

Maximum value of SAR (interpolated) = 0.299 W/kg

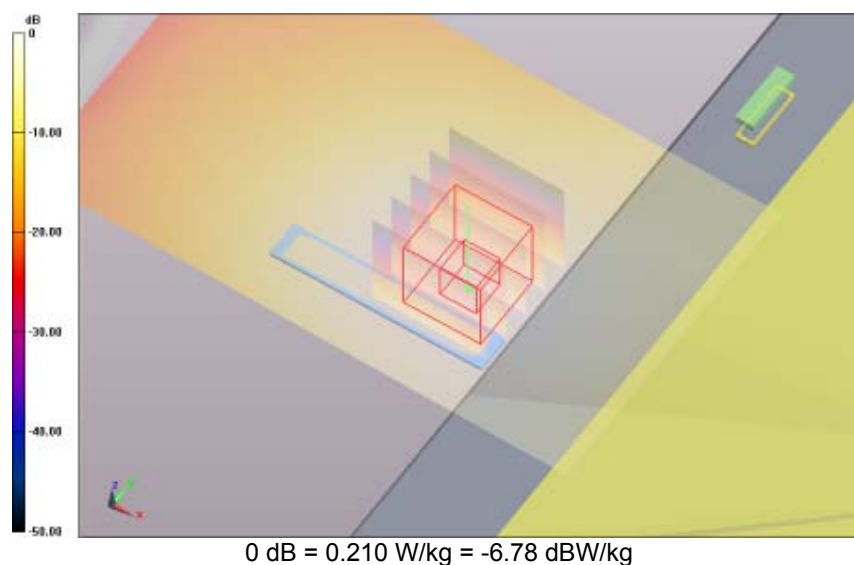


SAR Measurement Plot 89



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

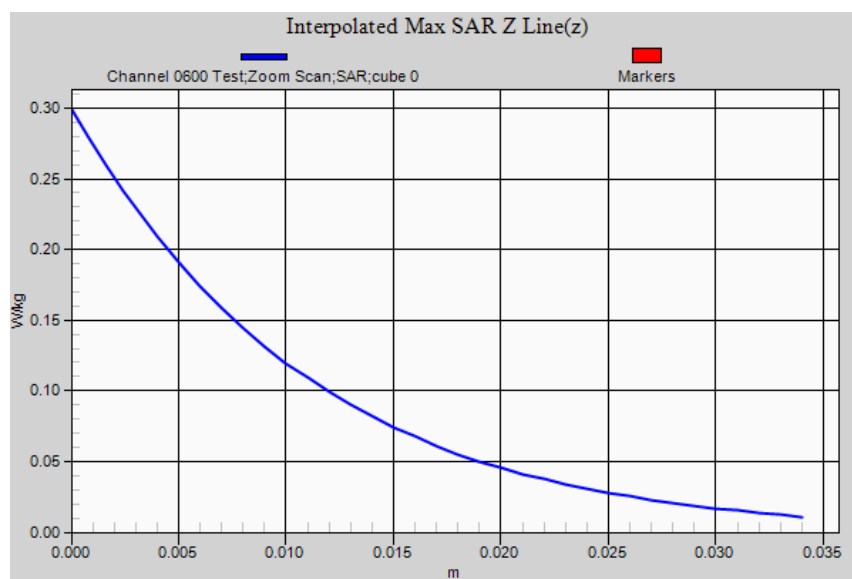

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz EVDO FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 25-11-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 1 (1880 MHz); Frequency: 1909 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1908.5$ MHz; $\sigma = 1.58$ S/m; $\epsilon_r = 51.6$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 25-11-14/Channel 1175 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.242 W/kg

Bystander 25mm Spacing Antenna OUT 25-11-14/Channel 1175 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 9.907 V/m; **Power Drift = -0.00 dB**

Averaged SAR: SAR(1g) = 0.226 W/kg; SAR(10g) = 0.140 W/kg

Maximum value of SAR (interpolated) = 0.351 W/kg

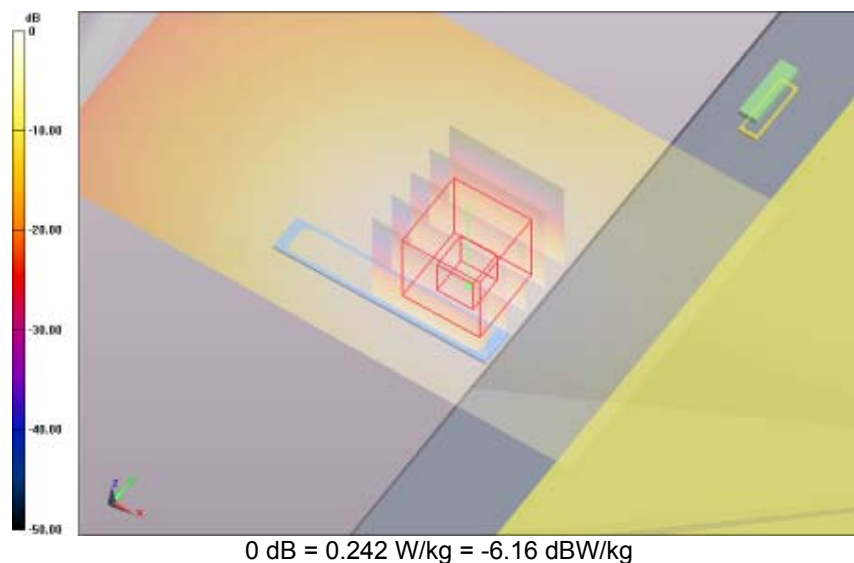


SAR Measurement Plot 90



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

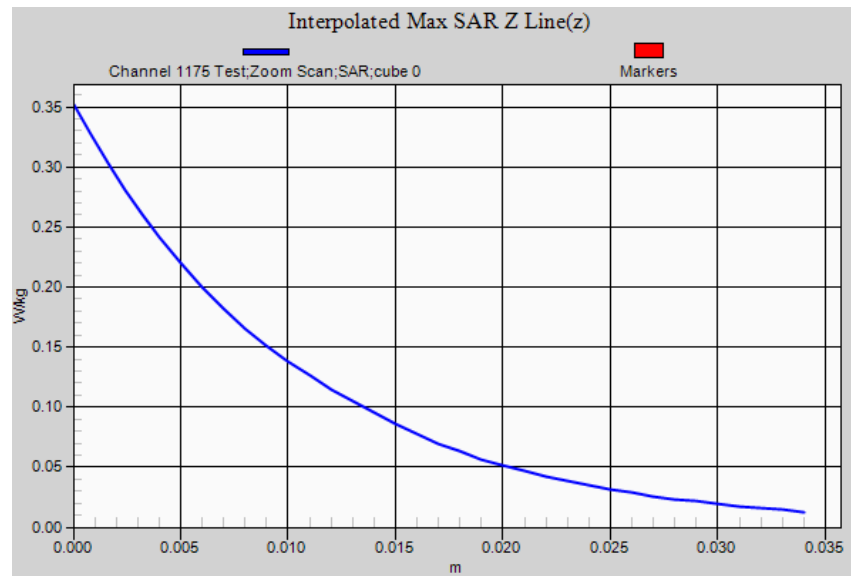

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz EVDO FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 25-11-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 1 (1880 MHz); Frequency: 1851 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1851$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 25-11-14/Channel 0025 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.474 W/kg

Lap Held Antenna OUT 25-11-14/Channel 0025 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 14.123 V/m; **Power Drift = -0.18 dB**

Averaged SAR: SAR(1g) = 0.465 W/kg; SAR(10g) = 0.273 W/kg

Maximum value of SAR (interpolated) = 0.721 W/kg

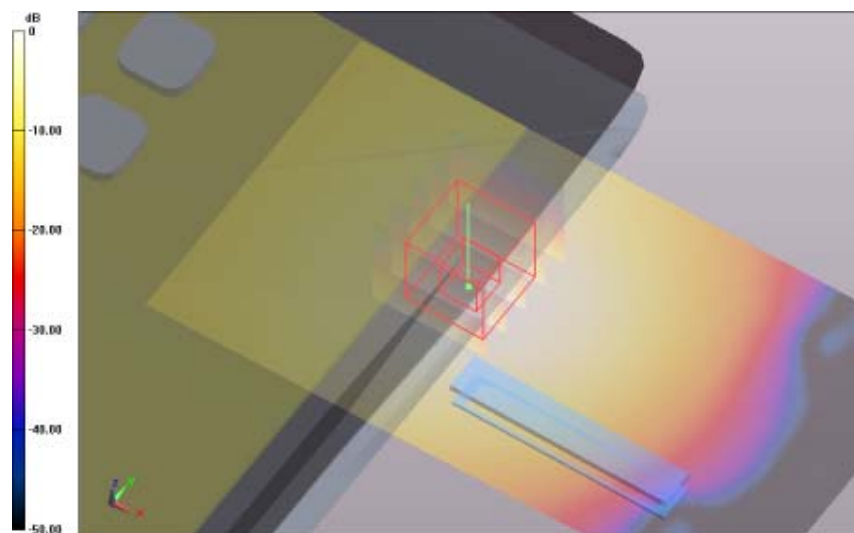


0 dB = 0.474 W/kg = -3.24 dBW/kg

SAR Measurement Plot 91



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

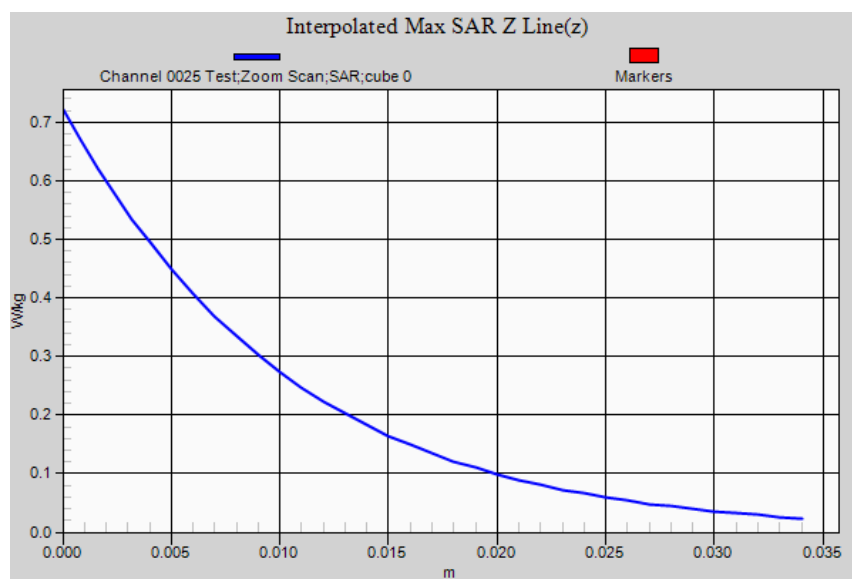

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.