
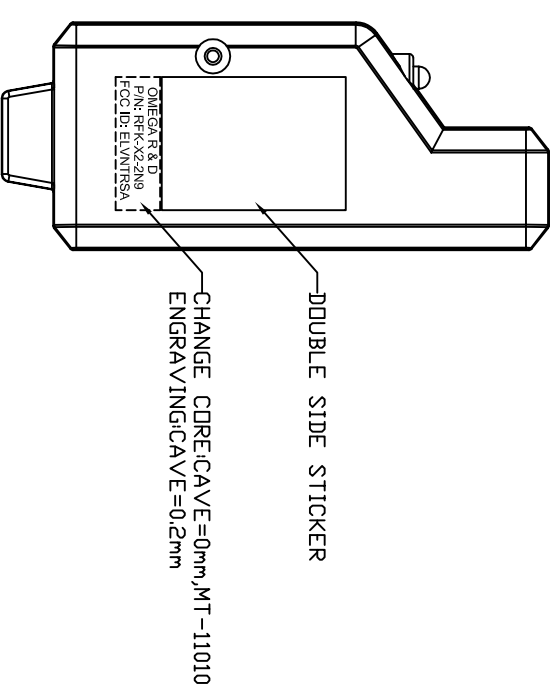
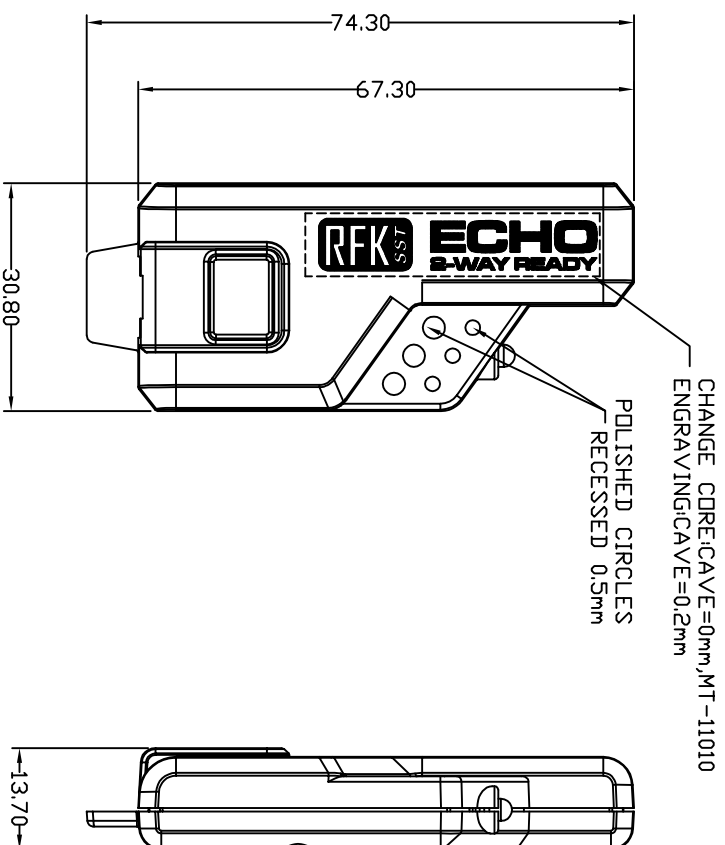


REVISIONS				
REV.	ACC.	DESCRIPTION	DRN.	DATE
1				
2				
3				




CHANGE CORE:CAVE=0mm,MT-11010
ENGRAVING:CAVE=0.2mm

POLISHED CIRCLES
✓ RECESSED 0.5mm

DOUBLE SIDE STICKER

—CHANGE CORE:CAVE=0mm,MT-11010
ENGRAVING:CAVE=0.2mm



- BODY MATERIAL: HIGH HEAT ABS+UV
1. Texture is same as MT-11010
 2. Radious will be 0.2 if not specified.
 3. Screw : MTF02008x1

tolerance category	tolerance units "C" major tolerance spec.		
	A	B	C
under 6	0.06	0.16	0.30
6-30	0.10	0.20	0.40
30-120	0.20	0.40	0.80
120-300	0.40	0.80	2.00

SCALE: 1:1		UNIT: M/M	DRN BY: FELIX	DATE: 2018/8/21	NUTEK CORPORATION		
MATERIAL		CHK BY: YS	TITLE: RPK-X2-2N9				
FINISH		APPD BY: V/cior					
CODE		SHEET	OF	SIZE: A4	DEPT:	DRAWING NO: 10510120-8	REV: 0

CASE P/N:IAERCOH9
KEY P/N:IKAGA000
SCREW P/N:MTF02008*1