


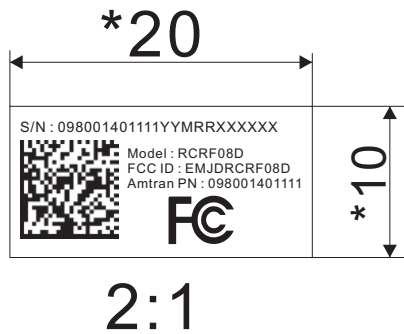

NOTE:
1.白底黑字
2. TOL: +/-1mm.
3.THE DIMENSIONS MARKED WITH"" ARE IMPORTANT.
4.GLUE : T=0.022~0.025mm.
5.STICKINESS: 3.0kg/cm.²
6.Product must be halogen free
Requirement of PRIMAX Green Part:
1. Comply with PRIMAX QW-5Q002
" Green Product Chemical Substances Specification"
2. Follow customer's specification as required.
3.Follow Halogen- Free requirement : Br<900 ppm,
Cl<900 ppm, Br+Cl< 1500 ppm if required.
7.二維條碼使用ECC200,等級為B,尺寸為6*6mm,
8.二維顯示內容為:
RCRF08D,098001401111YYMRRXXXXXX,EMJDRCRF08D,098001401111


固定碼 SN FCC ID固定碼 Amtran PN

9.SN編碼原則如下:
098001401111 YY M RR XXXXXX
固定碼 流水碼(000001~999999),每月更新
版本(02)
月份(1月=1,2月=2,...,10月=A,11月=B,12月=C)
年份(2014=14,2015=15,...)

DO NOT SCALE DRAWING		PRIMAX [®] 致伸資訊電子有限公司 PRIMAX ELECTRONICS LTD.			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE:±1.0 °		USED 910400034330		APPD. Sarah.Lee	
		FINISH		CHKD. Apple.Zhao	
		SCALE /	UNIT mm	DR. Susan.Lee 2014/05/28	
		TITLE MASTER CARTON LABEL			☞
MATERIAL 80P銅版紙		DWG NO. 304009893000		SIZE A4	
		FILE NAME 304009893000	SHEET	1/1	REV. 1

FCC Label
Location
(on Shielding cover)

Top of EUT

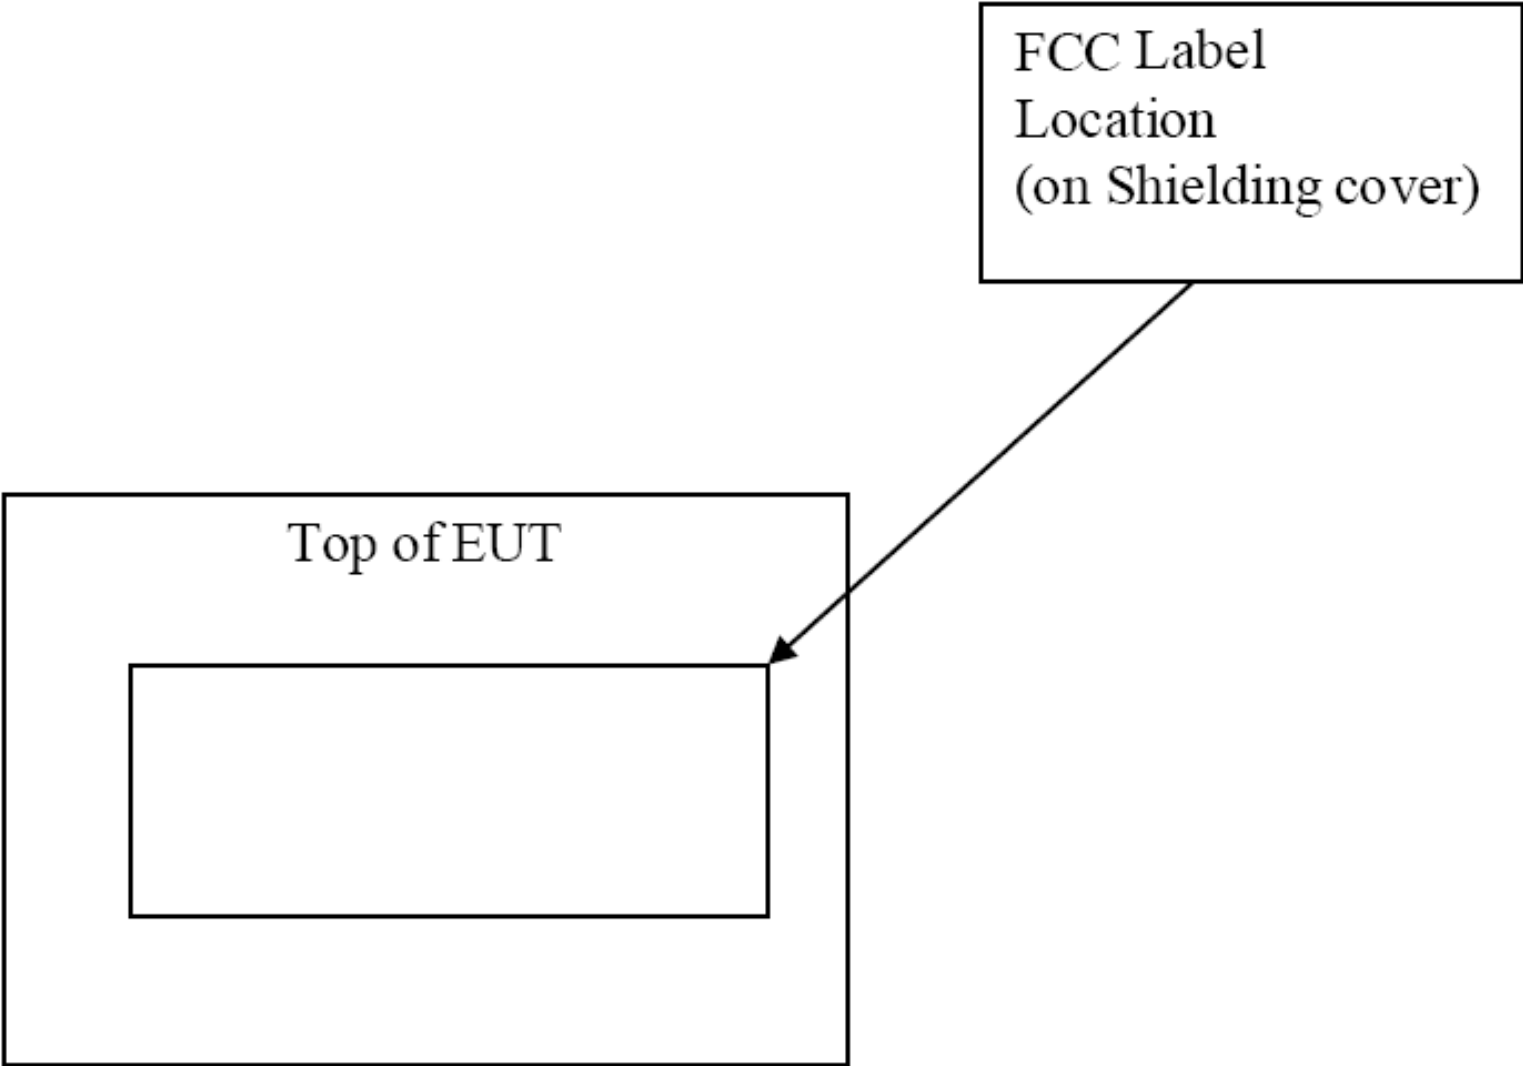

The diagram consists of two rectangular boxes. The larger box on the left is labeled 'Top of EUT' at its top center. Inside this box, there is a smaller, horizontally-oriented rectangle. An arrow originates from the bottom-left corner of the 'FCC Label Location' box and points to the top-right corner of the inner rectangle within the 'Top of EUT' box.