


Prüfbericht-Nr.: <i>Test Report No.:</i>	50047554 001	Auftrags-Nr.: <i>Order No.:</i>	164031439	Seite 1 von 60 <i>Page 1 of 60</i>
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	06.06.2016	
Auftraggeber: <i>Client:</i>	PRIMAX ELECTRONICS LTD No. 669, Ruey Kuang Road, Neihu 114 Taipei, Taiwan, R.O.C.			
Prüfgegenstand: <i>Test item:</i>	Lenovo Professional Wireless Keyboard			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	KBRFBD71 (Lenovo)			
Auftrags-Inhalt: <i>Order content:</i>	FCC/IC Certification			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.249 RSS-210 Issue 8 December 2010 FCC KDB Publication 447498 D01 v06		CFR47 FCC Part 15: Subpart C Section 15.209 RSS-Gen Issue 4 November 2014 RSS-102 Issue 5 March 2015	
Wareneingangsdatum: <i>Date of receipt:</i>	04.06.2016			
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000368939-001, A000368939-002			
Prüfzeitraum: <i>Testing period:</i>	04.06.2016 - 22.06.2016			
Ort der Prüfung: <i>Place of testing:</i>	Accurate Technology Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von / tested by:  04.07.2016 Lin Lin/Project Manager		kontrolliert von / reviewed by:  04.07.2016 Owen Tian/Technical Certifier		
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet				
Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht - Nr.: 50047554 001
Test Report No.

Seite 2 von 60
Page 2 of 60

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 20dB BANDWIDTH AND 99% BANDWIDTH

RESULT: Pass

5.1.3 FUNDAMENTAL & HARMONICS RADIATED EMISSION

RESULT: Pass

5.1.4 RADIATED EMISSIONS OUTSIDE OF THE BAND

RESULT: Pass

6.1.1 ELECTROMAGNETIC FIELDS

RESULT: Pass

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	5
2.4	CALIBRATION	5
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3.	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	7
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	7
3.5	SUBMITTED DOCUMENTS	8
4.	TEST SET-UP AND OPERATION MODES	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	9
4.2	TEST OPERATION AND TEST SOFTWARE	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	9
4.5	TEST SETUP DIAGRAM	10
5.	TEST RESULTS	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	12
5.1.1	<i>Antenna Requirement</i>	<i>12</i>
5.1.2	<i>20dB Bandwidth and 99% Bandwidth.....</i>	<i>13</i>
5.1.3	<i>Fundamental & Harmonics Radiated Emission</i>	<i>18</i>
5.1.1	<i>Radiated emissions outside of the band</i>	<i>25</i>
6.	SAFETY HUMAN EXPOSURE	57
6.1	RADIO FREQUENCY EXPOSURE COMPLIANCE.....	57
6.1.1	<i>Electromagnetic Fields.....</i>	<i>57</i>
7.	PHOTOGRAPHS OF THE TEST SET-UP	58
8.	LIST OF TABLES	60
9.	LIST OF PHOTOGRAPHS	60

Prüfbericht - Nr.: 50047554 001
*Test Report No.***Seite 4 von 60**
Page 4 of 60

1. General Remarks

1.1 Complementary Materials

None.

2. Test Sites

2.1 Test Facilities

Accurate Technology Co., Ltd.

(FCC Registration No.: 752051)

(Test site Industry Canada No.: 5077A-2)

F1, Bldg. A, Changyuan New Material Port
Keyuan Rd., Science & Industry Park, Nanshan
Shenzhen, P.R. China

The tests at the test site have been conducted under the supervision of a TÜV engineer.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Transmitter spurious emissions				
Spectrum Analyzer	Rohde & Schwarz	FSV40	101495	2017-01-09
Test Receiver	Rohde & Schwarz	ESCS30	100307	2017-01-09
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	2017-01-09
Loop Antenna	Schwarzbeck	FMZB1516	1516131	2017-01-09
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	2017-01-09
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	2017-01-09
RF Switching Unit+PreAMP	Compliance Direction	RSU-M2	38322	2017-01-09
Pre-Amplifier	Rohde&Schwarz	CBLU11835 40-01	3791	2017-01-09
50 Coaxial Switch	Anritsu Corp	MP59B	620050647 4	2017-01-09
RF Coaxial Cable	SUHNER	N-3m	No.8	2017-01-09
RF Coaxial Cable	RESENBERGER	N-3.5m	No.9	2017-01-09
RF Coaxial Cable	SUHNER	N-6m	No.10	2017-01-09
RF Coaxial Cable	RESENBERGER	N-12m	No.11	2017-01-09
RF Coaxial Cable	RESENBERGER	N-0.5m	No.12	2017-01-09
Radio Spectrum Test				
Spectrum Analyzer	Rohde & Schwarz	FSV40	101495	2017-01-09
Vector Signal Generator	Rohde & Schwarz	SMBV100A	260434	2017-01-09
Signal Generator	Rohde & Schwarz	SMB100A	108362	2017-01-09
Open Switch and Control Unit	Rohde & Schwarz	OSP120 + OSP-B157	101244 + 100866	2017-01-09

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Table 2: Measurement Uncertainty

Parameter	Uncertainty
Radio Spectrum	$< \pm 0.60 \text{ dB}$
Radiated emission of transmitter, valid up to 26.5 GHz	$< \pm 4.42 \text{ dB}$
Conducted Emission	$< \pm 2.23 \text{ dB}$
Radiated Emission	$< \pm 4.42 \text{ dB}$

2.6 Location of Original Data

The original copies of all test data taken during actual testing were retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

Accurate Technology Co., Ltd. test facility located at F1, Bldg. A, Changyuan New Material Port Keyuan Rd., Science & Industry Park, Nanshan, Shenzhen, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a wireless keyboard, it operates at 2.4GHz ISM band.
For details refer to the User Manual and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

Technical Specification	Value
Kind of Equipment	Lenovo Professional Wireless Keyboard
Type Designation	KBRFBD71
FCC ID	EMJKKBRFBD71
IC	4251A-KKBRFBD71
Operating Frequency Band	2400MHz ~ 2483.5MHz
Operating Frequency	2402MHz ~ 2479MHz
Channel Separation	1MHz
Number of Channel	78
Extreme Temperature Range	0~+40°C
Operation Voltage	DC 3V (via 2 x 'AA' size battery)
Modulation	GFSK
Antenna Gain	0.5dBi

3.3 Independent Operation Modes

The basic operation modes are:

- A. On
 - 1. Transmitting
 - 2. Receiving
- B. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

Prüfbericht - Nr.: 50047554 001
Test Report No.

Seite 8 von 60
Page 8 of 60

3.5 Submitted Documents

- Bill of Material
- PCB Layout
- Photo Document
- Circuit Diagram
- Instruction Manual
- Rating Label

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

4.3 Special Accessories and Auxiliary Equipment

None.

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test for below 1GHz

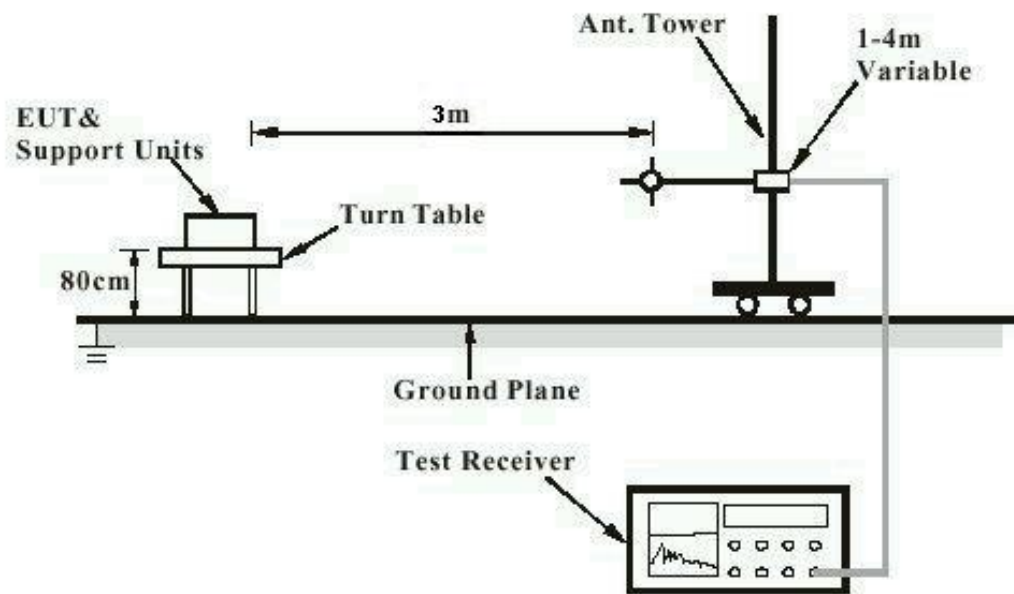


Diagram of Measurement Configuration for Radiation Test for above 1GHz


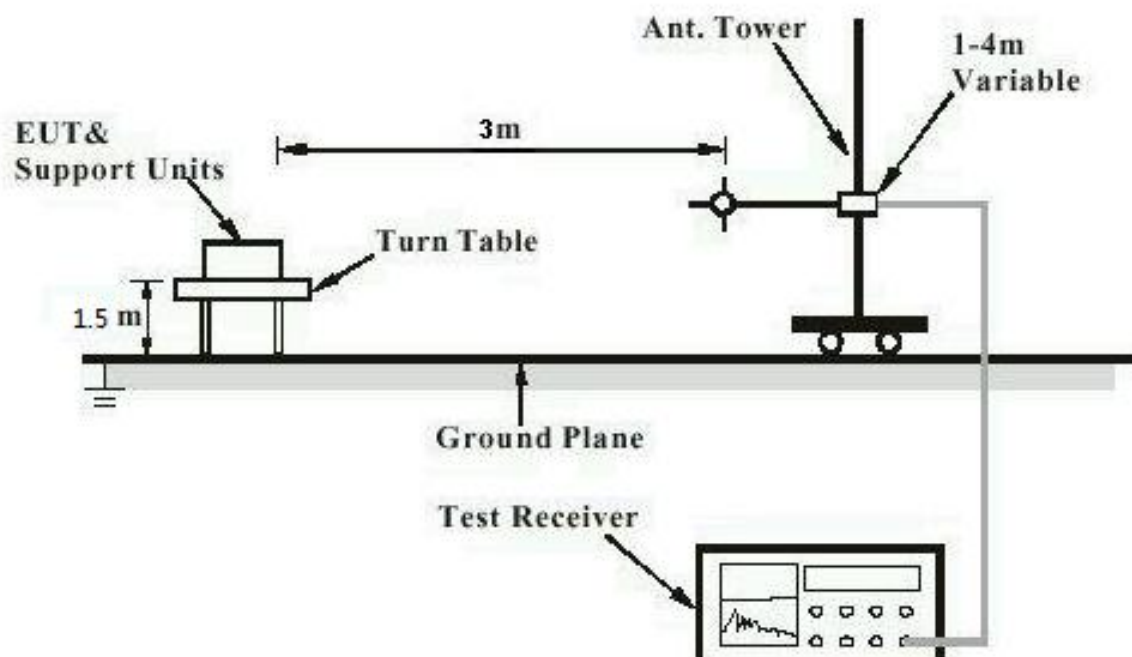


Diagram of Measurement Equipment Configuration for Transmitter Measurement

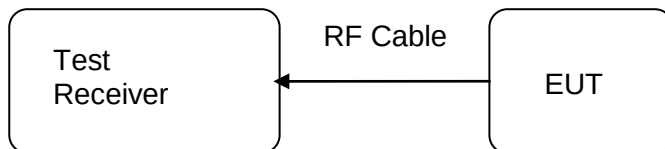

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass**

Test standard	:	Part 15.203 RSS-Gen 8.3
Limit	:	the use of antennas with directional gains that do not exceed 6dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 0.04dBi, therefore the EUT is considered sufficient to comply with the provision.

Prüfbericht - Nr.: 50047554 001

Test Report No.

Seite 13 von 60

Page 13 of 60

5.1.2 20dB Bandwidth and 99% Bandwidth**RESULT:****Pass**

Date of testing : 2016-06-22
Test standard : FCC Part 15.215 (c)
RSS-Gen clause 6.6
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded room

Test setup


Test Channel : Low/ Middle/ High
Operation Mode : A.1
Ambient temperature : 21°C
Relative humidity : 60%
Atmospheric pressure : 101kPa

Table 4: Test result of 20dB & 99% Bandwidth


Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low Channel	2402	0.795	0.716
Mid Channel	2441	0.795	0.703
High Channel	2479	1.263	1.142

For details refer to following test plot.


Test Plot of 20dB Bandwidth

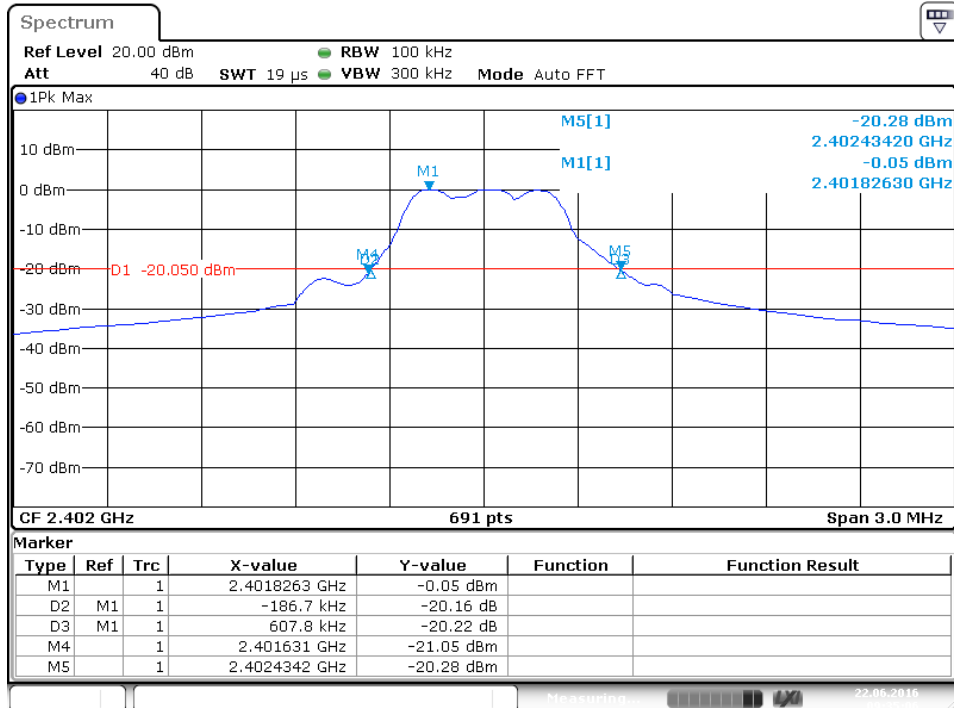

Date: 22.JUN.2016 09:35:06

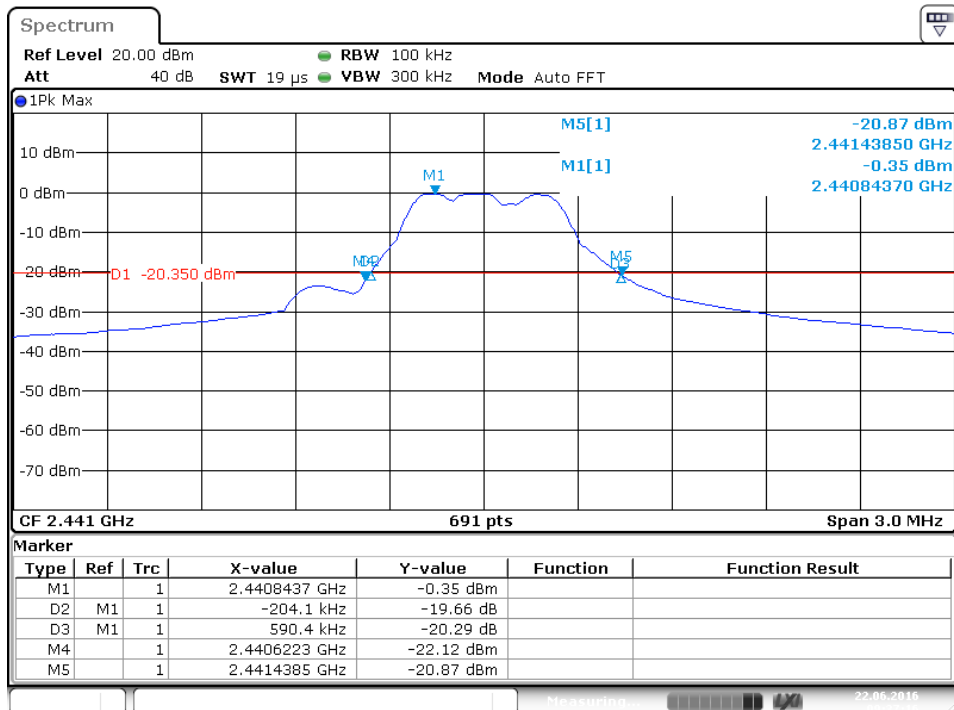


Date: 22.JUN.2016 09:37:16

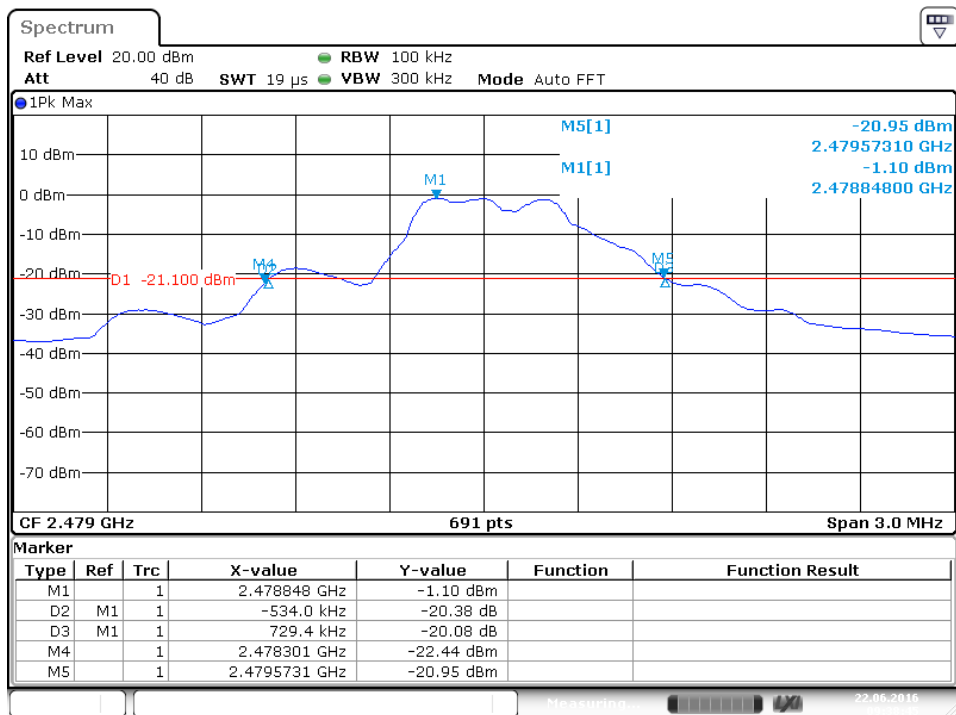


Date: 22.JUN.2016 09:38:46


Test Plot of 99% Bandwidth

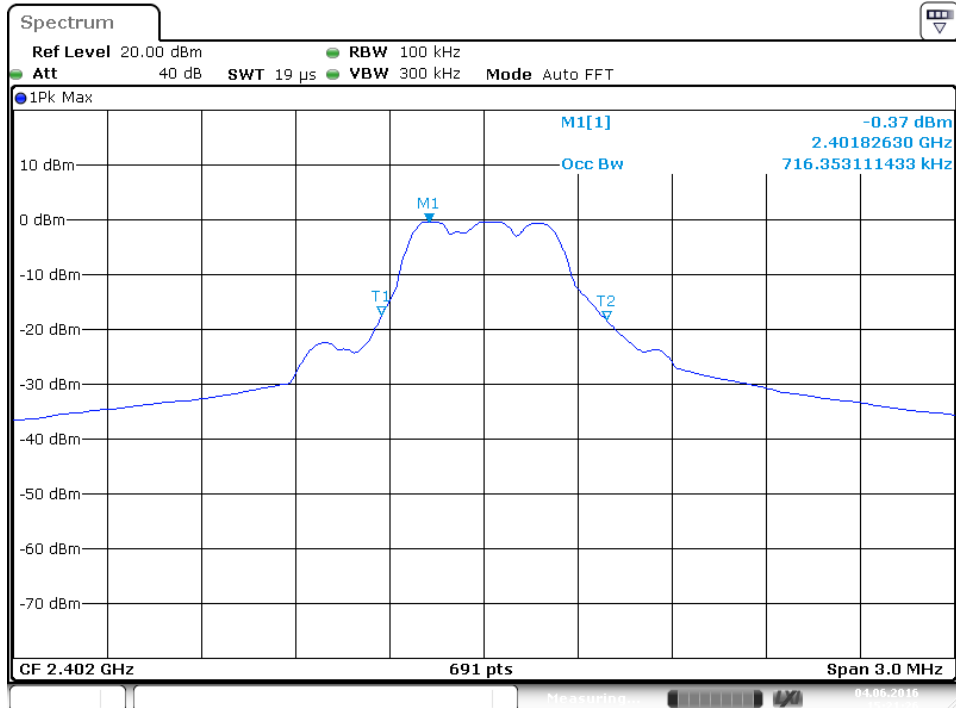

Date: 4.JUN.2016 15:21:26

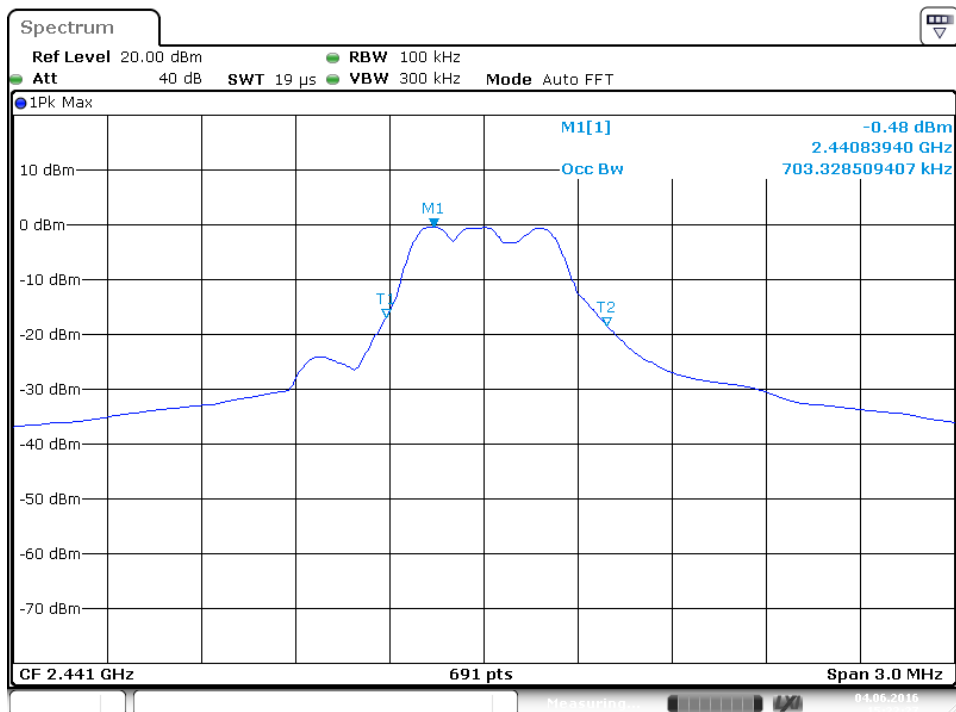

Date: 4.JUN.2016 15:22:27

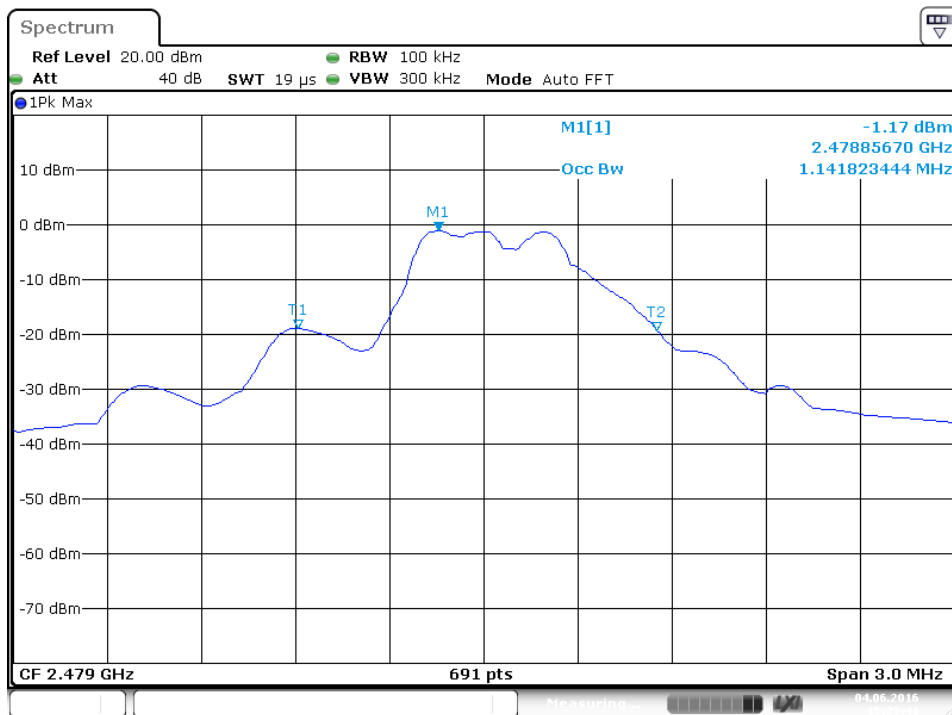

Date: 4.JUN.2016 15:23:40


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #1086

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Professional Wireless Keyboard

Mode: TX 2402MHz

Model: KBRFBD71

Manufacturer:

Polarization: Horizontal

Power Source: DC 3V


Date: 16/06/07/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

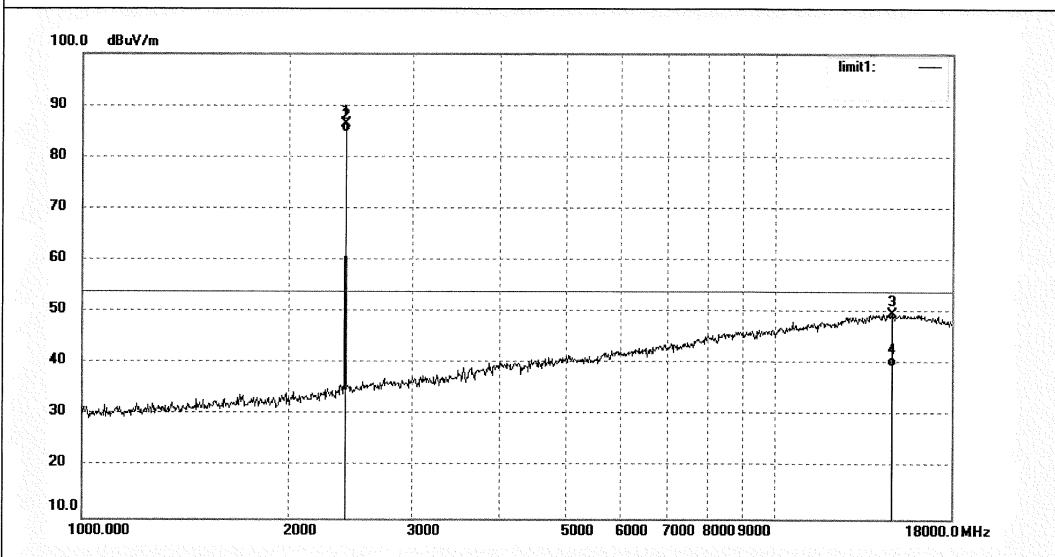

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	93.75	-7.45	86.30	114.00	-27.70	peak			
2	2402.000	92.37	-7.45	84.92	94.00	-9.08	AVG			
3	14745.473	7.79	41.86	49.65	74.00	-24.35	peak			
4	14745.473	-2.28	41.86	39.58	54.00	-14.42	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #1085

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Professional Wireless Keyboard

Mode: TX 2402MHz

Model: KBRFBD71

Manufacturer:

Polarization: Vertical

Power Source: DC 3V


Date: 16/06/07/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

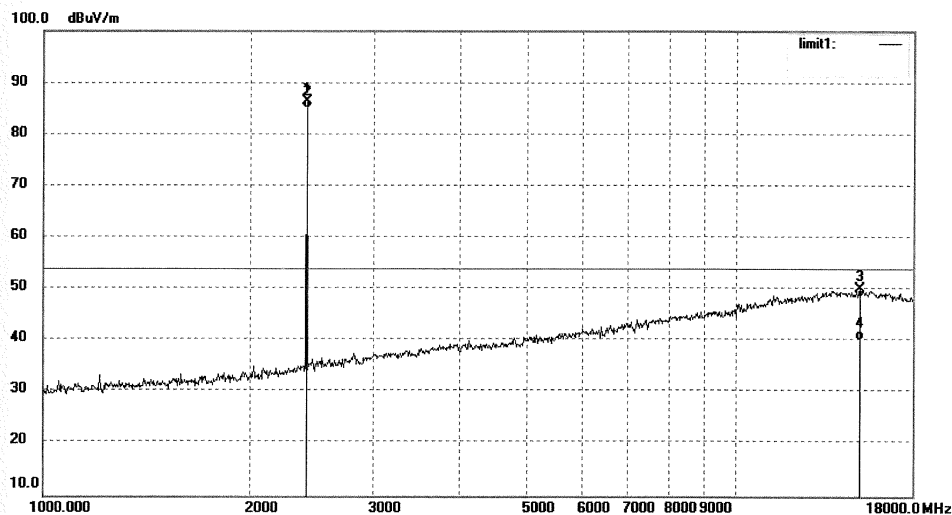

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	93.80	-7.45	86.35	114.00	-27.65	peak			
2	2402.000	92.50	-7.45	85.05	94.00	-8.95	AVG			
3	15090.405	9.16	40.92	50.08	74.00	-23.92	peak			
4	15090.405	-0.59	40.92	40.33	54.00	-13.67	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #1087

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Professional Wireless Keyboard

Mode: TX 2441MHz

Model: KBRFBD71

Manufacturer:

Polarization: Horizontal

Power Source: DC 3V


Date: 16/06/07/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

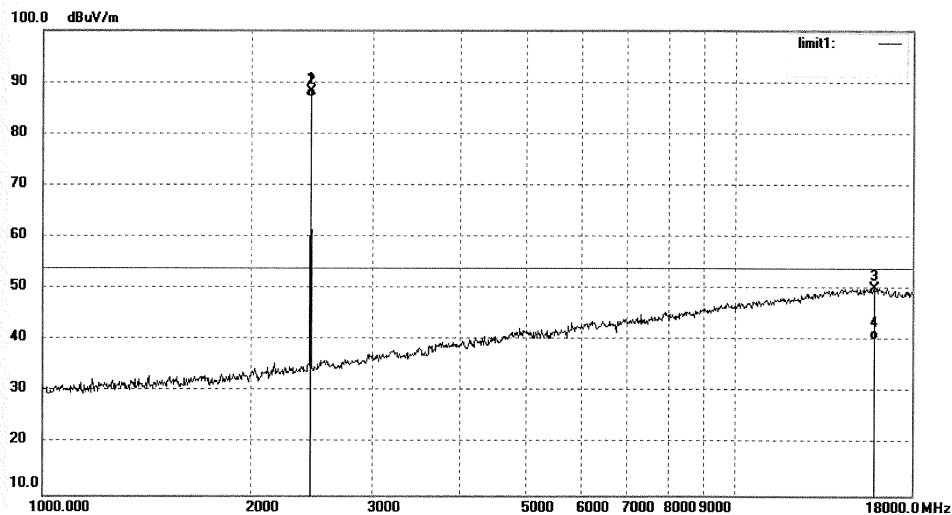

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	95.52	-7.35	88.17	114.00	-25.83	peak			
2	2441.000	94.36	-7.35	87.01	94.00	-6.99	AVG			
3	15850.410	10.16	40.03	50.19	74.00	-23.81	peak			
4	15850.410	0.20	40.03	40.23	54.00	-13.77	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #1088

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Professional Wireless Keyboard

Mode: TX 2441MHz

Model: KBRFBD71

Manufacturer:

Polarization: Vertical

Power Source: DC 3V


Date: 16/06/07/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

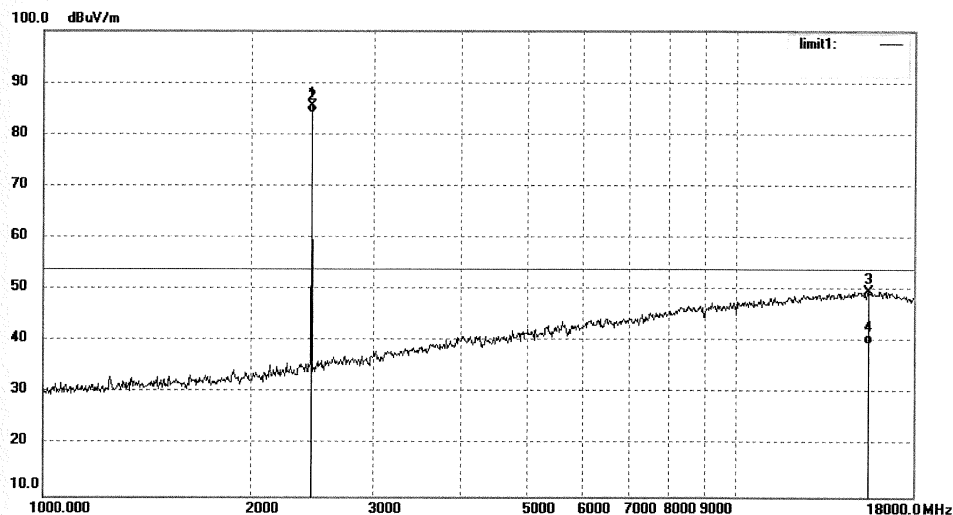

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	92.78	-7.35	85.43	114.00	-28.57	peak			
2	2441.000	91.56	-7.35	84.21	94.00	-9.79	AVG			
3	15488.107	9.68	40.12	49.80	74.00	-24.20	peak			
4	15488.107	-0.53	40.12	39.59	54.00	-14.41	AVG			

Prüfbericht - Nr.: 50047554 001
Test Report No.
Seite 23 von 60
Page 23 of 60

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #1090

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Professional Wireless Keyboard

Mode: TX 2479MHz

Model: KBRFBD71

Manufacturer:

Polarization: Horizontal

Power Source: DC 3V


Date: 16/06/07/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

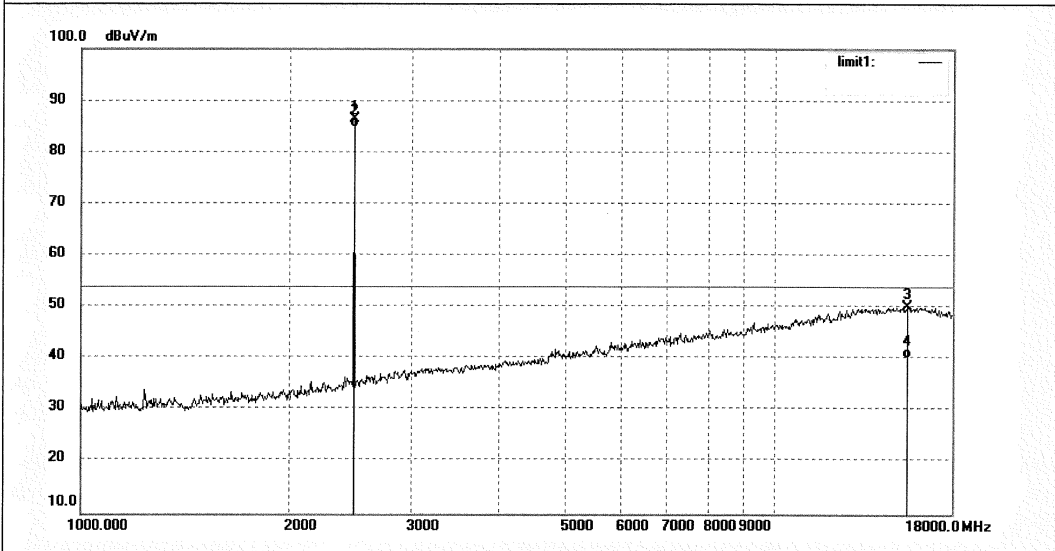

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2479.000	93.73	-7.37	86.36	114.00	-27.64	peak			
2	2479.000	92.29	-7.37	84.92	94.00	-9.08	AVG			
3	15532.938	9.97	40.09	50.06	74.00	-23.94	peak			
4	15532.938	0.20	40.09	40.29	54.00	-13.71	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #1089

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Professional Wireless Keyboard

Mode: TX 2479MHz

Model: KBRFBD71

Manufacturer:

Polarization: Vertical

Power Source: DC 3V


Date: 16/06/07/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

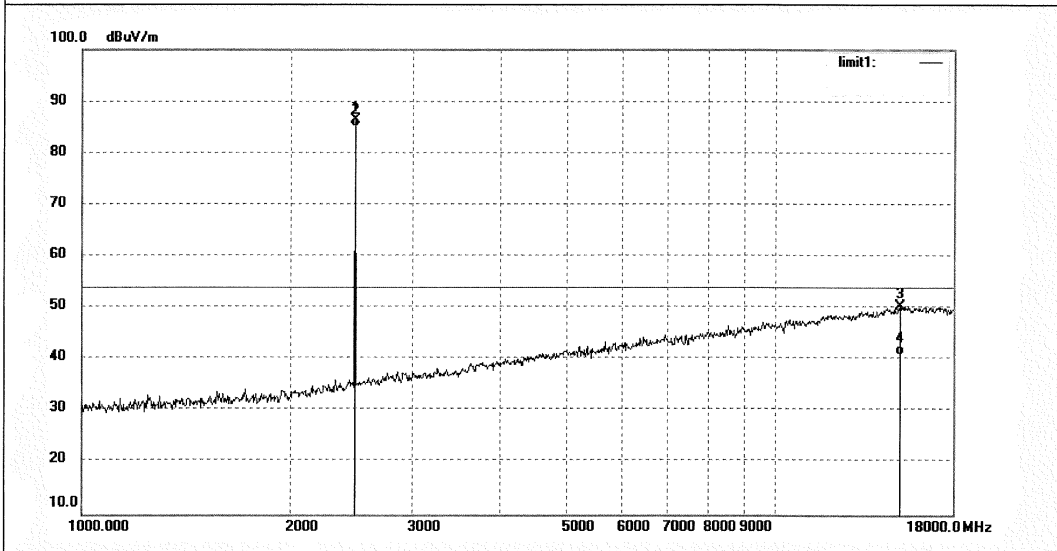

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2479.000	93.65	-7.37	86.28	114.00	-27.72	peak			
2	2479.000	92.40	-7.37	85.03	94.00	-8.97	AVG			
3	15090.405	9.50	40.92	50.42	74.00	-23.58	peak			
4	15090.405	-0.03	40.92	40.89	54.00	-13.11	AVG			

Prüfbericht - Nr.: 50047554 001

Test Report No.

Seite 25 von 60

Page 25 of 60

5.1.4 Radiated emissions outside of the band**RESULT:****Pass**

Date of testing	:	2016-06-13
Test standard	:	FCC Part 15.209(a) FCC Part 15.249(d) RSS-210 Clause A2.9(b)
Basic standard	:	ANSI C63.10: 2013
Frequency range	:	0.009 – 26500MHz*
Limits	:	FCC Part 15.209(a) FCC Part 15.249(d)
Kind of test site	:	3m Semi-Anechoic Chamber & Anechoic Chamber

Test Setup

Test channel	:	Low/ Middle/ High
Operation mode	:	A.1
Ambient temperature	:	23°C
Relative humidity	:	48%
Atmospheric pressure	:	101kPa

For details refer to following test plot.

Test Plot of Radiated emissions outside band


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Lenovo Professional Wireless Keyboard M/N:KBRFBD71
 Manufacturer: Lenovo
 Operating Condition: TX 2402MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 3V
 Comment: X
 Start of Test: 2016-06-10 /

SCAN TABLE: "LFRE Fin"

Short Description:		_SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

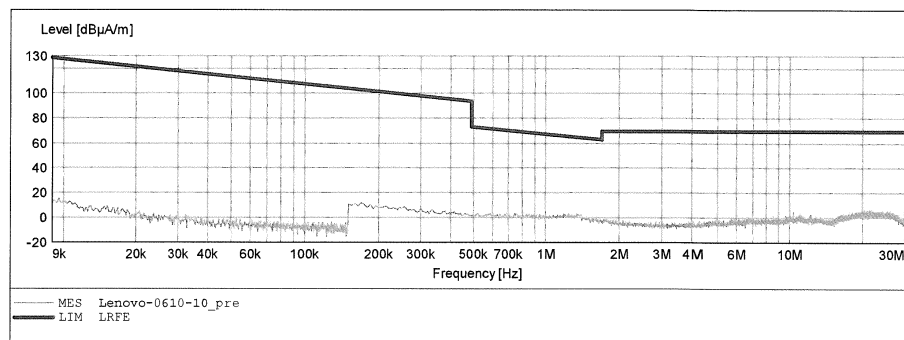


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Lenovo Professional Wireless Keyboard M/N:KBRFBD71
 Manufacturer: Lenovo
 Operating Condition: TX 2402MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 3V
 Comment: Y
 Start of Test: 2016-06-10 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

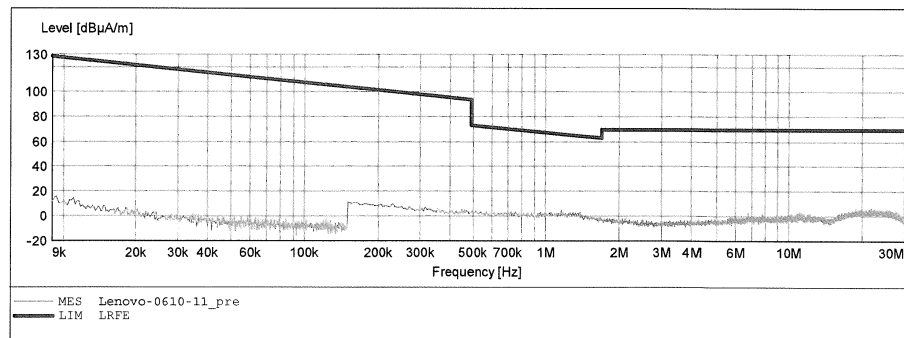


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Lenovo Professional Wireless Keyboard M/N:KBRFBD71
 Manufacturer: Lenovo
 Operating Condition: TX 2402MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 3V
 Comment: Z
 Start of Test: 2016-06-10 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

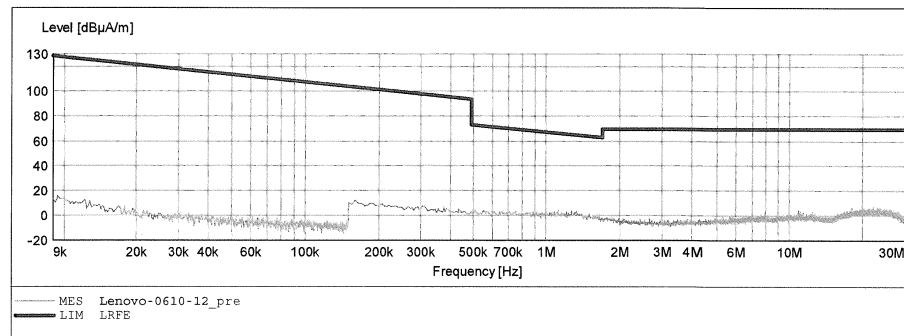


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Lenovo Professional Wireless Keyboard M/N:KBRFBD71
 Manufacturer: Lenovo
 Operating Condition: TX 2441MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 3V
 Comment: X
 Start of Test: 2016-06-10 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

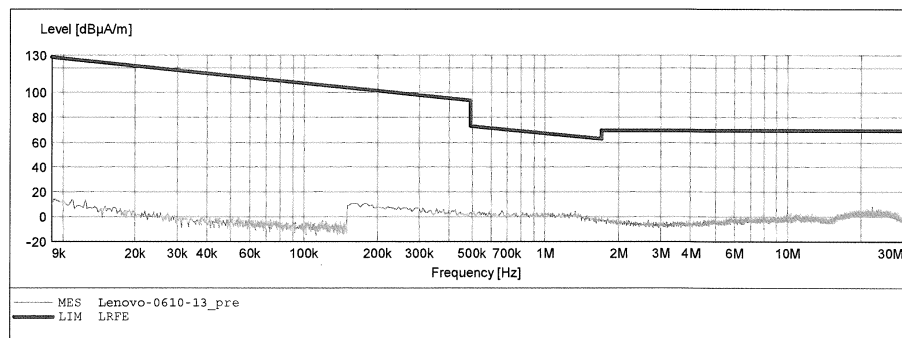


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Lenovo Professional Wireless Keyboard M/N:KBRFBD71
 Manufacturer: Lenovo
 Operating Condition: TX 2441MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 3V
 Comment: Y
 Start of Test: 2016-06-10 /

SCAN TABLE: "LFRE Fin"

Short Description:			SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

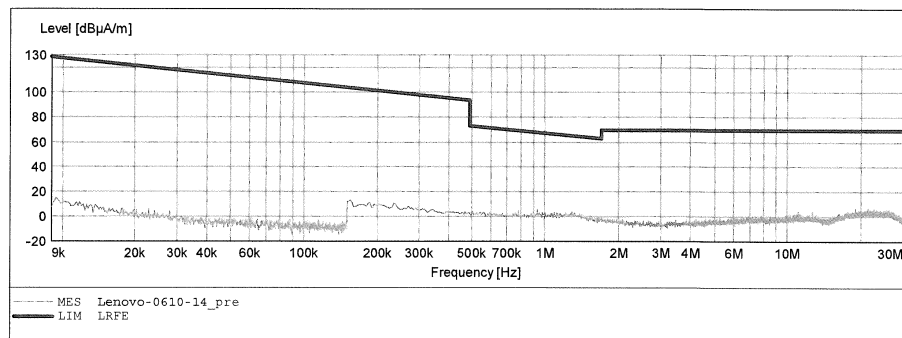


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Lenovo Professional Wireless Keyboard M/N:KBRFBD71
 Manufacturer: Lenovo
 Operating Condition: TX 2441MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 3V
 Comment: Z
 Start of Test: 2016-06-10 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

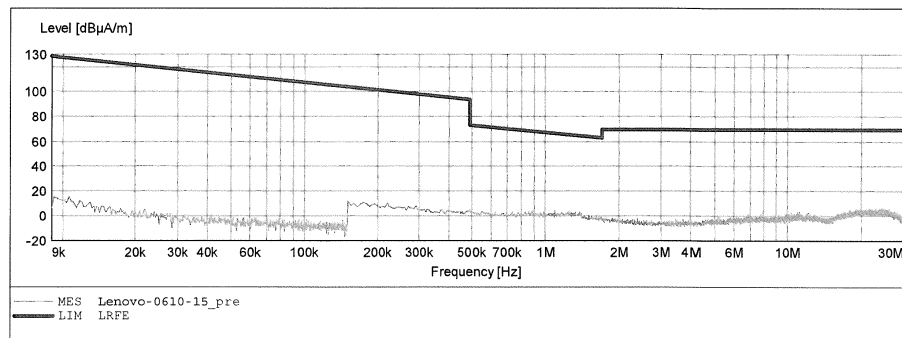


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Lenovo Professional Wireless Keyboard M/N:KBRFBD71
 Manufacturer: Lenovo
 Operating Condition: TX 2479MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 3V
 Comment: X
 Start of Test: 2016-06-10 /

SCAN TABLE: "LFRE Fin"

Short Description:			SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

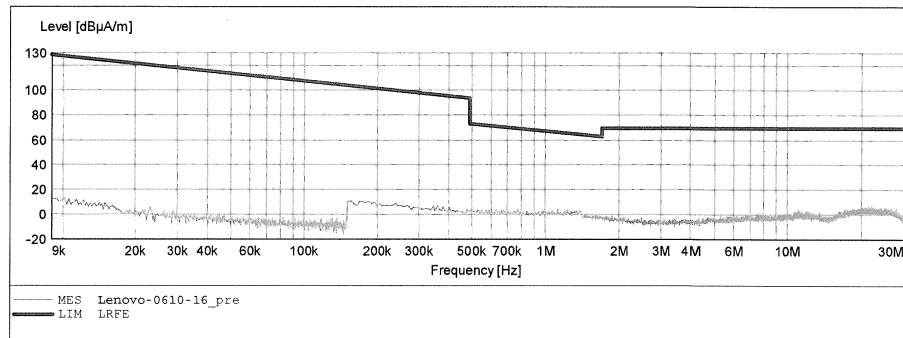


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Lenovo Professional Wireless Keyboard M/N:KBRFBD71
 Manufacturer: Lenovo
 Operating Condition: TX 2479MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 3V
 Comment: Y
 Start of Test: 2016-06-10 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

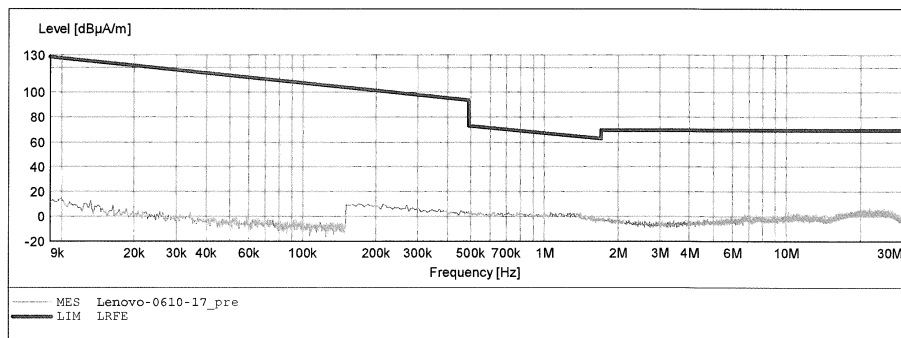


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Lenovo Professional Wireless Keyboard M/N:KBRFBD71
 Manufacturer: Lenovo
 Operating Condition: TX 2479MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 3V
 Comment: Z
 Start of Test: 2016-06-10 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

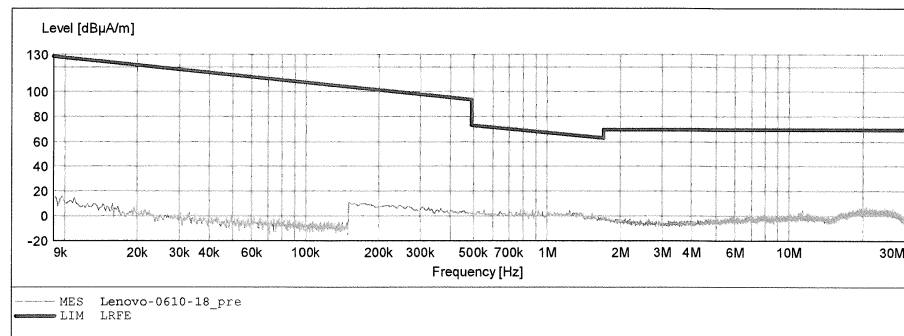


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ienovo #1095

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Professional Wireless Keyboard

Mode: TX 2402MHz

Model: KBRFBD71

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3V


Date: 16/06/08/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

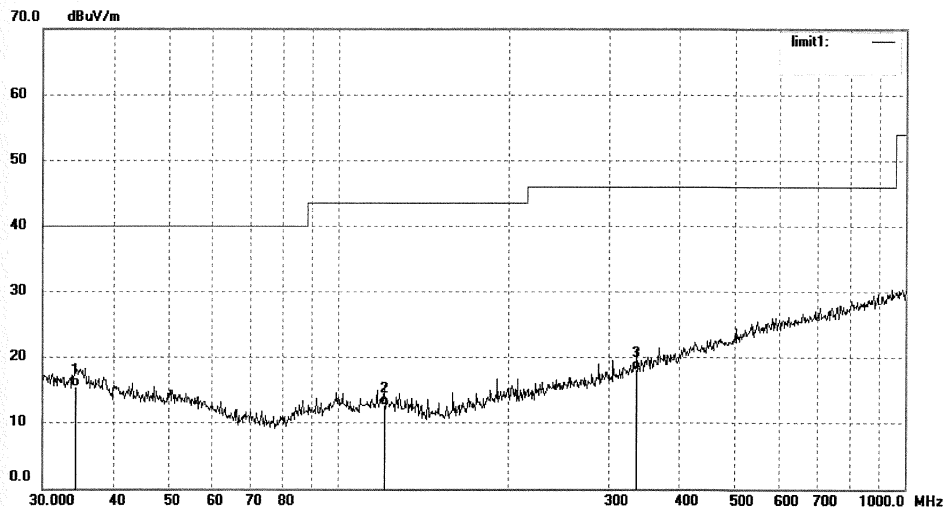


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.2760	25.89	-10.35	15.54	40.00	-24.46	QP			
2	120.2766	25.89	-13.18	12.71	43.50	-30.79	QP			
3	336.0351	26.42	-8.23	18.19	46.00	-27.81	QP			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: lenovo #1096	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 16/06/08/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Lenovo Professional Wireless Keyboard	Engineer Signature: LGWADE
Mode: TX 2402MHz	Distance: 3m
Model: KBRFBD71	
Manufacturer: Lenovo	

Note:

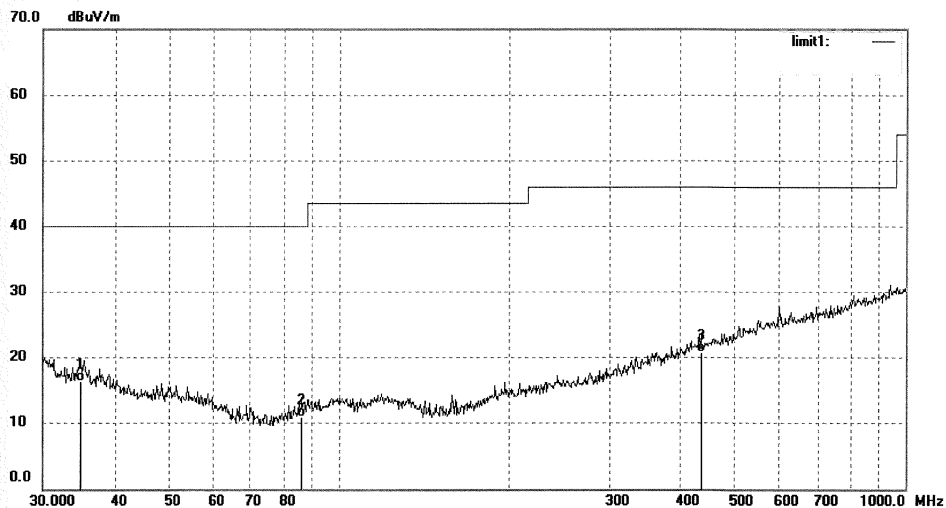

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.8823	26.83	-10.38	16.45	40.00	-23.55	QP			
2	86.2001	26.24	-15.31	10.93	40.00	-29.07	QP			
3	437.1198	26.66	-5.91	20.75	46.00	-25.25	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #1098

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Professional Wireless Keyboard

Mode: TX 2441MHz

Model: KBRFBD71

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3V


Date: 16/06/08/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

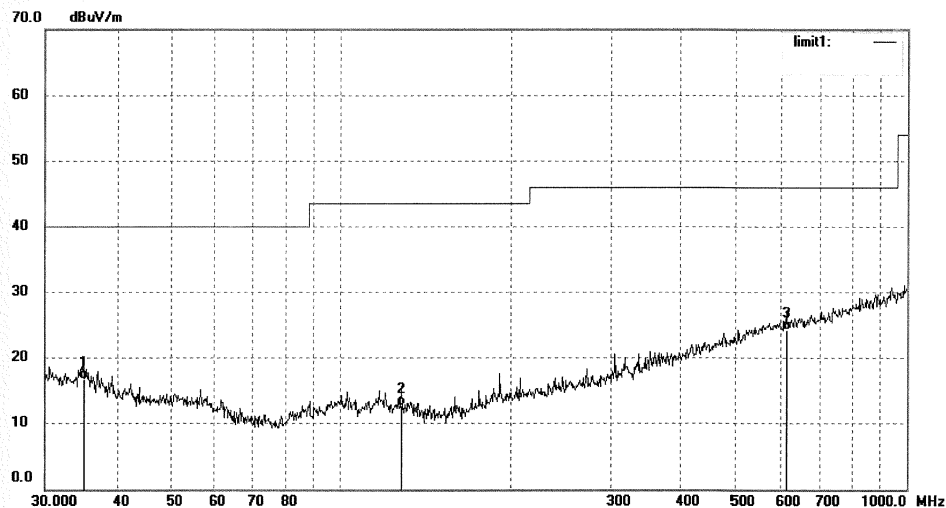


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.0048	27.14	-10.42	16.72	40.00	-23.28	QP			
2	128.1129	26.42	-13.81	12.61	43.50	-30.89	QP			
3	612.0642	27.00	-2.78	24.22	46.00	-21.78	QP			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: lenovo #1097	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 16/06/08/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Lenovo Professional Wireless Keyboard	Engineer Signature: LGWADE
Mode: TX 2441MHz	Distance: 3m
Model: KBRFBD71	
Manufacturer: Lenovo	

Note:

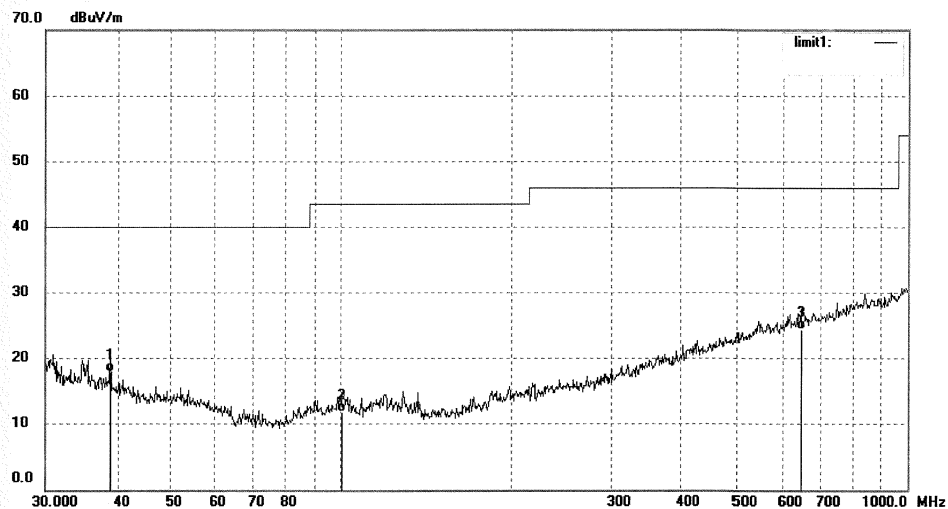

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	38.8878	29.21	-11.30	17.91	40.00	-22.09	QP			
2	100.5806	24.96	-13.21	11.75	43.50	-31.75	QP			
3	647.3855	26.96	-2.48	24.48	46.00	-21.52	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #1099

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Professional Wireless Keyboard

Mode: TX 2479MHz

Model: KBRFBD71

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3V


Date: 16/06/08/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

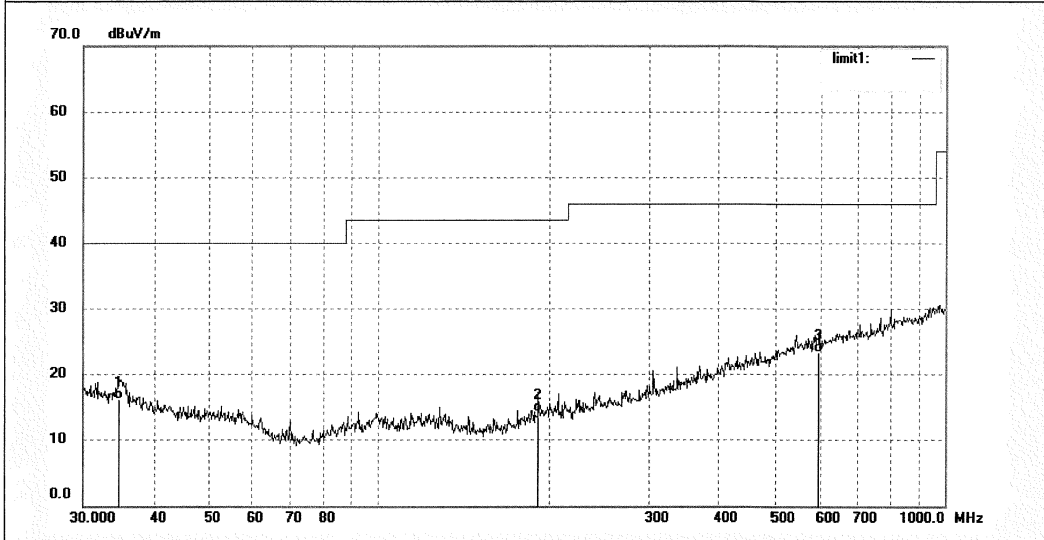

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.5172	26.55	-10.37	16.18	40.00	-23.82	QP			
2	191.7450	26.83	-12.59	14.24	43.50	-29.26	QP			
3	597.2233	26.36	-3.01	23.35	46.00	-22.65	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ienovo #1100

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Professional Wireless Keyboard

Mode: TX 2479MHz

Model: KBRFBD71

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 3V


Date: 16/06/08/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

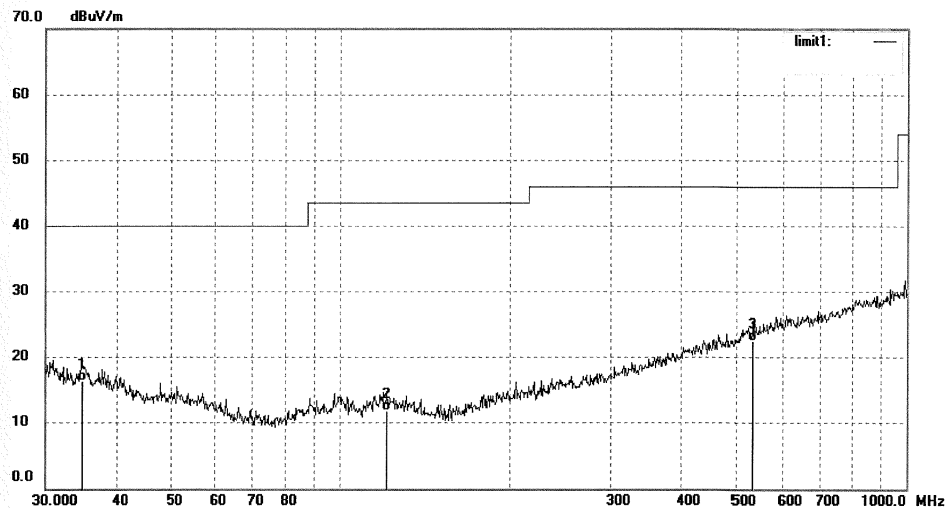

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.7601	26.75	-10.34	16.41	40.00	-23.59	QP			
2	120.6991	25.02	-13.22	11.80	43.50	-31.70	QP			
3	533.8320	26.44	-3.99	22.45	46.00	-23.55	QP			


ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #1086	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 16/06/07/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Lenovo Professional Wireless Keyboard	Engineer Signature: LGWADE
Mode: TX 2402MHz	Distance: 3m
Model: KBRFBD71	
Manufacturer: Lenovo	

Note:

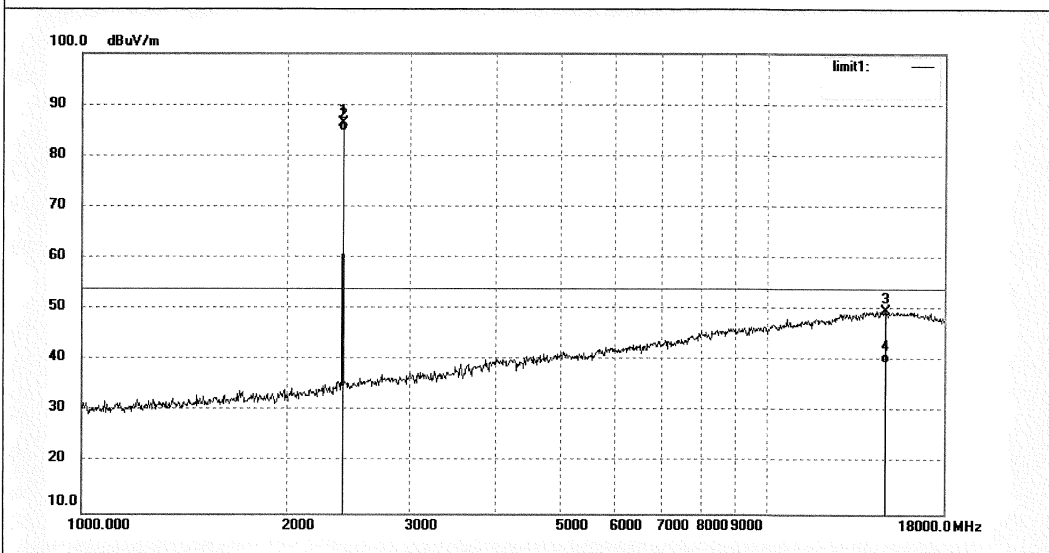

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	93.75	-7.45	86.30	/	/	peak			
2	2402.000	92.37	-7.45	84.92	/	/	AVG			
3	14745.473	7.79	41.86	49.65	74.00	-24.35	peak			
4	14745.473	-2.28	41.86	39.58	54.00	-14.42	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #1085	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 16/06/07/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Lenovo Professional Wireless Keyboard	Engineer Signature: LGWADE
Mode: TX 2402MHz	Distance: 3m
Model: KBRFBD71	
Manufacturer: Lenovo	

Note:

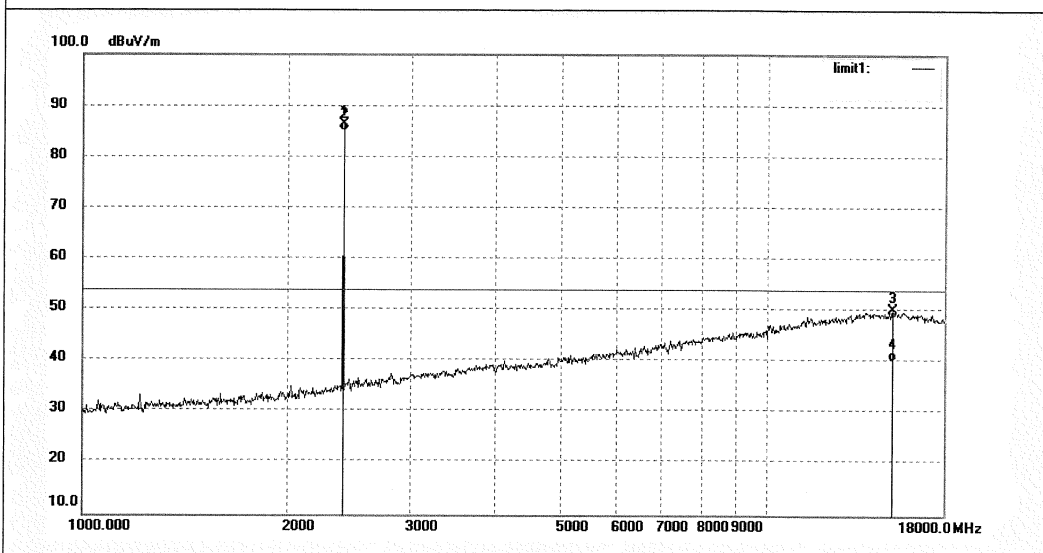

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	93.80	-7.45	86.35	/	/	peak			
2	2402.000	92.50	-7.45	85.05	/	/	AVG			
3	15090.405	9.16	40.92	50.08	74.00	-23.92	peak			
4	15090.405	-0.59	40.92	40.33	54.00	-13.67	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #1087

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Professional Wireless Keyboard

Mode: TX 2441MHz

Model: KBRFBD71

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3V


Date: 16/06/07/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

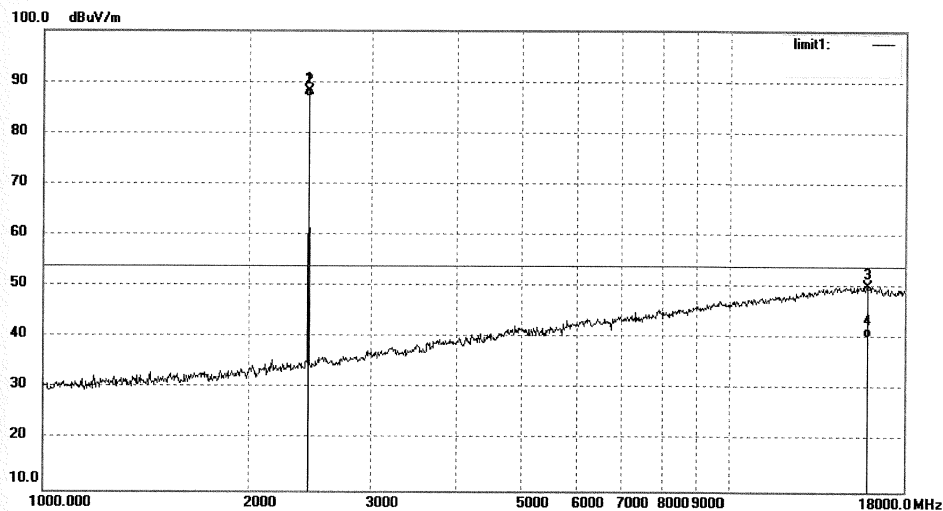

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	95.52	-7.35	88.17	/	/	peak			
2	2441.000	94.36	-7.35	87.01	/	/	AVG			
3	15850.410	10.16	40.03	50.19	54.00	-3.81	peak			
4	15850.410	0.20	40.03	40.23	54.00	-13.77	AVG			


ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #1088	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 16/06/07/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Lenovo Professional Wireless Keyboard	Engineer Signature: LGWADE
Mode: TX 2441MHz	Distance: 3m
Model: KBRFBD71	
Manufacturer: Lenovo	

Note:

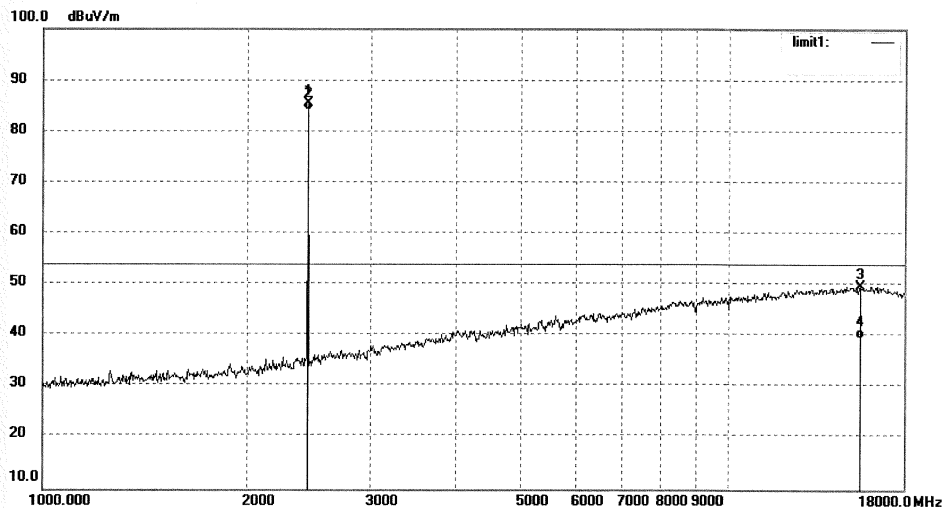

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	92.78	-7.35	85.43	/	/	peak			
2	2441.000	91.56	-7.35	84.21	/	/	AVG			
3	15488.107	9.68	40.12	49.80	74.00	-24.20	peak			
4	15488.107	-0.53	40.12	39.59	54.00	-14.41	AVG			


ACCURATE TECHNOLOGY CO., LTD.


 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ienovo #1090	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 16/06/07/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Ienovo Professional Wireless Keyboard	Engineer Signature: LGWADE
Mode: TX 2479MHz	Distance: 3m
Model: KBRFBD71	
Manufacturer: Ienovo	

Note:

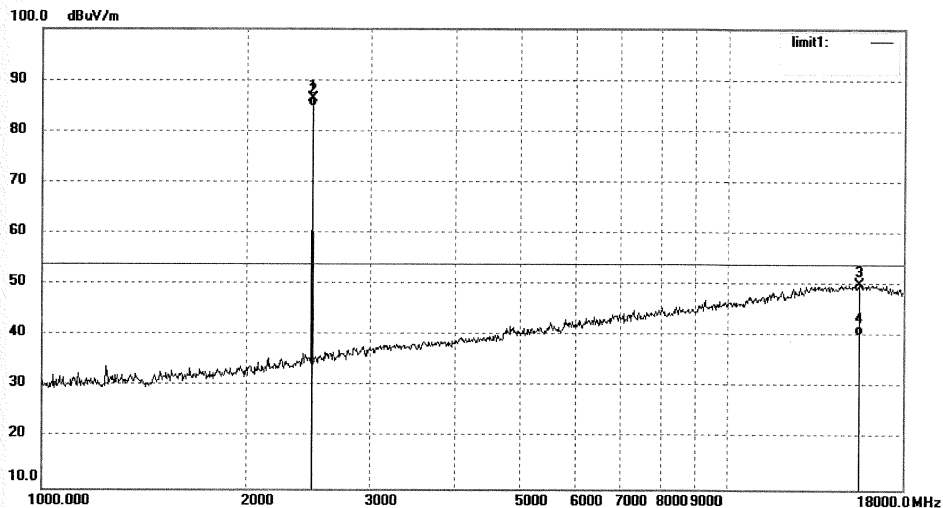

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2479.000	93.73	-7.37	86.36	/	/	peak			
2	2479.000	92.29	-7.37	84.92	/	/	AVG			
3	15532.938	9.97	40.09	50.06	74.00	-23.94	peak			
4	15532.938	0.20	40.09	40.29	54.00	-13.71	AVG			


ACCURATE TECHNOLOGY CO., LTD.


 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: lenovo #1089	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 16/06/07/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Lenovo Professional Wireless Keyboard	Engineer Signature: LGWADE
Mode: TX 2479MHz	Distance: 3m
Model: KBRFBD71	
Manufacturer: Lenovo	

Note:

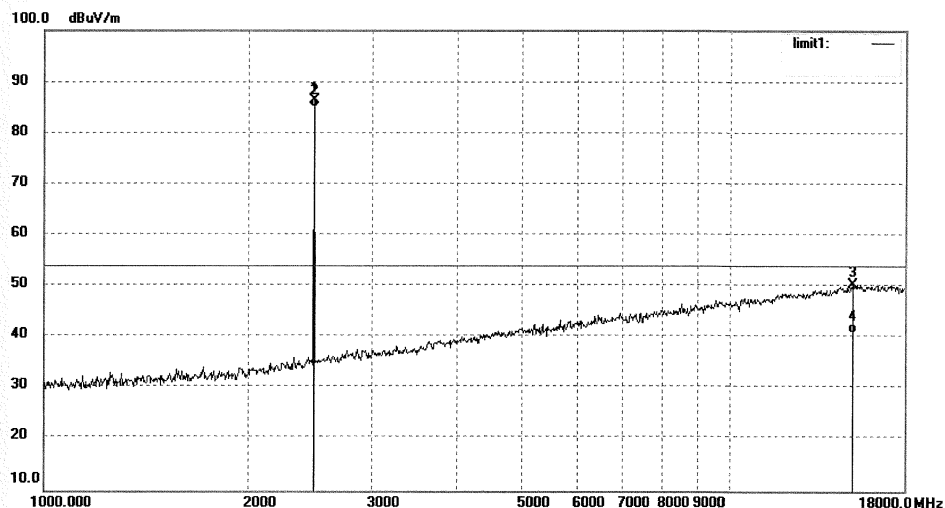

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2479.000	93.65	-7.37	86.28	/	/	peak			
2	2479.000	92.40	-7.37	85.03	/	/	AVG			
3	15090.405	9.50	40.92	50.42	74.00	-23.58	peak			
4	15090.405	-0.03	40.92	40.89	54.00	-13.11	AVG			


ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #1223	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 16/06/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Lenovo Professional Wireless Keyboard	Engineer Signature: LGWADE
Mode: TX 2402MHz	Distance: 3m
Model: KBRFBD71	
Manufacturer: Lenovo	

Note:

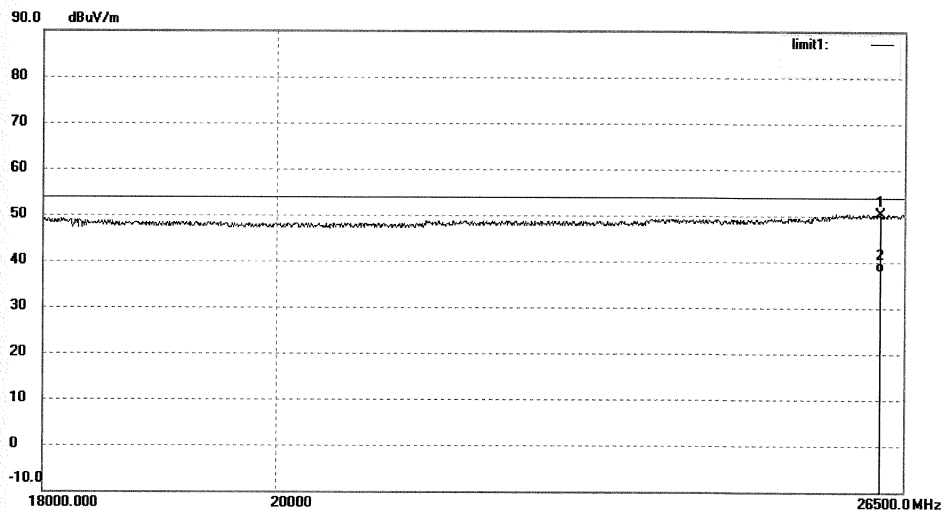

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26224.704	33.90	16.50	50.40	74.00	-23.60	peak			
2	26224.704	21.45	16.50	37.95	54.00	-16.05	AVG			

Prüfbericht - Nr.: 50047554 001
Test Report No.
Seite 48 von 60
Page 48 of 60

ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #1224	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 16/06/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Lenovo Professional Wireless Keyboard	Engineer Signature: LGWADE
Mode: TX 2402MHz	Distance: 3m
Model: KBRFBD71	
Manufacturer: Lenovo	

Note:

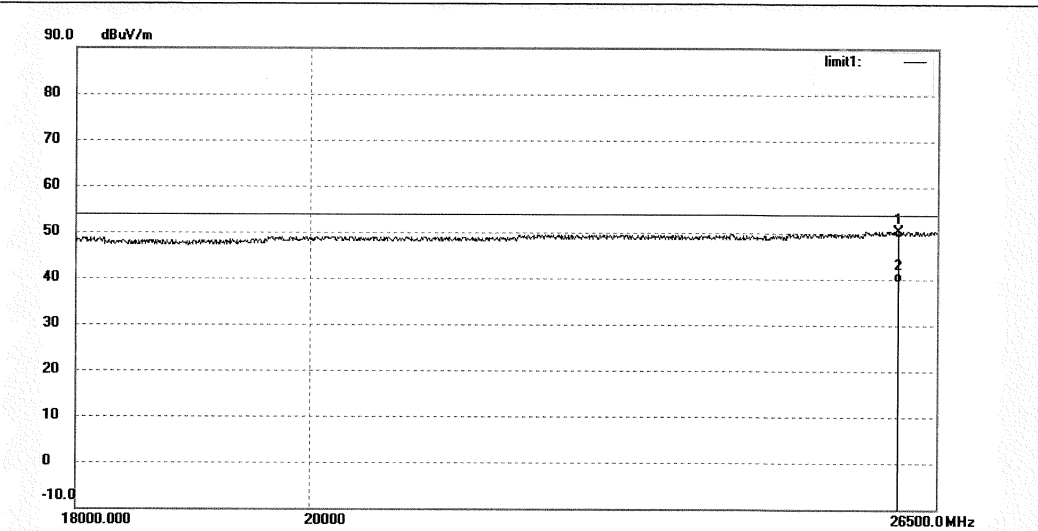

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26042.764	33.94	16.50	50.44	74.00	-23.56	peak			
2	26042.764	22.76	16.50	39.26	54.00	-14.74	AVG			

Prüfbericht - Nr.: 50047554 001
Test Report No.
Seite 49 von 60
Page 49 of 60

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #1226	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 16/06/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Lenovo Professional Wireless Keyboard	Engineer Signature: LGWADE
Mode: TX 2441MHz	Distance: 3m
Model: KBRFBD71	
Manufacturer: Lenovo	

Note:

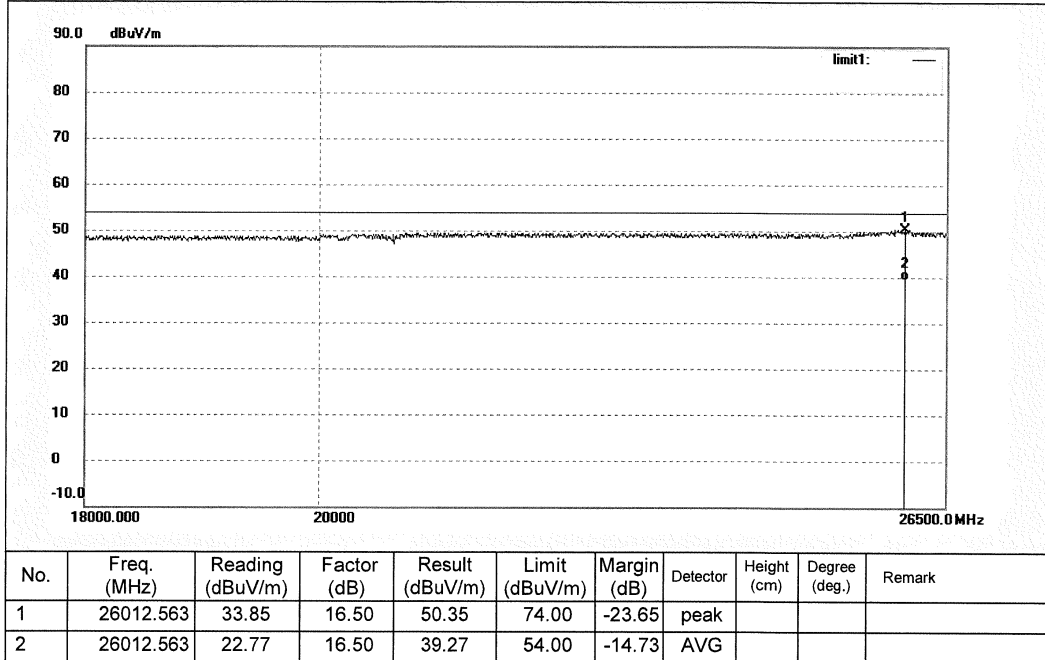

Prüfbericht - Nr.: 50047554 001
Test Report No.
Seite 50 von 60
Page 50 of 60

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #1225	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 16/06/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Lenovo Professional Wireless Keyboard	Engineer Signature: LGWADE
Mode: TX 2441MHz	Distance: 3m
Model: KBRFBD71	
Manufacturer: Lenovo	

Note:

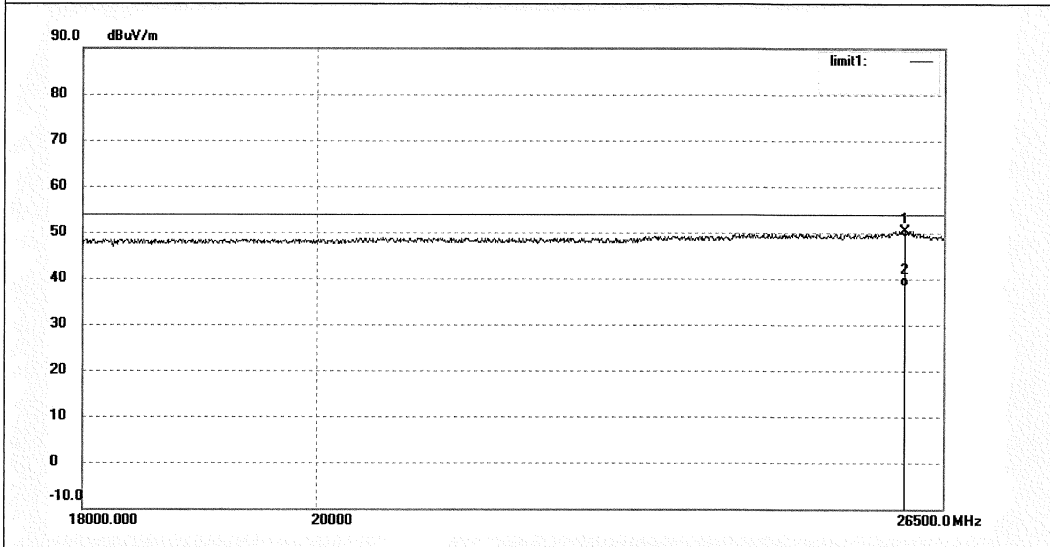

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26042.764	33.99	16.50	50.49	74.00	-23.51	peak			
2	26042.764	21.87	16.50	38.37	54.00	-15.63	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #1227	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 16/06/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Lenovo Professional Wireless Keyboard	Engineer Signature: LGWADE
Mode: TX 2479MHz	Distance: 3m
Model: KBRFBD71	
Manufacturer: Lenovo	

Note:

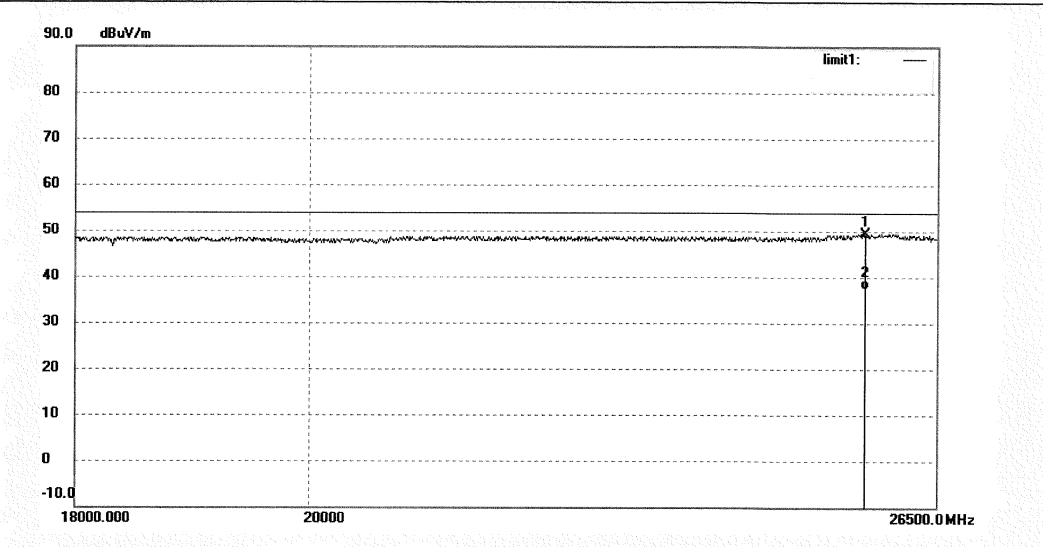

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25672.730	32.99	16.50	49.49	74.00	-24.51	peak			
2	25672.730	20.79	16.50	37.29	54.00	-16.71	AVG			

Prüfbericht - Nr.: 50047554 001
Test Report No.
Seite 52 von 60
Page 52 of 60

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #1228	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 16/06/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Lenovo Professional Wireless Keyboard	Engineer Signature: LGWADE
Mode: TX 2479MHz	Distance: 3m
Model: KBRFBD71	
Manufacturer: Lenovo	

Note:

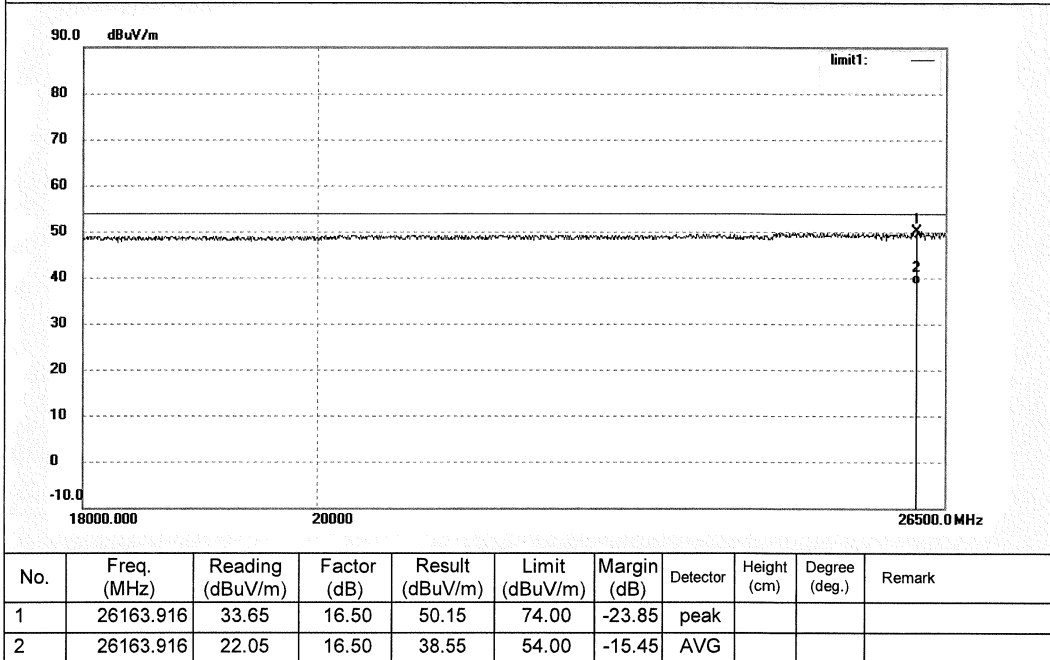

Prüfbericht - Nr.: 50047554 001
Test Report No.
Seite 53 von 60
Page 53 of 60

Test Plot of Frequency Band Edge


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #1094

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Professional Wireless Keyboard

Mode: TX 2402MHz

Model: KBRFBD71

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3V


Date: 16/06/07/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

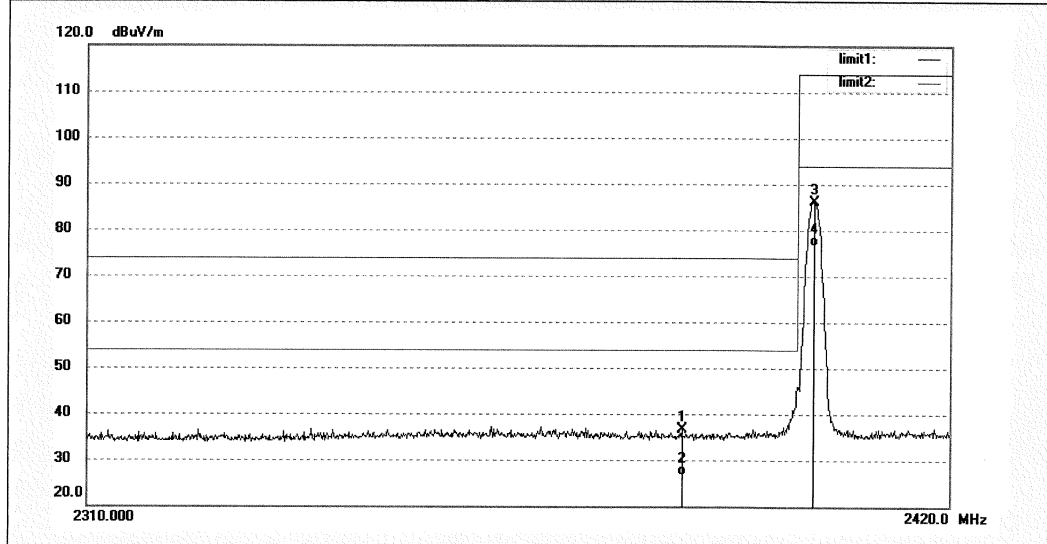

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2385.680	44.31	-7.56	36.75	74.00	-37.25	peak			
2	2385.680	34.15	-7.56	26.59	54.00	-27.41	AVG			
3	2402.000	93.64	-7.45	86.19	114.00	-27.81	peak			
4	2402.000	84.03	-7.45	76.58	94.00	-17.42	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax: +86-0755-26503396

Job No.: lenovo #1093	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: DC 3V
Test item: Radiation Test	Date: 16/06/07/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Lenovo Professional Wireless Keyboard	Engineer Signature: LGWADE
Mode: TX 2402MHz	Distance: 3m
Model: KBRFBD71	
Manufacturer: Lenovo	

Note:

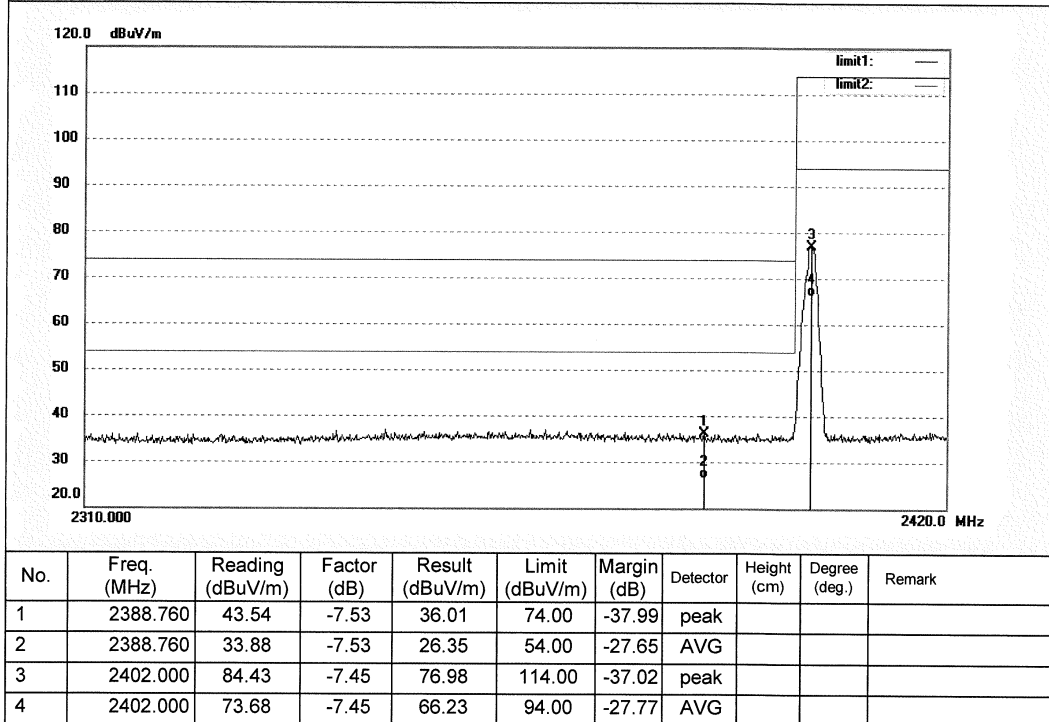


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #1091	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: DC 3V
Test item: Radiation Test	Date: 16/06/07/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Lenovo Professional Wireless Keyboard	Engineer Signature: LGWADE
Mode: TX 2479MHz	Distance: 3m
Model: KBRFBD71	
Manufacturer: Lenovo	

Note:

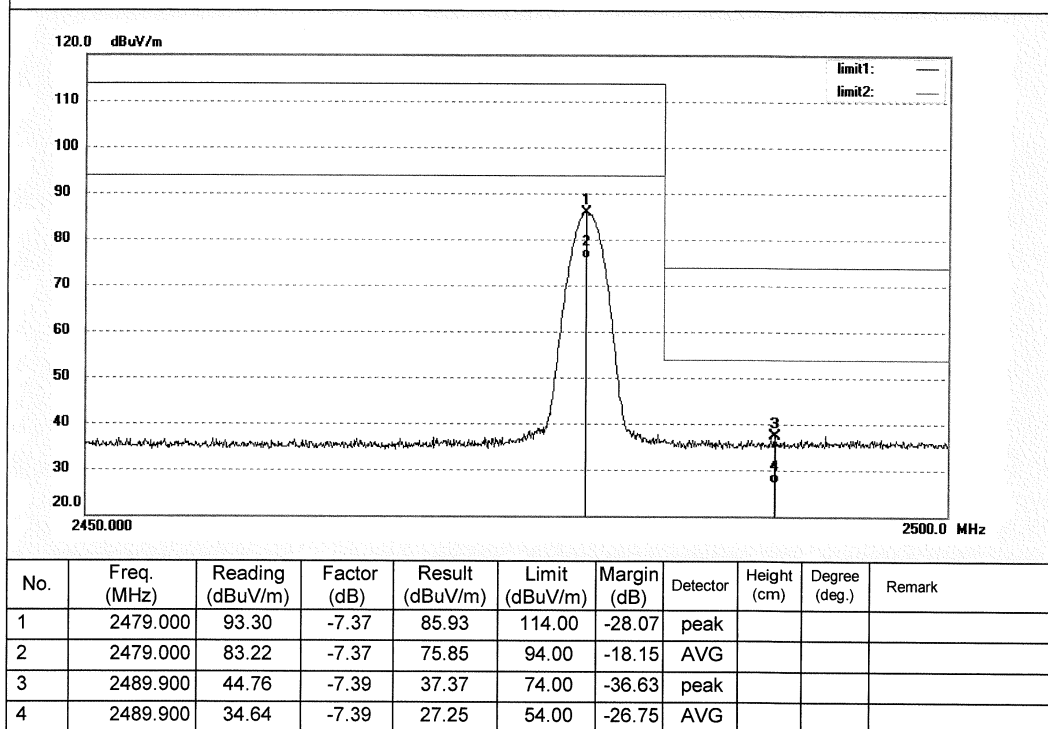


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #1092	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: DC 3V
Test item: Radiation Test	Date: 16/06/07/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Lenovo Professional Wireless Keyboard	Engineer Signature: LGWADE
Mode: TX 2479MHz	Distance: 3m
Model: KBRFBD71	
Manufacturer: Lenovo	

Note:

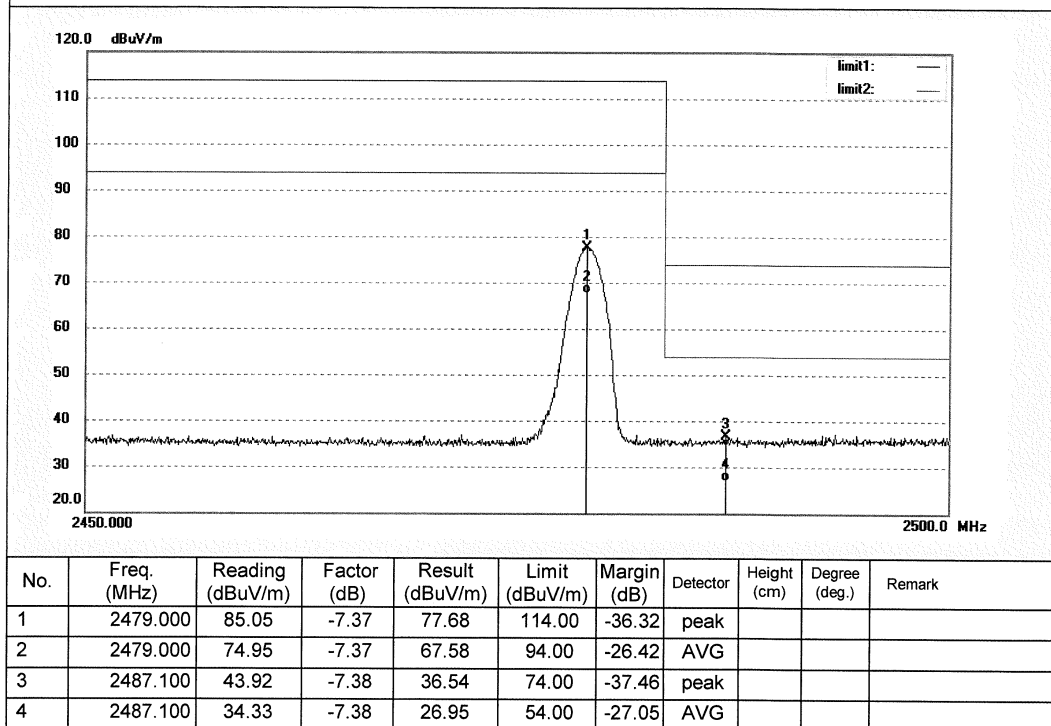

6. Safety Human exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:**Pass**

Test standard : RSS-102 Issue 5 March 2015
FCC KDB Publication 447498 D01 v06

The maximum radiated power of the transmitter is 0.989mW (-0.05dBm) only, which less than 4mW. Hence the EUT is exempted from routine evaluation limits (SAR Evaluation) according to clause 2.5.1 of RSS-102 Issue 5.

Since maximum radiated power of the transmitter is 0.989mW<10mW, and the distance from EUT to human is 5mm, hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01 General RF Exposure Guidance v06.

8. List of Tables

Table 1: List of Test and Measurement Equipment	5
Table 2: Measurement Uncertainty	6
Table 3: Technical Specification of EUT	7
Table 4: Test result of 20dB & 99% Bandwidth.....	13
Table 5: Polarization of the measurement for the larger power level channel 2441MHz: Horizontal.....	18

9. List of Photographs

Photograph 1: Set-up for Spurious Emissions below 30MHz	58
Photograph 2: Set-up for Spurious Emissions of 30MHz – 1GHz.....	58
Photograph 3: Set-up for Spurious Emissions of 1 – 18GHz	59
Photograph 4: Set-up for Spurious Emissions of 18 – 26.5GHz	59