

# **FCC TEST REPORT**

for

## **PART 15, SUBPART B CLASS B**

Equipment : FLATBED SCANNER

MODEL NO. : FB612D/FB613D/FB614D/FB615D/FB616D

**F C C I D** : EMJS00001

Filing Type : Original Grant

APPLICANT : **PRIMAX ELECTRONICS LTD.**

6F, No. 159, Kang Ning St., Hsi Chih Town,  
Taipei Hsien, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.

**SPORTON INTERNATIONAL INC.**

6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

---

**TABLE OF CONTENT**

| <b>SECTION TITLE</b>                                             | <b>PAGE</b> |
|------------------------------------------------------------------|-------------|
| <b>CERTIFICATE OF COMPLIANCE .....</b>                           | <b>3</b>    |
| <b>1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST.....</b>       | <b>4</b>    |
| 1.1. APPLICANT .....                                             | 4           |
| 1.2. MANUFACTURER .....                                          | 4           |
| 1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST .....             | 4           |
| 1.4. FEATURE OF EQUIPMENT UNDER TEST.....                        | 4           |
| <b>2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>       | <b>5</b>    |
| 2.1. TEST MANNER .....                                           | 5           |
| 2.2. DESCRIPTION OF TEST SYSTEM .....                            | 5           |
| 2.3. CONNECTION DIAGRAM OF TEST SYSTEM.....                      | 7           |
| <b>3. TEST SOFTWARE.....</b>                                     | <b>8</b>    |
| <b>4. GENERAL INFORMATION OF TEST .....</b>                      | <b>9</b>    |
| 4.1. TEST FACILITY .....                                         | 9           |
| 4.2. STANDARD FOR METHODS OF MEASUREMENT .....                   | 9           |
| 4.3. TEST IN COMPLIANCE WITH.....                                | 9           |
| 4.4. FREQUENCY RANGE INVESTIGATED .....                          | 9           |
| 4.5. TEST DISTANCE .....                                         | 9           |
| <b>5. TEST OF CONDUCTED POWERLINE.....</b>                       | <b>10</b>   |
| 5.1. MAJOR MEASURING INSTRUMENTS .....                           | 10          |
| 5.2. TEST PROCEDURES .....                                       | 11          |
| 5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE .....      | 12          |
| 5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION .....        | 13          |
| 5.5. PHOTOGRAPHS OF CONDUCTED POWERLINE TEST CONFIGURATION ..... | 14          |
| <b>6. TEST OF RADIATED EMISSION .....</b>                        | <b>16</b>   |
| 6.1. MAJOR MEASURING INSTRUMENTS .....                           | 16          |
| 6.2. TEST PROCEDURES .....                                       | 17          |
| 6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION .....        | 18          |
| 6.4. TEST RESULT OF RADIATED EMISSION .....                      | 19          |
| 6.5. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION .....   | 20          |
| <b>7. ANTENNA FACTOR AND CABLE LOSS.....</b>                     | <b>21</b>   |
| <b>8. LIST OF MEASURING INSTRUMENTS USED.....</b>                | <b>22</b>   |

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

**FCC TEST REPORT**

**REPORT NO. : F850816**

CERTIFICATE NO. : F850816

## CERTIFICATE OF COMPLIANCE

for

### FCC PART 15, SUBPART B CLASS B

Equipment : FLATBED SCANNER

MODEL NO. : FB612D/FB613D/FB614D/FB615D/FB616D


**F C C I D : EMJS00001**

**APPLICANT : PRIMAX ELECTRONICS LTD.**

6F, No. 159, Kang Ning St., Hsi Chih Town,  
Taipei Hsien, Taiwan, R.O.C.

### I HEREBY CERTIFY THAT :

The measurement shown in this report were made in accordance with the procedures given in **ANSI C63.4 -1992** and the energy emitted by this equipment was **passed** both radiated and conducted emissions CLASS B limits. Testing was carried out on MAY. 07, 1998 at **SPORTON International Inc.** in LIN KOU.

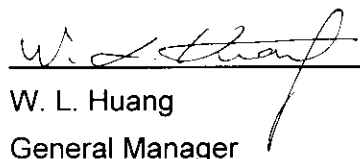 June 08, 98  
W. L. Huang  
General Manager

**SPORTON International Inc.**

6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## **1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST**

### **1.1. APPLICANT**

**PRIMAX ELECTRONICS LTD.**

6F, No. 159, Kang Ning St., Hsi Chih Town,  
Taipei Hsien, Taiwan, R.O.C.

### **1.2. MANUFACTURER**

Same as 1.1

### **1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST**

EQUIPMENT : FLATBED SCANNER

MODEL NO. : FB612D/FB613D/FB614D/FB615D/FB616D

FCC ID:EMJS00001

TRADE NAME : PRIMAX or STORM

DATA CABLE : Shielded

POWER SUPPLY TYPE : Switching

Remark: A ferrite core is added on the adaptor cable at EUT end.

Two ferrite cores are added on the data cable at two end.

POWER CORD : N/A

### **1.4. FEATURE OF EQUIPMENT UNDER TEST**

- Reading Size: MAX. 216x297mm (A4)
- 8 bit/gray/pixel, 300x600
- 24 bit/color/pixel, 300x600
- Scanning speed 12 ms per line (MAX.)
- Sensor: CCD (charge coupled device)
- Interface: parallel port (EPP/SPP)

## **2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST**

### **2.1. TEST MANNER**

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The DELL keyboard, SONY monitor, HP printer, PRIMAX scanner and ACEEX modem were connected to the LEO PC.
- c. The EUT was applied five models, the PCB layout, circuit and components are exactly the same. The only difference is appearance.
- d. The EUT was applied two models of adaptor:
  1. BESTEC/BPA-201S-12
  2. DVE/DSA-0151A-12
- e. The BESTEC adaptor and DVE adaptor were tested in order to find the maximum emissions. Since the DVE adaptor generates the worst case, the mode was used as the final data.
- f. During the test, the monitor AC power cord was plugged into the PC computer-mounted AC outlet and a floor-mounted AC outlet to search the maximum emission.
- g. Frequency range investigated: Conduction 450 KHz to 30 MHz, Radiation 30 MHz to 1000 MHz.

### **2.2. DESCRIPTION OF TEST SYSTEM**

#### **Support Device 5. --- PERSONAL COMPUTER (LEO)**

FCC ID :EUNPA2005  
Model No. :PA-2005  
Serial No. :SP1037  
Data Cable :Shielded, 360 degree via metal backshells.  
Power Supply Type :Switching  
Power Cord :Non-shielded

#### **Support Device 2. --- MODEM ( ACEEX )**

FCC ID :IFAXDM1414  
Model No. :DM1414  
Serial No. :SP0016  
Data Cable :Shielded, 360 degree via metal backshells  
Power Supply Type :Linear

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

**FCC TEST REPORT****REPORT NO. : F850816**

## Support Device 3. --- PRINTER (HP)

FCC ID : B94C2642X  
Model No. : DESKJET 400  
Serial No. : SP0003  
Data Cable : Shielded, 360 degree via metal backshells  
Power Supply Type : Linear

## Support Device 4. --- MONITOR (SONY)

FCC ID : AK8GDM17SE2T  
Model No. : GDM-17SE27  
Serial No. : SP1045  
Data Cable : Shielded  
Power Supply Type : Switching  
Power Cord : Non-shielded


## Support Device 5. --- KEYBOARD (DELL)

FCC ID : GYUM92SK  
Model No. : AT101  
Serial No. : SP1008  
Data Cable : Shielded, 360 degree via metal backshells

## Support Device 6. --- VGA CARD (BRITEK)

FCC ID : ILLS386XP  
Model No. : BTK-076  
Serial No. : SP1015  
Data Cable : Shielded, 360 degree via metal backshells

## **2.3. CONNECTION DIAGRAM OF TEST SYSTEM**

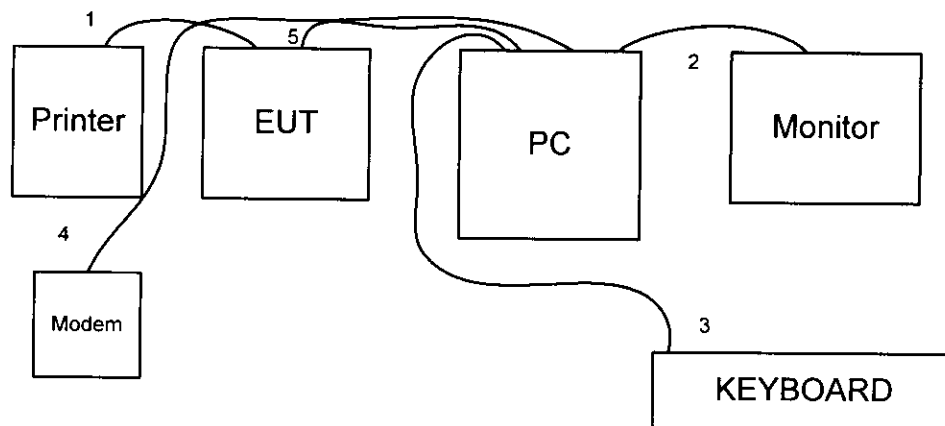

1. The I/O cable is connected from EUT to the support device 3.
2. The I/O cable is connected to the support device 4.
3. The I/O cable is connected to the support device 5.
4. The I/O cable is connected to the support device 2.
5. The I/O cable is connected to the EUT.

### **3. TEST SOFTWARE**

An executive program, FCC.EXE, which generates a complete line of continuously repeating " H " pattern is used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC reads "H" messages from scanner through parallel port.
- d. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- e. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- f. The PC sends " H " messages to the modem.
- g. The PC sends " H " messages to the internal Hard Disk, then the hard disk reads and writes the message.
- h. Repeat the steps from b to g.

## **4. GENERAL INFORMATION OF TEST**

### **4.1. TEST FACILITY**

This test was carried out by SPORTON INTERNATIONAL INC. in an openarea test site.

Openarea Test Site Location : No. 30-1, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,  
Taipei Hsien, Taiwan, R.O.C.

TEL : 886-2-2601-1640

FAX : 886-2-2601-1695

### **4.2. STANDARD FOR METHODS OF MEASUREMENT**

ANSI C63.4-1992

### **4.3 .TEST IN COMPLIANCE WITH**

FCC PART 15, SUBPART B CLASS B

### **4.4. FREQUENCY RANGE INVESTIGATED**

- a. Conduction : from 450 KHz to 30 MHz
- b. Radiation : from 30 MHz to 1000 MHz

### **4.5. TEST DISTANCE**

The test distance of radiated emission from antenna to EUT is 3M.

## 5. TEST OF CONDUCTED POWERLINE

Conducted Emissions were measured from 450 KHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in Figure 5-3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

### 5.1. MAJOR MEASURING INSTRUMENTS

- Test Receiver HP 85462A
  - Attenuation 0 dB
  - Start Frequency 0.45 MHz
  - Stop Frequency 30 MHz
  - Step MHz 0.007 MHz
  - IF Bandwidth 9 KHz

## **5.2. TEST PROCEDURES**

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room and was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network ( LISN ).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm , 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 450 KHz to 30 MHz was searched.
- h. Set the test-receiver system ( HP receiver 85462A ) to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be retested on by one using the quasi-peak method and reported.



**5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION**

- Frequency Range of Test : from 0.45 MHz to 30 MHz
- Temperature : 23 °C
- Relative Humidity :68% RH
- TEST MODE: DVE ADAPTOR
- All emissions not reported here are more than 10 dB below the prescribed limit.
- Test Date : MAY. 07, 1998

**The Conducted Emission test was passed at minimum margin**

**NEUTRAL 25.99MHz / 45.00dBuV.**

| Frequency<br>( MHz ) | Line / Neutral | Meter Reading |        | Limits   |        | Margin |
|----------------------|----------------|---------------|--------|----------|--------|--------|
|                      |                | ( dBuV )      | ( uV ) | ( dBuV ) | ( uV ) | ( dB ) |
| 2.30                 | L              | 40.70         | 108.39 | 48.00    | 251.19 | -7.30  |
| 8.01                 | L              | 36.20         | 64.57  | 48.00    | 251.19 | -11.80 |
| 20.99                | L              | 41.30         | 116.14 | 48.00    | 251.19 | -6.70  |
| 25.55                | L              | 44.20         | 162.18 | 48.00    | 251.19 | -3.80  |
| 25.55                | N              | 44.50         | 167.88 | 48.00    | 251.19 | -3.50  |
| 25.99                | N              | 45.00         | 177.83 | 48.00    | 251.19 | -3.00  |

Test Engineer :



## 6. TEST OF RADIATED EMISSION

Radiated emissions from 30 MHz to 1000MHz were measured with a bandwidth of 120 KHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in Figure 6-3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.


### 6.1. MAJOR MEASURING INSTRUMENTS

- RF Preselector
  - Attenuation 0 dB
  - RF Gain 20 dB
  - Signal Input Input 2 ( for 20 MHz to 2 GHz )
  
- Spectrum Analyzer 8568B
  - Attenuation 0 dB
  - Start Frequency 30 MHz
  - Stop Frequency 1000MHz
  - Resolution Bandwidth 1 MHz
  - Video Bandwidth 1 MHz
  - Signal Input Input 1 ( for 100KHz to 1.5 GHz )
  
- Quasi-Peak Adapter
  - Resolution Bandwidth 120 KHz
  - Frequency Band 30 MHz to 1 GHz
  - Quasi-Peak Detector ON for Quasi-Peak Mode  
OFF for Peak Mode

## **6.2. TEST PROCEDURES**

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower ( from 1 M to 4 M ) and turn table ( from 0 degree to 360 degrees ) to find the maximum reading.
- f. Set the test-receiver system ( HP 8568B ) to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

### 6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION

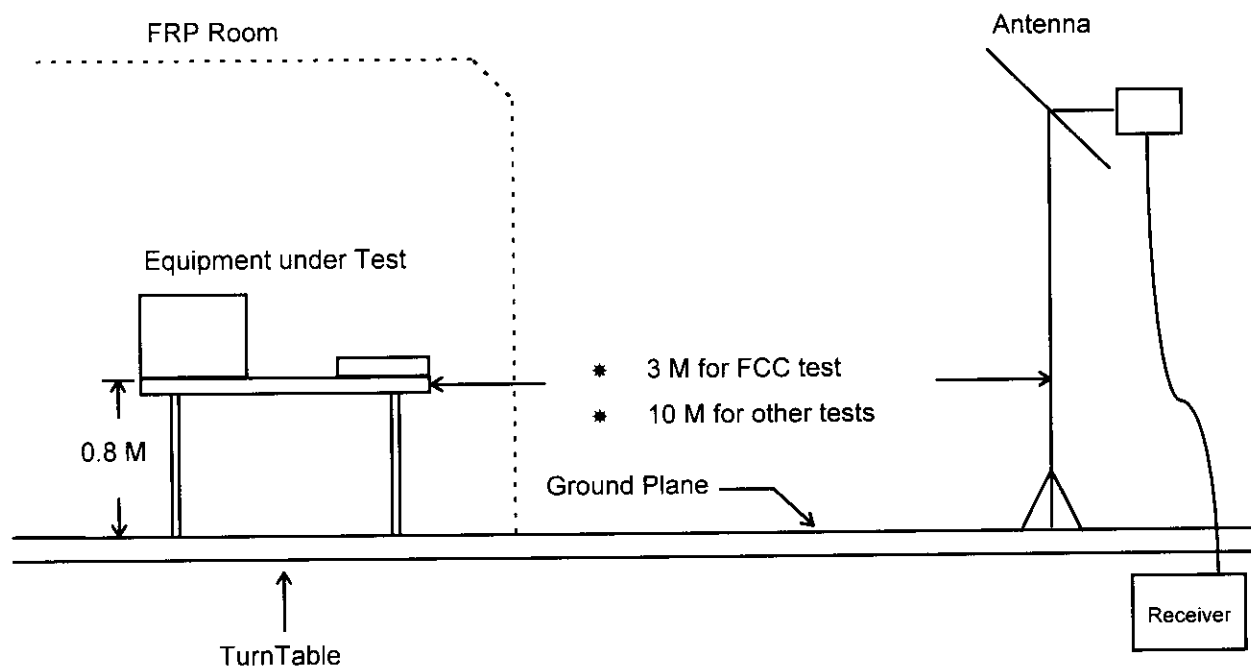

**6.4. TEST RESULT OF RADIATED EMISSION**

- Equipment meets the technical specifications of 15.109
- Frequency Range of Test : from 30 MHz to 1000 MHz
- Test Distance : 3 M
- Temperature : 23 °C
- Relative Humidity :68% RH
- Test Date :MAY. 08, 1998
- TEST MODE: DVE ADAPTOR
- Emission level ( dBuV/m ) = 20 log Emission level ( uV/m )
- Sample Calculation at 140.50MHz  
Corrected Reading = 11.44+ 1.91+ 22.96= 36.32(dBuV/m )

**The Radiated Emission test was passed at minimum margin**

**Vertical 79.90 MHz / 36.73dBuV**

**Antenna Height 1.5Meter , Turntable Degree 114°.**

| Frequency | Antenna  | Cable         | Reading     | Limits   | Emission | Level  | Margin   |        |        |
|-----------|----------|---------------|-------------|----------|----------|--------|----------|--------|--------|
| ( MHz )   | Polarity | Factor ( dB ) | Loss ( dB ) | ( dBuV ) | ( dBuV ) | ( uV ) | ( dBuV ) | ( uV ) | ( dB ) |
| 79.90     | V        | 7.08          | 1.40        | 28.25    | 40.00    | 100    | 36.73    | 68.63  | -3.27  |
| 71.90     | H        | 5.79          | 1.24        | 29.53    | 40.00    | 100    | 36.56    | 67.30  | -3.44  |
| 177.90    | H        | 12.85         | 2.28        | 21.33    | 43.50    | 150    | 36.46    | 66.53  | -7.04  |
| 136.50    | V        | 11.18         | 1.87        | 23.29    | 43.50    | 150    | 36.34    | 65.61  | -7.16  |
| 159.80    | V        | 12.24         | 2.01        | 22.08    | 43.50    | 150    | 36.33    | 65.54  | -7.17  |
| 140.50    | H        | 11.44         | 1.91        | 22.96    | 43.50    | 150    | 36.32    | 65.46  | -7.18  |

Test Engineer :

*William Lee*

## 7. ANTENNA FACTOR AND CABLE LOSS

| Frequency ( Mhz ) | Antenna Factor ( dB ) | Cable Loss ( dB ) |
|-------------------|-----------------------|-------------------|
| 30                | -1.91                 | 0.90              |
| 35                | -0.50                 | 0.92              |
| 40                | 0.61                  | 1.04              |
| 45                | 1.40                  | 1.28              |
| 50                | 2.39                  | 1.10              |
| 55                | 3.54                  | 1.11              |
| 60                | 4.40                  | 1.30              |
| 65                | 4.84                  | 1.40              |
| 70                | 5.59                  | 1.37              |
| 75                | 6.21                  | 1.24              |
| 80                | 7.60                  | 1.51              |
| 85                | 7.73                  | 1.60              |
| 90                | 8.22                  | 1.60              |
| 95                | 8.90                  | 1.70              |
| 100               | 9.36                  | 1.70              |
| 110               | 10.01                 | 1.70              |
| 120               | 10.41                 | 1.90              |
| 130               | 10.84                 | 1.90              |
| 140               | 11.42                 | 1.91              |
| 150               | 11.91                 | 2.01              |
| 160               | 12.25                 | 2.11              |
| 170               | 12.72                 | 2.21              |
| 180               | 13.02                 | 2.30              |
| 190               | 13.50                 | 2.30              |
| 200               | 14.05                 | 2.40              |
| 220               | 15.11                 | 2.50              |
| 240               | 16.81                 | 2.60              |
| 260               | 17.51                 | 2.71              |
| 280               | 17.70                 | 2.90              |
| 300               | 17.89                 | 2.91              |
| 320               | 18.00                 | 3.10              |
| 340               | 18.33                 | 3.20              |
| 360               | 19.44                 | 3.30              |
| 380               | 20.31                 | 3.40              |
| 400               | 21.19                 | 3.50              |
| 450               | 21.10                 | 3.70              |
| 500               | 22.21                 | 4.10              |
| 550               | 23.42                 | 4.30              |
| 600               | 24.01                 | 4.50              |
| 650               | 25.11                 | 4.70              |
| 700               | 26.00                 | 4.90              |
| 750               | 26.41                 | 5.11              |
| 800               | 27.10                 | 5.50              |
| 850               | 27.51                 | 5.60              |
| 900               | 27.90                 | 5.80              |
| 950               | 28.01                 | 5.90              |
| 1000              | 29.00                 | 6.20              |

※ Remark: For frequency above 1000 MHz, we used low cable loss BNC cable to test.

**8. LIST OF MEASURING INSTRUMENTS USED**

| INSTRUMENT                     | Manufacturer | Model No.  | Serial No. | Characteristic   | Calibration date | Remark |
|--------------------------------|--------------|------------|------------|------------------|------------------|--------|
| Receiver RF Section            | HP           | 85462A     | 3325A00108 | 9 KHz - 6.5 GHz  | Oct. 22, 1997    | C      |
| RF Section                     | HP           | 85460A     | 3308A00104 | 9 KHz - 6.5 GHz  | Oct. 22, 1997    | C      |
| LISN                           | EMCO         | 3850/2     | 1035       | 50 ohm / 50 uH   | Oct. 27, 1997    | C      |
| LISN                           | KYORITSU     | KNW-407    | 8-693-10   | 50 ohm / 50 uH   | Oct. 04, 1997    | C      |
| EMI Filter                     | CORCOM       | MRI-2030   | N/A        | 480 VAC / 30 A   | N/A              | C      |
| EMI Filter                     | CORCOM       | MRI-2030   | N/A        | 480 VAC / 30 A   | N/A              | C      |
| Spectrum Analyzer<br>(Site 1)  | HP           | 8568B      | 2732A04100 | 100Hz - 1500GHz  | Jun 17, 1997     | R      |
| Quasi-peak Adapter<br>(site 1) | HP           | 85650A     | 2811A01116 | 9KHz -1 GHz      | Jun. 17, 1997    | R      |
| Amplifier (Site 1)             | HP           | 8447D      | 2944A08291 | 0.1 MHz -1.3 GHz | Nov. 12, 1997    | R      |
| Bilog Antenna (Site 1)         | CHASE        | CBL6111    | 1378       | 30 MHz -1000 MHz | Aug. 11, 1997    | R      |
| Half-wave dipole<br>antenna    | EMCO         | 3121C      | 9705-1285  | 28M-1GHZ         | May. 19, 1998    | R      |
| Turn Table<br>(site 1)         | EMCO         | 1060-1.211 | 9508-1805  | 0 ~ 360 degree   | N/A              | R      |
| Antenna Mast<br>(site 1)       | EMCO         | 1051-1.2   | 9502-1868  | 1 m- 4 m         | N/A              | R      |

※ The column of Remark indicates that the instruments used for conduction ("C") or radiation ("R") test.