

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

Rechargeable Bluetooth Speaker with Speakerphone and Accent Lighting

Model No.: iBTS70, iBT70SX (X= A-Z denotes as color of cabinet)

Trademark: iHome

FCC ID: EMOIBTS70

Report No.: ED170601009E

Issue Date: June 10, 2017

Prepared for

**SDI Technologies Inc.
1299, Main Street, Rahway, NJ 07065, U.S.A.**

Prepared by

EMTEK(DONGGUAN) CO., LTD.

**No.281, Guantai Road, Nancheng District,
Dongguan, Guangdong, China
TEL: 86-769-22807078
FAX: 86-769-22807079**

**This report shall not be reproduced, except in full, without the written approval of
EMTEK(DONGGUAN) CO., LTD.**

VERIFICATION OF COMPLIANCE

Applicant:	SDI Technologies Inc. 1299, Main Street, Rahway, NJ 07065, U.S.A.
Manufacturer:	SDI Technologies Inc. 1299, Main Street, Rahway, NJ 07065, U.S.A.
Factory:	ShenZhen Alpinor Technology Co., Limited. JingHua Industrial Park, PingHu LongGang ShenZhen China
Product Description:	Rechargeable Bluetooth Speaker with Speakerphone and Accent Lighting
Trade Mark:	iHome
Model Number:	iBTS70, iBT70SX (X= A-Z denotes as color of cabinet) (note: The models are the same except color of appearance and model number, here we prepare iBTS70 for the EMC test)

We hereby certify that:

The above equipment was tested by EMTEK(DONGGUAN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2017).

Date of Test : June 01, 2017 to June 05, 2017

Abby Li

Prepared by :

Abby Li/Editor

Tomas Yang

Reviewer :

Tomas Yang/Supervisor

Sam Lv

Approved & Authorized
Signer :

Sam Lv/Manager

Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	ED170601009E

Table of Contents

1.	GENERAL INFORMATION.....	6
1.1	PRODUCT DESCRIPTION	6
1.2	TEST FACILITY	7
2.	SYSTEM TEST CONFIGURATION.....	8
2.1	EUT CONFIGURATION.....	8
2.2	EUT EXERCISE	8
2.3	TEST PROCEDURE.....	8
2.4	CONFIGURATION OF TESTED SYSTEM	9
3.	SUMMARY OF TEST RESULTS	10
4.	DESCRIPTION OF TEST MODES.....	11
5.	TEST SYSTEM UNCERTAINTY	12
6.	CONDUCTED EMISSIONS TEST	13
6.1	MEASUREMENT PROCEDURE:	13
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	13
6.3	MEASUREMENT EQUIPMENT USED:	13
6.4	MEASUREMENT RESULT:.....	13
6.5	CONDUCTED MEASUREMENT PHOTOS	16
7.	RADIATED EMISSION TEST	17
7.1	MEASUREMENT PROCEDURE.....	17
7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	19
7.3	MEASUREMENT EQUIPMENT USED	20
7.4	RADIATED EMISSION LIMIT	21
7.5	MEASUREMENT RESULT.....	22
7.5	RADIATED MEASUREMENT PHOTOS:.....	34
8.	CHANNEL SEPARATION TEST	35
8.1	MEASUREMENT PROCEDURE.....	35
8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	35
8.3	MEASUREMENT EQUIPMENT USED:.....	35
8.4	MEASUREMENT RESULTS:	35
9.	20DB BANDWIDTH TEST	42
9.1	MEASUREMENT PROCEDURE.....	42
9.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	42
9.3	MEASUREMENT EQUIPMENT USED:.....	42
9.4	MEASUREMENT RESULTS:.....	42
10.	QUANTITY OF HOPPING CHANNEL TEST	49

10.1 MEASUREMENT PROCEDURE.....	49
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	49
10.3 MEASUREMENT EQUIPMENT USED:.....	49
10.4 MEASUREMENT RESULTS:	49
11. TIME OF OCCUPANCY (DWELL TIME) TEST.....	50
11.1 TEST DESCRIPTION.....	50
11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	50
11.3 MEASUREMENT EQUIPMENT USED:.....	50
11.4 TEST REQUIREMENTS / LIMITS.....	50
11.5 TEST RESULT	51
12. MAXIMUM PEAK OUTPUT POWER TEST.....	53
12.1 MEASUREMENT PROCEDURE.....	53
12.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	53
12.3 MEASUREMENT EQUIPMENT USED:.....	53
12.4 MEASUREMENT RESULTS:.....	54
13. BAND EDGE TEST	60
13.1 MEASUREMENT PROCEDURE.....	60
13.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	61
13.3 MEASUREMENT EQUIPMENT USED:.....	61
13.4 MEASUREMENT RESULTS:	62
14. ANTENNA APPLICATION.....	79
14.1 ANTENNA REQUIREMENT	79
14.2 RESULT.....	79
15. PHOTOS OF EUT	79

1. GENERAL INFORMATION

1.1 Product Description

Characteristics	Description
Product Name	Rechargeable Bluetooth Speaker with Speakerphone and Accent Lighting
Model number	iBTS70
Power Supply	AC 120V/50Hz for adapter, DC 7.4V Battery
Adapter	Model number:FJ-SW1160501000UU Input rating:100-240~, 50/60Hz, 0.3A Max Output rating: DC 5V, 1000mA
Kind of Device	Bluetooth Ver.2.1+EDR
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Operating Frequency Range	2402-2480MHz
Number of Channels	79
Transmit Power Max(PK)	2.27dBm(0.001687W)
Antenna Type	Internal PCB antenna
Antenna Gain	0dBi
Product Software Version	F-6688(FS7)_FQ_(iHome iBTS70)_DZX_MFB.01_MIC_EQ_VF2.8(hfp6)_20170525_(967B)
Product Hardware version	BT-6100-MAIN V1.0 2017-04-25
Radio Software Version	F-6688(FS7)_FQ_(iHome iBTS70)_DZX_MFB.01_MIC_EQ_VF2.8(hfp6)_20170525_(967B)
Radio Hardware version	F-6688V1.0 2014-04-19

1.2 Test Facility

Site Description

EMC Lab. : Registered on FCC, July 06, 2016
The Certificate Number is 247565.

Registered on Industry Canada, January 13, 2017
The Certificate Number is 9444A

Name of Firm : EMTEK(DONGGUAN) CO., LTD.

Site Location : No.281, Guantai Road, Nancheng District,
Dongguan, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of EUT was rotated according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Trade Mark	Model No.	FCC ID	Note
1.	Rechargeable Bluetooth Speaker with Speakerphone and Accent Lighting	iHome	iBTS70	EMOIBTS70	EUT
2	Adapter	N/A	Model number:FJ-SW1160501000UU Input rating:100-240~, 50/60Hz, 0.3A Max Output rating: DC 5V, 1000mA	N/A	Support EUT

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

3. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.247(d), §15.209	Radiated Emission	Compliant
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§15.247(a)(1)(iii)	Time of Occupancy(Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.203	Antenna Requirement	Compliant

4. Description of test modes

The EUT has been tested under its typical operating condition and fully-charged battery for EUT tested alone. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

For Radiated: The EUT's antenna was pre-tested under the following modes:

Test Mode	Description
Mode A	X-Y axis
Mode B	Y-Z axis
Mode C	X-Z axis

From the above modes, the worst case was found in Mode A. Therefore only the test data of the mode was recorded in this report.

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK, $\pi/4$ -DQPSK, 8DPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel	Frequency(MHz)
1	2402
40	2441
79	2480

5. TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$


Remark: The coverage Factor ($k=2$), and measurement Uncertainty for a level of Confidence of 95%

6. Conducted Emissions Test

6.1 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.2 Test SET-UP (Block Diagram of Configuration)

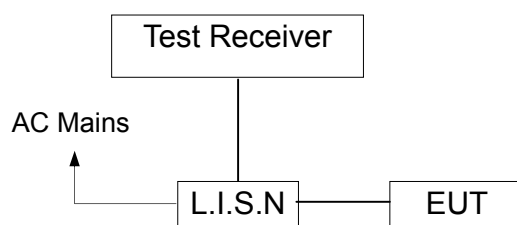

6.3 Measurement Equipment Used:


Conducted Emission Test Site						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	Last Cal.	Due date
Test Receiver	Rohde & Schwarz	ESCS30	100018	9kHz~3GHz	05/16/2017	05/15/2018
L.I.S.N	Rohde & Schwarz	ENV216	100017	9KHz-300MHz	05/16/2017	05/15/2018
RF Switching Unit	CDS	RSU-M2	38401	9KHz-300MHz	05/16/2017	05/15/2018
Coaxial Cable	CDS	79254	46107086	9kHz~3GHz	05/16/2017	05/15/2018

6.4 Measurement Result:

Pass.

. All the modulation modes were tested the data of the worst mode (GFSK TX 2480MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following data.

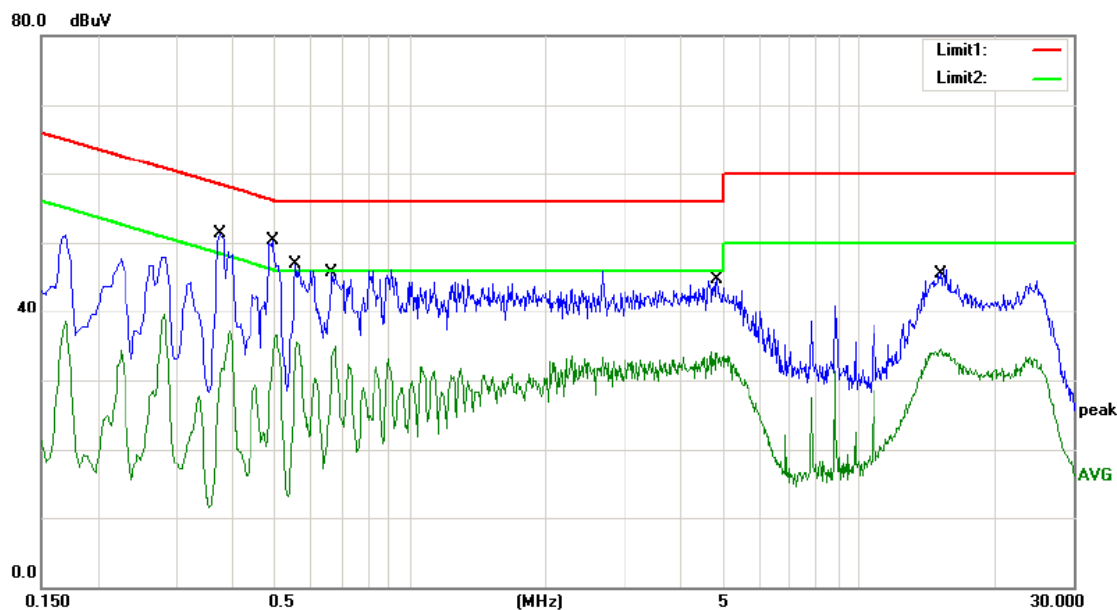

Site site #1

Phase: **L1**

Temperature: 24

Limit: (CE)FCC PART 15C_QP

Power: AC 120V/60Hz


Humidity: 55 %

Mode: TX2480

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3740	41.26	10.07	51.33	58.41	-7.08	QP	
2		0.3740	27.02	10.07	37.09	48.41	-11.32	AVG	
3	*	0.4940	40.27	10.10	50.37	56.10	-5.73	QP	
4		0.4940	26.38	10.10	36.48	46.10	-9.62	AVG	
5		0.5540	36.71	10.10	46.81	56.00	-9.19	QP	
6		0.5540	25.30	10.10	35.40	46.00	-10.60	AVG	
7		0.6660	35.63	10.10	45.73	56.00	-10.27	QP	
8		0.6660	24.83	10.10	34.93	46.00	-11.07	AVG	
9		4.8100	34.57	10.10	44.67	56.00	-11.33	QP	
10		4.8100	24.04	10.10	34.14	46.00	-11.86	AVG	
11		15.2020	35.76	10.30	46.06	60.00	-13.94	QP	
12		15.2020	24.14	10.30	34.44	50.00	-15.56	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Aspen

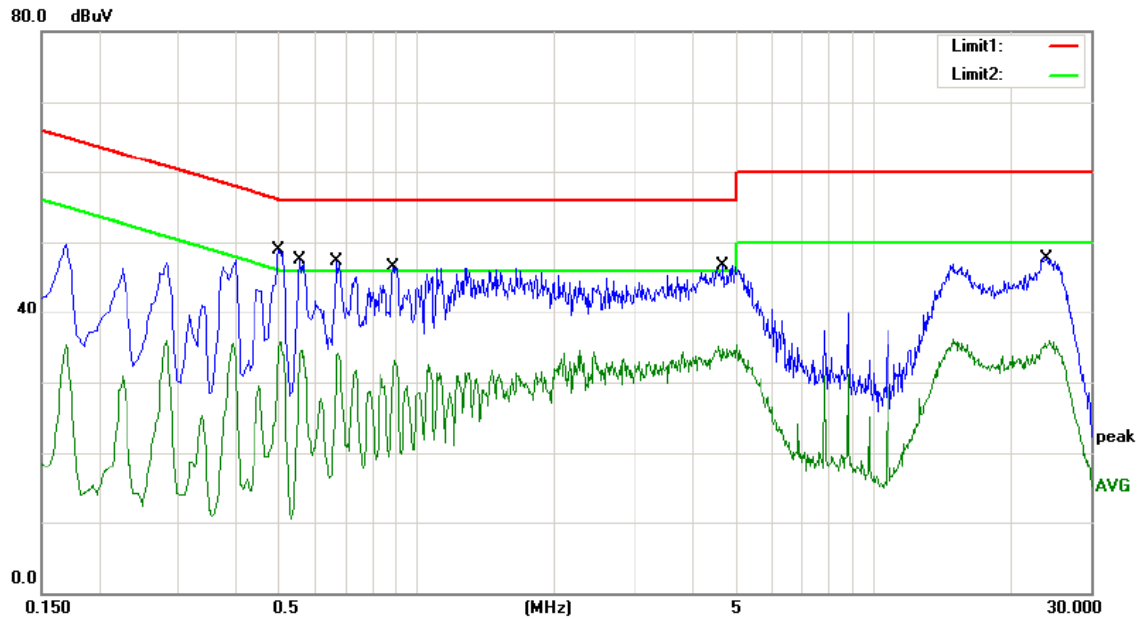

Site site #1

Phase: **N**

Temperature: 24

Limit: (CE)FCC PART 15C_QP

Power: AC 120V/60Hz

Humidity: 55 %

Mode: TX2480

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.4980	38.72	10.10	48.82	56.03	-7.21	QP	
2		0.4980	25.52	10.10	35.62	46.03	-10.41	AVG	
3		0.5540	37.35	10.10	47.45	56.00	-8.55	QP	
4		0.5540	24.37	10.10	34.47	46.00	-11.53	AVG	
5		0.6660	37.12	10.10	47.22	56.00	-8.78	QP	
6		0.6660	24.07	10.10	34.17	46.00	-11.83	AVG	
7		0.8860	36.38	10.10	46.48	56.00	-9.52	QP	
8		0.8860	22.98	10.10	33.08	46.00	-12.92	AVG	
9		4.6940	36.55	10.10	46.65	56.00	-9.35	QP	
10		4.6940	25.10	10.10	35.20	46.00	-10.80	AVG	
11		24.1420	37.26	10.47	47.73	60.00	-12.27	QP	
12		24.1420	25.50	10.47	35.97	50.00	-14.03	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Aspen

6.5 Conducted Measurement Photos



7. Radiated Emission Test

7.1 Measurement Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a Styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Use the following spectrum analyzer settings:

When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz and video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	120KHz
VB	300KHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

7.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

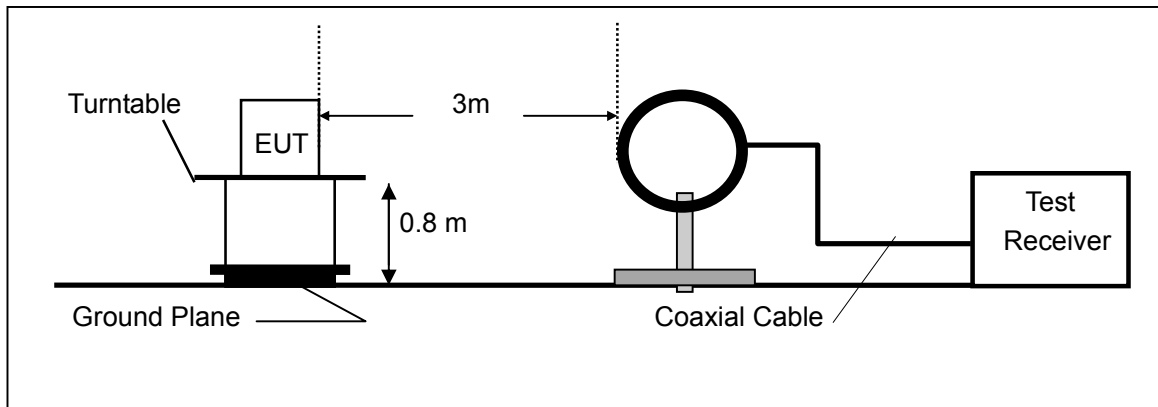

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

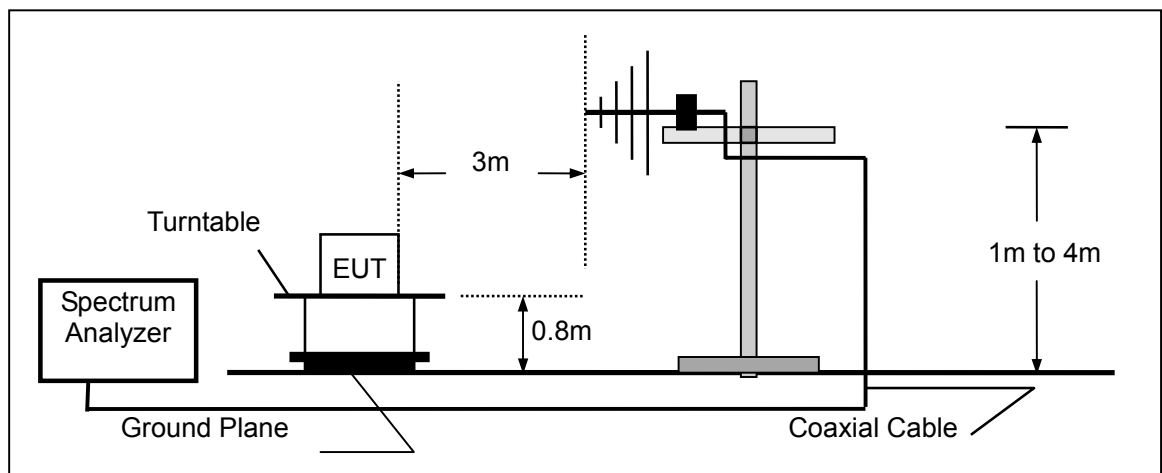

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

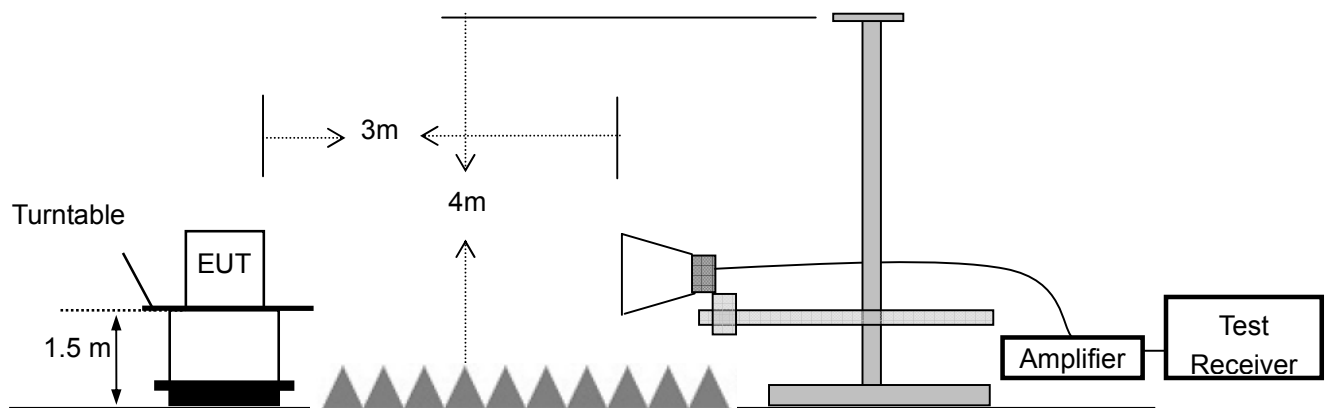

7.3 Measurement Equipment Used

Item	Equipment	Manufacturer	Model No.	Serial No.	Characteristics	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	1166.5950.03	9KHz-3GHz	05/16/2017	1 Year
2.	Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	05/16/2017	1 Year
3.	Bilog Antenna	Schwarzbeck	VULB9163	000141	25MHz-2GHz	05/16/2017	1 Year
4.	Power Amplifier	CDS	RSU-M352	818	1MHz-1GHz	05/16/2017	1 Year
5.	Power Amplifier	HP	8447F	OPT H64	1GHz-26.5GHz	05/16/2017	1 Year
6.	Color Monitor	SUNSP0	SP-140A	N/A	--	05/16/2017	1 Year
7.	Single Line Filter	JIANLI	XL-3	N/A	--	05/16/2017	1 Year
8.	Single Phase Power Line Filter	JIANLI	DL-2X100B	N/A	--	05/16/2017	1 Year
9.	3 Phase Power Line Filter	JIANLI	DL-4X100B	N/A	--	05/16/2017	1 Year
10.	DC Power Filter	JIANLI	DL-2X50B	N/A	--	05/16/2017	1 Year
11.	Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	05/16/2017	1 Year
12.	Cable	Rosenberger	CIL02	A0783566	9KHz-3GHz	05/16/2017	1 Year
13.	Cable	Rosenberger	RG 233/U	525178	9KHz-3GHz	05/16/2017	1 Year
14.	Signal Analyzer	Rohde & Schwarz	FSV30	103040	9KHz-40GHz	05/16/2017	1 Year
15.	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1272	1GHz-18GHz	05/16/2017	1 Year
16.	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	14GHz -26.5GHz	05/16/2017	1 Year
17.	Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	05/16/2017	1 Year
18.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year
19.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year
20.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year

7.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

Remark 1. Emission level in dBuV/m=20 log (uV/m)

: 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

7.5 Measurement Result

Below 30MHz:

Operation Mode:	TX	Test Date :	June 02, 2017
Frequency Range:	9KHz~30MHz	Temperature :	28℃
Test Result:	PASS	Humidity :	65 %
Measured Distance:	3m	Test By:	Lin

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--


Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Below 1000MHz:

Pass.

All the modulation modes were tested the data of the worst mode (GFSK) are recorded in the following pages and the others modulation methods do not exceed the limits.


Please refer to the following data.

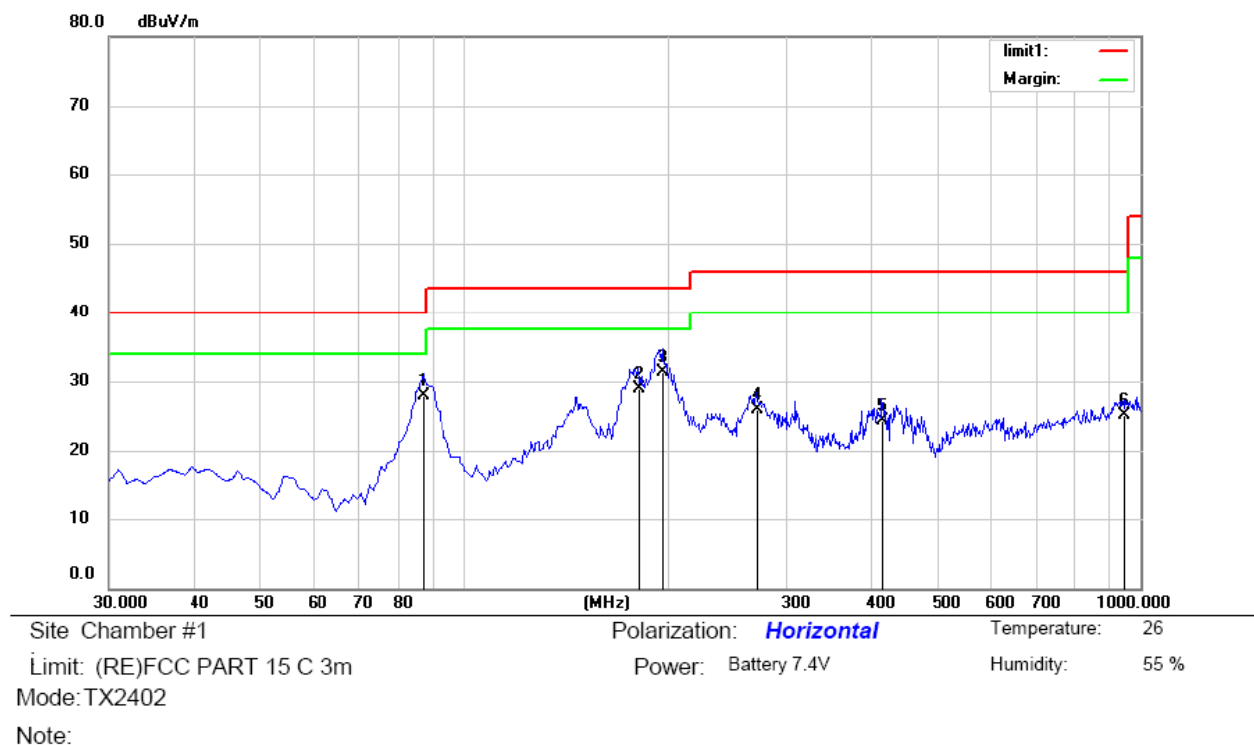

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		87.2300	49.65	-21.83	27.82	40.00	-12.18	QP		
2		181.3200	48.65	-19.77	28.88	43.50	-14.62	QP		
3	*	196.8400	50.23	-18.85	31.38	43.50	-12.12	QP		
4		270.5600	42.13	-16.27	25.86	46.00	-20.14	QP		
5		415.0900	36.15	-11.83	24.32	46.00	-21.68	QP		
6		948.5900	27.20	-2.13	25.07	46.00	-20.93	QP		

*:Maximum data x:Over limit !:over margin

Operator: washington

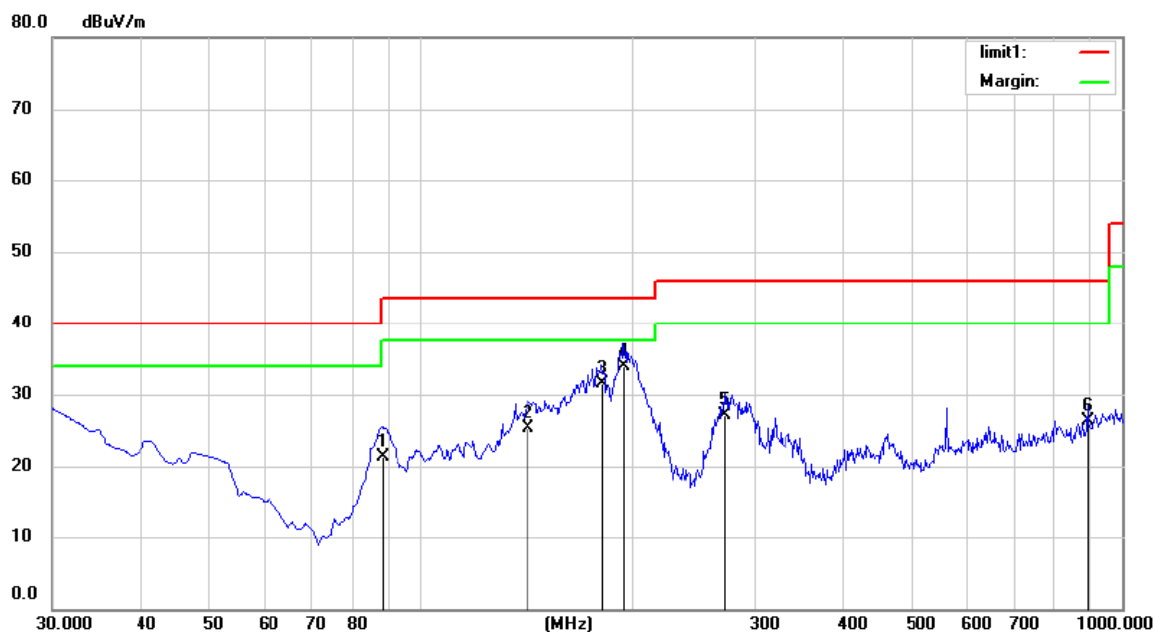

Site Chamber #1

Polarization: **Vertical**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m

Power: Battery 7.4V

Humidity: 55 %


Mode: TX2402

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		88.3421	42.90	-21.68	21.22	43.50	-22.28	QP		
2		142.5200	43.56	-18.32	25.24	43.50	-18.26	QP		
3		181.3200	51.22	-19.77	31.45	43.50	-12.05	QP		
4	*	194.9000	52.78	-18.92	33.86	43.50	-9.64	QP		
5		271.5300	43.25	-16.24	27.01	46.00	-18.99	QP		
6		894.2700	30.12	-3.85	26.27	46.00	-19.73	QP		

*:Maximum data x:Over limit !:over margin

Operator: washington

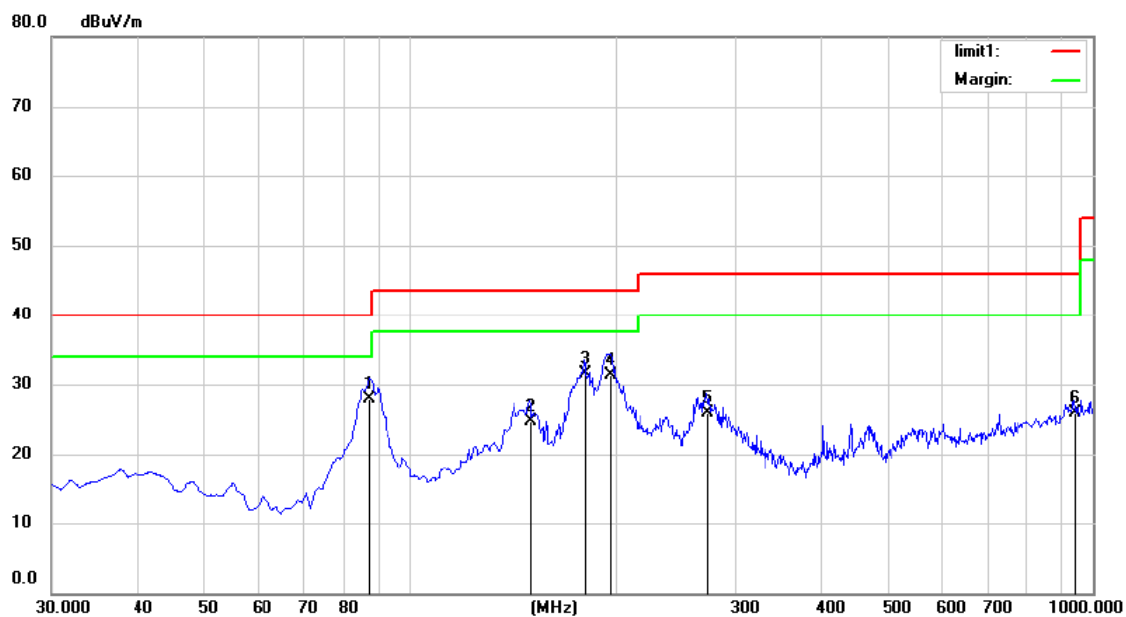


Site: Chamber #1 Polarization: **Horizontal** Temperature: 26
 Limit: (RE)FCC PART 15 C 3m Power: Battery 7.4V Humidity: 55 %
 Mode: TX2441
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		87.2300	49.65	-21.83	27.82	40.00	-12.18	QP		
2		150.2800	43.25	-18.62	24.63	43.50	-18.87	QP		
3	*	180.3500	51.30	-19.85	31.45	43.50	-12.05	QP		
4		195.8700	50.15	-18.89	31.26	43.50	-12.24	QP		
5		272.5000	42.05	-16.21	25.84	46.00	-20.16	QP		
6		940.8300	28.10	-2.29	25.81	46.00	-20.19	QP		

*:Maximum data x:Over limit !:over margin

Operator: washington

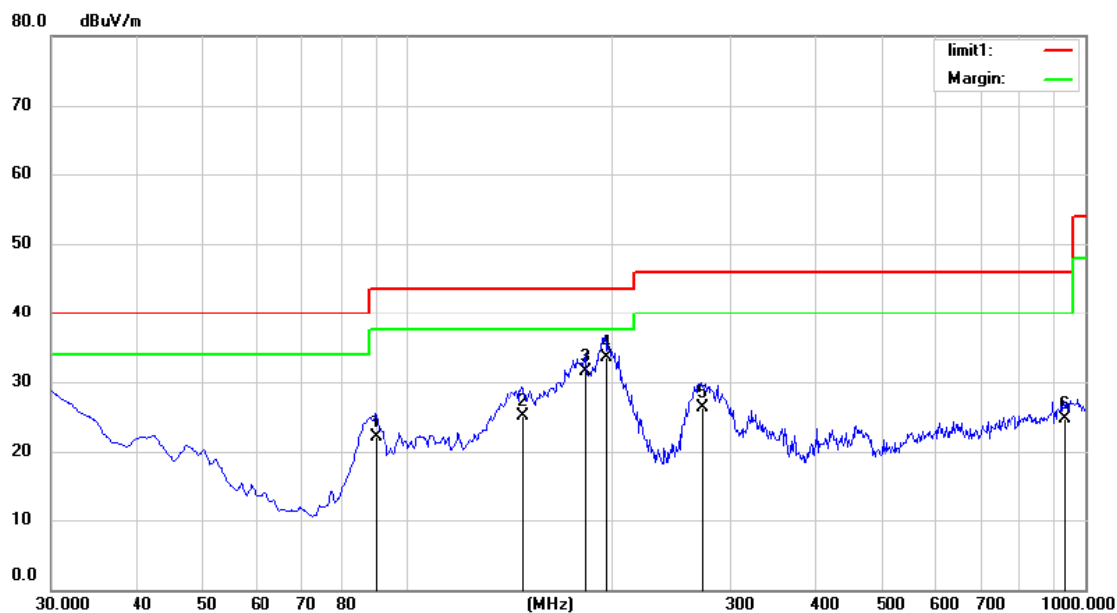

Site Chamber #1

Polarization: **Vertical**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m

Power: Battery 7.4V

Humidity: 55 %

Mode: TX2441

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		90.1400	43.59	-21.43	22.16	43.50	-21.34	QP		
2		148.3400	43.65	-18.54	25.11	43.50	-18.39	QP		
3		183.2600	51.22	-19.64	31.58	43.50	-11.92	QP		
4	*	195.8700	52.46	-18.89	33.57	43.50	-9.93	QP		
5		272.5000	42.58	-16.21	26.37	46.00	-19.63	QP		
6		932.1000	27.12	-2.47	24.65	46.00	-21.35	QP		

*:Maximum data x:Over limit !:over margin

Operator: washington




Site Chamber #1 Polarization: **Horizontal** Temperature: 26
 Limit: (RE)FCC PART 15 C 3m Power: Battery 7.4V Humidity: 55 %
 Mode: TX2480
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		88.2000	49.37	-21.69	27.68	43.50	-15.82	QP		
2		181.3200	48.35	-19.77	28.58	43.50	-14.92	QP		
3	*	193.9300	51.65	-19.01	32.64	43.50	-10.86	QP		
4		270.5600	42.13	-16.27	25.86	46.00	-20.14	QP		
5		434.4900	36.59	-11.68	24.91	46.00	-21.09	QP		
6		931.1300	27.22	-2.49	24.73	46.00	-21.27	QP		

*:Maximum data x:Over limit !:over margin

Operator: washington

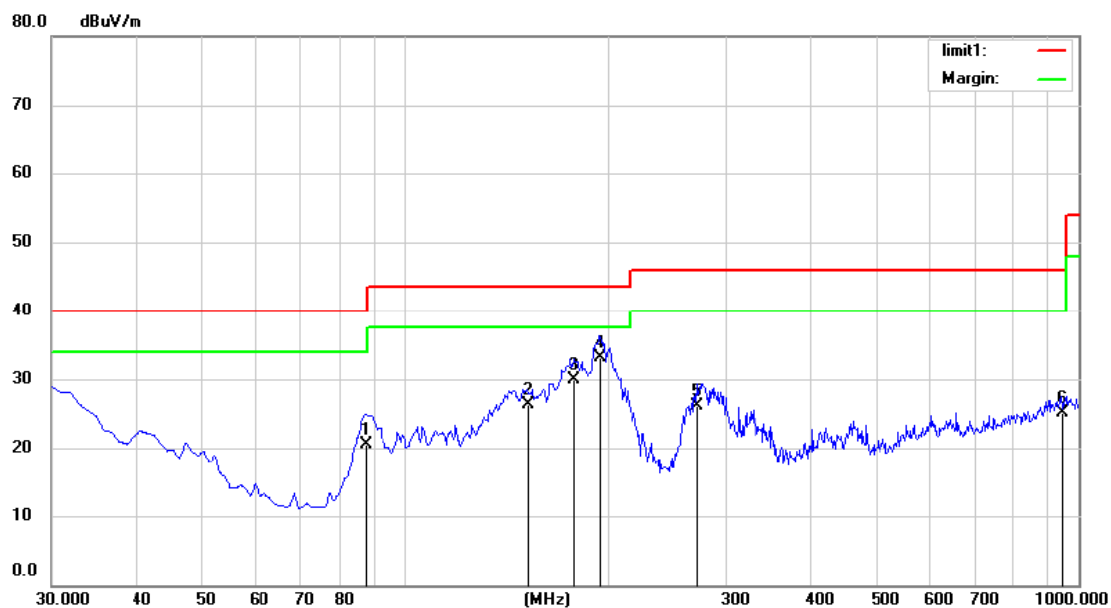

Site Chamber #1

Polarization: **Vertical**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m

Power: Battery 7.4V

Humidity: 55 %

Mode: TX2480

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		87.4177	42.35	-21.80	20.55	40.00	-19.45	QP		
2		152.2200	45.05	-18.79	26.26	43.50	-17.24	QP		
3		178.4100	49.65	-19.83	29.82	43.50	-13.68	QP		
4	*	194.9000	52.10	-18.92	33.18	43.50	-10.32	QP		
5		271.5300	42.35	-16.24	26.11	46.00	-19.89	QP		
6		944.7100	27.23	-2.22	25.01	46.00	-20.99	QP		

*:Maximum data x:Over limit !:over margin

Operator: washington

Above 1000MHz

Operation Mode: GFSK (CH1: 2402MHz) Test Date : June 02, 2017

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4804	V	65.02	45.12	74	54	-8.98	-8.88
7206	V	64.39	44.62	74	54	-9.61	-9.38
9608	V	63.25	43.25	74	54	-10.75	-10.75
12010	V	62.95	42.63	74	54	-11.05	-11.37
14412	V	61.69	41.25	74	54	-12.31	-12.75
16814	V	60.85	40.69	74	54	-13.15	-13.31
4804	H	65.04	45.63	74	54	-8.96	-8.37
7206	H	62.24	42.5	74	54	-11.76	-11.5
9608	H	63.25	43.62	74	54	-10.75	-10.38
12010	H	61.95	41.25	74	54	-12.05	-12.75
14412	H	60.25	40.36	74	54	-13.75	-13.64
16814	H	59.42	39.52	74	54	-14.58	-14.48

Operation Mode: GFSK (CH40: 2441MHz) Test Date : June 02, 2017

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4882	V	65.02	45.12	74	54	-8.98	-8.88
7323	V	63.14	43.62	74	54	-10.86	-10.38
9764	V	62.5	42.95	74	54	-11.5	-11.05
12205	V	61.41	41.41	74	54	-12.59	-12.59
14646	V	60.25	40.25	74	54	-13.75	-13.75
17087	V	59.42	39.41	74	54	-14.58	-14.59
4882	H	64.15	44.25	74	54	-9.85	-9.75
7323	H	63.95	43.62	74	54	-10.05	-10.38
9764	H	62.41	42.18	74	54	-11.59	-11.82
12205	H	61.41	41.65	74	54	-12.59	-12.35
14646	H	60.55	40.28	74	54	-13.45	-13.72
17087	H	59.21	39.55	74	54	-14.79	-14.45

Operation Mode: GFSK (CH79: 2480MHz) Test Date : June 02, 2017

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4960	V	63.25	43.26	74	54	-10.75	-10.74
7440	V	62.95	42.51	74	54	-11.05	-11.49
9920	V	61.42	41.95	74	54	-12.58	-12.05
12400	V	60.36	40.66	74	54	-13.64	-13.34
14880	V	59.42	39.41	74	54	-14.58	-14.59
17360	V	58.41	38.42	74	54	-15.59	-15.58
4960	H	64.15	44.14	74	54	-9.85	-9.86
7440	H	63.25	43.65	74	54	-10.75	-10.35
9920	H	62.65	42.51	74	54	-11.35	-11.49
12400	H	60.99	40.24	74	54	-13.01	-13.76
14880	H	59.41	40.12	74	54	-14.59	-13.88
17360	H	58.41	38.65	74	54	-15.59	-15.35

Operation Mode: Pi/4-DQPSK (CH1: 2402MHz) Test Date : June 02, 2017

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4804	V	63.95	43.58	74	54	-10.05	-10.42
7206	V	62.41	42.74	74	54	-11.59	-11.26
9608	V	61.25	41.95	74	54	-12.75	-12.05
12010	V	60.21	40.74	74	54	-13.79	-13.26
14412	V	59.42	39.42	74	54	-14.58	-14.58
16814	V	58.4	38.77	74	54	-15.6	-15.23
4804	H	64.52	44.14	74	54	-9.48	-9.86
7206	H	63.54	43.65	74	54	-10.46	-10.35
9608	H	61.25	41.09	74	54	-12.75	-12.91
12010	H	60.95	40.77	74	54	-13.05	-13.23
14412	H	60.03	39.87	74	54	-13.97	-14.13
16814	H	59.55	39.04	74	54	-14.45	-14.96

Operation Mode: Pi/4-DQPSK (CH40: 2441MHz) Test Date : June 02, 2017

Freq.	Ant. Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4882	V	64.59	44.12	74	54	-9.41	-9.88
7323	V	63.25	43.25	74	54	-10.75	-10.75
9764	V	62.41	42.95	74	54	-11.59	-11.05
12205	V	61.48	41.26	74	54	-12.52	-12.74
14646	V	60.69	40.52	74	54	-13.31	-13.48
17087	V	59.52	39.45	74	54	-14.48	-14.55
4882	H	64.33	44.18	74	54	-9.67	-9.82
7323	H	63.65	43.65	74	54	-10.35	-10.35
9764	H	62.95	42.57	74	54	-11.05	-11.43
12205	H	61.52	41.24	74	54	-12.48	-12.76
14646	H	60.25	40.62	74	54	-13.75	-13.38
17087	H	59.85	39.52	74	54	-14.15	-14.48

Operation Mode: Pi/4-DQPSK (CH79: 2480MHz) Test Date : June 02, 2017

Freq.	Ant. Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4960	V	64.05	44.12	74	54	-9.95	-9.88
7440	V	63.25	43.62	74	54	-10.75	-10.38
9920	V	62.12	42.05	74	54	-11.88	-11.95
12400	V	61.95	41.69	74	54	-12.05	-12.31
14880	V	60.28	40.25	74	54	-13.72	-13.75
17360	V	59.42	39.52	74	54	-14.58	-14.48
4960	H	65.12	45.21	74	54	-8.88	-8.79
7440	H	64.59	44.52	74	54	-9.41	-9.48
9920	H	63.25	43.65	74	54	-10.75	-10.35
12400	H	62.41	42.11	74	54	-11.59	-11.89
14880	H	61.52	41.2	74	54	-12.48	-12.8
17360	H	60.55	40.22	74	54	-13.45	-13.78

Operation Mode: 8DPSK (CH1: 2402MHz) Test Date : June 02, 2017

Freq.	Ant. Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4804	V	64.02	44.9	74	54	-9.98	-9.1
7206	V	63.2	43.65	74	54	-10.8	-10.35
9608	V	62.14	42.14	74	54	-11.86	-11.86
12010	V	61.95	41.58	74	54	-12.05	-12.42
14412	V	60.25	40.28	74	54	-13.75	-13.72
16814	V	59.52	39.51	74	54	-14.48	-14.49
4804	H	64.21	44.14	74	54	-9.79	-9.86
7206	H	63.25	43.52	74	54	-10.75	-10.48
9608	H	62.59	42.58	74	54	-11.41	-11.42
12010	H	61.25	41.25	74	54	-12.75	-12.75
14412	H	60.25	40.88	74	54	-13.75	-13.12
16814	H	59.52	39.52	74	54	-14.48	-14.48

Operation Mode: 8DPSK (CH40: 2441MHz) Test Date : June 02, 2017

Freq.	Ant. Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4882	V	64.06	44.08	74	54	-9.94	-9.92
7323	V	62.51	42.65	74	54	-11.49	-11.35
9764	V	61.26	41.95	74	54	-12.74	-12.05
12205	V	60.95	40.21	74	54	-13.05	-13.79
14646	V	59.41	39.41	74	54	-14.59	-14.59
17087	V	58.65	38.42	74	54	-15.35	-15.58
4882	H	64.21	44.14	74	54	-9.79	-9.86
7323	H	63.95	43.65	74	54	-10.05	-10.35
9764	H	62.11	42.14	74	54	-11.89	-11.86
12205	H	61.25	41.28	74	54	-12.75	-12.72
14646	H	60.52	40.65	74	54	-13.48	-13.35
17087	H	59.54	39.52	74	54	-14.46	-14.48


Operation Mode: 8DPSK (CH79: 2480MHz) Test Date : June 02, 2017

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4960	V	64.02	44.63	74	54	-9.98	-9.37
7440	V	63.22	43.25	74	54	-10.78	-10.75
9920	V	62.14	42.14	74	54	-11.86	-11.86
12400	V	61.52	41.95	74	54	-12.48	-12.05
14880	V	60.59	40.32	74	54	-13.41	-13.68
17360	V	59.42	39.42	74	54	-14.58	-14.58
4960	H	63.21	43.12	74	54	-10.79	-10.88
7440	H	62.24	42.15	74	54	-11.76	-11.85
9920	H	61.25	41.95	74	54	-12.75	-12.05
12400	H	60.25	40.66	74	54	-13.75	-13.34
14880	H	59.88	39.52	74	54	-14.12	-14.48
17360	H	57.04	37.14	74	54	-16.96	-16.86

Other harmonics emissions are lower than 20dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) Measuring frequencies from 1GHz to 25GHz.

7.5 Radiated Measurement Photos:

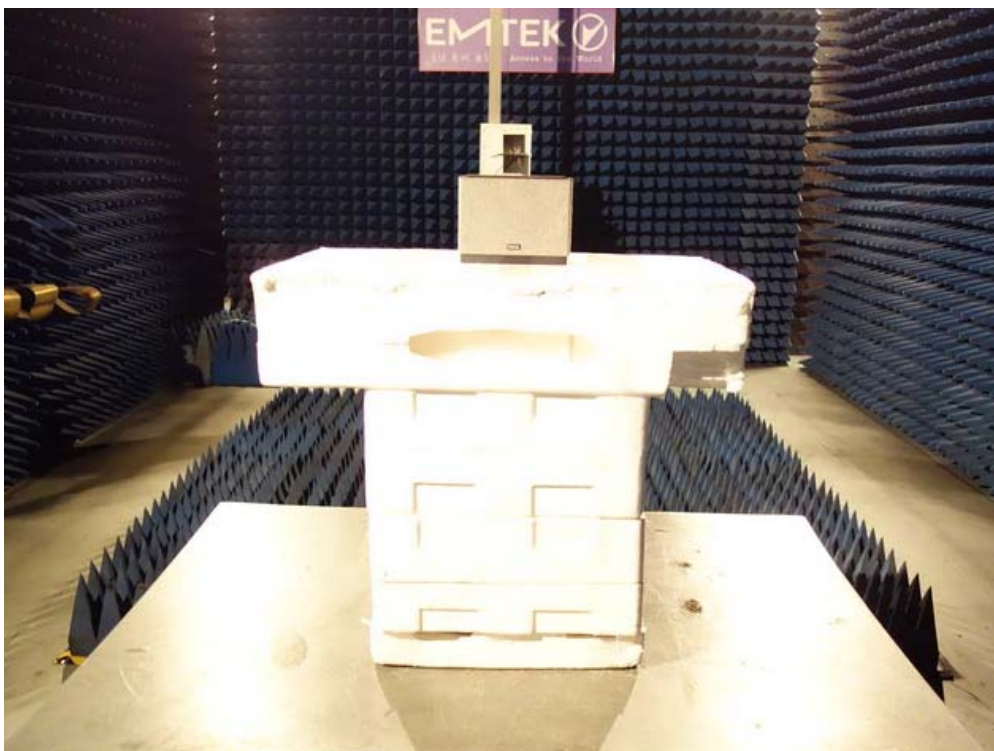


8. Channel Separation test

8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/16/2017	05/15/2018
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/16/2017	05/15/2018
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/16/2017	05/15/2018



Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


8.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	June 02, 2017
Test By:	YF	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %
Modulation:	GFSK		



Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1003	>753
40	2441	1003	>750
79	2480	1003	>747

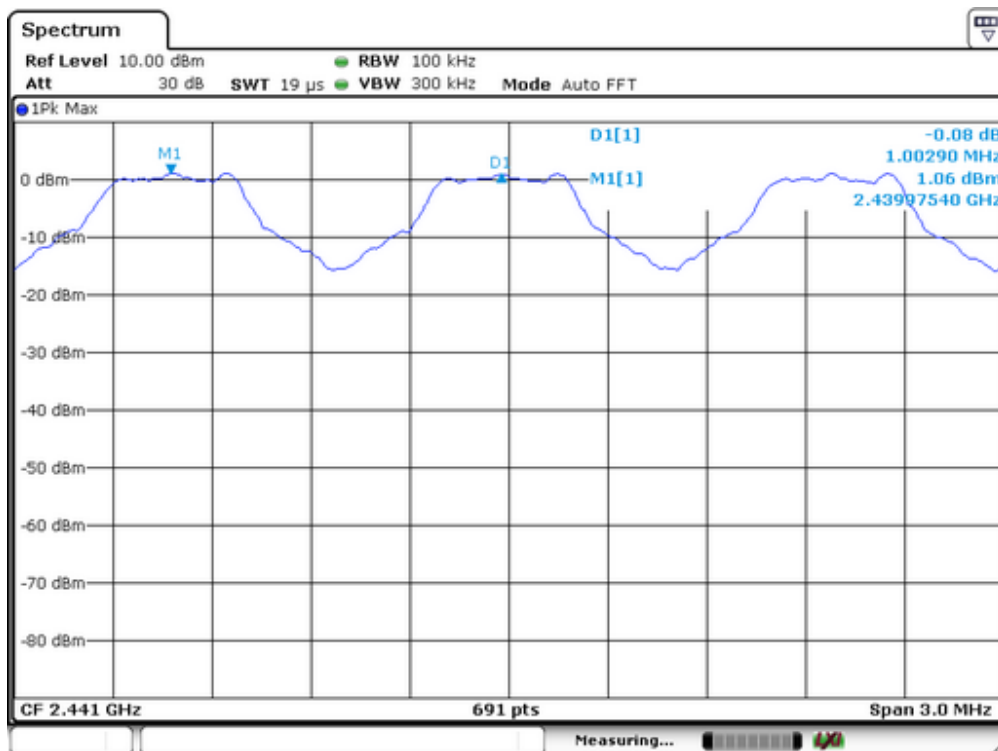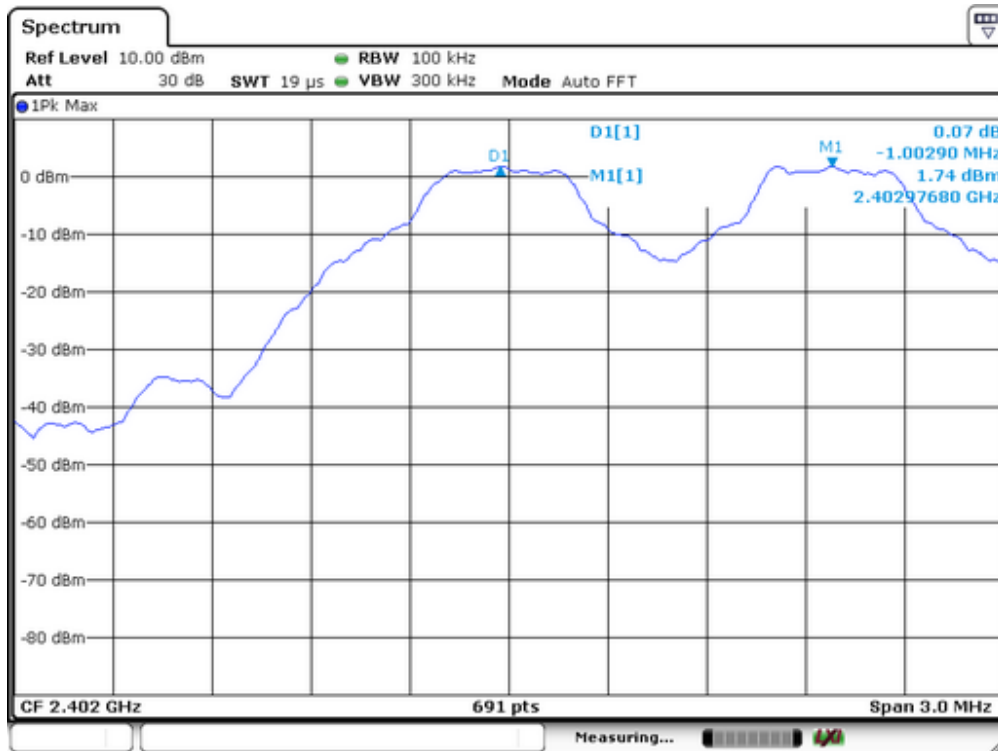


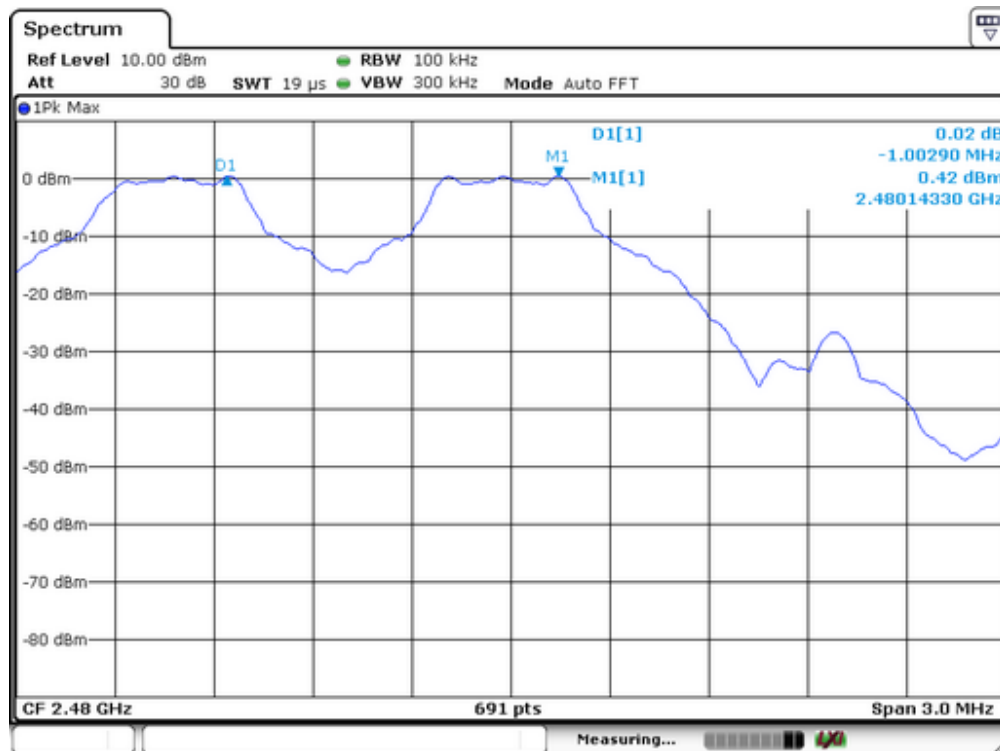

Spectrum Detector:	PK	Test Date :	June 02, 2017
Test By:	YF	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	$\Pi/4$ -DQPSK		



Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1003	>943
40	2441	1003	>947
79	2480	1003	>938

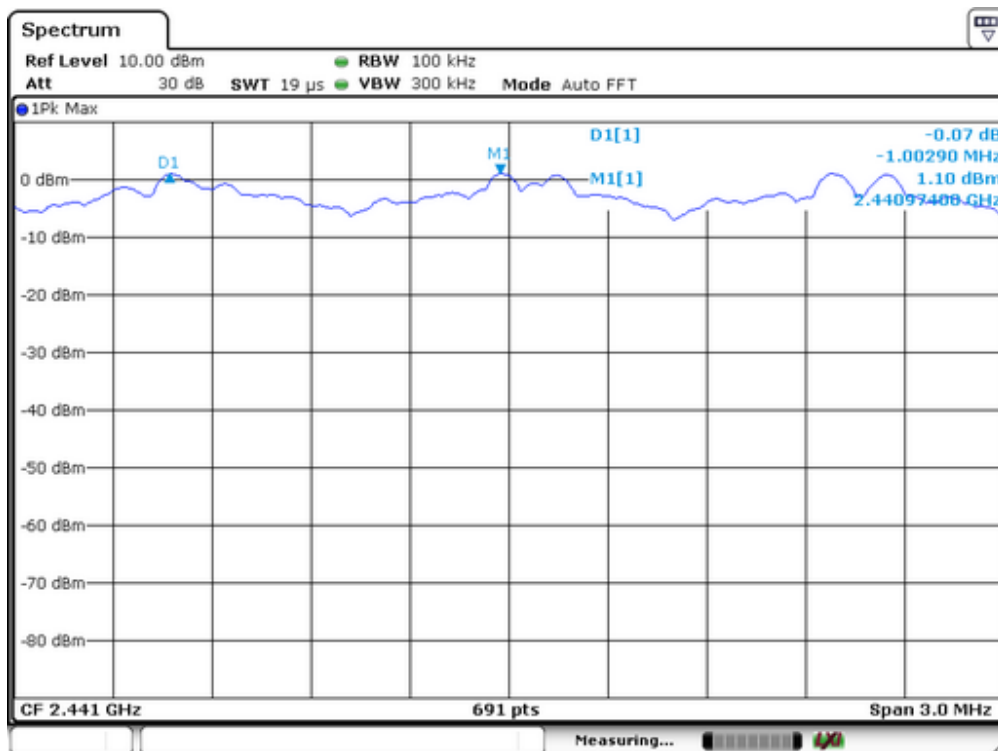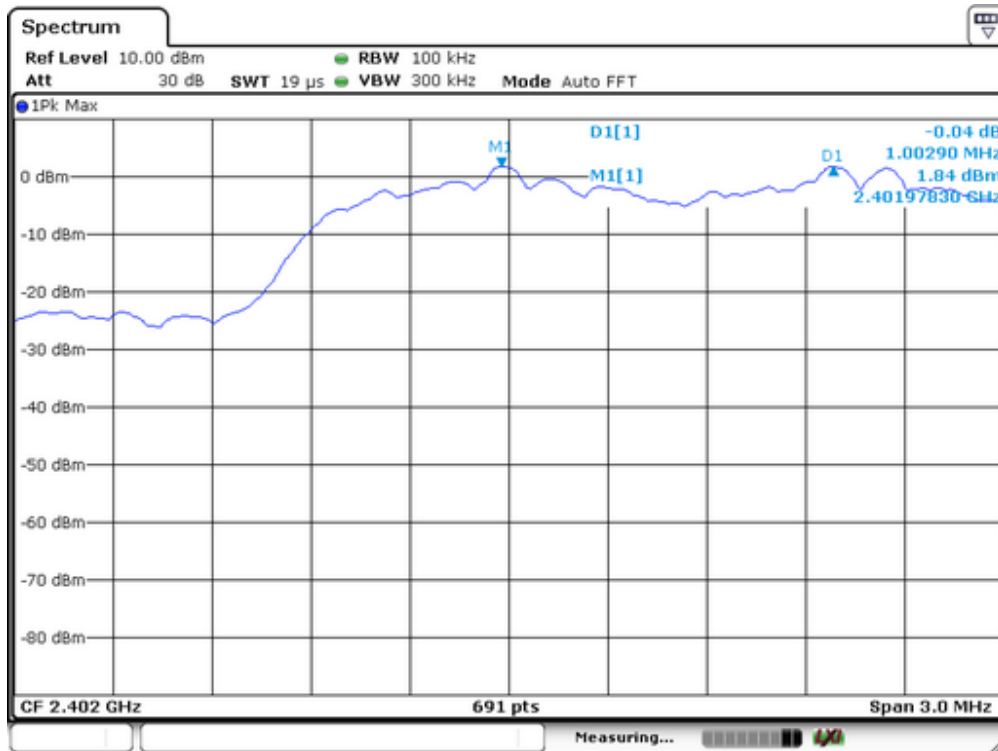


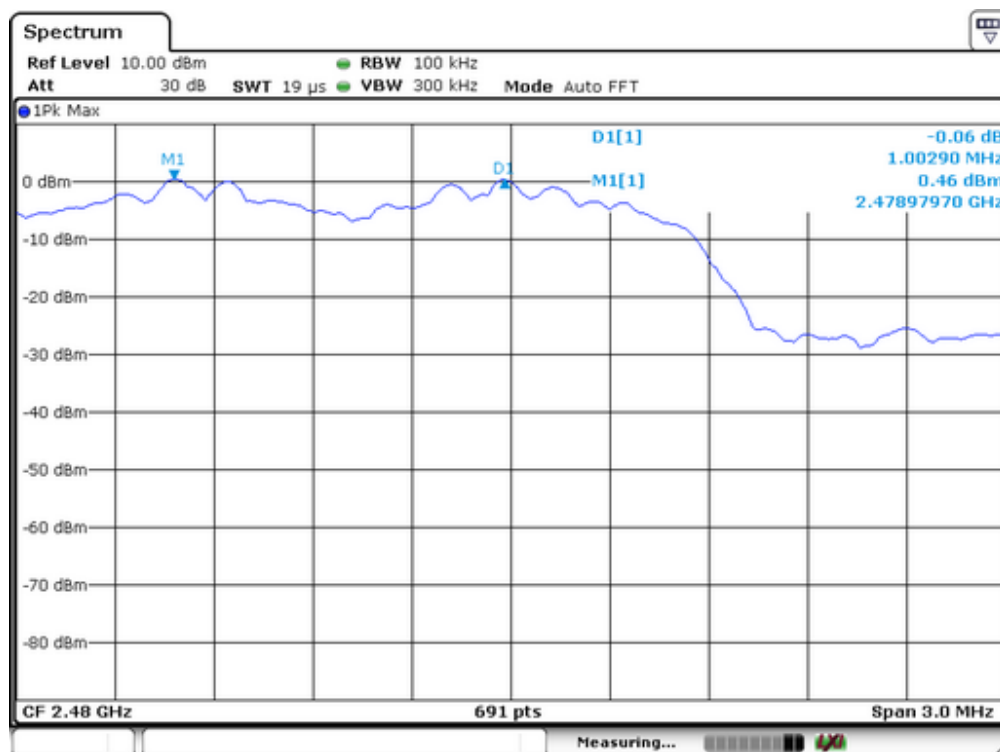

Spectrum Detector: PK Test Date : June 02, 2017
 Test By: YF Temperature : 24 °C
 Test Result: PASS Humidity : 53 %
 Modulation: 8DPSK

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1003	>955
40	2441	1003	>952
79	2480	1003	>943

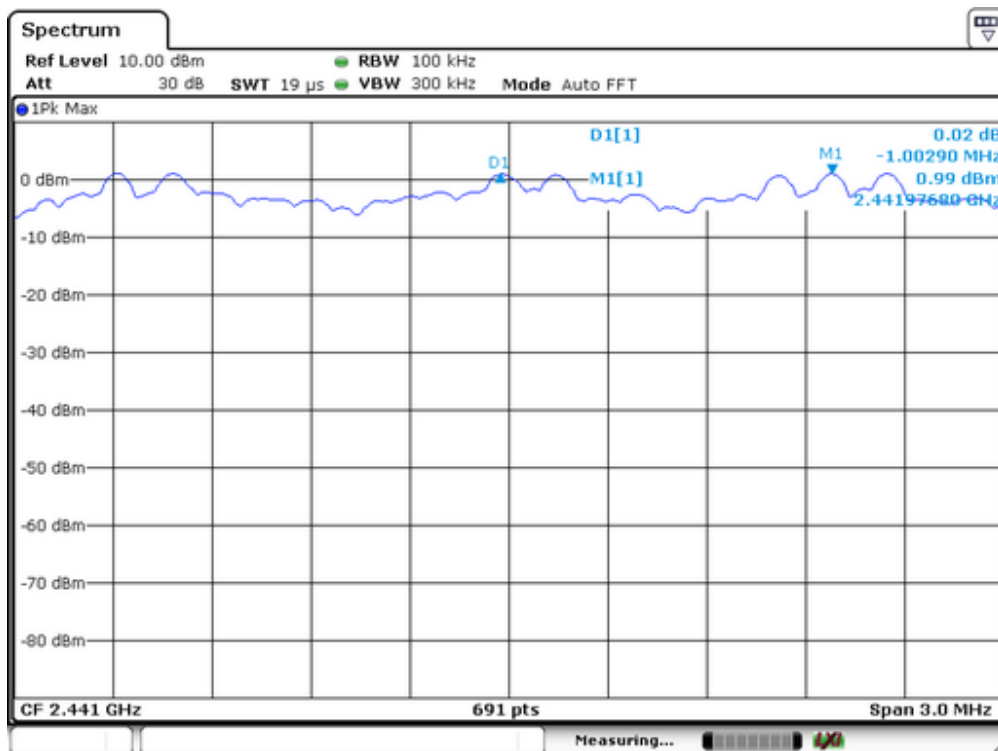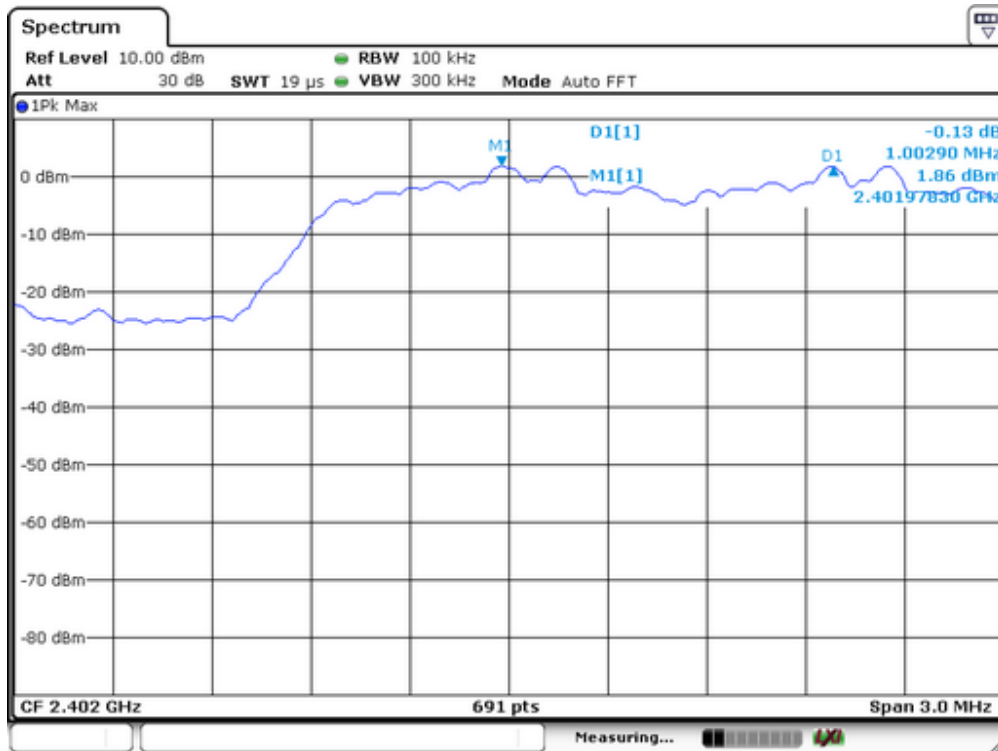

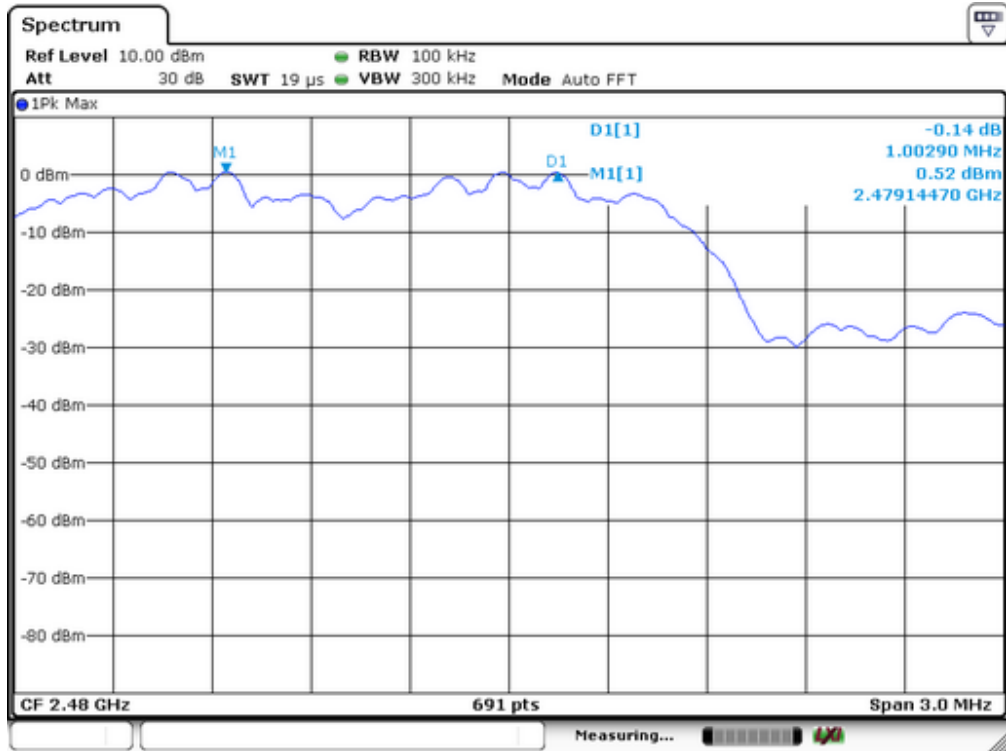


9. 20dB Bandwidth test

9.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

9.2 Test SET-UP (Block Diagram of Configuration)



9.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/16/2017	05/15/2018
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/16/2017	05/15/2018
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/16/2017	05/15/2018



Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


9.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	June 02, 2017
Test By:	YF	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	GFSK		



Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1129
40	2441	1125
79	2480	1120

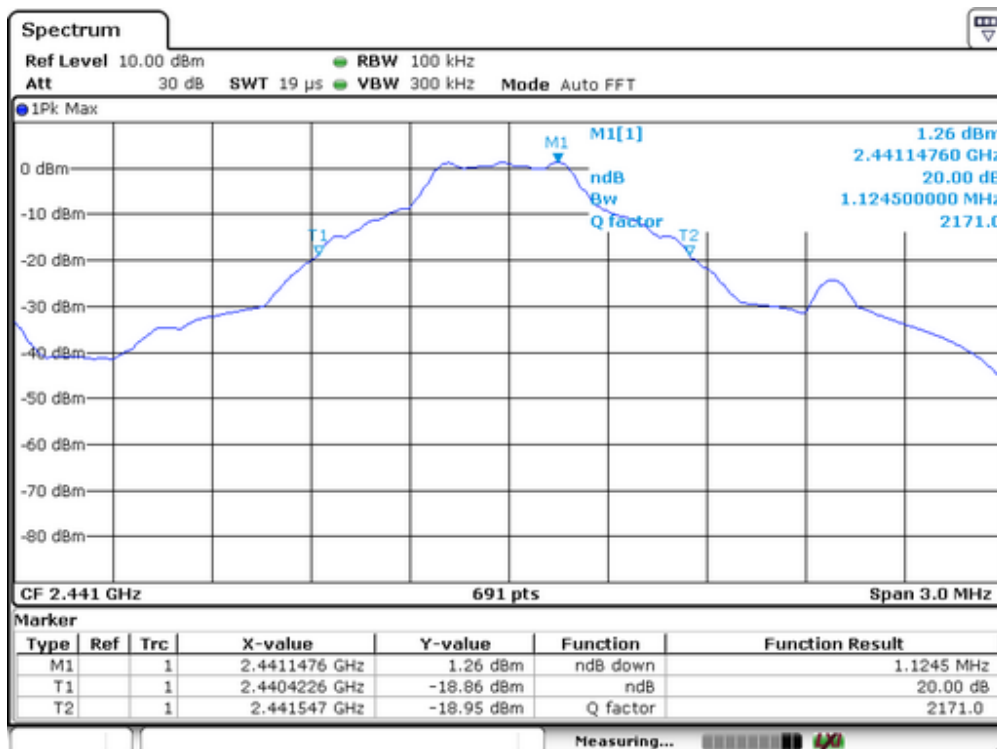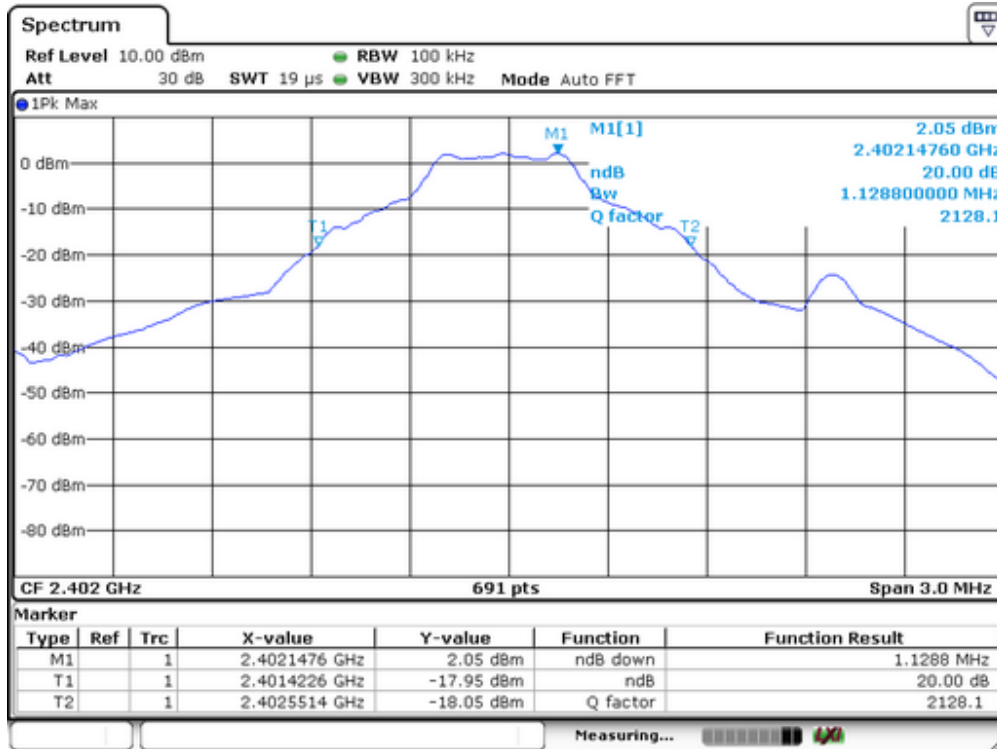


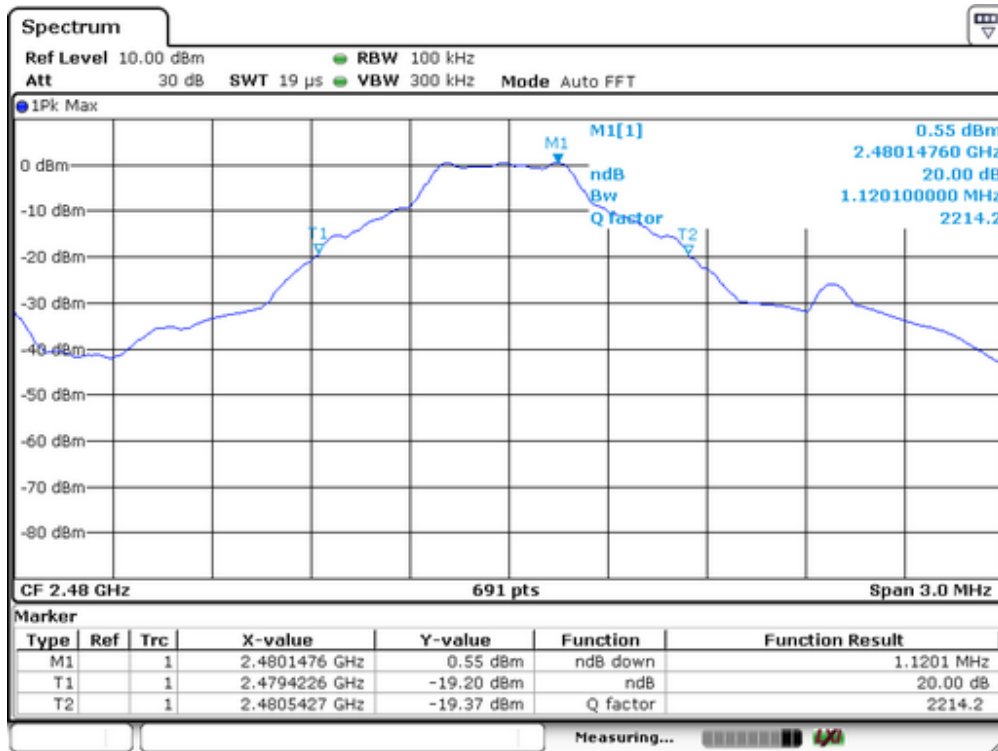

Spectrum Detector:	PK	Test Date :	June 02, 2017
Test By:	YF	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	$\pi/4$ -DQPSK		



Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1415
40	2441	1420
79	2480	1407

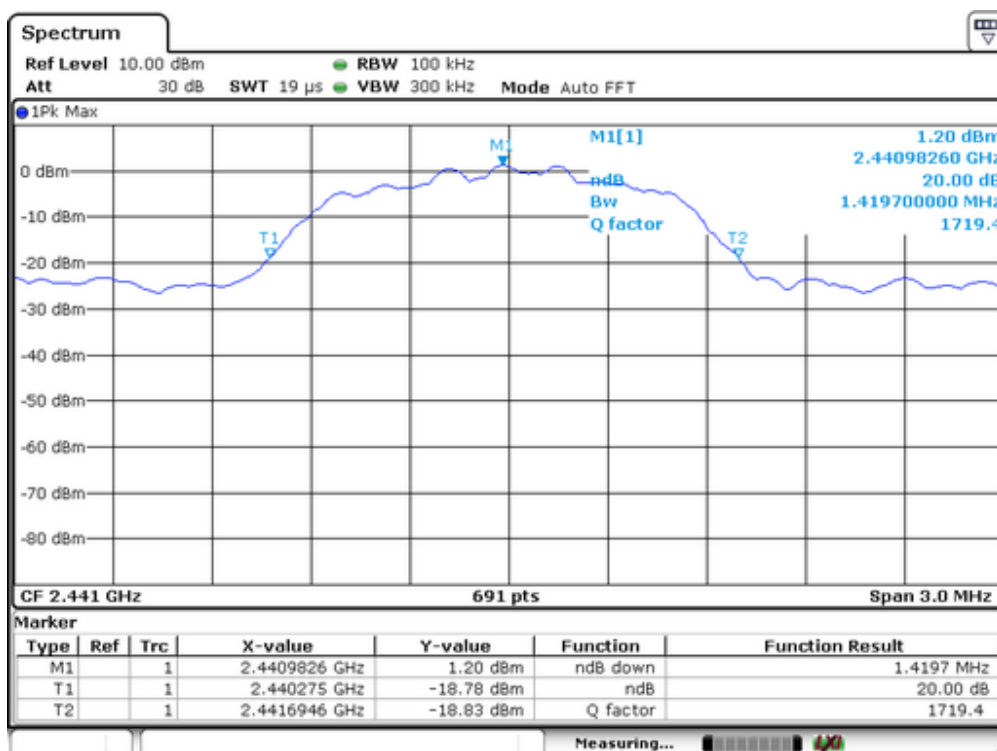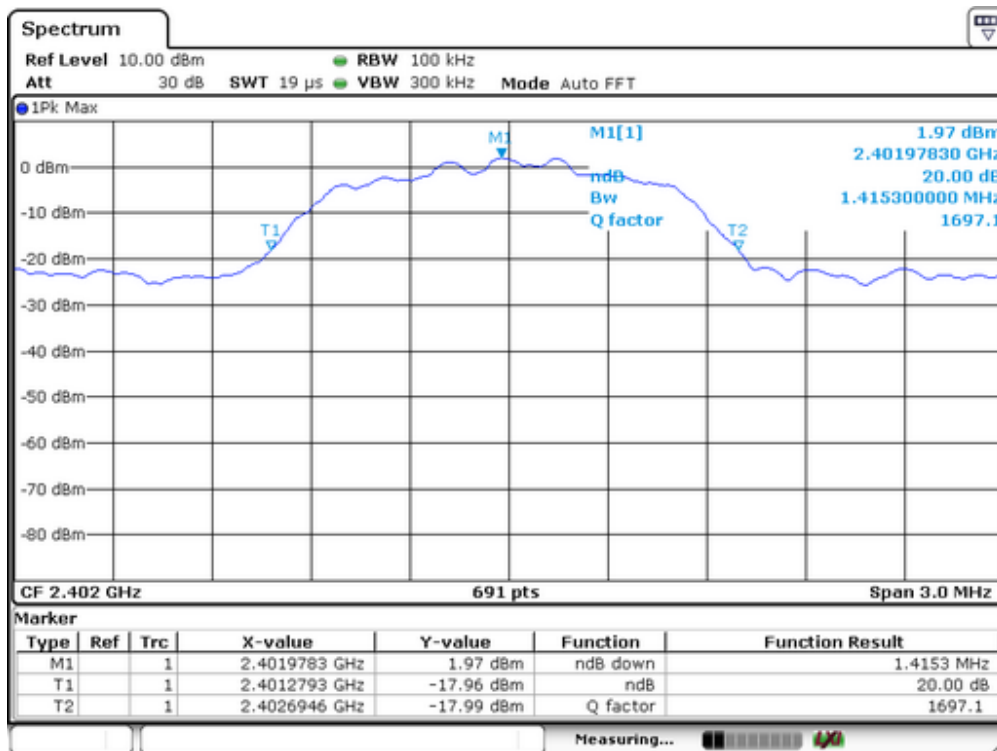


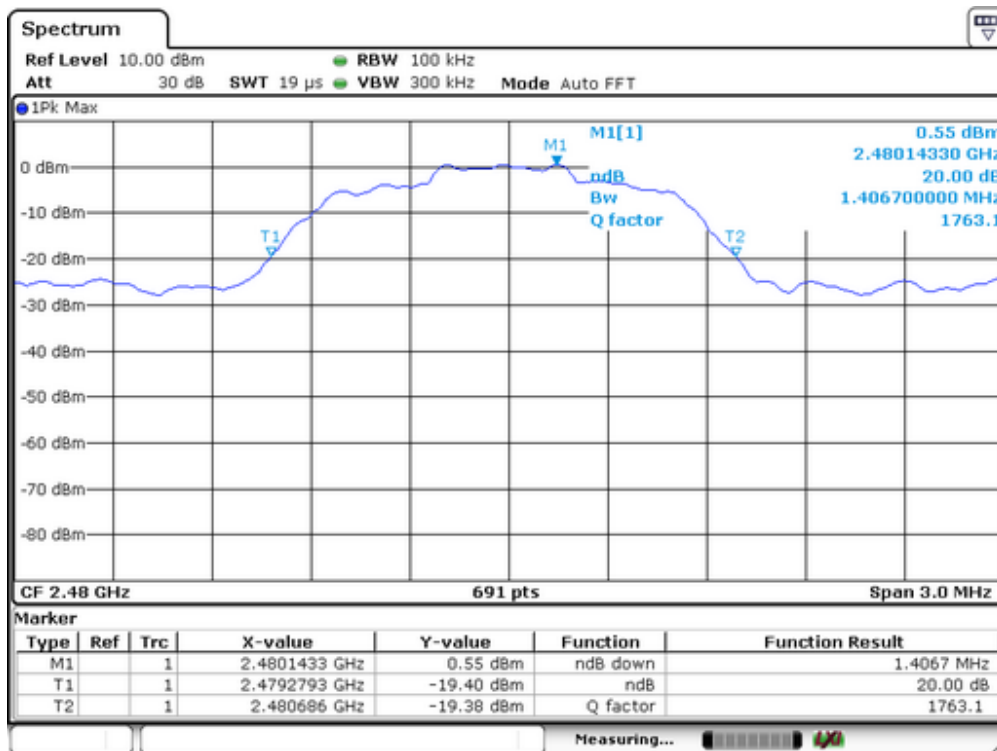

Spectrum Detector:	PK	Test Date :	June 02, 2017
Test By:	YF	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	8DPSK		

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1433
40	2441	1428
79	2480	1415

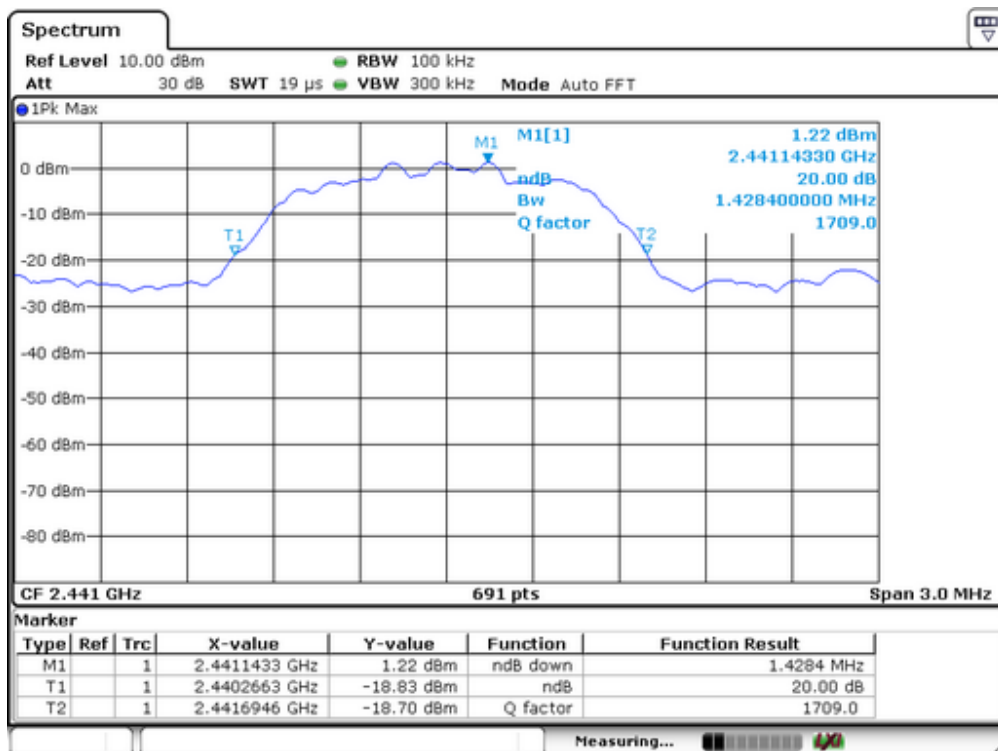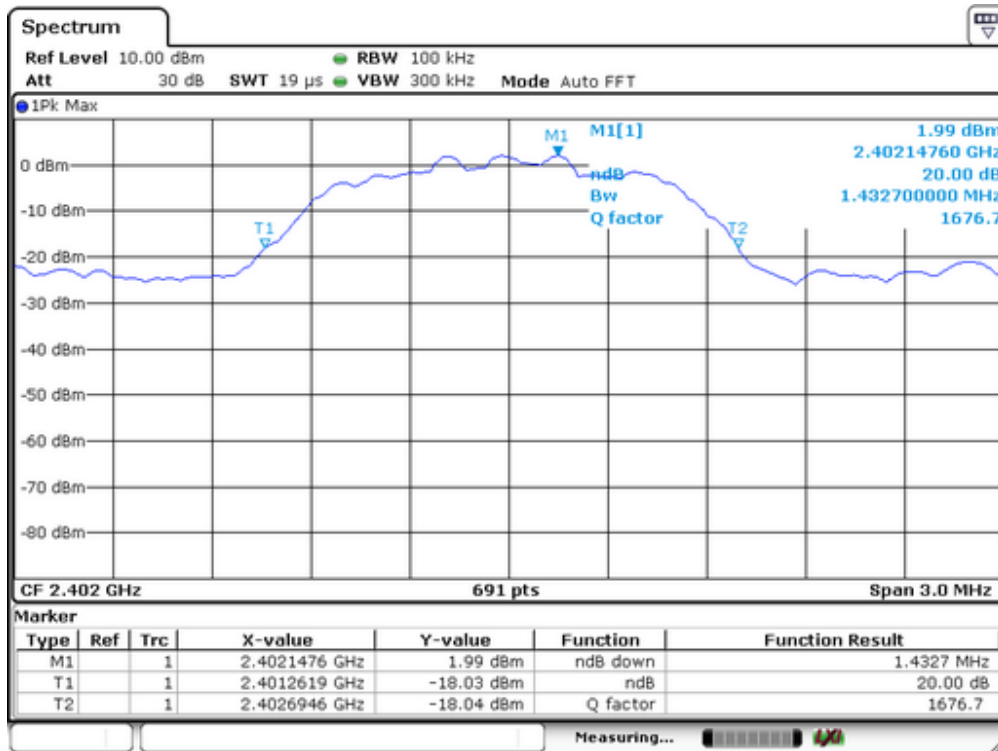

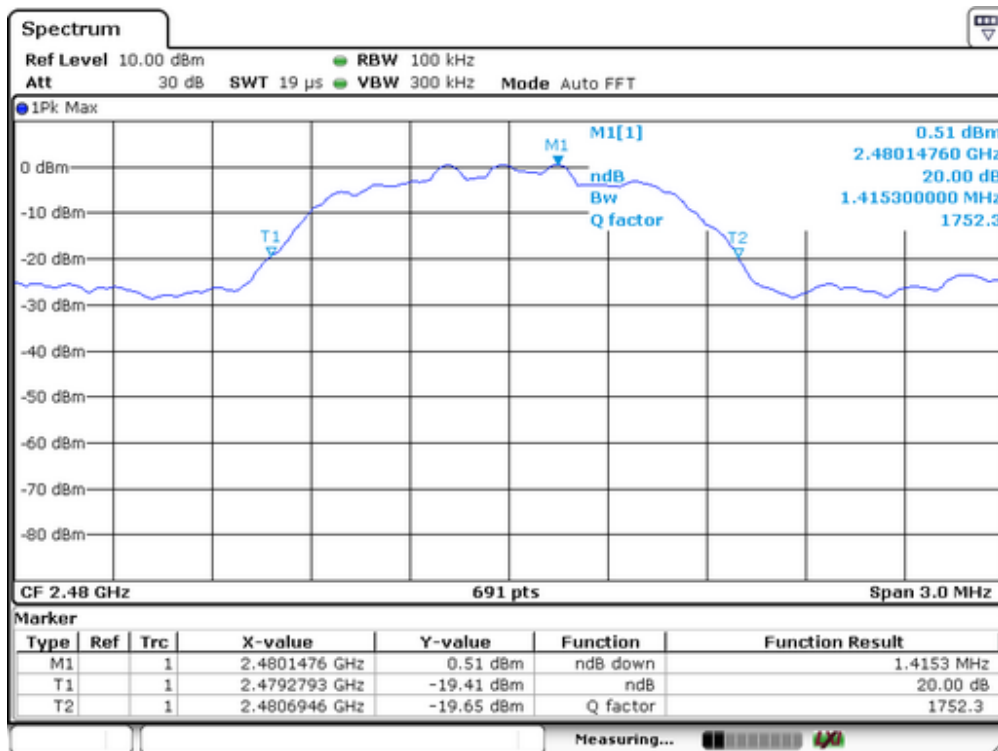


10. Quantity of Hopping Channel Test

10.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

10.2 Test SET-UP (Block Diagram of Configuration)



10.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/16/2017	05/15/2018
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/16/2017	05/15/2018
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/16/2017	05/15/2018


Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

10.4 Measurement Results:

Refer to attached data chart.

Worst Test Mode	GFSK	Test Date :	June 02, 2017
Test By:	YF	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480	79	> 15

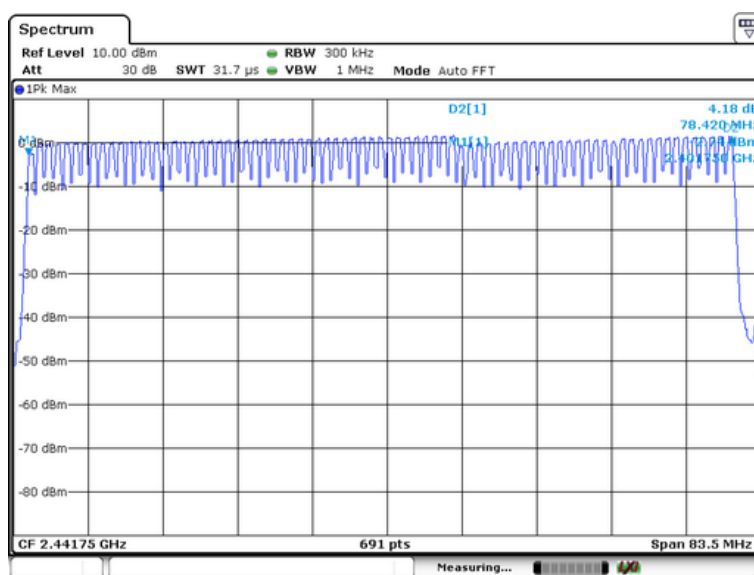

11. Time of Occupancy (Dwell Time) test

11.1 Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:


Dwell time = time slot length * hop rate / number of hopping channels * 31.6s

with:

- hop rate = $1600 * 1/s$ for DH1 packets = $1600 s^{-1}$
- hop rate = $1600/3 * 1/s$ for DH3 packets = $533.33 s^{-1}$
- number of hopping channels = 79
- $31.6 s = 0.4$ seconds multiplied by the number of hopping channels = $0.4 s * 79$

The highest value of the dwell time is reported.

11.2 Test SET-UP (Block Diagram of Configuration)



11.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/16/2017	05/15/2018
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/16/2017	05/15/2018
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/16/2017	05/15/2018

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

11.4 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6seconds. Refer to attached data chart.

11.5 Test result


Mode	Number of transmission in a 31.6(79 Hopping*0.4)	Length of transmissions time(msec)	Result (msec)	Limit (msec)
DH1	$1600/(2*79) \times 31.6 = 320$	0.421	134.72	400
DH3	$1600/(4*79) \times 31.6 = 160$	1.678	268.48	400
DH5	$1600/(6*79) \times 31.6 = 106.67$	2.925	312.01	400

Remark: The results of worst cased was recorded.


DH1:

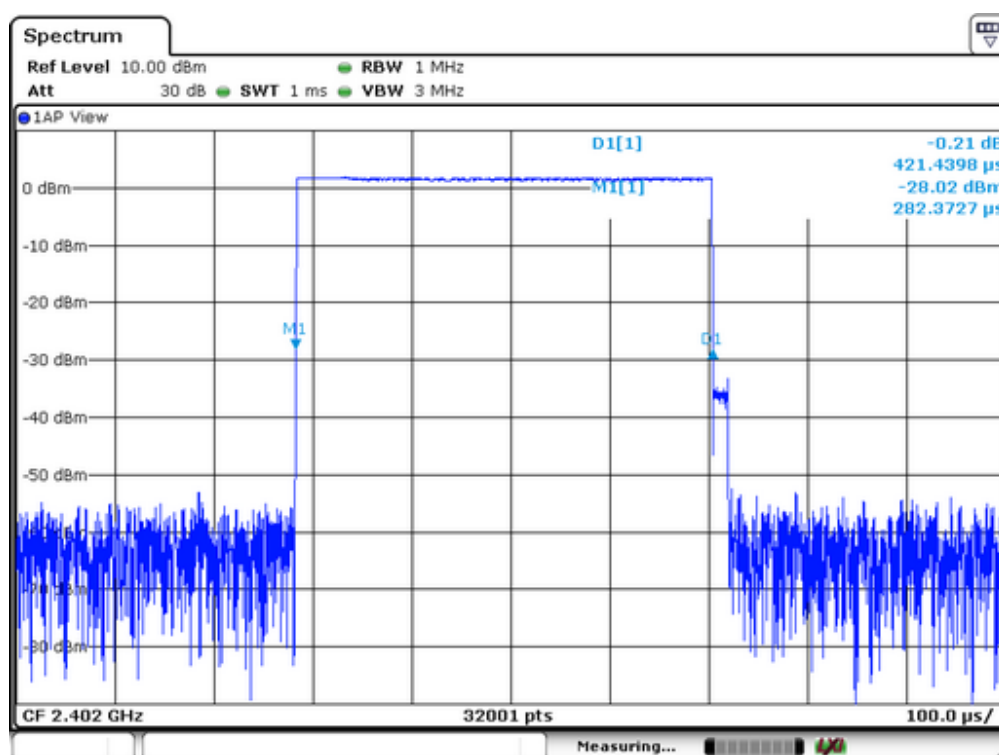

DH3:

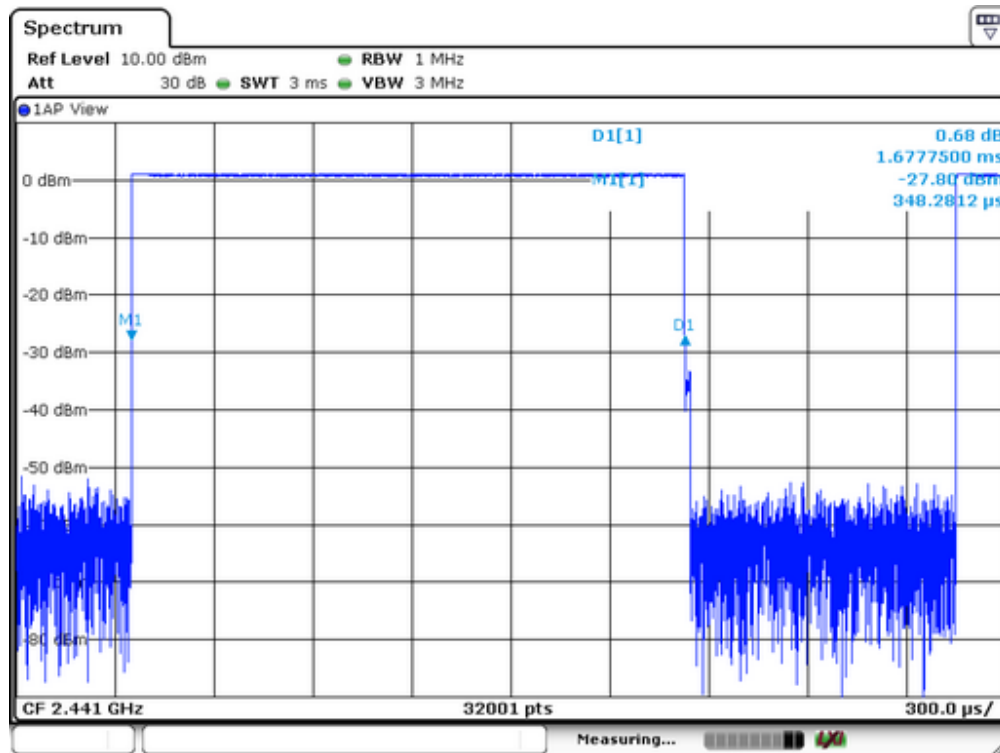

DH5:

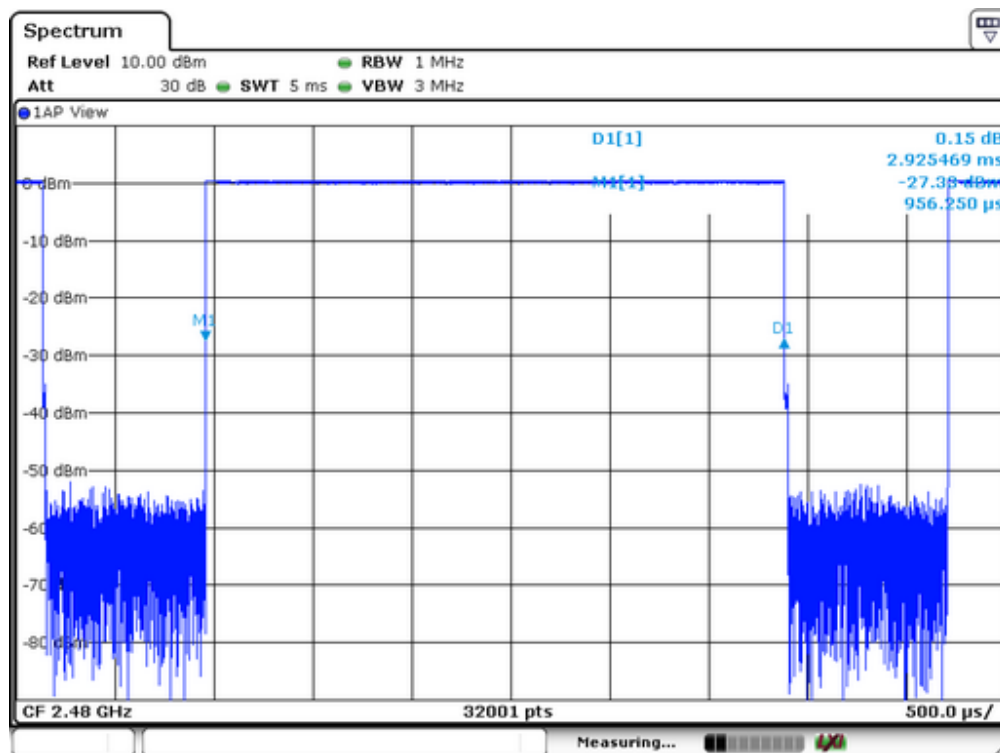


12. MAXIMUM PEAK OUTPUT POWER TEST

12.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

12.2 Test SET-UP (Block Diagram of Configuration)



12.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/16/2017	05/15/2018
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/16/2017	05/15/2018
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/16/2017	05/15/2018


Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.



12.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	June 02, 2017
Test By:	YF	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %
Modulation:	GFSK		


Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
01	2402	2.06	1.607	125	PASS
40	2441	1.21	1.321	125	PASS
79	2480	0.52	1.127	125	PASS


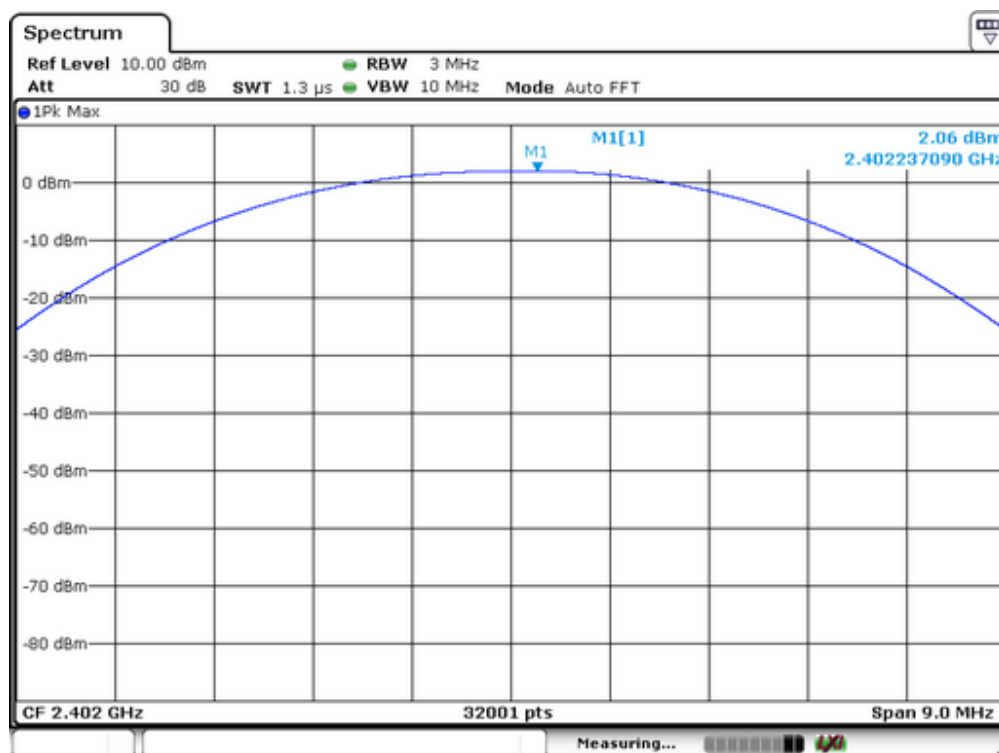


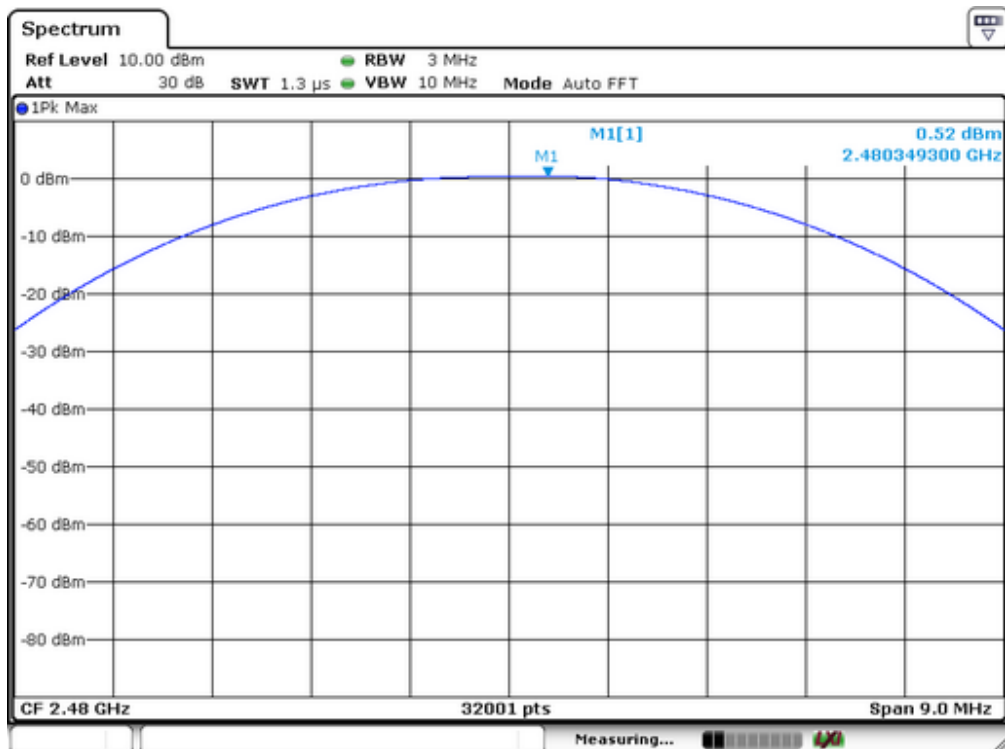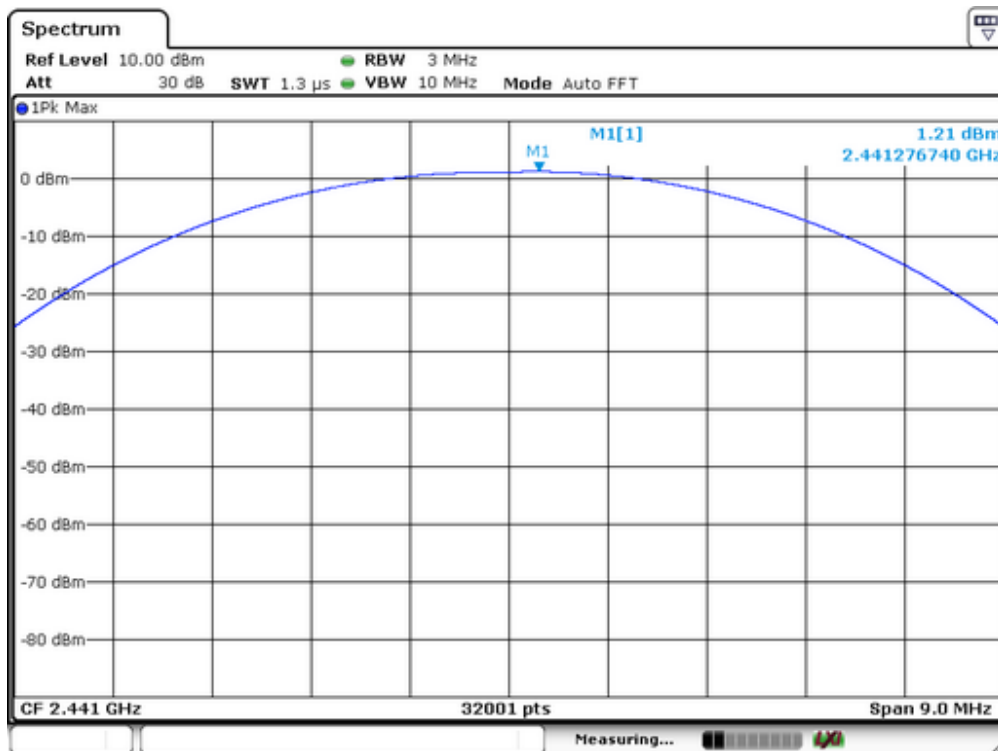

Spectrum Detector: PK Test Date : June 02, 2017
 Test By: YF Temperature : 25 °C
 Test Result: PASS Humidity : 50 %
 Modulation: Π/4-DQPSK

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
01	2402	2.2	1.660	125	PASS
40	2441	1.35	1.365	125	PASS
79	2480	0.82	1.208	125	PASS

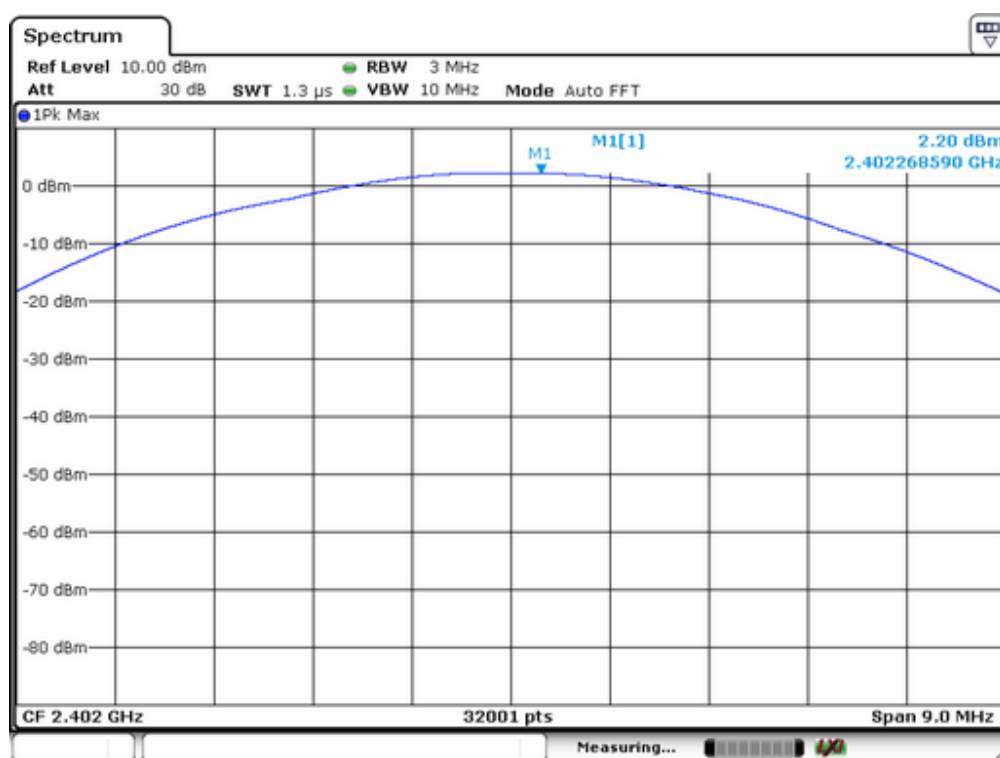


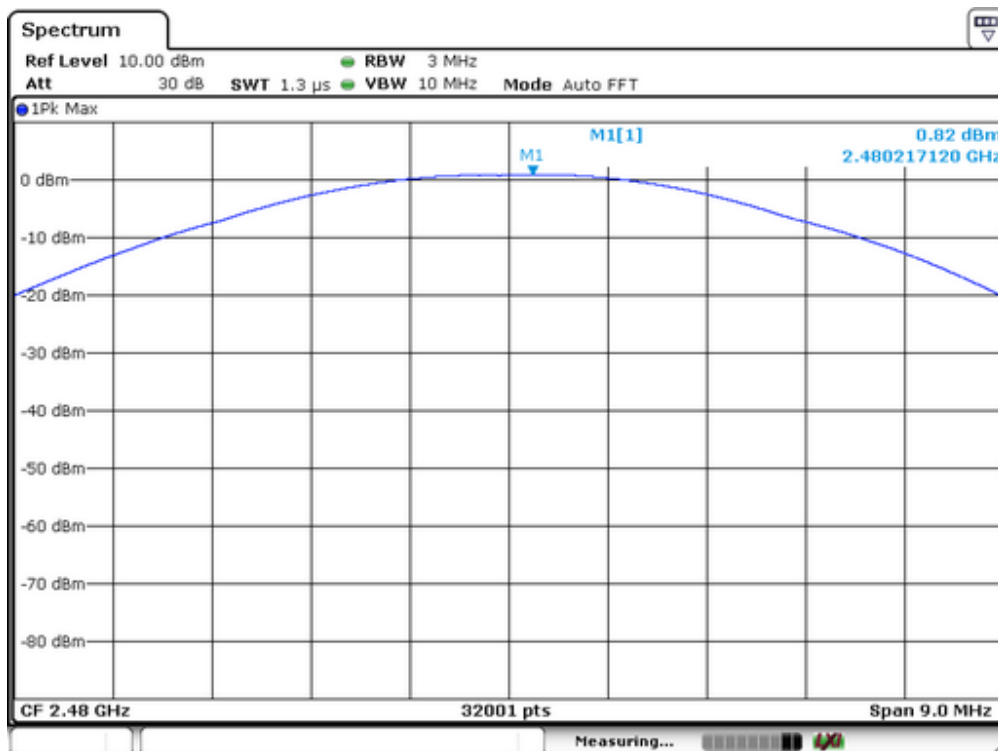
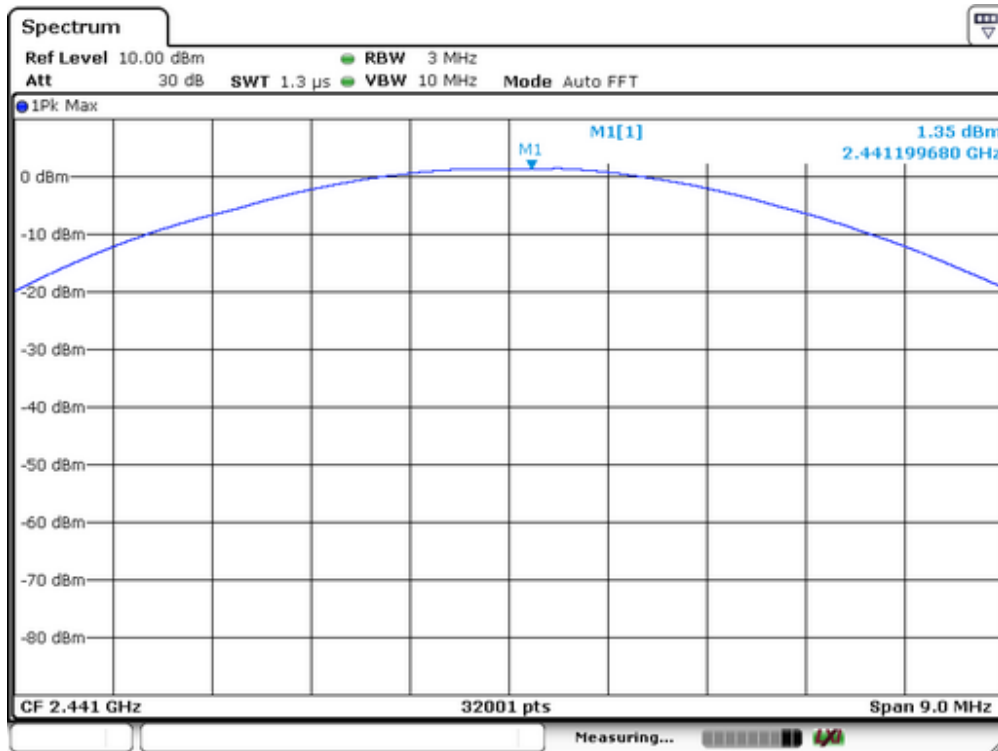


Spectrum Detector: PK
 Test By: YF
 Test Result: PASS
 Modulation: 8DPSK

Test Date : June 02, 2017
 Temperature : 25 °C
 Humidity : 50 %

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
01	2402	2.27	1.687	125	PASS
40	2441	1.43	1.390	125	PASS
79	2480	1.00	1.259	125	PASS

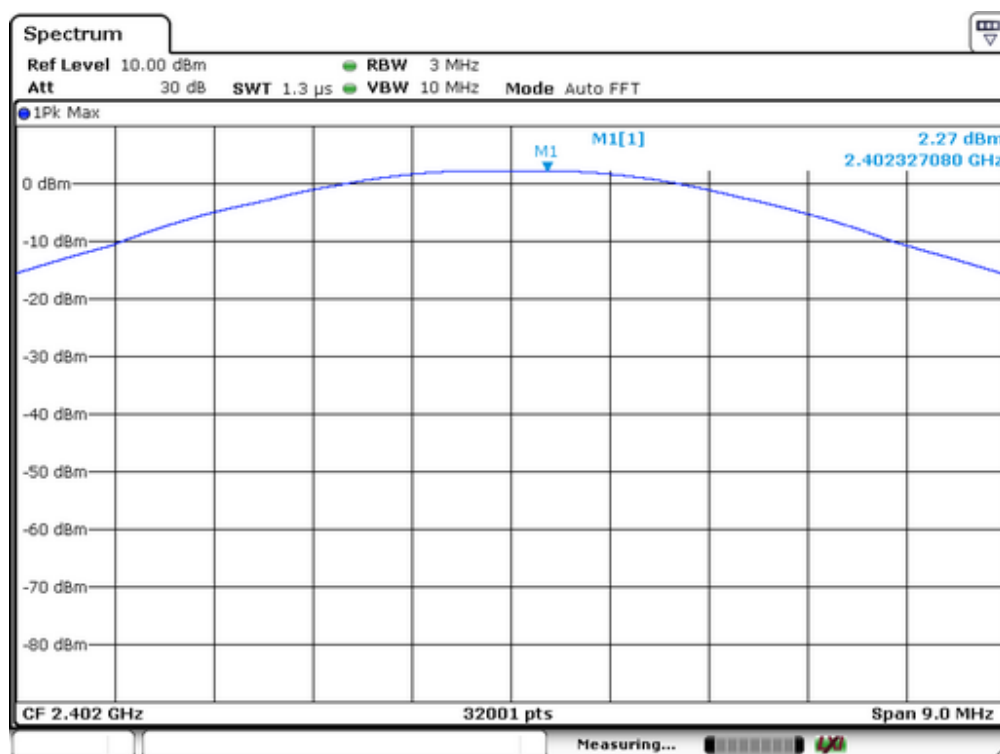

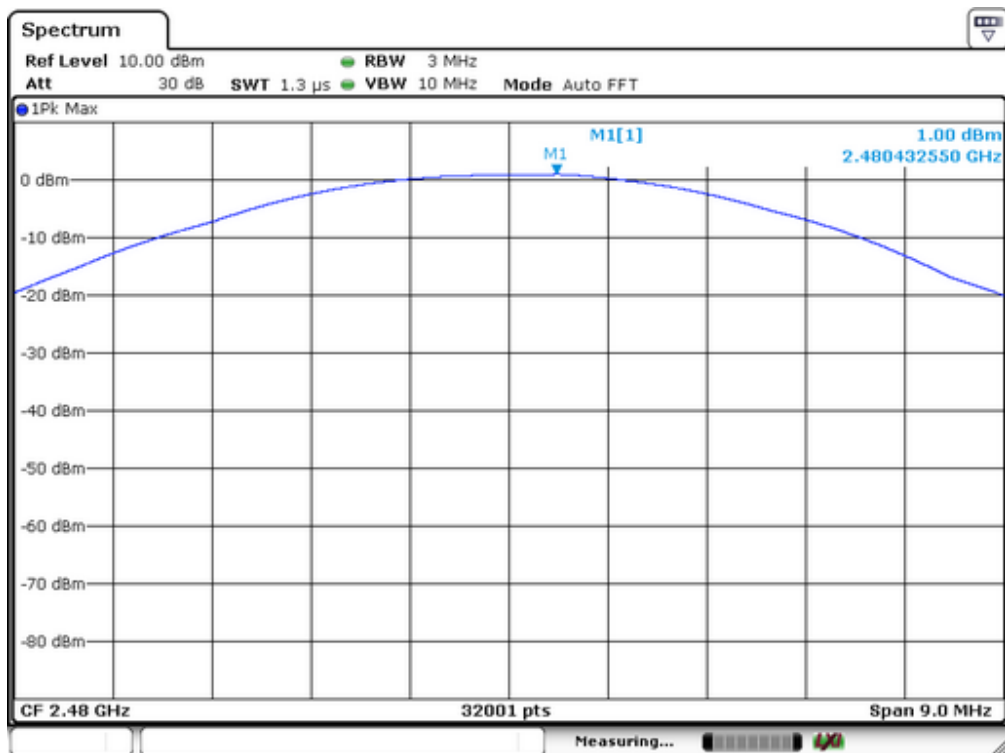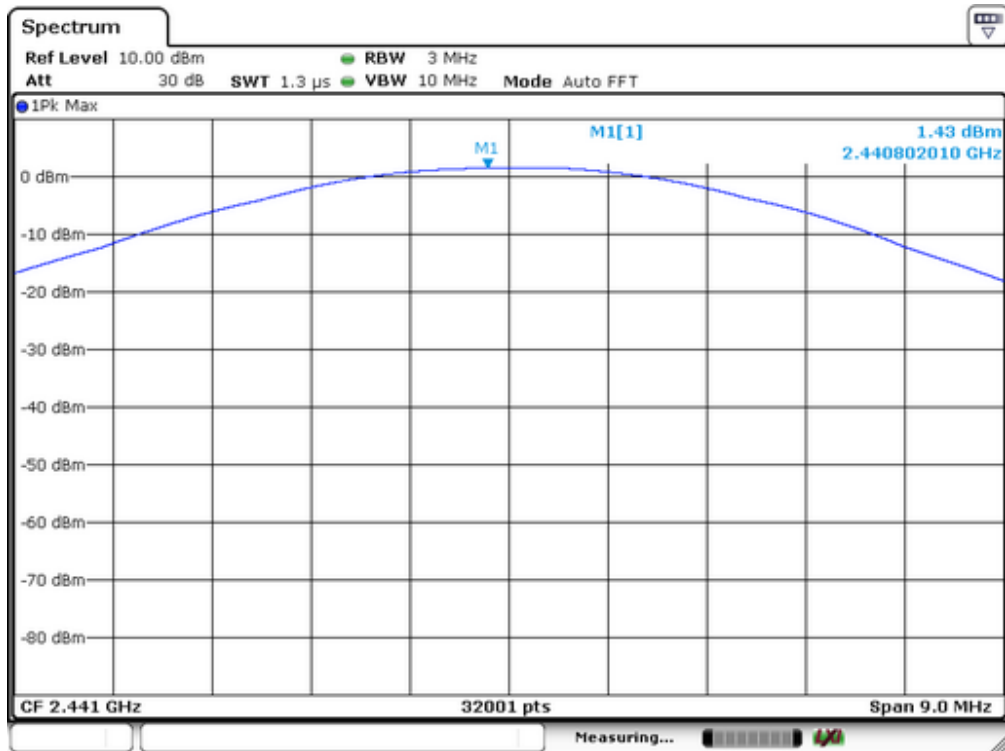

13. Band EDGE test

13.1 Measurement Procedure

For Conducted Test

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.
2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

For Radiated emission Test

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the band edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were encompassed by the span. After trace stabilization, the maximum peak was determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.

The measurements were performed at the lower end of the 2.4GHz band.

Use the following spectrum analyzer settings:

For Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RBW	1MHz
VBW	3MHz
Detector	Peak
Trace	Max hold

For Non-Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 100KHz, video bandwidth 300KHz:


EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

13.2 Test SET-UP (Block Diagram of Configuration)

For Conducted Test



For Radiated emission Test

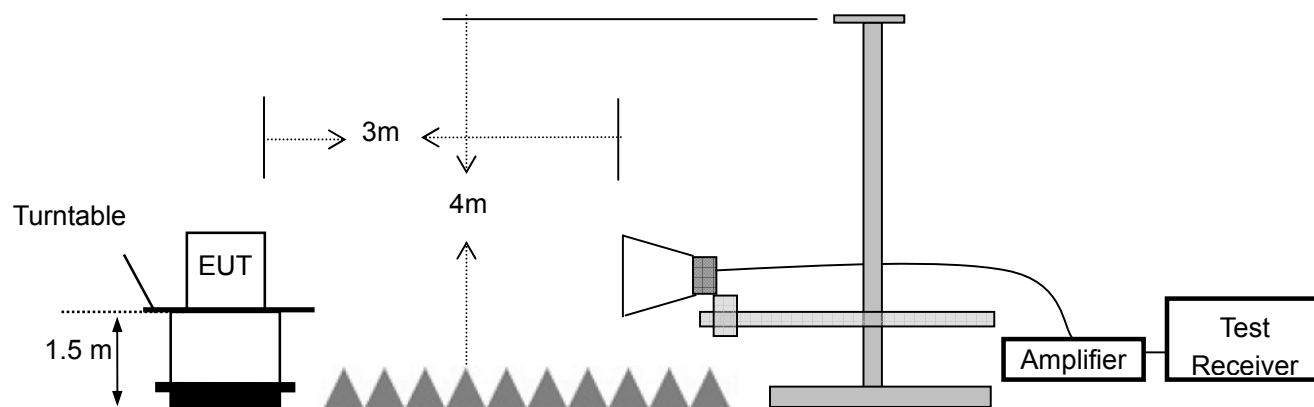

13.3 Measurement Equipment Used:

For Conducted Test

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/16/2017	05/15/2018
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/16/2017	05/15/2018
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/16/2017	05/15/2018

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

For Radiated emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Characteristics	Last Cal.	Cal. Interval
1	Signal Analyzer	Rohde & Schwarz	FSV30	103040	9KHz-40GHz	05/16/2017	1 Year
2	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1272	1GHz-18GHz	05/16/2017	1 Year
3	Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	05/16/2017	1 Year
4	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year
5	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year
6	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year

13.4 Measurement Results:

Refer to attached data chart.


Spectrum Detector:	PK	Test Date :	June 02, 2017
Test By:	YF	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %


1. Conducted Test

For Non-Hopping Mode:


Frequency (MHz)	Modulation	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
2399.25	GFSK	0.1	-40.5	40.6	>20dBc
2399.93	pi/4-DQPSK	-1.34	-26.85	25.51	>20dBc
2399.76	8DPSK	-1.02	-25.5	24.48	>20dBc
2483.76	GFSK	0.05	-41.96	42.01	>20dBc
2484.13	pi/4-DQPSK	-1.27	-35.15	33.88	>20dBc
2483.69	8DPSK	-1.32	-33.49	32.17	>20dBc


Test plots of GFSK

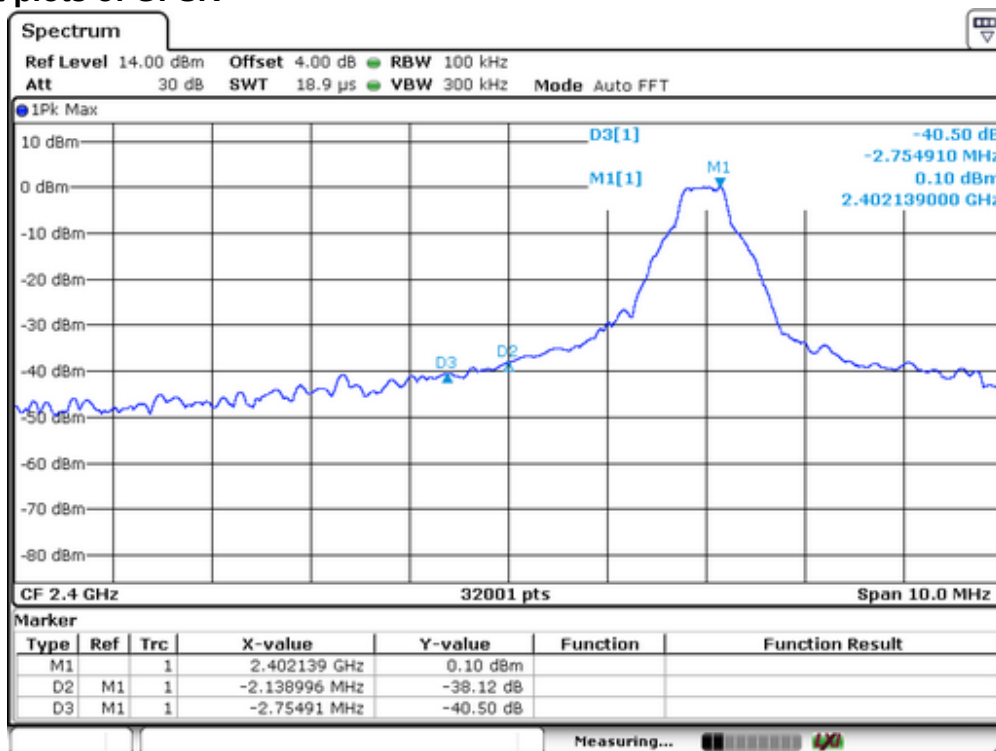

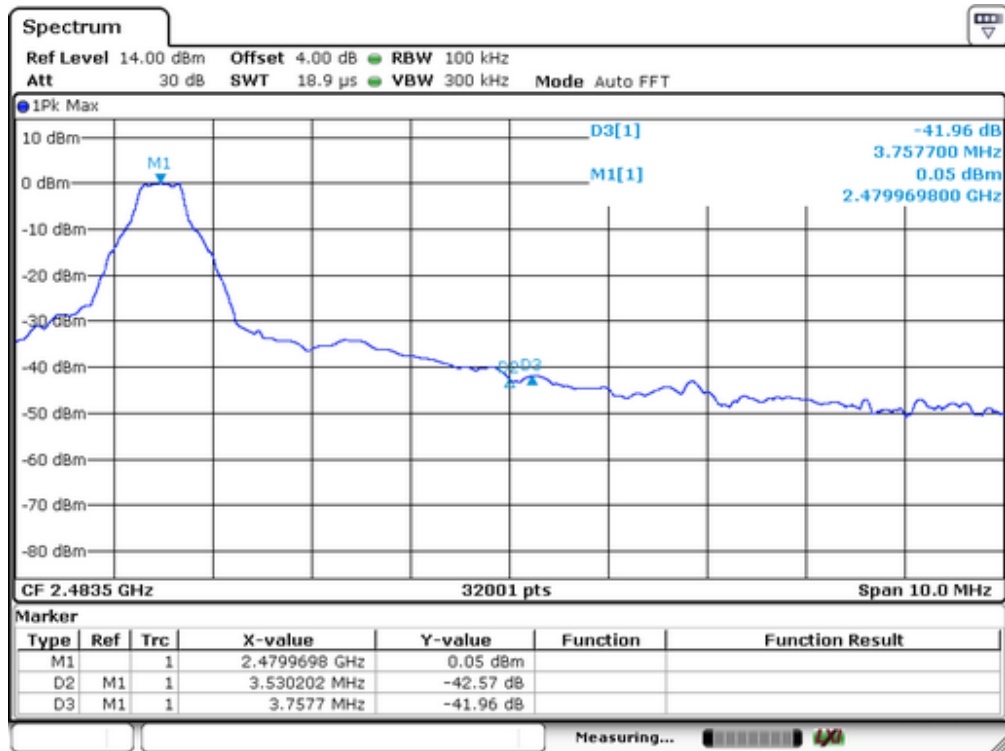



Test plots of pi/4-DQPSK

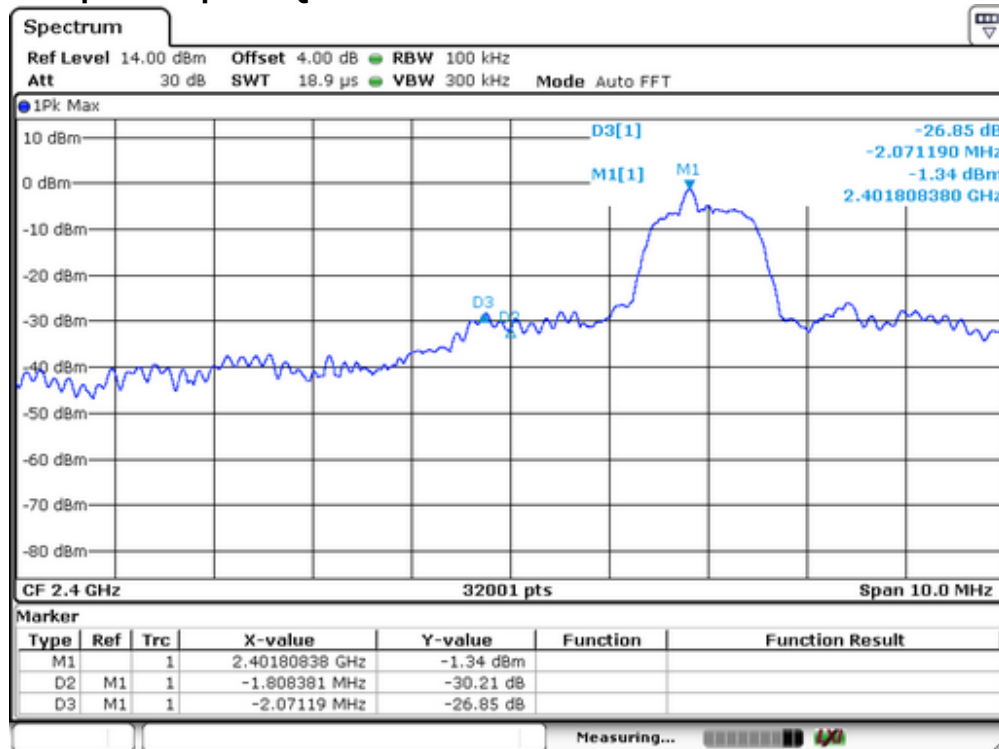

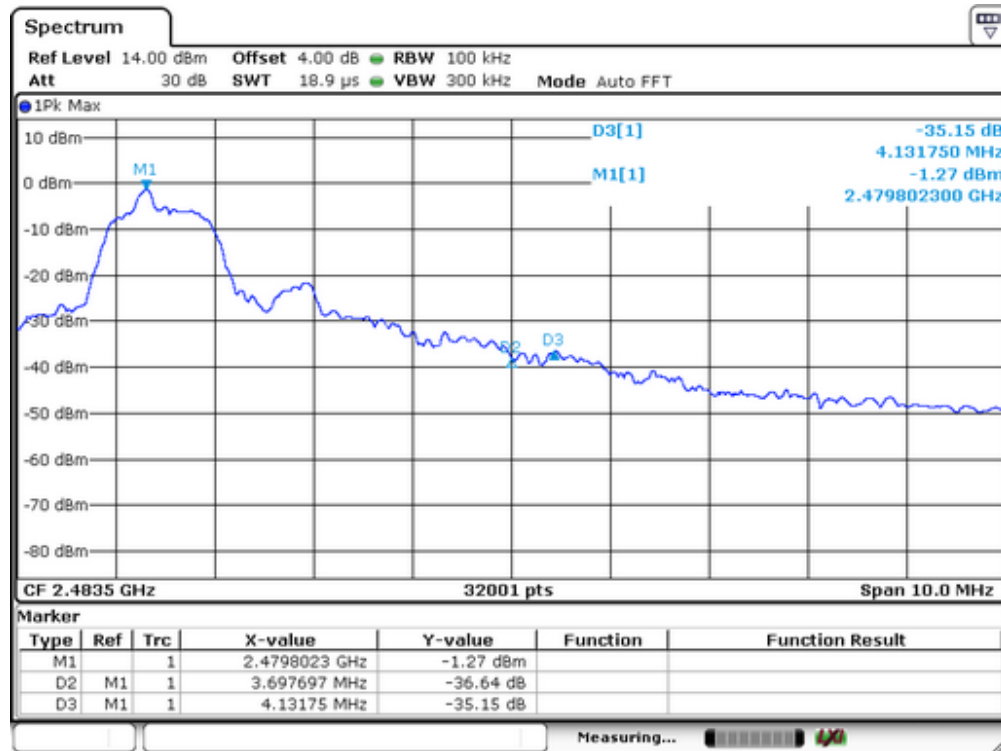

Test plots of 8DPSK


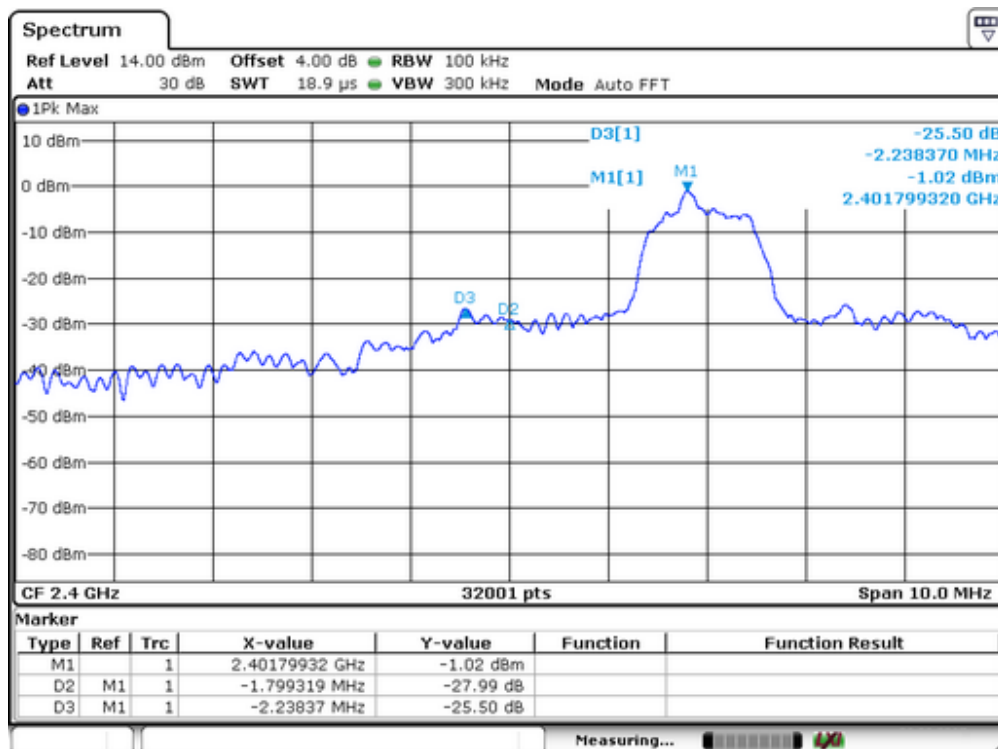


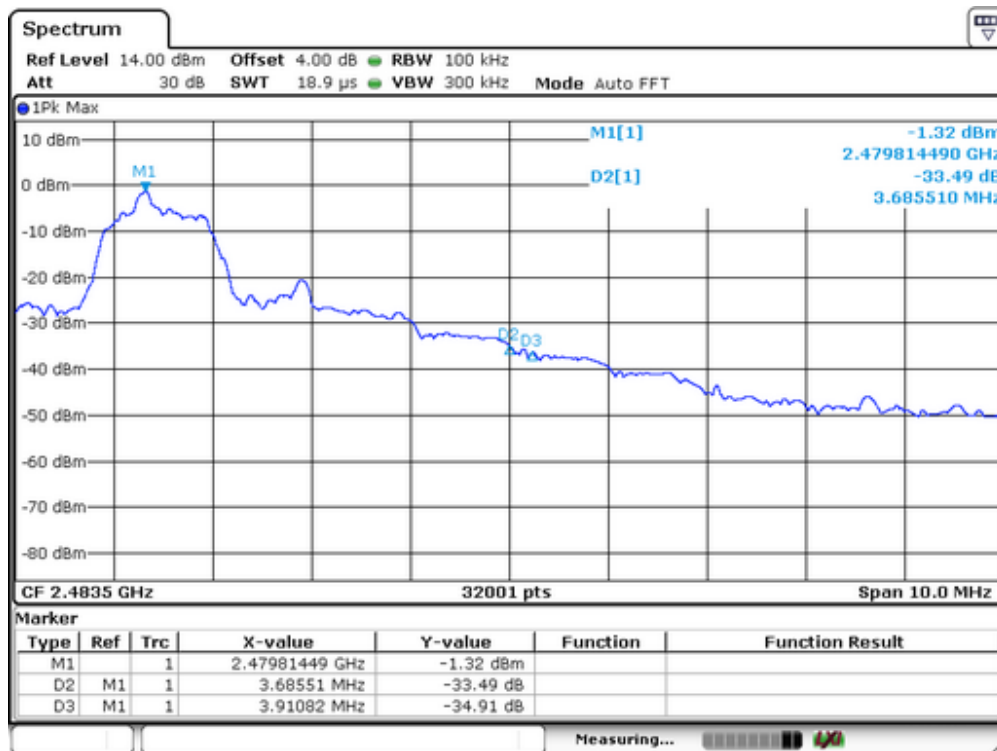

For Hopping Mode:



Frequency (MHz)	Modulation	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
2399.49	GFSK	0.11	-37.88	37.99	>20dBc
2399.95	pi/4-DQPSK	-3.2	-30.39	27.19	>20dBc
2399.86	8DPSK	-4.89	-25.48	20.59	>20dBc
2483.59	GFSK	0.00	-44.08	44.08	>20dBc
2484.2	pi/4-DQPSK	-1.82	-40.75	38.93	>20dBc
2484.25	8DPSK	-4.95	-32.49	27.54	>20dBc

Test plots of GFSK

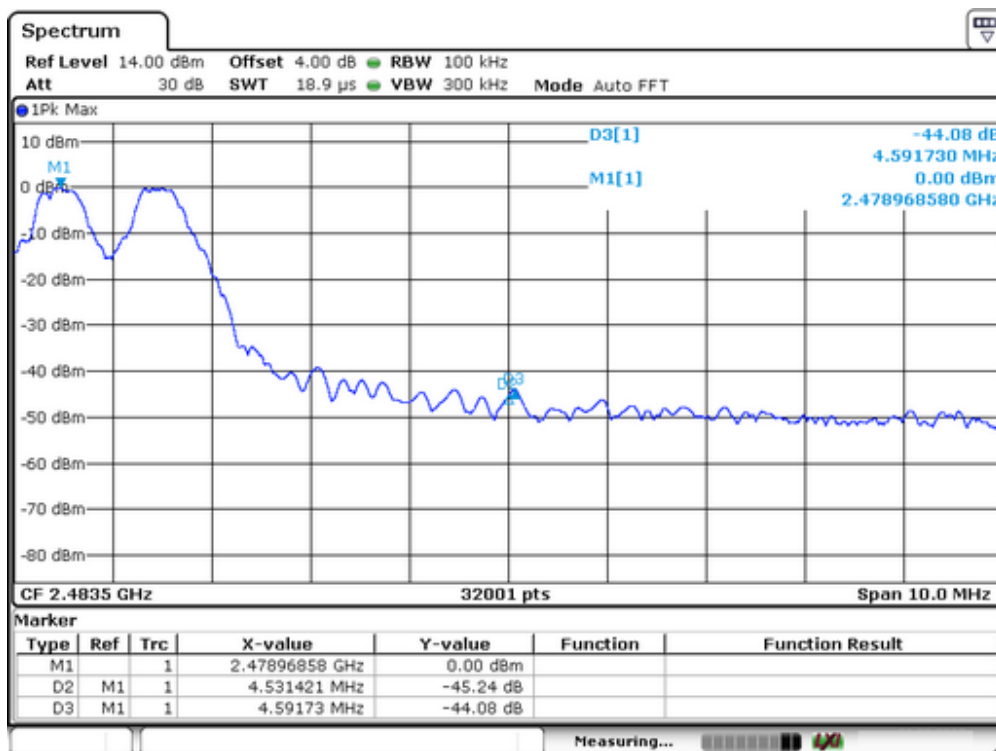
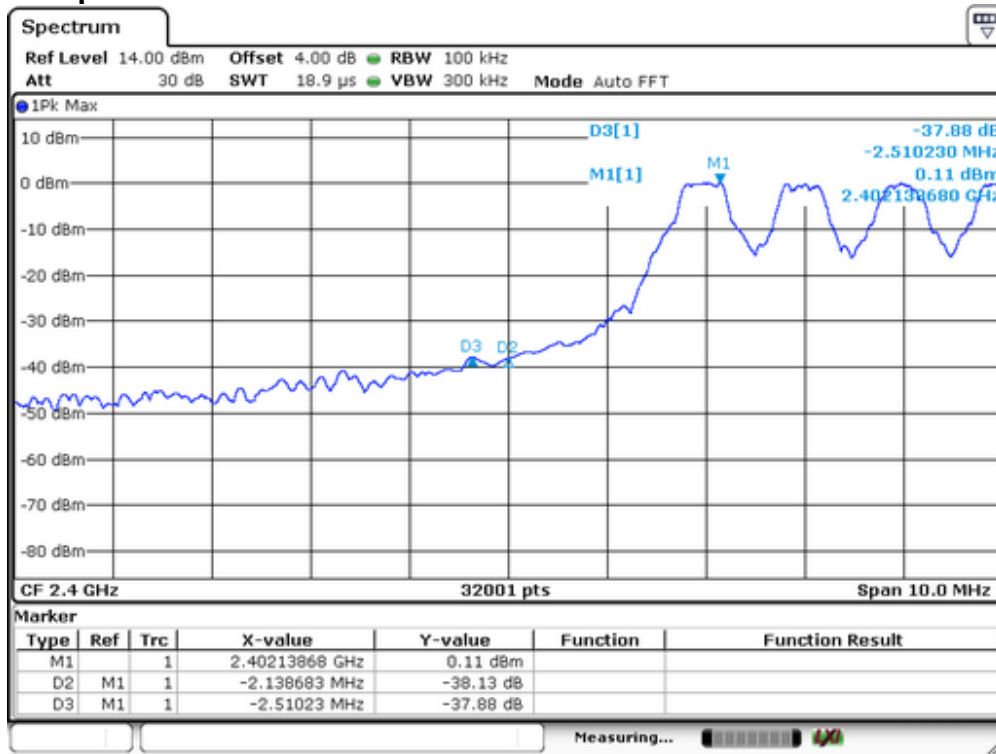


Test

plots of pi/4-DQPSK

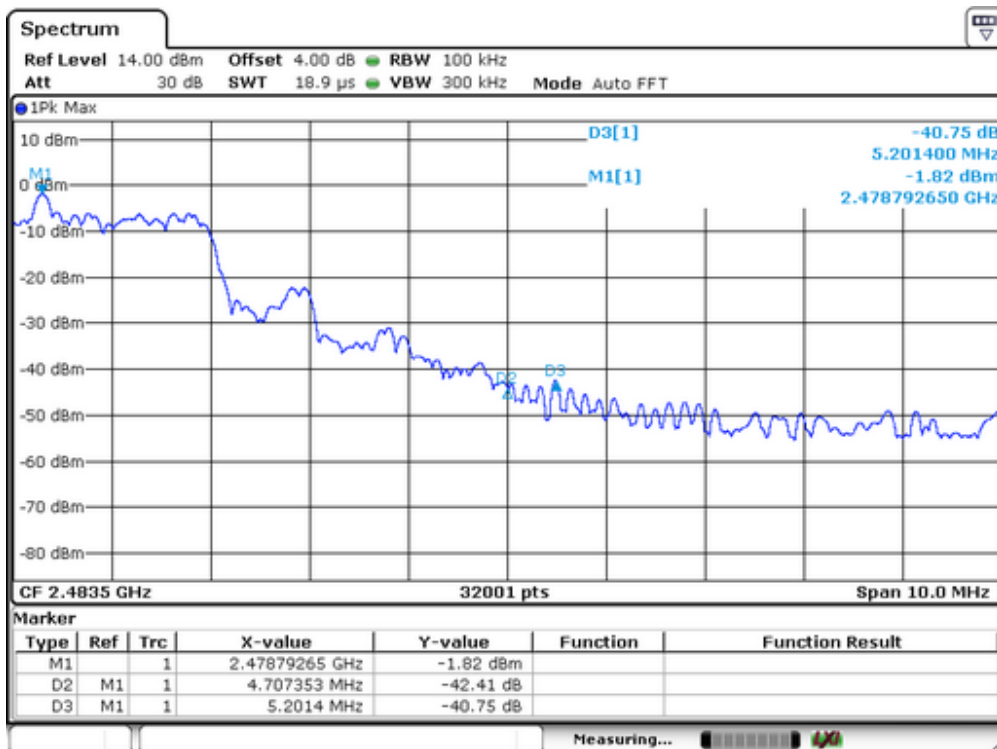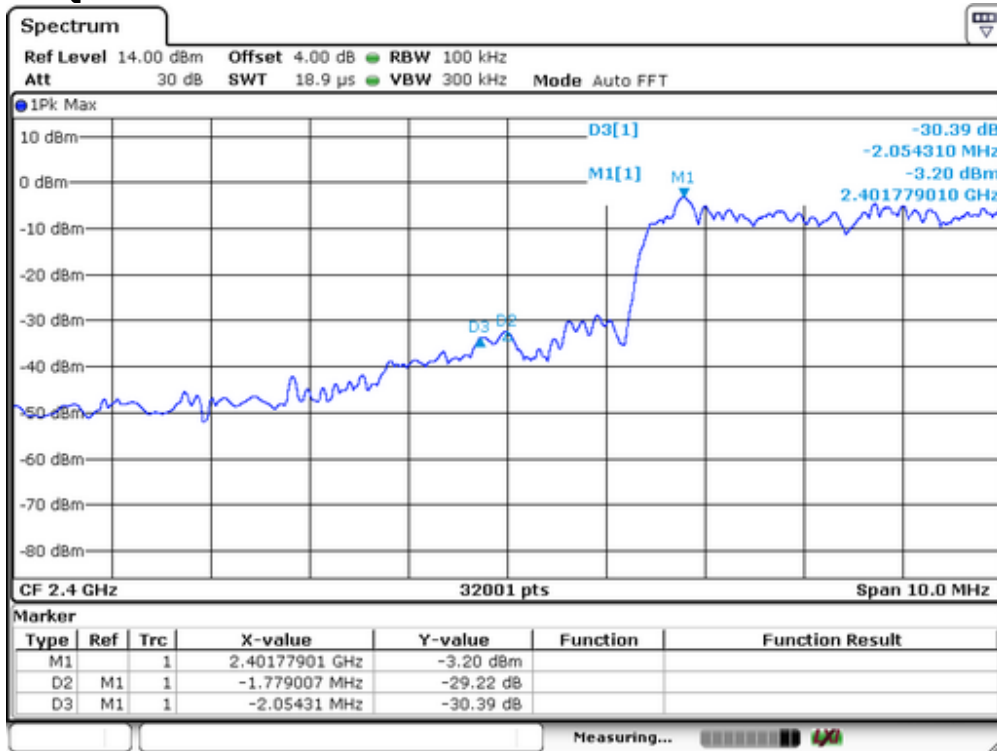

Test plots of 8DPSK

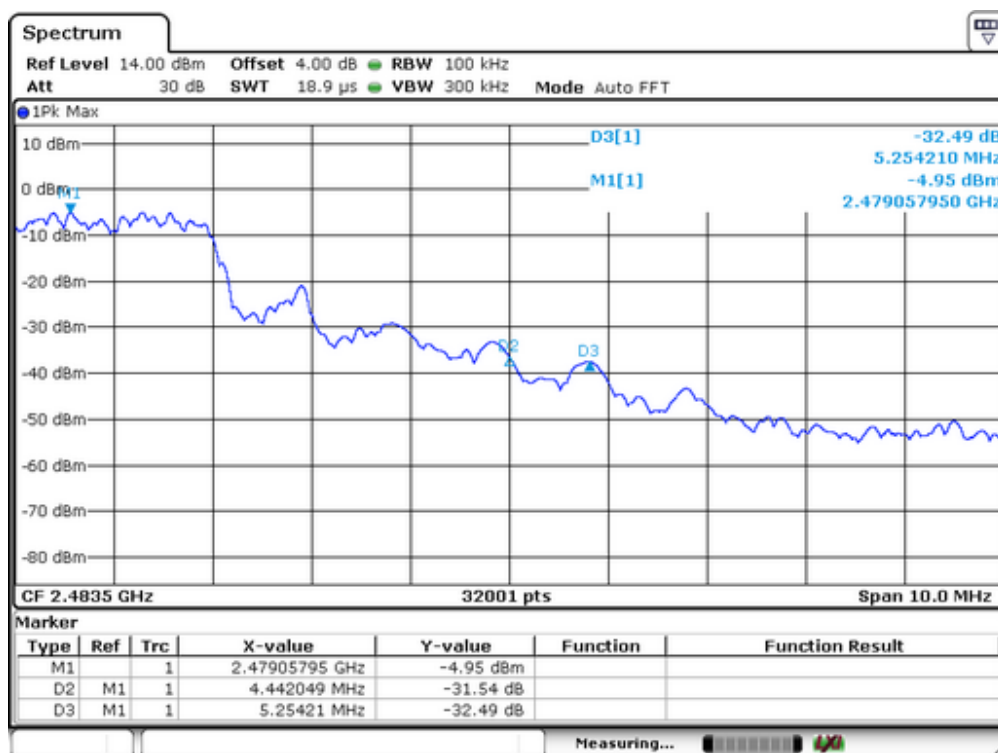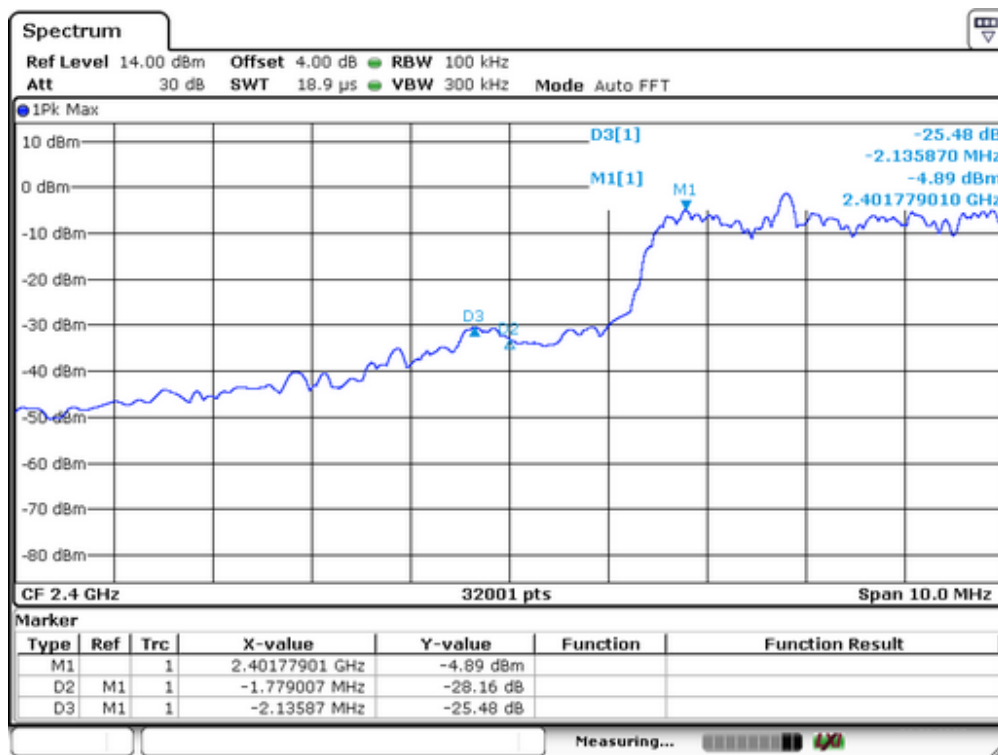


2. Radiated emission Test

Worst test modulation GFSK

For Non-Hopping Mode:

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
2398.73	H	64.16	43.15	74	54	-9.84	-10.85
2397.4	V	63.05	45.36	74	54	-10.95	-8.64
2483.65	H	62.99	44.62	74	54	-11.01	-9.38
2485.61	V	61.05	43.08	74	54	-12.95	-10.92

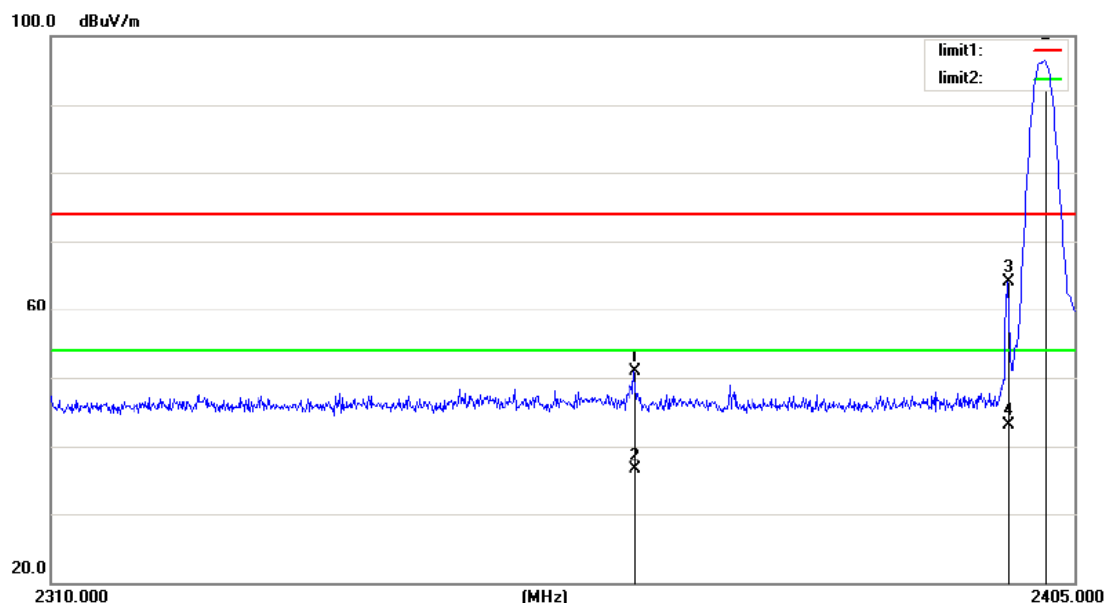


Site site #1 Polarization: **Horizontal** Temperature: 26
 Limit: (RE)FCC PART 15 C 3m_PEAK Power: Battery 7.4V Humidity: 55 %
 Mode:DSS(TX2402)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2363.770	56.90	-6.00	50.90	74.00	-23.10	peak	200	0
2		2363.770	42.59	-6.00	36.59	54.00	-17.41	AVG	210	0
3		2398.730	69.92	-5.76	64.16	74.00	-9.84	peak	200	0
4		2398.730	48.91	-5.76	43.15	54.00	-10.85	AVG	220	0
5	*	2402.245	102.15	-5.73	96.42	74.00	22.42	peak	220	0

*:Maximum data x:Over limit !:over margin

Operator: Lin

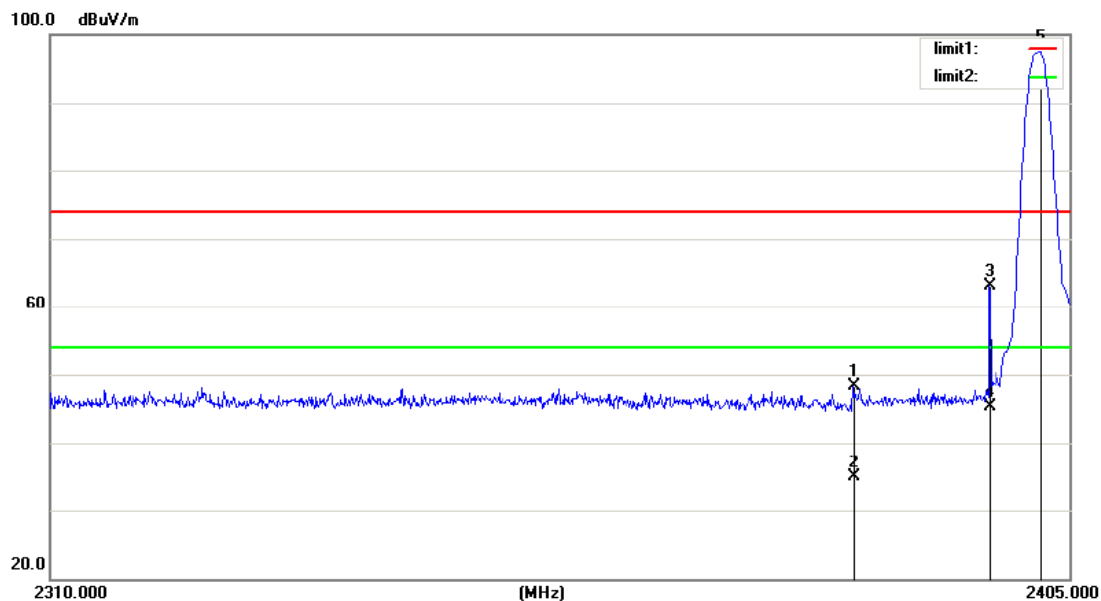


Site site #1 Polarization: **Vertical** Temperature: 26
 Limit: (RE)FCC PART 15 C 3m_PEAK Power: Battery 7.4V Humidity: 55 %
 Mode:DSS(TX2402)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2384.480	54.20	-5.86	48.34	74.00	-25.66	peak	110	0
2		2384.480	40.75	-5.86	34.89	54.00	-19.11	AVG	110	0
3		2397.400	68.82	-5.77	63.05	74.00	-10.95	peak	120	0
4		2397.400	51.13	-5.77	45.36	54.00	-8.64	AVG	150	0
5	*	2402.245	103.23	-5.73	97.50	74.00	23.50	peak	120	0

*:Maximum data x:Over limit l:over margin

Operator: Lin

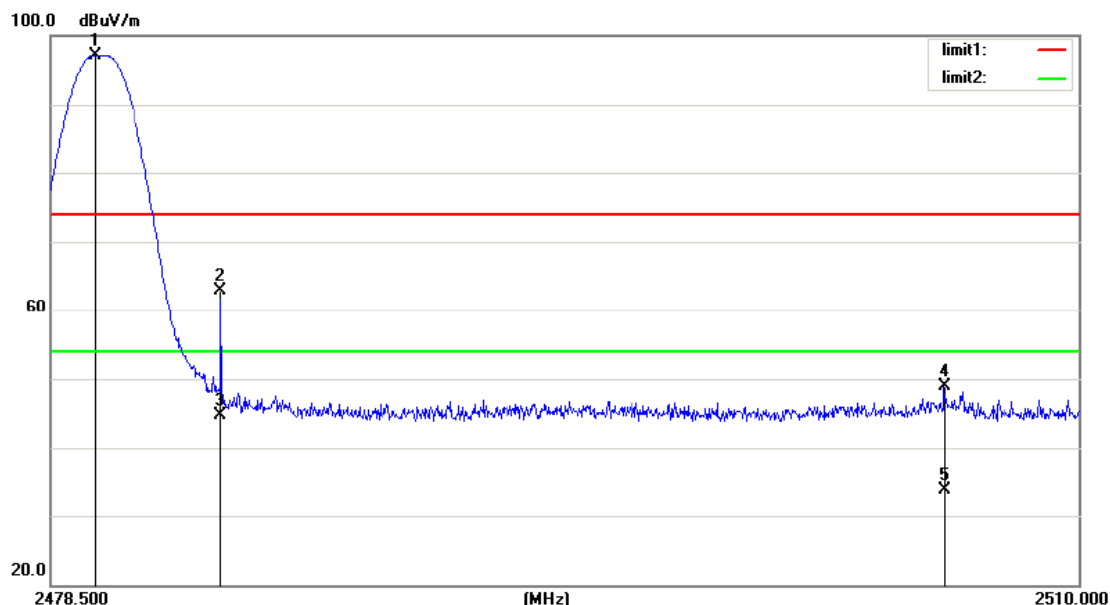


Site site #1 Polarization: **Horizontal** Temperature: 26
 Limit: (RE)FCC PART 15 C 3m_PEAK Power: Battery 7.4V Humidity: 55 %
 Mode:DSS(TX2480)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2479.823	102.39	-5.20	97.19	74.00	23.19	peak	200	0
2		2483.650	68.17	-5.18	62.99	74.00	-11.01	peak	220	0
3		2483.650	49.80	-5.18	44.62	54.00	-9.38	AVG	210	0
4		2505.874	53.99	-5.04	48.95	74.00	-25.05	peak	220	0
5		2505.874	38.73	-5.04	33.69	54.00	-20.31	AVG	250	0

*:Maximum data x:Over limit !:over margin

Operator: Lin

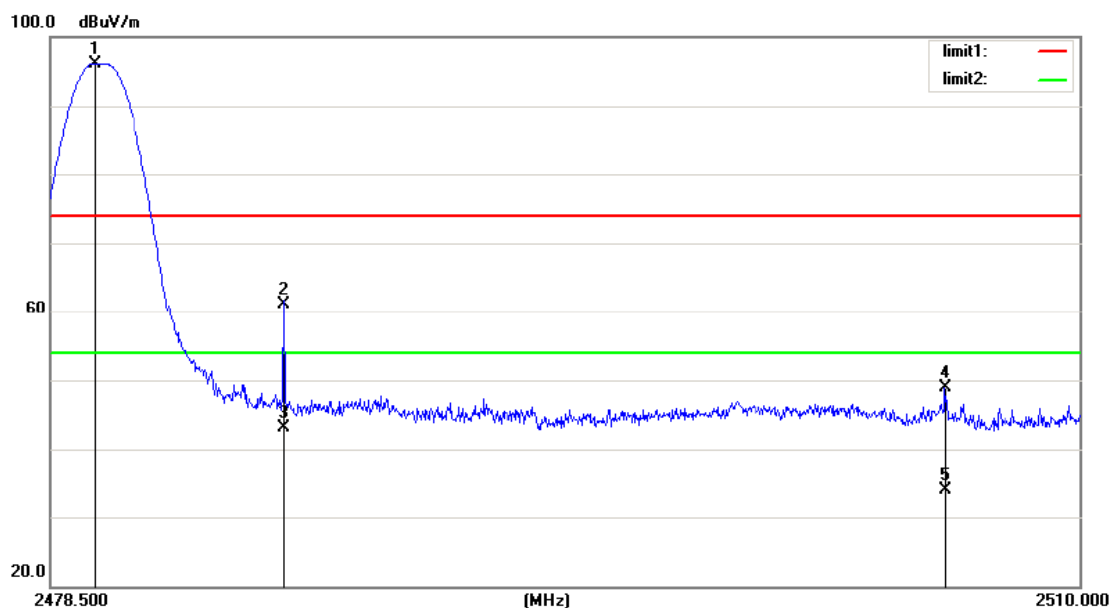

Site site #1 Polarization: **Vertical** Temperature: 26
 Limit: (RE)FCC PART 15 C 3m_PEAK Power: Battery 7.4V Humidity: 55 %
 Mode:DSS(TX2480)
 Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2479.823	101.39	-5.20	96.19	74.00	22.19	peak	150	0
2		2485.610	66.21	-5.16	61.05	74.00	-12.95	peak	110	0
3		2485.610	48.24	-5.16	43.08	54.00	-10.92	AVG	150	0
4		2505.874	53.99	-5.04	48.95	74.00	-25.05	peak	120	0
5		2505.874	38.92	-5.04	33.88	54.00	-20.12	AVG	130	0

*:Maximum data x:Over limit !:over margin

Operator: Lin

For Hopping Mode:

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
2398.65	H	63.15	45.12	74	54	-10.85	-8.88
2398.16	V	59.21	43.05	74	54	-14.79	-10.95
2484.02	H	63.61	44.06	74	54	-10.39	-9.94
2483.98	V	58.26	41.37	74	54	-15.74	-12.63

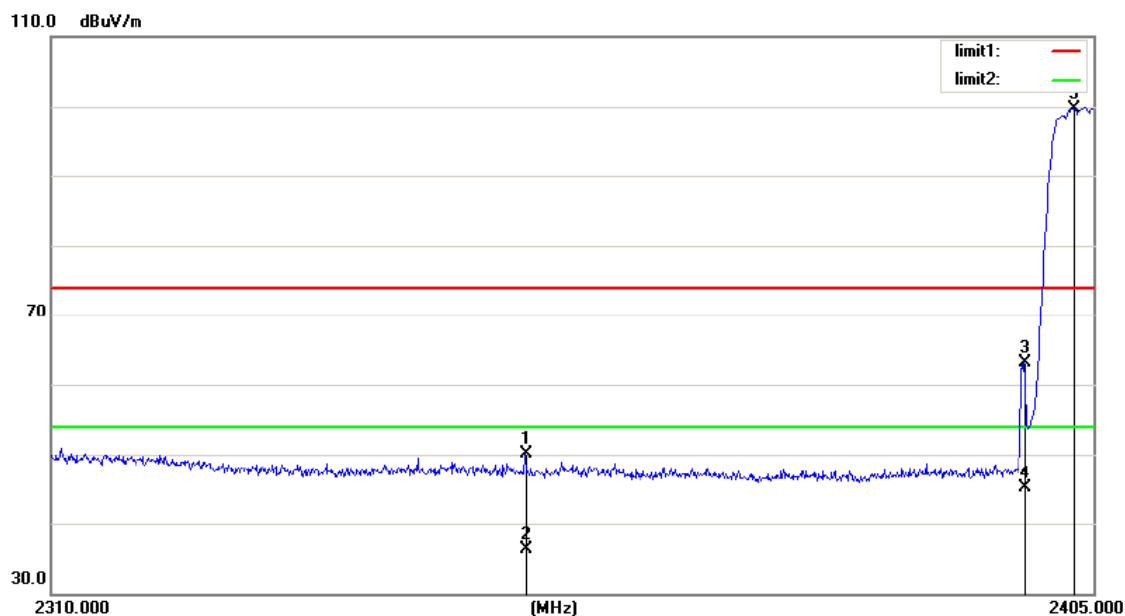


Site site #1 Polarization: **Horizontal** Temperature: 26
 Limit: (RE)FCC PART 15 C 3m_PEAK Power: Battery 7.4V Humidity: 55 %
 Mode:Hopping
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2352.845	56.12	-6.07	50.05	74.00	-23.95	peak	210	0
2		2352.845	42.32	-6.07	36.25	54.00	-17.75	AVG	230	0
3		2398.650	68.91	-5.76	63.15	74.00	-10.85	peak	220	0
4		2398.650	50.88	-5.76	45.12	54.00	-8.88	AVG	250	0
5	*	2403.195	105.50	-5.72	99.78	74.00	25.78	peak	220	0

*:Maximum data x:Over limit !:over margin

Operator: Lin

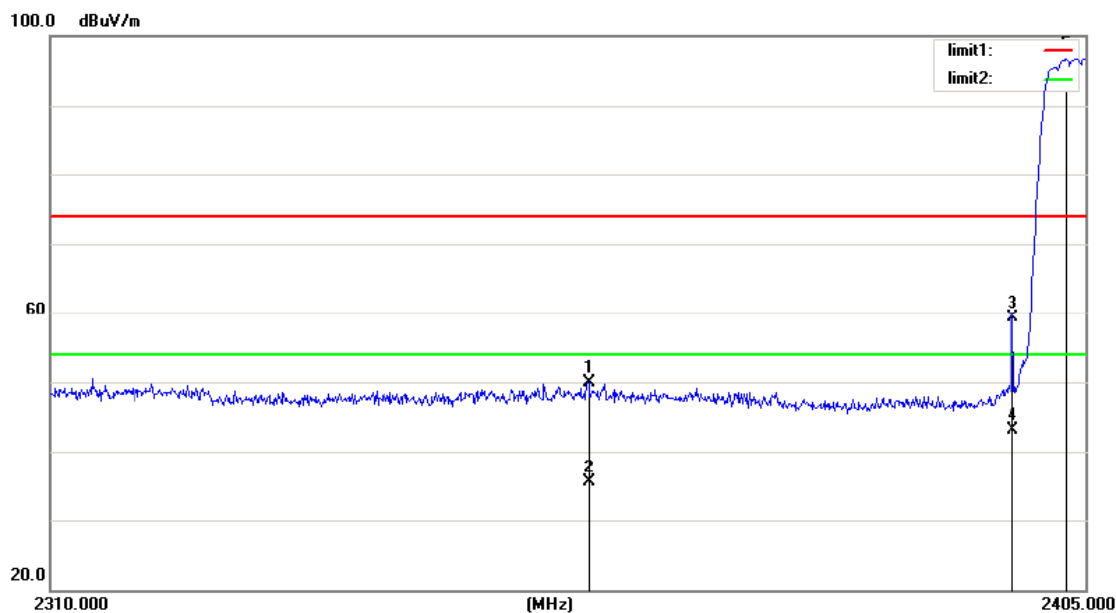


Site site #1 Polarization: **Vertical** Temperature: 26
 Limit: (RE)FCC PART 15 C 3m_PEAK Power: Battery 7.4V Humidity: 55 %
 Mode: Hopping
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2358.925	55.93	-6.03	49.90	74.00	-24.10	peak	110	0
2		2358.925	41.51	-6.03	35.48	54.00	-18.52	AVG	120	0
3		2398.160	64.97	-5.76	59.21	74.00	-14.79	peak	110	0
4		2398.160	48.81	-5.76	43.05	54.00	-10.95	AVG	150	0
5	*	2403.195	102.35	-5.72	96.63	74.00	22.63	peak	120	0

*:Maximum data x:Over limit !:over margin

Operato Lin

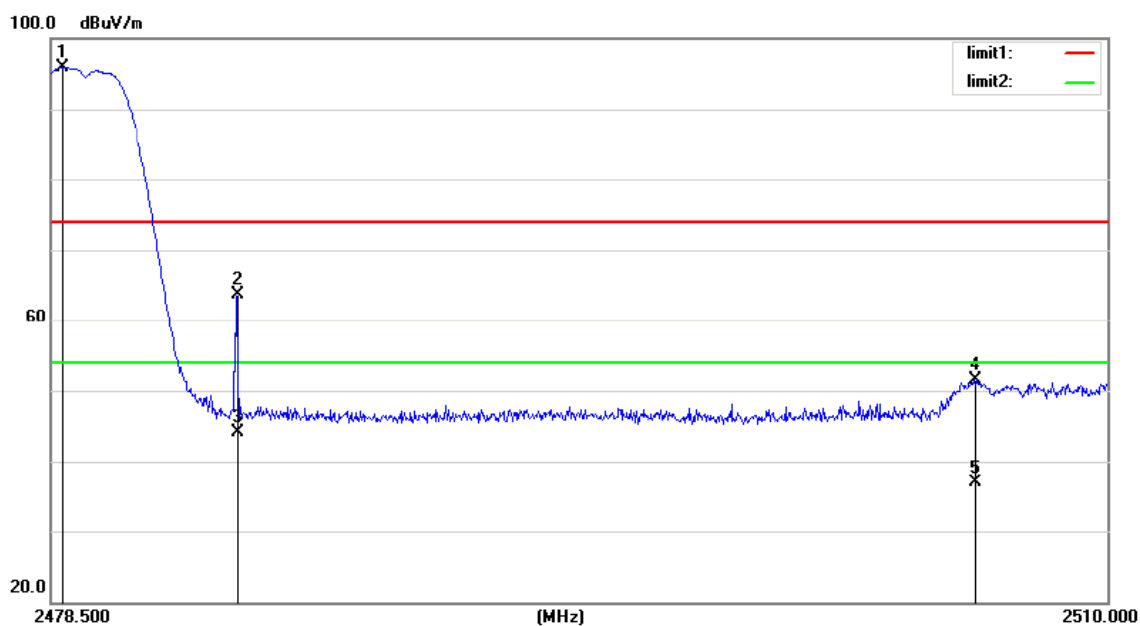


Site site #1 Polarization: **Horizontal** Temperature: 26
 Limit: (RE)FCC PART 15 C 3m_PEAK Power: Battery 7.4V Humidity: 55 %
 Mode: Hopping
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	2478.815	101.20	-5.21	95.99	74.00	21.99	peak	210	0	
2		2484.020	68.79	-5.18	63.61	74.00	-10.39	peak	220	0	
3		2484.020	49.24	-5.18	44.06	54.00	-9.94	AVG	250	0	
4		2506.031	56.55	-5.04	51.51	74.00	-22.49	peak	200	0	
5		2506.031	42.00	-5.04	36.96	54.00	-17.04	AVG	210	0	

*:Maximum data x:Over limit !:over margin

Operator: Lin

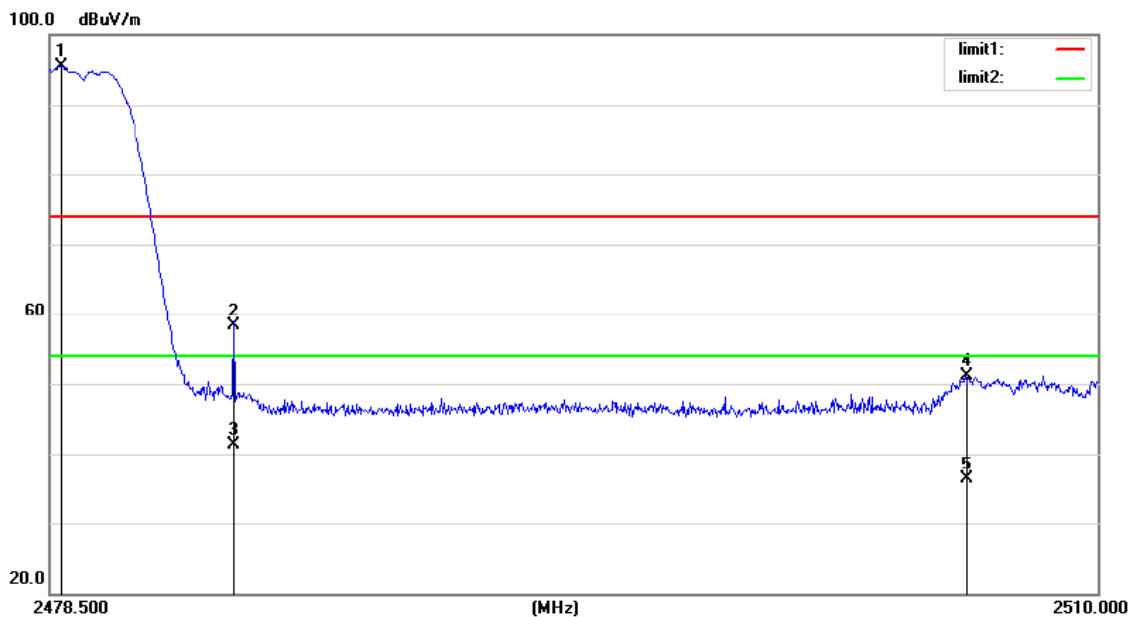

Site site #1 Polarization: **Vertical** Temperature: 26
 Limit: (RE)FCC PART 15 C 3m_PEAK Power: Battery 7.4V Humidity: 55 %
 Mode: Hopping
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2478.815	100.70	-5.21	95.49	74.00	21.49	peak	110	0
2		2483.980	63.44	-5.18	58.26	74.00	-15.74	peak	120	0
3		2483.980	46.55	-5.18	41.37	54.00	-12.63	AVG	150	0
4		2506.031	56.05	-5.04	51.01	74.00	-22.99	peak	100	0
5		2506.031	41.29	-5.04	36.25	54.00	-17.75	AVG	120	0

*:Maximum data x:Over limit !:over margin

Operator: Lin

14. Antenna Application

14.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

14.2 Result

The EUT's antenna, permanent attached antenna, used a PCB antenna and integrated on PCB, The antenna's gain is 0 dBi and meets the requirement.

15. Photos of EUT

Please refer to external photos and internal photos.