

Underwriters Laboratories Inc.
1285 Walt Whitman Road
Melville, New York 11747-3081
(631) 271-6200

**Report of Measurements
Of Electromagnetic Compatibility Testing**

Test Report File No.:	NC4557	Date of issue:	7/7/03
Applicant:	Timex Corporation		
Model / Serial No.:	M568/850		
Product Type:	GPS Speed and Distance System		
Power Supply:	4.5 Volt (Battery)		
Manufacturer:	Same As Applicant		
License holder:	Same As Applicant		
Address:	555 Christian Road Middlebury, CT 06762		
Test Type:	Compliance Investigation		
Test Project Number:	03ME09617		
References(s)	FCC ID: EP9TMXM850 (Permissive 2 change)		

Underwriters Laboratories Inc. authorizes the above-named company to reproduce this Report provided it is reproduced in its entirety.

Underwriters Laboratories Inc. reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. Underwriters Laboratories Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from Underwriters Laboratories Inc. issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval. The client to claim product endorsement by NVLAP or any agency of the US government shall not use this report.

Report Directory

1.0	<i>GENERAL - Product Description</i>	3
1.1	Device Configuration During Test	4
1.2	Deviations from ANSI C63.4	5
1.3	Device Modifications Necessary for Compliance	5
1.4	Test Summary	5
1.6	FCC Labeling Information	6
2.0	<i>EMISSIONS TEST REGULATIONS</i>	6
2.1	EUT OPERATION MODE - EMISSIONS TESTS	6
2.1.2	Conducted Click Emissions Tests	6
2.1.3	Radiated Emissions Test (10 Meter Semi-Anechoic Chamber).....	7
3.0	<i>SUMMARY:</i>	23

1.0 G E N E R A L - Product Description

The GPS speed and distance system is composed of two units a transceiver (M850) and a receiver (M568) watch.

The EUT (Equipment under Test) was configured in a typical user configuration. The Timex M850 is a 137.5KHz mark and 141KHz space radio transmitter used in conjunction with the receiver located inside a wristwatch (M568). The receiver receives the transmitted radio signals, decodes it and displays the information on the LCD screen of the watch. The system uses an FSK (frequency shift keying) based simplex data communication scheme. The data rate does not exceed 1024 baud. The system is designed to function up to a maximum distance of 1 meter between transmitter and receiver.

The Transmit antenna is permanently attached to the M850 Transceiver.

1.1 Device Configuration During Test

The transceiver is a new version of the existing M850 Speed + Distance transmitter. This new version operates exactly the same as the existing transceiver and will be marketed with our existing watch receivers. It has the same RF transmitting characteristics; however the differences include changes to the PCB, case, and tuning circuitry. The testing is to verify the Fundamental Frequency output power at the antenna port has not change. In addition, all spurious emission are still in compliance with the applicable limits. This change to the product would fall under FCC a Class 2 Permissive change.

1. Simply pressing and releasing the button on the front of the unit turned on the GPS unit. A red LED will begin flashing which indicates the unit is trying to acquire a satellite signal. Because of testing indoors you won't be able to sync to a satellite signal, however the unit will be transmitting RF data to the watch.

Pressing the S+D button on the watch turned on the RF operation of the watch receiver. As long as the watch is within approximately 1 meter from the transmitter the message "SEARCHING" will appear on the top line of the watch display. As long as the flashing red light on the GPS transceiver and the SEARCHING message on the watch appear the system is in a normal operating state, i.e. the GPS box is transmitting RF data to the watch every 3.57 seconds.

Device	Manufacturer	Model Number	Serial Number	FCC ID
Transceiver	Timex	M850	Prototype	EP9TMXM850
Receiver	Timex	M568	CR 2025	-----

Note: The EUT was investigated and the orientation and position depicted in the report was deemed worst-case emissions.

"The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report"

1.2 Deviations from ANSI C63.4

Not Applicable

1.3 Device Modifications Necessary for Compliance

NA

1.4 Test Summary

Test	Basic Standard	Considered	Tested	In Compliance
Conducted Voltage Emissions	FCC Subpart C, Class B	Yes	Not applicable EUT operates on batteries	Yes
Radiated Emissions	FCC Subpart C, Class B	Yes	Yes	Yes

Environmental conditions in the lab:

	<u>Range</u>
Temperature:	20-25°C
Relative Humidity	30 - 65 %
Atmospheric pressure	680 - 1060 mbar

1.5 FCC Labeling Information

Not requested by the applicant

2.0 EMISSIONS TEST REGULATIONS

FCC Part 15, Subpart B (15.109).
FCC Part 15, Subpart C; (15.209).
Mark Frequency 137.5 KHz
Space Frequency 141.0 KHz

2.1 EUT OPERATION MODE - EMISSIONS TESTS

As per manufacturer's instructions: The receiver receives the transmitted radio signals, decodes it and displays the information on the LCD screen of the watch. The system uses an FSK (frequency shift keying) based simplex data communication scheme. The data rate does not exceed 1024 baud. The system is designed to function up to a maximum distance of 1 meter between transmitter and receiver.

2.1.1 Conducted Click Emissions Tests

Test Not Applicable

The EUT does not contain devices, which produce transient emissions as defined by the standard.

2.1.2 Conducted Emissions Tests

Test Not Applicable

The GPS Transceiver operates on three 1.5-volt DC batteries.

2.1.3 Radiated Emissions Test (10 Meter Semi-Anechoic Chamber)

Test Applicable

Temperature:	21.0°C	
Humidity:	41.1 %RH	
Pressure:	1015 mbar	
Date test performed:	17 June 03	
Measurement distance:	3 Meters	
Frequency Range:	9kHz - 30MHz	Electric
	30MHz - 1000MHz	Electric
	1GHz - 7.5GHz	Electric

9kHz – 30MHz a Magnetic Loop Antenna was utilized. The limit was adjusted using the 40dB/decade-limit extrapolation method. In addition, the electric field strengths when measured with the loop antenna were maximized about the antenna full azimuth during test.

30MHz – 7.5GHz the measurement was made throughout the frequency banned on the EUT.

Tests were performed on the transmitter in accordance with the limitation set forth by CFR47 FCC Part 15 Subpart C Paragraph 15.209 and tested in accordance with the test procedures and methodologies in ANSI C63.4: 2001.

The EUT was checked throughout the frequency band 9kHz to 7.5GHz. The transmitter operated at 137.5 -141kHz. The allowable field strength limits in accordance with 15.209 were applied to the fundamental frequency. All other emissions were tested in accordance with the general limitations 15.209.

All frequencies were evaluated and the plots enclosed show worst-case emissions.

File Number: NC4557
Project Number: 03ME09617
Model Number: M568/850
FCC ID: EP9TMXM850

Issued: 7/7/03

Test equipment used for final radiated emissions tests:

ESI26	Rhode & Schwartz	EMI Receiver	Equipment No.: ME5B-081
		Quasi Peak BW:	200Hz
		RBW	10 KHz
		Quasi Peak BW:	9kHz
		RBW	100 KHz
		Quasi Peak BW:	120 kHz
		RBW	1.0 MHz

Range: 20Hz to 26.5 GHz Last Calibration Date: 20 Aug. 02 Calibration Due Date: 20 Aug. 03


For Measurements above 1GHz:

Test Accessories for Radiated Emissions:

94455-1	Ailtech	Biconnical Antenna	Equipment No.: ME5-439
Last Calibration Date: 15 Nov. 2		Calibration Due Date: 15 Nov. 03	
3146 EMCO	Log Periodic Antenna	Equipment No.: ME5-451	
Last Calibration Date: 21 Nov 02		Calibration Due Date: 21 Nov. 03	
8449BHewlett Packard	1-26GHz Pre-Amp	Equipment No.: ME5-914	
6507 EMCO	Active Loop Antenna	Equipment No.: ME5A-288	
Last Calibration Date: 7 March 03		Calibration Due Date: 7 March 04	
99760-00	Cole -Parmer	Hydrometer/Temp/Barometer	Equipment No.: ME4-268
Ranges: Temp:0°C-55°C			
Humidity 25% to 95 %RH			
Pressure 795 to 1050 mbar			
Last Calibration Date: 27 May 03		Calibration Due Date: 27 May 04	

File Number: NC4557
Project Number: 03ME09617
Model Number: M568/850
FCC ID: EP9TMXM850

Issued: 7/7/03

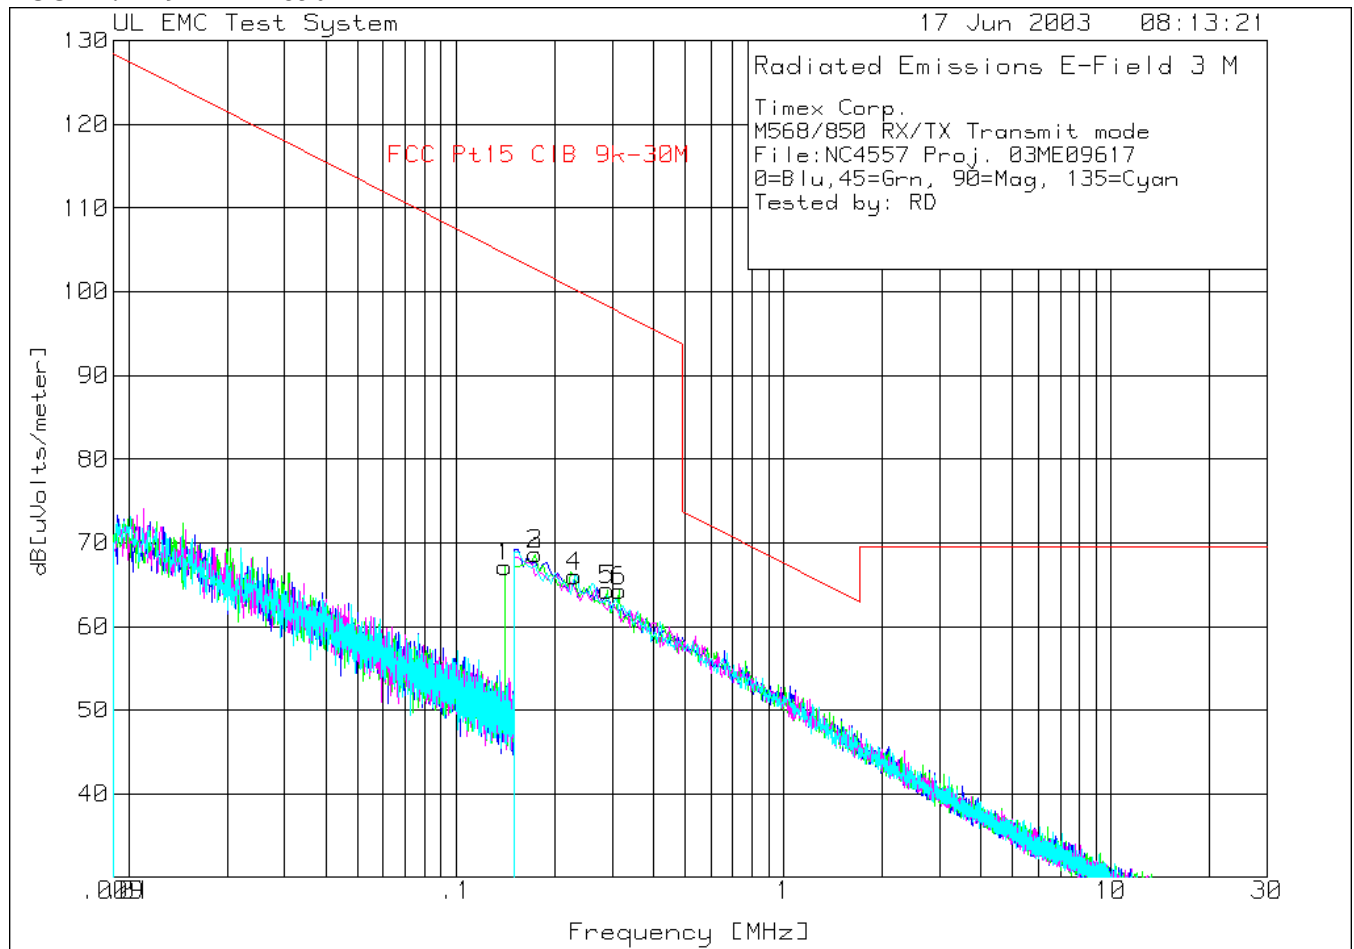

File Number: NC4557
 Project Number: 03ME09617
 Model Number: M568/850
 FCC ID: EP9TMXM850


Issued: 7/7/03

Timex Corp.
 M568/850 RX/TX Transmit mode
 File:NC4557 Proj. 03ME09617
 0=Blu,45=Grn, 90=Mag, 135=Cyan
 Tested by: RD

No.	Test Frequency [MHz]	Meter Reading [dB (uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1
=====						
.009 - .15MHz -----						
1	.14097	50.83 pk	.1	16.2	67.13	104.6
	Azimuth:184	Height:122	Horz	Margin [dB]		-37.47
.15 - 30MHz -----						
2	.17488	52.62 pk	.1	15.9	68.62	102.7
	Azimuth:276	Height:122	Horz	Margin [dB]		-34.08
3	.17488	52.62 pk	.1	15.9	68.62	102.7
	Azimuth:276	Height:122	Horz	Margin [dB]		-34.08
4	.22961	50.42 pk	.1	15.5	66.02	100.4
	Azimuth:19	Height:122	Horz	Margin [dB]		-34.38
5	.28932	49.06 pk	.1	15.2	64.36	98.4
	Azimuth:2	Height:122	Horz	Margin [dB]		-34.04
6	.3142	48.98 pk	.1	15.2	64.28	97.7
	Azimuth:2	Height:122	Horz	Margin [dB]		-33.42

LIMIT 1: FCC Pt15 ClB 9k-30M

pk - Peak detector
 qp - Quasi-Peak detector
 av - Average detector
 avlg - denotes average log detection
 avem - denotes EMI average detection
 tm - Trace Math Result

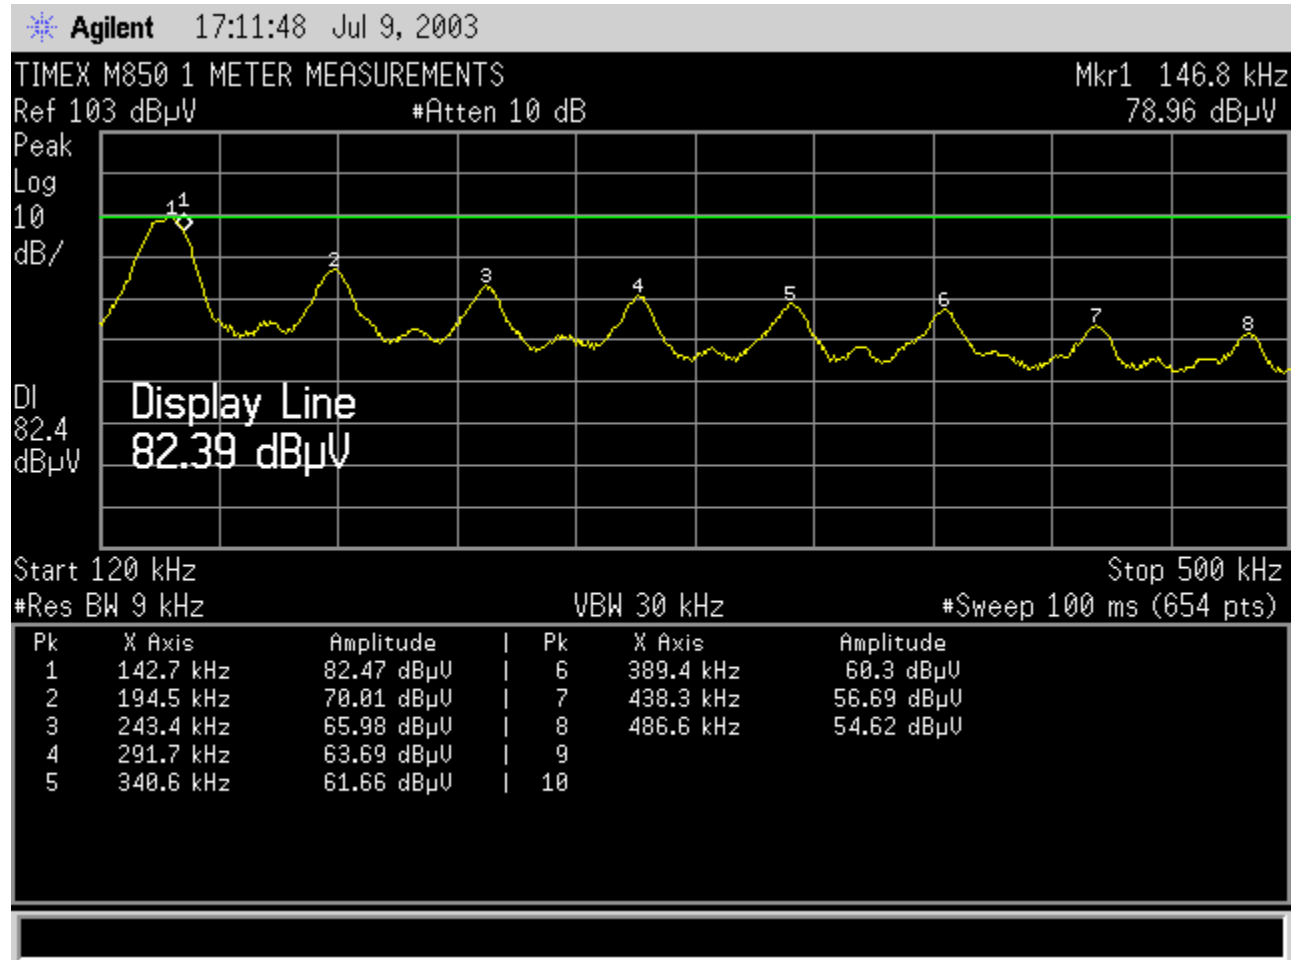

Sweep 120khz to 500khz the harmonics frequencies measured at 1 meter

File Number: NC4557
 Project Number: 03ME09617
 Model Number: M568/850
 FCC ID: EP9TMXM850

Issued: 7/7/03

Timex Corp.
 M568/850 RX/TX Transmit mode
 File:NC4557 Proj. 03ME09617
 0=Blu,45=Grn, 90=Mag, 135=Cyan
 Tested by: JD
 Data measured at 1 meter and extrapolated back to 3 meters.

No.	Test Frequency [MHz]	Meter Reading [dB (uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1
=====						
0.15MHz - 500KHz						
1	.1945	34.19avg	.1	15.4	49.59	104.6
				Margin [dB]		-55.01
2	.2434	35.62avg	.1	15.2	50.92	102.7
				Margin [dB]		-51.78
3	.2917	28.45avg	.1	15.2	43.75	100.4
				Margin [dB]		-56.65
4	.3406	16.22avg	.1	15.2	31.52	98.4
				Margin [dB]		-66.88
5	.3894	24.17avg	.1	15.1	39.37	97.7
				Margin [dB]		-58.33
6	.4866	11.59avg	.1	15.1	26.79	97.7
				Margin [dB]		-70.91

LIMIT 1: FCC Pt15 ClB 9k-30M


pk - Peak detector
 qp - Quasi-Peak detector
 av - Average detector
 avlg - denotes average log detection
 avem - denotes EMI average detection
 tm - Trace Math Result

The emission where the system noise floor was above the fundamental was checked with the antenna at 1 meter and the data was extrapolated back to 3 meters.

Emissions were measured at 1 meter between 150kHz and 500kHz and the data is shown above.

File Number: NC4557
Project Number: 03ME09617
Model Number: M568/850
FCC ID: EP9TMXM850

Issued: 7/7/03

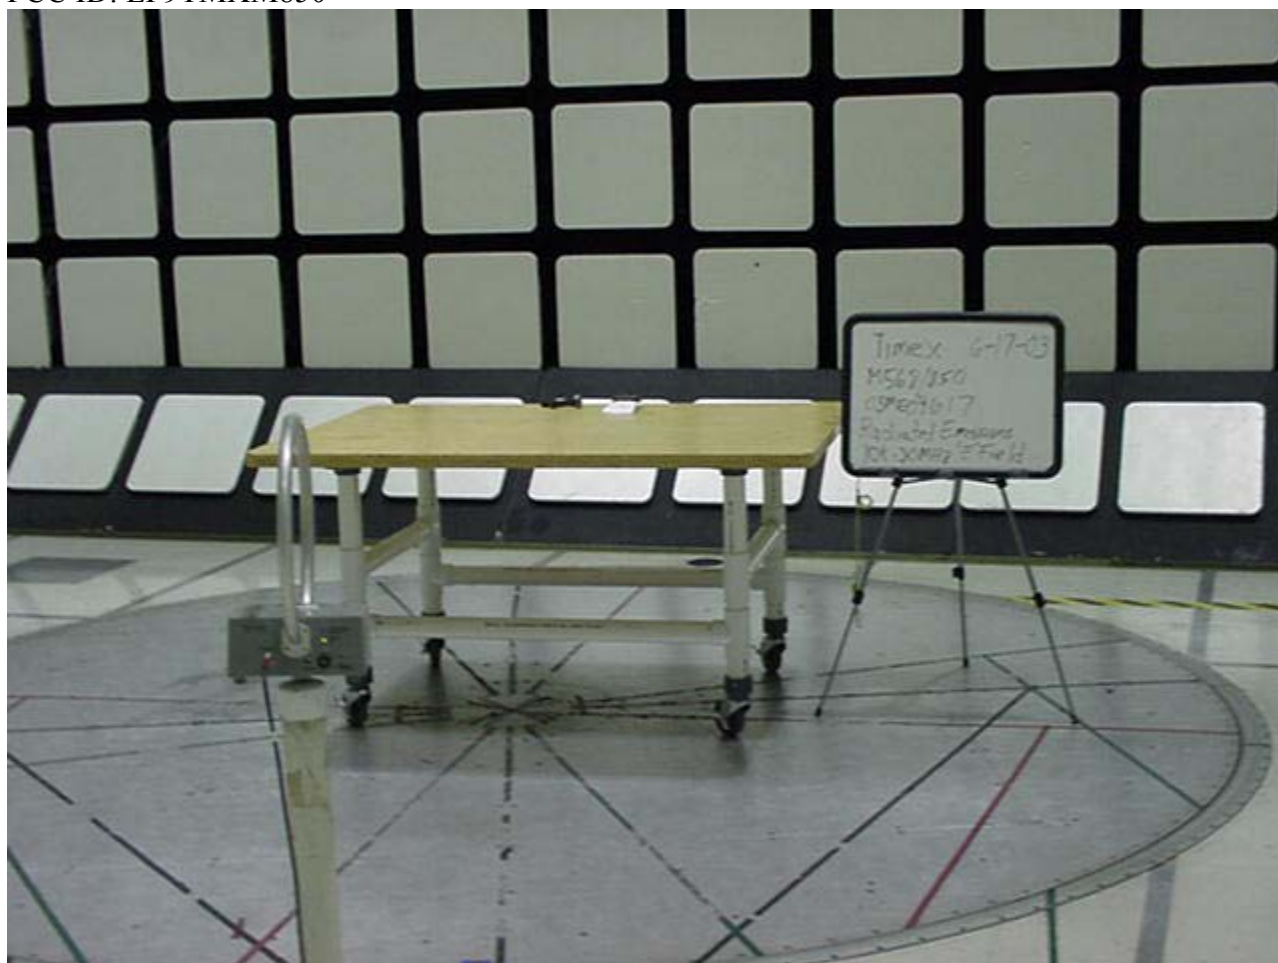

Radiated Emission, 9KHz to 30 MHz test Set-up Front View

File Number: NC4557
Project Number: 03ME09617
Model Number: M568/850
FCC ID: EP9TMXM850


Issued: 7/7/03



Radiated Emission, 9KHz to 30 MHz Test Set-Up Rear View

File Number: NC4557
Project Number: 03ME09617
Model Number: M568/850
FCC ID: EP9TMXM850

Issued: 7/7/03

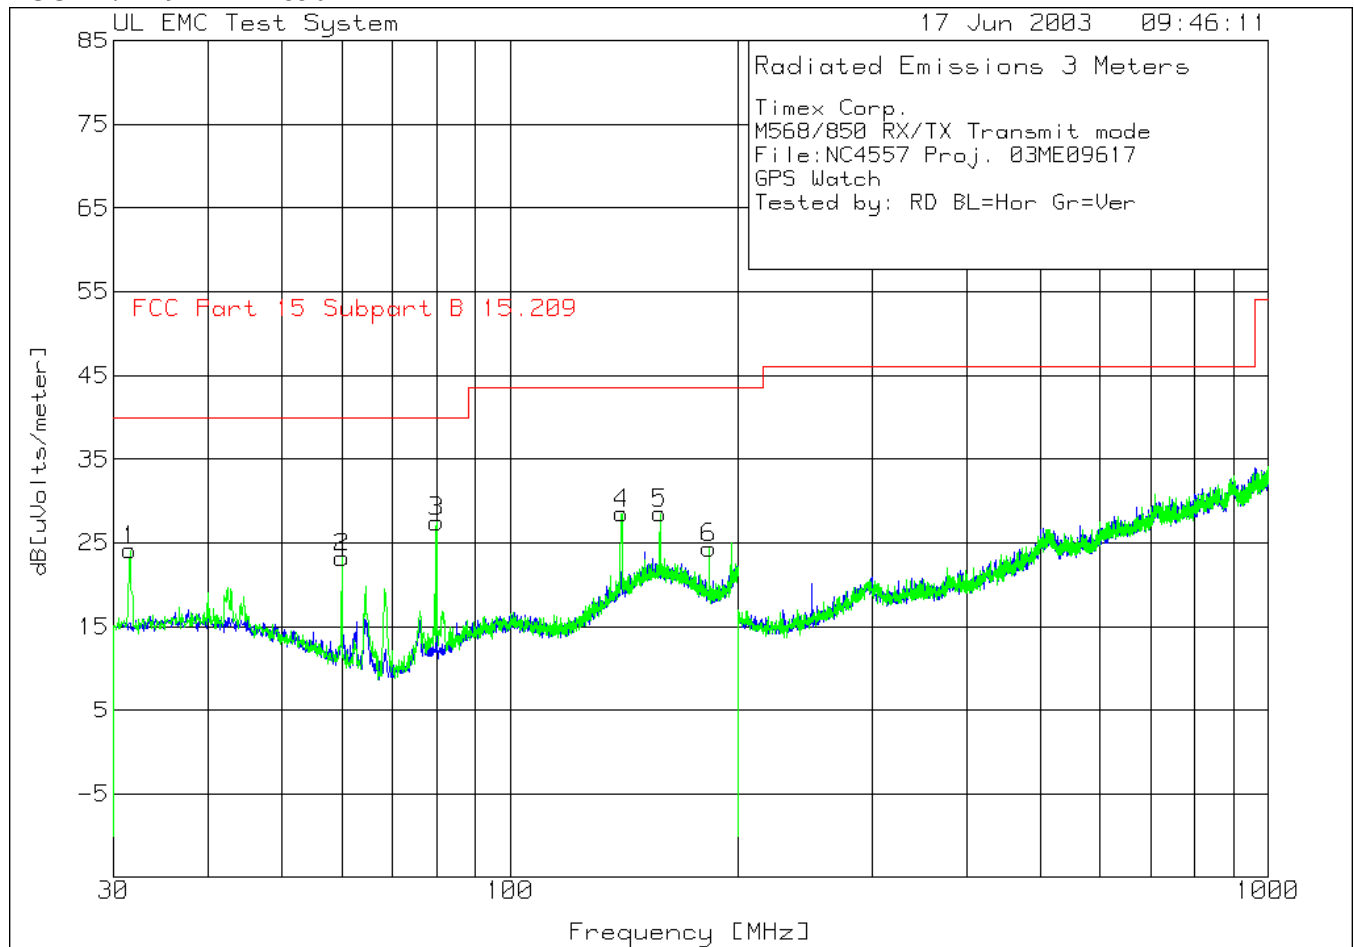

File Number: NC4557
Project Number: 03ME09617
Model Number: M568/850
FCC ID: EP9TMXM850

Issued: 7/7/03

Timex Corp.
M568/850 RX/TX Transmit mode
File:NC4557 Proj. 03ME09617
GPS Watch

Tested by: RD BL=Hor Gr=Ver

No.	Test Frequency [MHz]	Meter Reading [dB (uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1
-----	----------------------------	--------------------------------	-----------------------------	------------------------------	---------------------------	---------


=====						
Vertical 30 - 200MHz -----						
1	31.5308	10 pk	.9	13.2	24.1	40
	Azimuth:358	Height:100	Vert	Margin [dB]		-15.9
2	60.02	14.33 pk	1.1	7.8	23.23	40
	Azimuth:290	Height:122	Vert	Margin [dB]		-16.77
3	80.005	17.8 pk	1.3	8.4	27.5	40
	Azimuth:222	Height:122	Vert	Margin [dB]		-12.5
4	140.3002	11.8 pk	1.7	15	28.5	43.5
	Azimuth:355	Height:122	Vert	Margin [dB]		-15
5	157.6488	9.79 pk	1.8	16.9	28.49	43.5
	Azimuth:357	Height:122	Vert	Margin [dB]		-15.01
6	183.0765	8.26 pk	1.9	14.2	24.36	43.5
	Azimuth:20	Height:122	Vert	Margin [dB]		-19.14

LIMIT 1: FCC Part 15 Subpart B 15.209

pk - Peak detector
qp - Quasi-Peak detector
av - Average detector
avlg - denotes average log detection
avem - denotes EMI average detection
tm - Trace Math Result

File Number: NC4557
Project Number: 03ME09617
Model Number: M568/850
FCC ID: EP9TMXM850


Issued: 7/7/03

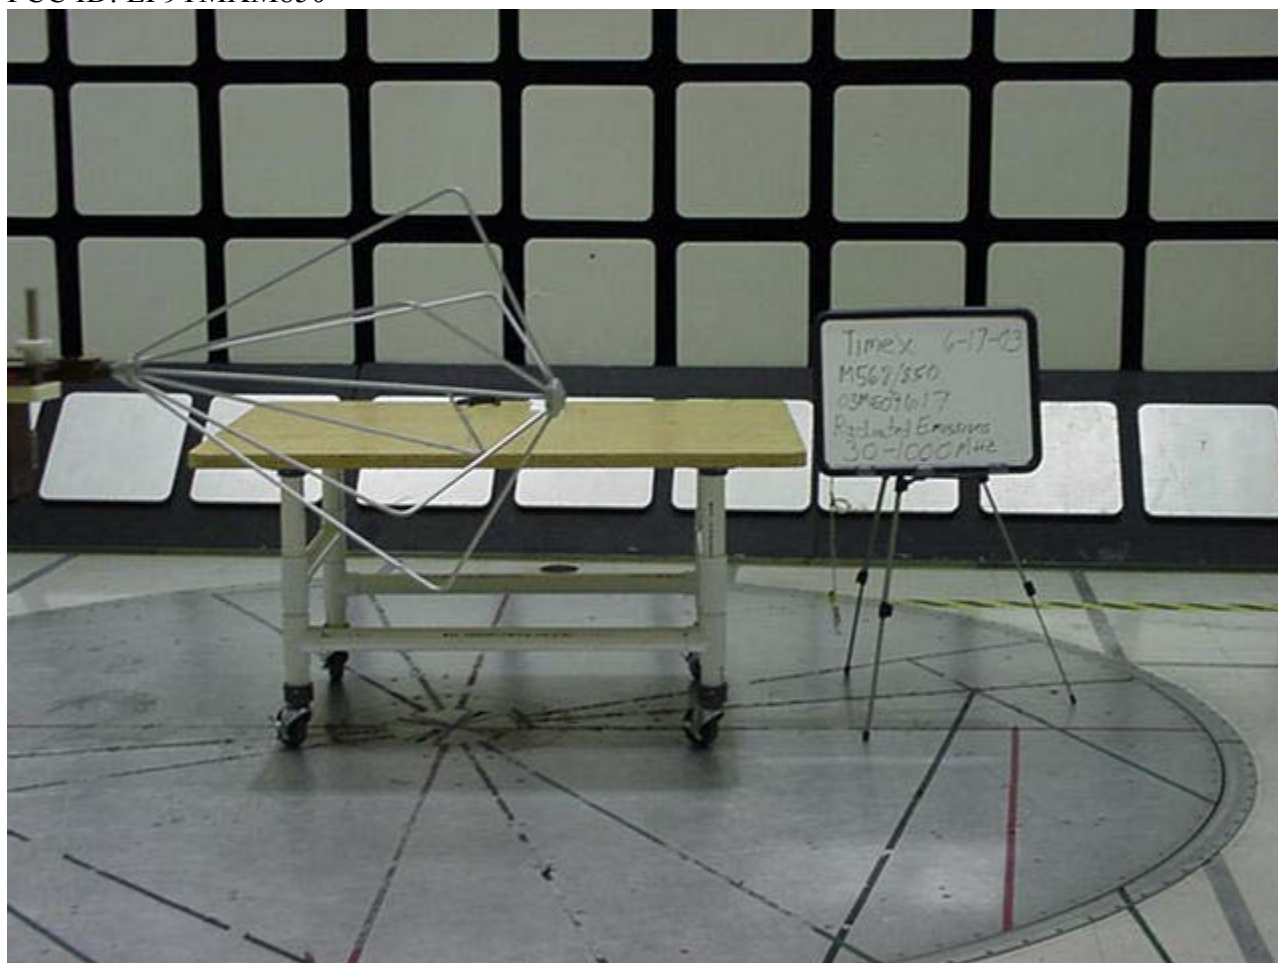

Radiated Emission, 30 MHz to 1000 MHz Test Set-Up Front View

File Number: NC4557
Project Number: 03ME09617
Model Number: M568/850
FCC ID: EP9TMXM850


Issued: 7/7/03

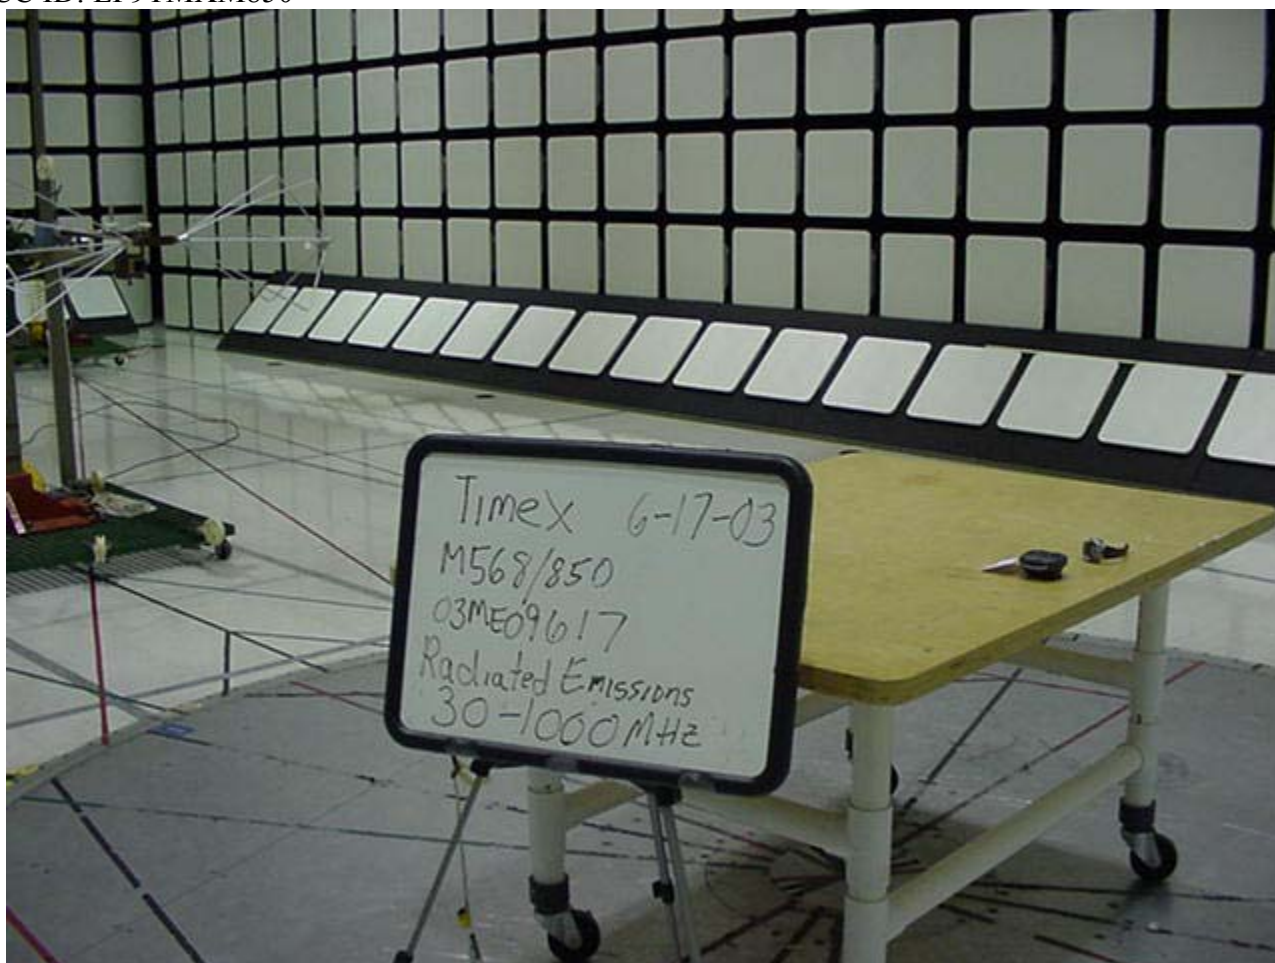

Radiated Emission, 30 MHz to 1000 MHz Test Set-Up Rear View

File Number: NC4557
Project Number: 03ME09617
Model Number: M568/850
FCC ID: EP9TMXM850

Issued: 7/7/03

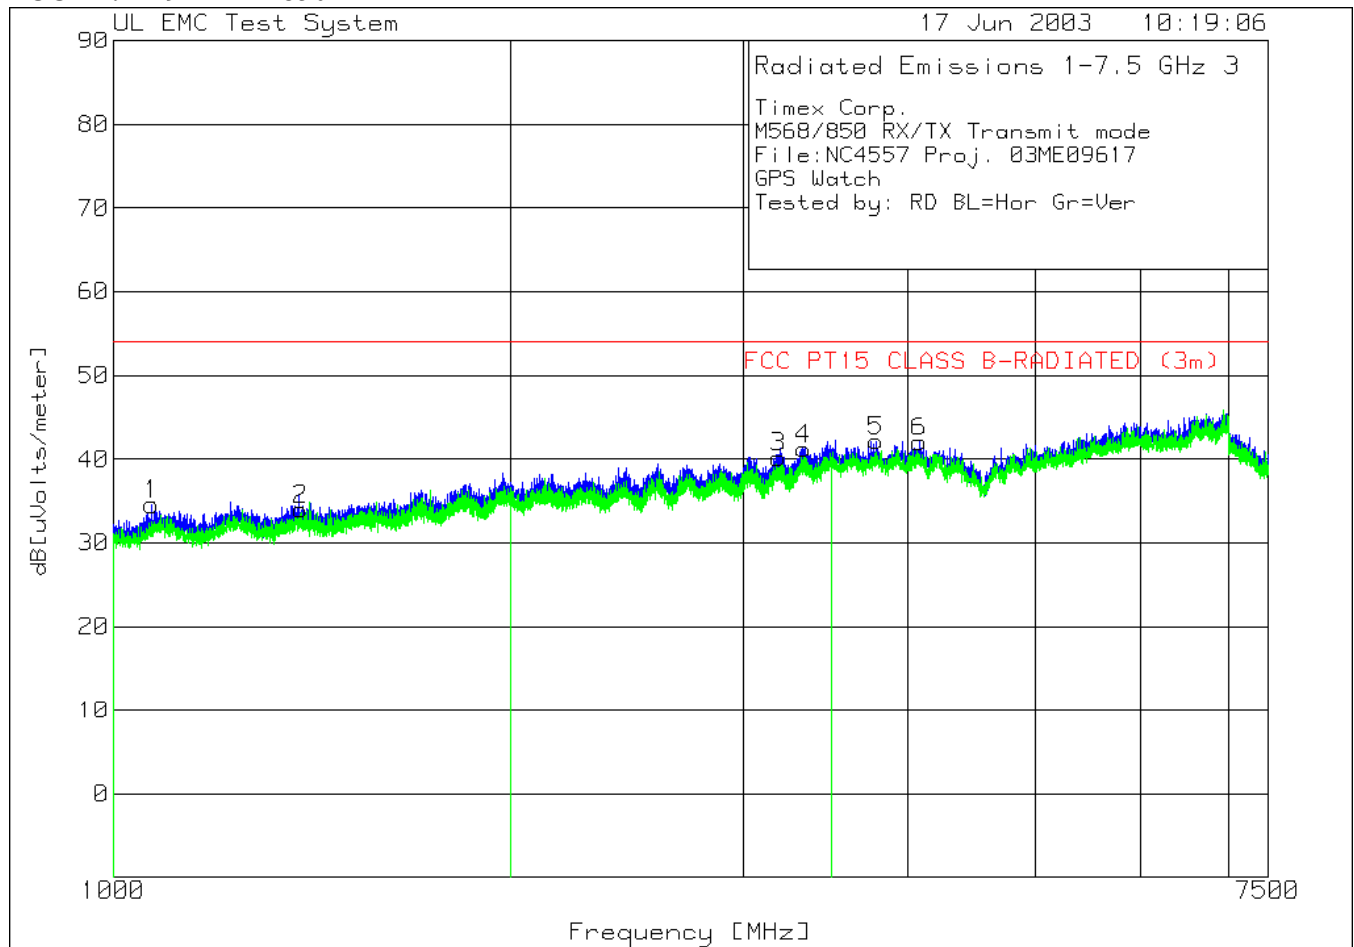

File Number: NC4557
Project Number: 03ME09617
Model Number: M568/850
FCC ID: EP9TMXM850

Issued: 7/7/03

Timex Corp.
M568/850 RX/TX Transmit mode
File:NC4557 Proj. 03ME09617
GPS Watch

Tested by: RD BL=Hor Gr=Ver

No.	Test Frequency [MHz]	Meter Reading [dB (uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1
-----	----------------------------	--------------------------------	-----------------------------	------------------------------	---------------------------	---------

=====						
Horizontal 1000 - 2000MHz -----						
1	1069.023	42.98 pk	-33.5	25.1	34.58	54
	Azimuth:303	Height:99	Horz	Margin [dB]		-19.42
2	1386.796	40.38 pk	-32.7	26.3	33.98	54
	Azimuth:331	Height:199	Horz	Margin [dB]		-20.02
Horizontal 2000 - 3500MHz -----						
3	3191.397	36.6 pk	-28.4	32	40.2	54
	Azimuth:10	Height:100	Horz	Margin [dB]		-13.8
4	3334.445	36.61 pk	-27.8	32.4	41.21	54
	Azimuth:200	Height:198	Horz	Margin [dB]		-12.79
Horizontal 3500 - 7500MHz -----						
5	3784.095	35.76 pk	-27.3	33.7	42.16	54
	Azimuth:358	Height:99	Horz	Margin [dB]		-11.84
6	4078.86	35.16 pk	-27.4	34.3	42.06	54
	Azimuth:306	Height:99	Horz	Margin [dB]		-11.94

LIMIT 1: FCC PT15 CLASS B-RADIATED (3m)

pk - Peak detector

qp - Quasi-Peak detector

av - Average detector

avlg - denotes average log detection

avem - denotes EMI average detection

tm - Trace Math Result

File Number: NC4557
Project Number: 03ME09617
Model Number: M568/850
FCC ID: EP9TMXM850

Issued: 7/7/03



Radiated Emission, 1GHz to 7.5GHz Test Set-Up Rear View

File Number: NC4557
Project Number: 03ME09617
Model Number: M568/850
FCC ID: EP9TMXM850

Issued: 7/7/03

Sample Calculation:

Radiated Emission Limit Conversion from dBuV/m
(Limits in accordance with paragraph 15.109)

Radiated Emissions Limit (dBuV/m) = $20 \cdot \log(uV/m)$

Radiated Emissions Limit (dBuV/m) = $20 \cdot \log(90)$

Radiated Emissions Limit (dBuV/m) = 39.0

Radiated Emissions test data obtained during measurements.

Field strength (dBuV / m) = Measured field strength (dBuV) + Antenna factor (dB) + cable factor (dB).

Field strength (dBuV / m) = 51.1 dBuV/m + 15.8 dB + 0.3 dB.

Field strength (dBuV / m) = 71.3

Radiated Emissions Limit conversion from uV/m to dBuV/m add 40 dB / Decade.

(The limits are in accordance with paragraph 15.209).

Radiated Emissions Limits General Requirements.

Frequency 0.009-0.490 MHz,

$2400/F$ (kHz) at 300 meters = Field strength in uV/meter.

Frequency = 9KHz.

$2400/(9)$ at 300 meters

Radiated Emission at 9 kHz at 300 meters = 266.6uV/meter.

$\text{dBuV/m } 20 \cdot \log(266.6uV/m)$.

$\text{dBuV/M} = 48.5$ at 300 meters.

Add 40 dB /decade

300meters to 3 meters = 80 dB.

Radiated Emission Limit = $\text{dBuV/m} + \text{dB}$.

$48.5 + 80$

128.5dBuV/m

Magnetic field conversion of the active loop antenna:

The magnetic field reading was converted to an electrical field reading by adding the electric field factors (dB) to the field strength reading. The electric antenna factors are established at the time of the antenna calibration.

Antenna factor (dB) + constant = Field strength dBuV/m

At 100 kHz $16.4 + 51.5 = 67.9$

File Number: NC4557
Project Number: 03ME09617
Model Number: M568/850
FCC ID: EP9TMXM850

Issued: 7/7/03

3.0 SUMMARY:

The equipment under test has

Met the technical requirements as defined under section(s) 2.0

Test Start Date: 6/16/03

Test Completion Date: 6/16/03

- UNDERWRITERS LABORATORIES, INC. -

Project Engineer



Joseph Danisi (Ext.23055)
Senior Engineering Associate
International EMC Services
Conformity Assessment Services-3014AMEL

Reviewer



Robert DeLisi (Ext.22452)
Senior Staff Engineer
International EMC Services
Conformity Assessment Services -3014AMEL