

South East Asia Resources Ltd.

VETTA VL110 T2X

Model Number: 00-051801-00 (Torpedo)

Prepared for : South East Asia Resources Ltd.
1902-03, Kwong Sang Center, 151-153 Hoi Bun Road,
Kwun Tong, Hong Kong.

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F06142
Date of Test : Mar.11, 2006
Date of Report : Mar.30,2006

TABLE OF CONTENTS

Description	Page
Test Report Declaration	
1. GENERAL INFORMATION	1-1
1.1. Description of Device (EUT)	1-1
1.2. Test Facility	1-2
1.3. Measurement Uncertainty	1-2
2. POWER LINE CONDUCTED EMISSION TEST	2-1
3. RADIATED EMISSION TEST	3-1
3.1. Test Equipment.....	3-1
3.2. Block Diagram of Test Setup	3-1
3.3. Radiated Emission Limit 30~1000MHz Standard: FCC 15.249	3-2
3.4. EUT Configuration on Test	3-3
3.5. Operating Condition of EUT	3-3
3.6. Test Procedure	3-3
3.7. Radiated Emission Test Results	3-4
4. BAND EDGES MEASUREMENT	4-14
4.1. Test Equipment.....	4-14
4.2. Block Diagram of Test Setup	4-14
4.3. Test Standard.....	4-14
4.4. Bandwidth Limit.....	4-14
4.5. Test Procedure.....	4-14
5. DEVIATION TO TEST SPECIFICATIONS	5-1
6. PHOTOGRAPH.....	6-1
6.1. Photos of Radiated Emission Test (In Anechoic Chamber).....	6-1
6.2. Photos of Band Edges Test.....	6-2

APPENDIX I

(5 pages)

TEST REPORT DECLARATION

Applicant : South East Asia Resources Ltd.
 Manufacturer : Acumen Manufacturing Limited
 EUT Description : VETTA VL110 T2X
 (A) MODEL NO. : 00-051801-00 (Torpedo)
 (B) SERIAL NO. : N/A
 (C) POWER SUPPLY : DC 3V

Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Feb.2006

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits for radiated and conducted emissions. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of tests. Also, this report shows that EUT is technically compliant with FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd. This report must not be used by the applicant to claim product endorsement by NVLAP or any agency of the U.S. Government.

Date of Test : Mar.11, 2006

Prepared by : Sala Yang
 Sala Yang/ Assistant

Reviewer : Sean Xing
 Sean Xing / Assistant Manager



Approved & Authorized Signer :

Name of the Representative of the Responsible Party : _____

Signature : _____

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description : VETTA VL110 T2X

Model Number : 00-051801-00 (Torpedo)

Applicant : South East Asia Resources Ltd.
1902-03, Kwong Sang Center, 151-153 Hoi Bun Road, Kwun
Tong, Hong Kong.

Manufacturer : Acumen Manufacturing Limited
Queshan, Industrial Zone, Longhua, Baoan, Shenzhen, China.

Date of Test : Feb.14~16,2006

1.2. Test Facility

Site Description

3m Anechoic Chamber	:	Certificated by FCC, USA Registration Number: 90454 Aug. 15, 2003
3m & 10m Anechoic Chamber	:	Certificated by FCC, USA Registration Number: 794232 Mar. 15, 2004
EMC Lab.	:	Certificated by DATech, German Registration Number: DAT-P-091/99-01 Feb. 02, 2004
		Certificated by NVLAP, USA NVLAP Code: 200372-0 Mar. 31, 2004
		Certificated by Nemko, Norway Aut. No.: ELA135 April. 22, 2004
		Certificated by Industry Canada Registration Number: IC 5183 Jul. 28, 2004
Name of Firm	:	Audix Technology (Shenzhen) Co., Ltd.
Site Location	:	No. 6, Ke Feng Rd., 52 Block, Shenzhen Science & Industrial Park, Nantou, Shenzhen, Guangdong, China

1.3. Measurement Uncertainty

No.	Item	Uncertainty	Remark
1.	Uncertainty for Conducted Emission Test	1.22dB	
2.	Uncertainty for Radiated Emission Test	3.14dB	3m Chamber
3.	Uncertainty for Radiated Emission Test	3.18dB	10m Chamber
4.	Uncertainty for Power Clamp Test	1.38dB	

2. POWER LINE CONDUCTED EMISSION TEST

According to Paragraph (f) of FCC Part 15 section 15.249, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

3. RADIATED EMISSION TEST

3.1. Test Equipment

The following test equipments are used during the radiated emission Test :

3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	May 16, 05	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May 16, 05	1 Year
3.	Amplifier	HP	8447D	2944A07794	Mar. 13, 06	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 11, 06	1 Year
5.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Jan. 30, 06	1/2 Year
6.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Jan. 30, 06	1/2 Year
7.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Jan. 30, 06	1/2 Year
8.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Jan. 30, 06	1/2 Year
9.	Coaxial Switch	Anritsu	MP59B	M73989	Jan. 30, 06	1/2 Year

3.2. Block Diagram of Test Setup


3.2.1. Block Diagram of connection between EUT and simulators



(EUT: VETTA VL110 T2X)

3.2.2. Anechoic Chamber Setup Diagram

ANTENNA TOWER

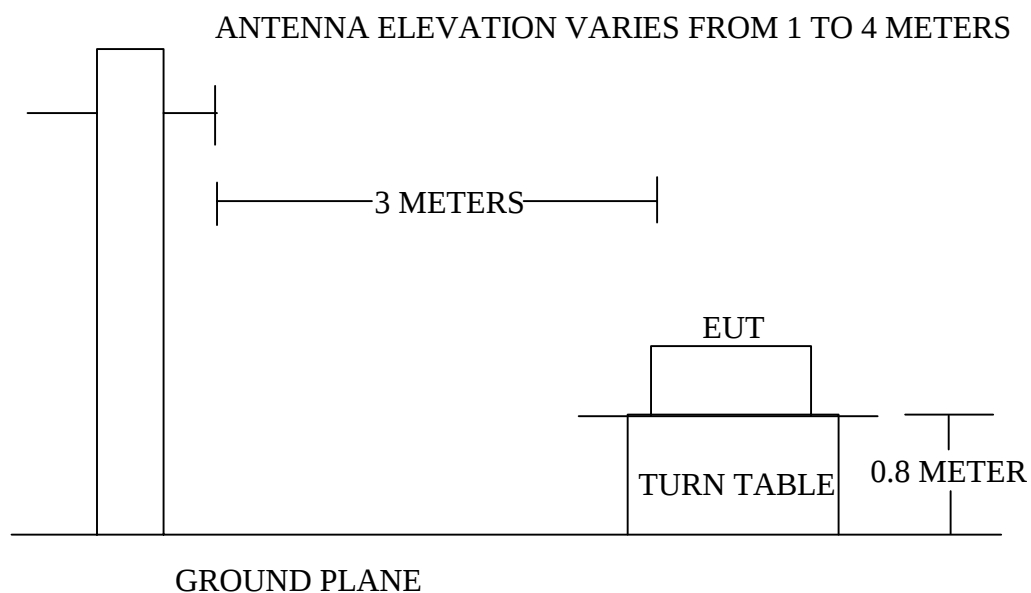

3.3. Radiated Emission Limit 30~1000MHz Standard: FCC 15.249

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Local Oscillator:	3	94.0 $\text{dB}(\mu\text{V})/\text{m}$	
Above 1000	3	Other: 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.4.1. VETTA VL110 T2X (EUT)

Model Number	:	00-051801-00 (Torpedo)
Serial Number	:	N/A
Manufacturer	:	Acumen Manufacturing Limited

3.5. Operating Condition of EUT

3.5.1. Setup the EUT as shown in Section 3.2..

3.5.2. Let the EUT work in test modes (TX) and test it.

3.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2003 on radiated emission Test.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the VBW is set at 300kHz and RBW is set at 120kHz for measurement below 1GHz.

The frequency range from 30MHz to 1000MHz and above 1000MHz are checked.

The test modes (TX) is tested in Anechoic Chamber and all the scanning waveforms are attached in Appendix II.

3.7. Radiated Emission Test Results

PASS.

The frequency range from 30MHz to 1000MHz and above 1000MHz is investigated.
Please see the following pages.

Date of Test :	Mar.11, 2006	Temperature :	23°C
EUT :	VETTA VL110 T2X	Humidity :	54%
Model No. :	00-051801-00 (Torpedo)	Test Mode :	TX Mode
Test Engineer:	Jack		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m
127.970	12.34	2.52	0.21	15.07	-28.43	43.50
454.860	16.86	4.96	0.37	22.19	-23.81	46.00
648.860	20.08	6.04	0.18	26.30	-19.70	46.00
745.860	21.50	6.46	1.25	29.22	-16.78	46.00
823.460	21.97	6.90	0.49	29.36	-16.64	46.00
916.540	22.72	7.44	60.64	90.80	-3.20	94.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 916.540MHz with corrected signal level of 90.80dBμV/m (Limit is 94.00dBμV/m).

4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer:

Jack/zhong

Date of Test :	Mar.11,2006	Temperature :	23°C
EUT :	VETTA VL110 T2X	Humidity :	54%
Model No. :	00-051801-00 (Torpedo)	Test Mode :	TX Mode
Test Engineer:	Jack		

Frequency	Antenna	Cable	Meter Reading	Emission Level	Over	Limits
MHz	Factor	Loss	Vertical	Vertical	Limits	
	dB/m	dB	dBμV	dBμV/m	dB	dBμV/m
127.000	11.13	2.45	0.85	14.44	-29.06	46.00
243.400	11.60	3.45	0.16	15.21	-30.79	46.00
418.000	16.26	4.79	1.23	22.29	-23.71	46.00
570.290	19.41	5.67	1.70	26.78	-19.23	46.00
798.240	21.53	7.07	0.92	29.52	-16.48	46.00
916.540	23.33	7.44	50.40	81.17	-12.83	94.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 916.540MHz with corrected signal level of 81.17dBμV/m (Limit is 94.00dBμV/m).

4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer:

Jack/zhong

Date of Test :	Mar.11, 2006	Temperature :	21°C
EUT :	VETTA VL110 T2X	Humidity :	55%
Model No. :	00-051801-00 (Torpedo)	Test Mode :	TX Mode
Test Engineer:	Jack		

Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
MHz	Factor	Loss	Horizontal	Horizontal	Limits		
	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
1833.080	35.46	5.27	66.07	63.04	-10.96	74.00	Peak
2749.620	35.07	6.83	50.53	52.52	-21.48	74.00	Peak
3666.160	34.80	8.28	45.76	52.10	-21.90	74.00	Peak
4582.700	34.55	9.09	46.05	54.03	-19.97	74.00	Peak

Remark: 1. All readings are Average and Peak values.

2. Emission Level = Probe Factor + Meter Reading +Cable Loss-Preamplifier Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
MHz	Factor	Loss	Horizontal	Horizontal	Limits		
	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
1833.080	35.46	5.27	50.07	47.04	-6.96	54.00	Average
2749.620	35.08	6.77	43.53	45.33	-8.67	54.00	Average
3666.160	34.80	8.28	37.76	44.10	-9.90	54.00	Average
4582.700	34.56	9.05	39.06	46.94	-7.06	54.00	Average

Remark: 1. All readings are Average and Peak values.

2. Emission Level = Probe Factor + Meter Reading +Cable Loss-Preamplifier Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer:

Jack Zhong

Date of Test :	Mar.11, 2006	Temperature :	21°C
EUT :	VETTA VL110 T2X	Humidity :	55%
Model No. :	00-051801-00 (Torpedo)	Test Mode :	TX Mode
Test Engineer:	Jack		

Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
MHz	Factor	Loss	Vertical	Vertical	Limits		
	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
1833.080	35.46	5.27	70.00	66.97	-7.03	74.00	Peak
2749.620	35.07	6.83	54.06	56.05	-17.95	74.00	Peak
3666.160	34.80	8.28	47.14	53.48	-20.52	74.00	Peak
4582.700	34.55	9.09	44.90	52.88	-21.12	74.00	Peak

Remark: 1. All readings are Average and Peak values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss-Preamp Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
MHz	Factor	Loss	Vertical	Vertical	Limits		
	dB/m	dB	DBμV	dBμV/m	dBμV/m	dBμV/m	
1833.080	35.46	5.27	48.33	45.30	-8.70	54.00	Average
2749.620	35.08	6.77	41.61	43.41	-10.59	54.00	Average
3666.160	34.80	8.28	37.22	43.56	-10.44	54.00	Average
4582.700	34.56	9.05	34.26	42.14	-11.86	54.00	Average

Remark: 1. All readings are Average and Peak values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss-Preamp Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer:

Jack/zhong




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

NO.6, Ke Feng Road, Block 52
Shenzhen Science & Industry Park,
Guangdong, China
Tel: +86-755-26639495-7

Data#: 6 File#: ACS6QH009-1.EMI

Date: 2006-03-11 Time: 18:44:37

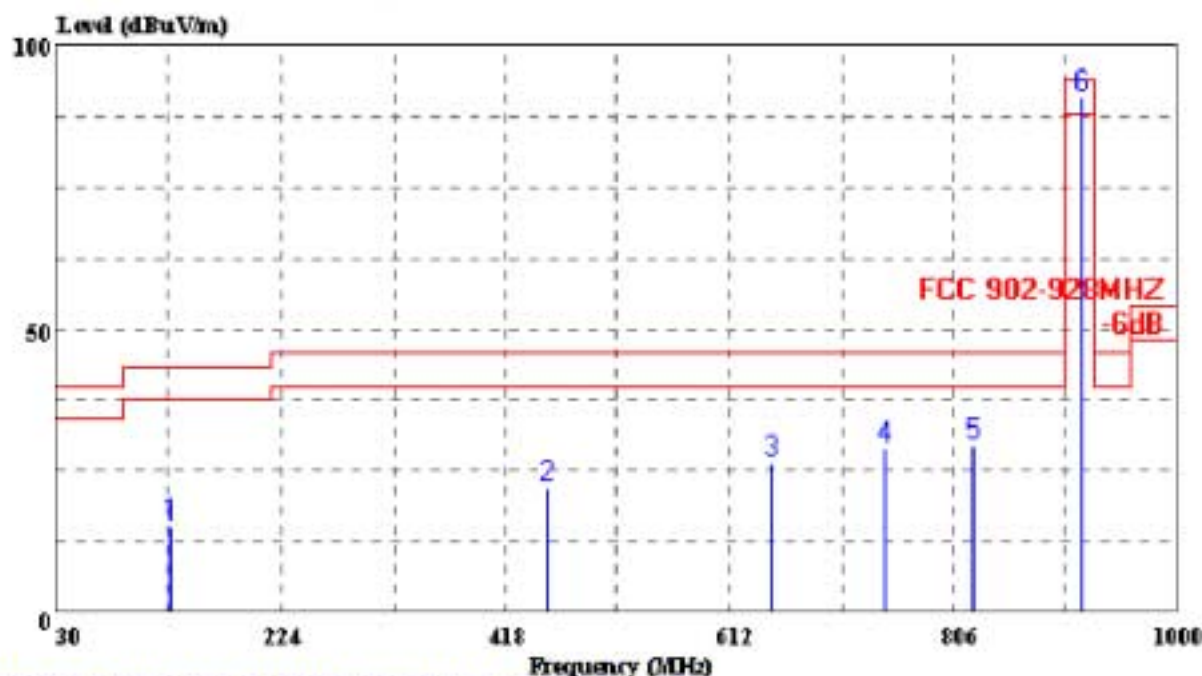

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC 902-928MHZ 3m 2598FACTOR HORIZONTAL
EUT : VETTA VL110 T2X
M/N : 00-051801-00 (Torpedo)
OP Condition : TX Mode
Test Spec : DC 3V
Test Engineer: Jack
Comment : Temp:23° Humi:54%
Memo :

Page: 1

	Freq	Level	Limit	Over	Read	Probe	Cable
	MHz	dBuV/m	Line	Limit	Level	Factor	Loss
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB
1	127.970	15.07	43.50	-28.43	0.21	12.34	2.52
2	454.860	22.19	46.00	-23.81	0.37	16.86	4.96
3	648.860	26.30	46.00	-19.70	0.18	20.08	6.04
4	745.860	29.22	46.00	-16.78	1.25	21.50	6.46
5	823.460	29.36	46.00	-16.64	0.49	21.97	6.90
6	916.540	90.80	94.00	-3.20	60.64	22.72	7.44




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

NO.6, Ke Feng Road, Block 52
Shenzhen Science & Industry Park,
Guangdong, China
Tel: +86-755-26639495-7

Data#: 8 File#: ACS6QH009-1.EMI

Date: 2006-03-11 Time: 18:46:41

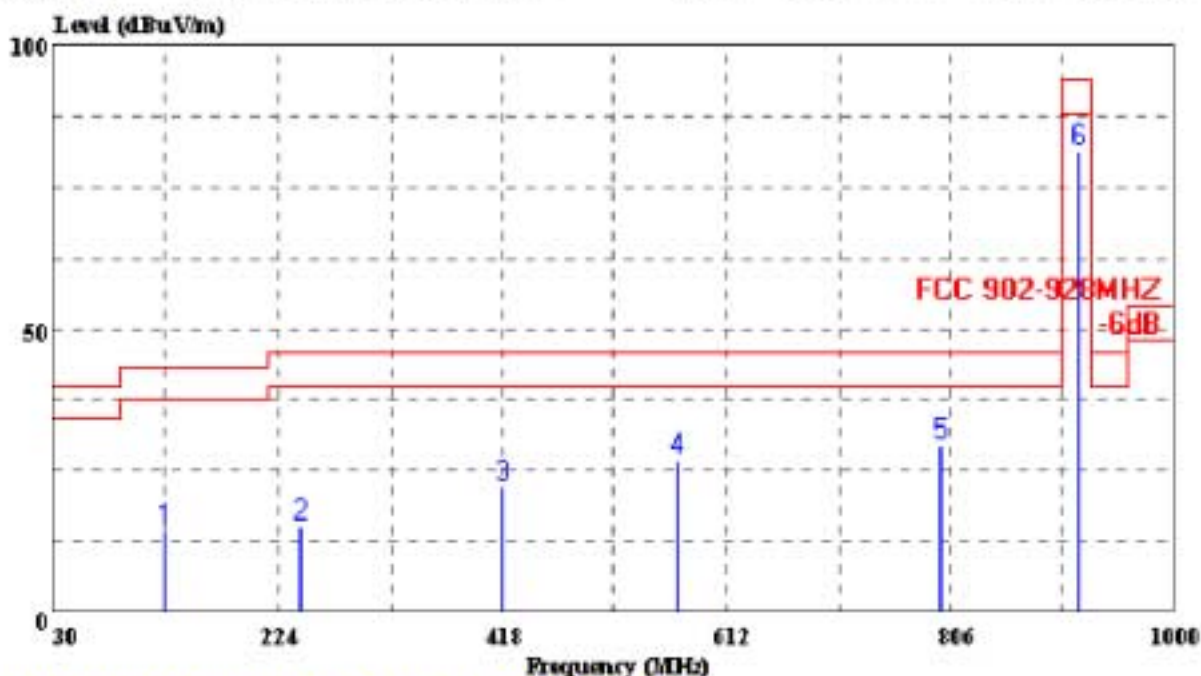

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC 902-928MHz 3m 2598FACTOR VERTICAL
EUT : VETTA VL110 T2X
M/N : 00-051801-00 (Torpedo)
OP Condition : TX Mode
Test Spec : DC 3V
Test Engineer: Jack
Comment : Temp: 23° Humi: 54%
Memo :

Page: 1


	Freq	Level	Limit	Over	Read	Probe	Cable
	MHz	dBuV/m	Line	Limit	Level	Factor	Loss
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB
1	127.000	14.44	43.50	-29.06	0.85	11.13	2.45
2	243.400	15.21	46.00	-30.79	0.16	11.60	3.45
3	418.000	22.29	46.00	-23.71	1.23	16.26	4.79
4	570.290	26.78	46.00	-19.23	1.70	19.41	5.67
5	798.240	29.52	46.00	-16.48	0.92	21.53	7.07
6	916.540	81.17	94.00	-12.83	50.40	23.33	7.44



Audix Technology (Shenzhen) Co., Ltd.
Shenzhen Science & Ind. Park
Tel: +86-0755-26639495-7
Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 4

File#: D:\2006 Report Data\J\Jack\R\RUI MING\ACS6QH009-1.EMI

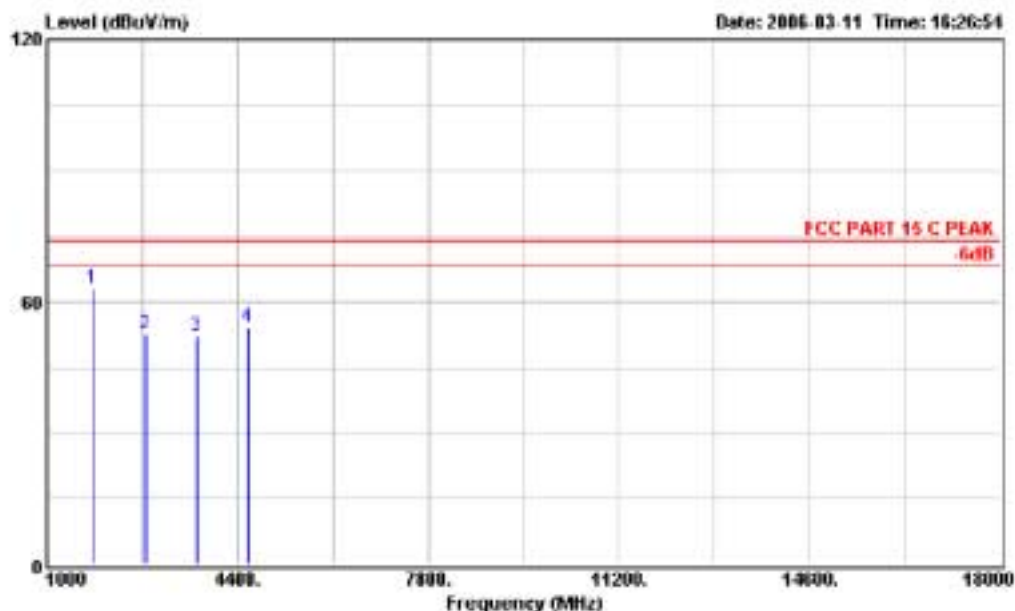

Site : site
Condition : FCC PART 15 C PEAK 3m 3115 FACTOR HORIZONTAL
EUT : VETTA VL110 T2X
M/N : 00-051801-00(Torpedo)
Test Spec : DC 3V
OP Condition : TX Mode
Test Engineer : Jack
Comment : Temp:21° Temp:55%


	Freq	Level	Over Limit		Read Level	Probe Factor	Cable Loss		Preamp Factor	Remark
			dB	dBuV/m			dB	dB		
1	1833.080	63.04	-10.96	74.00	66.07	27.16	5.27	35.46	Peak	
2	2749.620	52.52	-21.48	74.00	50.53	30.23	6.03	35.07	Peak	
3	3666.160	52.10	-21.90	74.00	45.76	32.86	8.28	34.80	Peak	
4	4582.700	54.83	-19.17	74.00	46.05	33.44	9.09	34.55	Peak	



Audix Technology (Shenzhen) Co., Ltd.
Shenzhen Science & Ind. Park
Tel: +86-0755-26639495-7
Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 6

File#: D:\2006 Report Data\J\Jack\RF\TUT MING\ACS6Q1H009-1.EMI

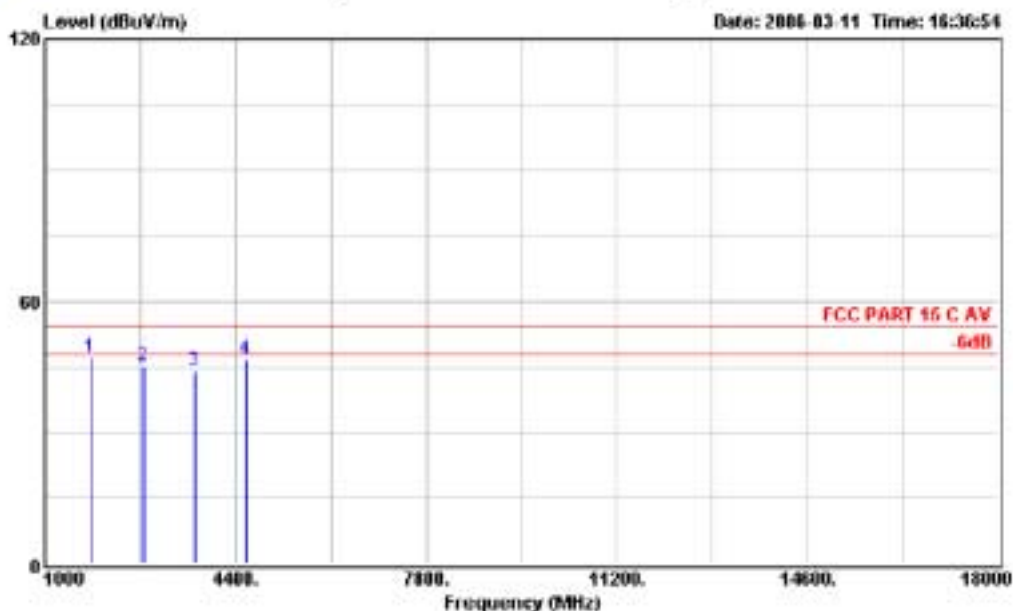

Site : site
Condition : FCC PART 15 C AV 3m 3115 FACTOR HORIZONTAL
EUT : VETTA VL110 T2X
M/N : 00-051801-00(Torpedo)
Test Spec : DC 3V
OP Condition : TX Mode
Test Engineer : Jack
Comment : Temp:21' Temp:55%


	Freq	Level	Over Limit		Read Level	Probe Factor	Cable Loss		Preamp	Remark
			Limit	Line			Loss	Factor		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		
1	1833.080	47.04	-6.96	54.00	50.07	27.16	5.27	35.46	Average	
2	2749.620	45.33	-8.67	54.00	43.53	30.11	6.77	35.00	Average	
3	3666.160	44.10	-9.90	54.00	37.76	32.86	8.28	34.00	Average	
4	4582.700	46.94	-7.06	54.00	39.06	33.39	9.05	34.56	Average	



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 2

File#: D:\2006 Report Data\J\Jack\R\RTU MING\ACS6Q1H009-1.EMI

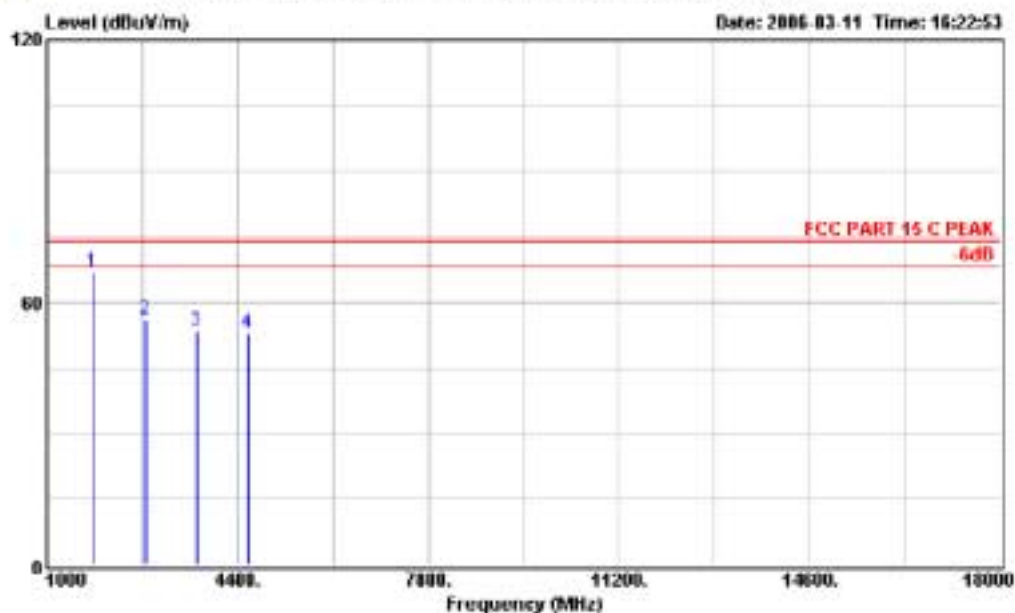

Site : site
 Condition : FCC PART 15 C PEAK 3m 3115 FACTOR VERTICAL
 EUT : VETTA VL110 T2X
 M/N : 00-051801-00(Torpedo)
 Test Spec : DC 3V
 OP Condition : TX Mode
 Test Engineer : Jack
 Comment : Temp:21° Temp:55%


	Freq	Level	Over Limit		Read Level	Probe Factor	Cable Presump		Remark
			Limit	Line			Loss	Factor	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1833.080	66.97	-7.03	74.00	70.00	27.16	5.27	35.46	Peak
2	2749.620	56.05	-17.95	74.00	54.06	30.23	6.83	35.07	Peak
3	3666.160	53.48	-20.52	74.00	47.14	32.86	8.28	34.80	Peak
4	4582.700	52.88	-21.12	74.00	44.90	33.44	9.09	34.55	Peak



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 5

File#: D:\2006 Report Data\J\Jack\RX\RTU MING\ACS6Q1H009-1.EMI

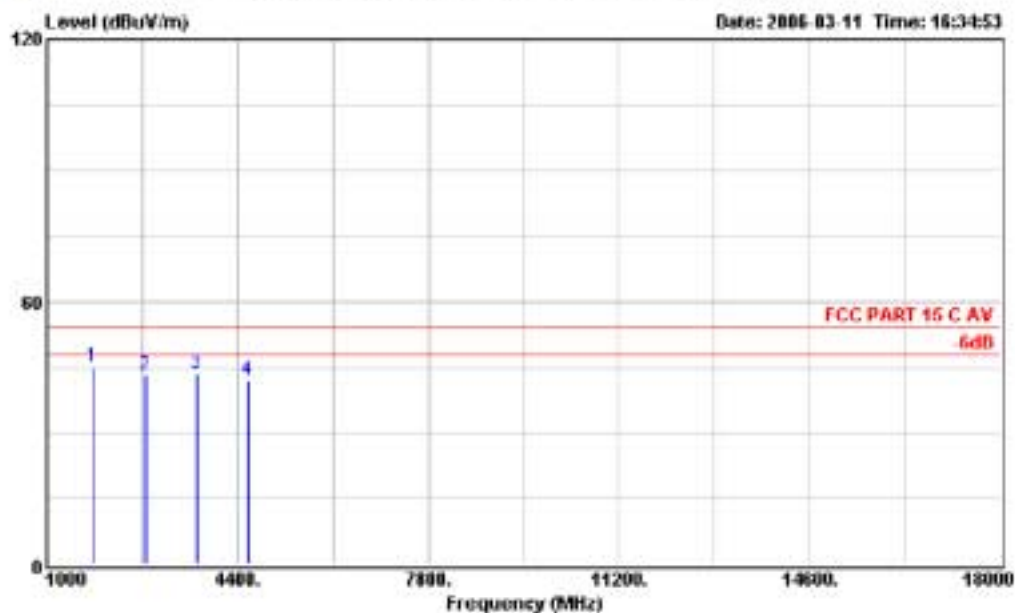

Site : site
 Condition : FCC PART 15 C AV 3m 3115 FACTOR VERTICAL
 EUT : VETTA VL110 T2X
 M/N : 00-051801-00(Torpedo)
 Test Spec : DC 3V
 OP Condition : TX Mode
 Test Engineer : Jack
 Comment : Temp:21° Temp:55%

	Freq	Level	Over Limit		Read Level	Probe Factor	Cable Preamp		Remark
			Limit	Limit			Loss	Factor	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1833.080	45.30	-8.70	54.00	48.33	27.16	5.27	35.46	Average
2	2749.620	43.41	-10.59	54.00	41.61	30.11	6.77	35.00	Average
3	3666.160	43.56	-10.44	54.00	37.22	32.86	8.28	34.80	Average
4	4582.700	42.14	-11.86	54.00	34.26	33.39	9.05	34.56	Average

4. BAND EDGES MEASUREMENT

4.1. Test Equipment

The following test equipment were used during the Emission Bandwidth Test :

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4407B	MY41440292	May 23, 05	1 Year
2.	Amp	HP	8449B	3008A00863	May 23, 05	1 Year
3.	Antenna	EMCO	3115	9607-4877	Dec. 14, 05	1.5 Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May 23, 05	1 Year

4.2. Block Diagram of Test Setup

EUT

(EUT: VETTA VL110 T2X)

4.3. Test Standard

The test completeness FCC 15C (249).

4.4. Bandwidth Limit

200kHz wide centered on the operation frequency.

4.5. Test Procedure

PASS.

The testing data was attached in the next pages.




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

No.6 Ke Feng Road, Block 52,
Shenzhen Science&Industry Park,

Data#: 10 File#: ACS6QH009-1.EMI

Date: 2006-03-11 Time: 19:07:49

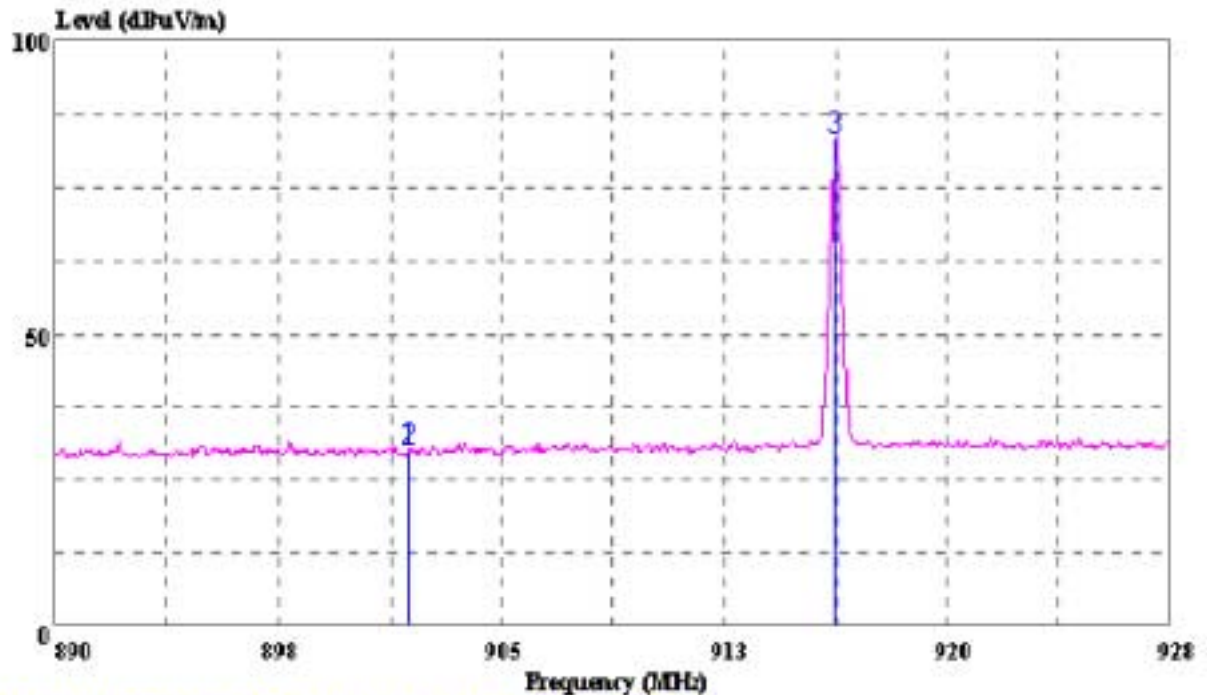

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace: 9

Ref Trace:

Condition: 3m 2598FACTOR VERTICAL
 EUT : VETIA VL110 T2X
 M/N : 00-051801-00 (Torpedo)
 OP Condition : TX Mode
 Test Spec : DC 3V
 Test Engineer: Jack
 Comment : Temp: 23° Humi: 54%
 Memo : edge band

Page: 1

	Freq	Level	Limit	Over	Read	Cable	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor
			dBuV/m	dB	dBuV	dB	dB
1	901.990	30.00	-----	-----	28.60	7.04	1.40
2	902.000	30.00	-----	-----	28.60	7.04	1.40
3	916.540	83.14	-----	-----	80.38	7.45	2.76




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

No.6 Ke Feng Road,Block 52,
Shenzhen Science&Industry Park,

Data#: 12 File#: ACS6QH009-1.EMI

Date: 2006-03-11 Time: 19:10:54

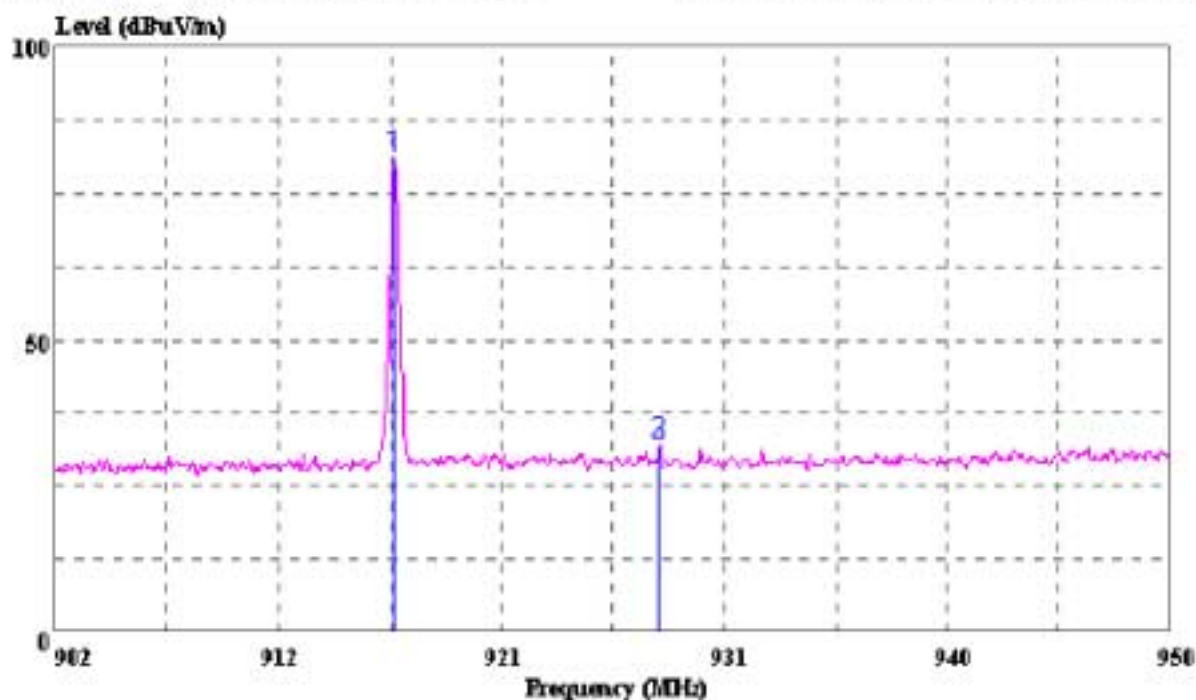

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace: 11

Ref Trace:

Condition: 3m 2598FACTOR VERTICAL
 EUT : VBTIA VL110 T2X
 M/N : 00-051801-00 (Torpedo)
 OP Condition : TX Mode
 Test Spec : DC 3V
 Test Engineer: Jack
 Comment : Temp:23° Humi:54%
 Memo : edge band

Page: 1

	Freq	Level	Limit	Over	Read	Cable	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor
			dBuV/m	dB	dBuV	dB	dB
1	916.540	80.94	-----	-----	78.18	7.45	2.76
2	928.000	32.13	-----	-----	29.64	7.44	2.49
3	928.001	32.13	-----	-----	29.64	7.44	2.49

5. DEVIATION TO TEST SPECIFICATIONS

[NONE]

APPENDIX I




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

NO.6, Ke Feng Road, Block 52
Shenzhen Science & Industry Park,
Guangdong, China
Tel: +86-755-26639495-7

Data#: 5 File#: ACS6QH009-1.EMI

Date: 2006-03-11 Time: 18:37:34

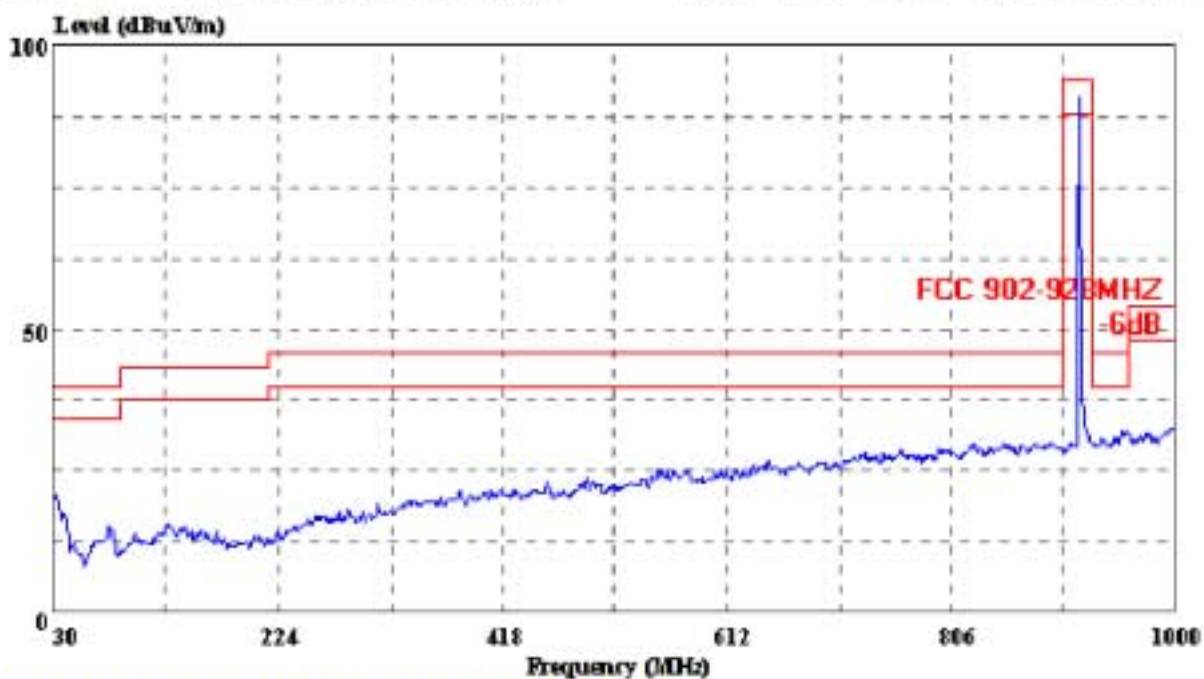

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC 902-928MHZ 3m 2598FACTOR HORIZONTAL
EUT : VETTA VL110 T2X
M/N : 00-051801-00 (Torpedo)
OP Condition : TX Mode
Test Spec : DC 3V
Test Engineer: Jack
Comment : Temp: 23° Humi: 54%
Memo :




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

NO.6, Ke Feng Road, Block 52
Shenzhen Science & Industry Park,
Guangdong, China
Tel: +86-755-26639495-7

Data#: 7 File#: ACS6QH009-1.EMI

Date: 2006-03-11 Time: 18:46:09

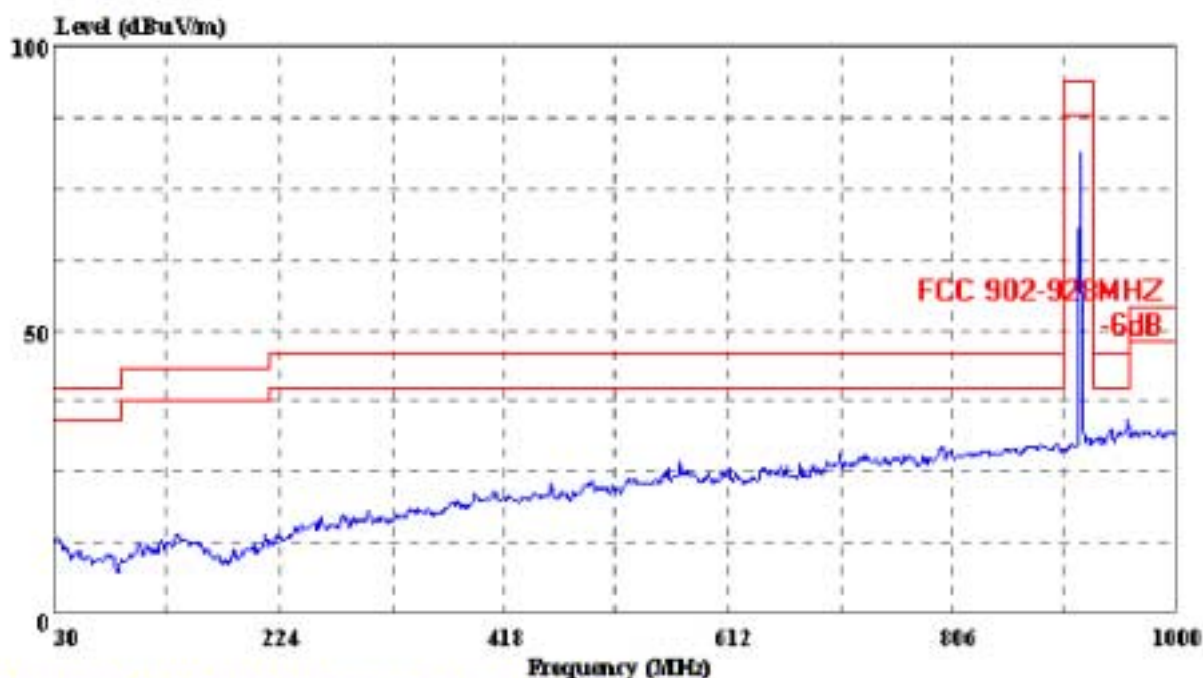

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC 902-928MHZ 3m 2598FACTOR VERTICAL
EUT : VETTA VL110 T2X
M/N : 00-051801-00 (Torpedo)
OP Condition : TX Mode
Test Spec : DC 3V
Test Engineer: Jack
Comment : Temp: 23° Humi: 54%
Memo :



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 3

File#: D:\2006 Report Data\J\Jack\R\RUI MING\ACS6Q1H009-1.EMI

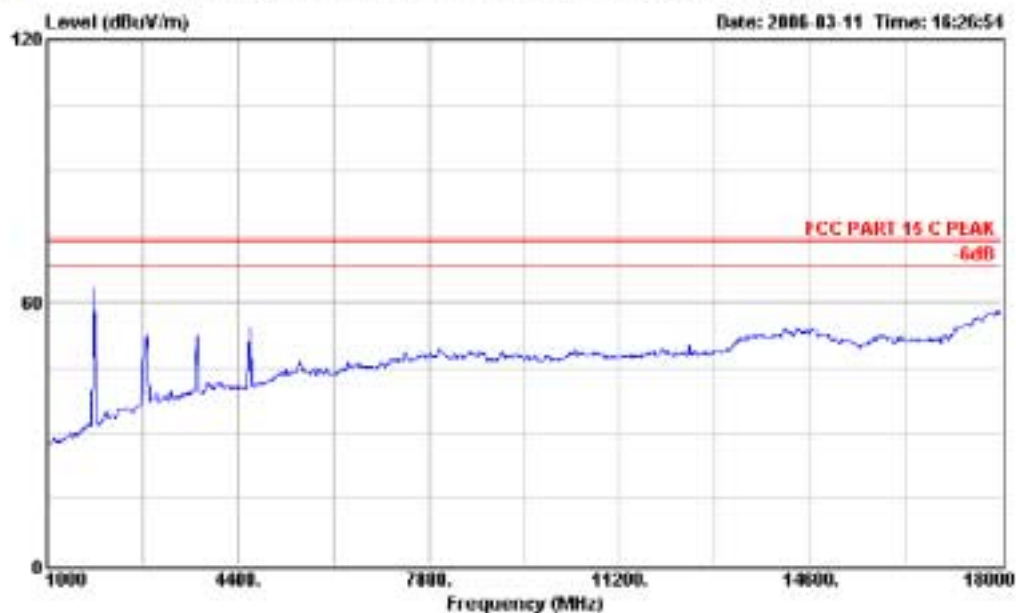


Site : site
 Condition : FCC PART 15 C PEAK 3m 3115 FACTOR HORIZONTAL
 EUT : VETTA VL110 T2X
 M/N : 00-051801-00(Torpedo)
 Test Spec : DC 3V
 OP Condition : TX Mode
 Test Engineer : Jack
 Comment : Temp:21° Temp:55%



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 1 File#: D:\2006 Report Data\J.Jack\JERRU MING\ACS6QH009-1.EMI

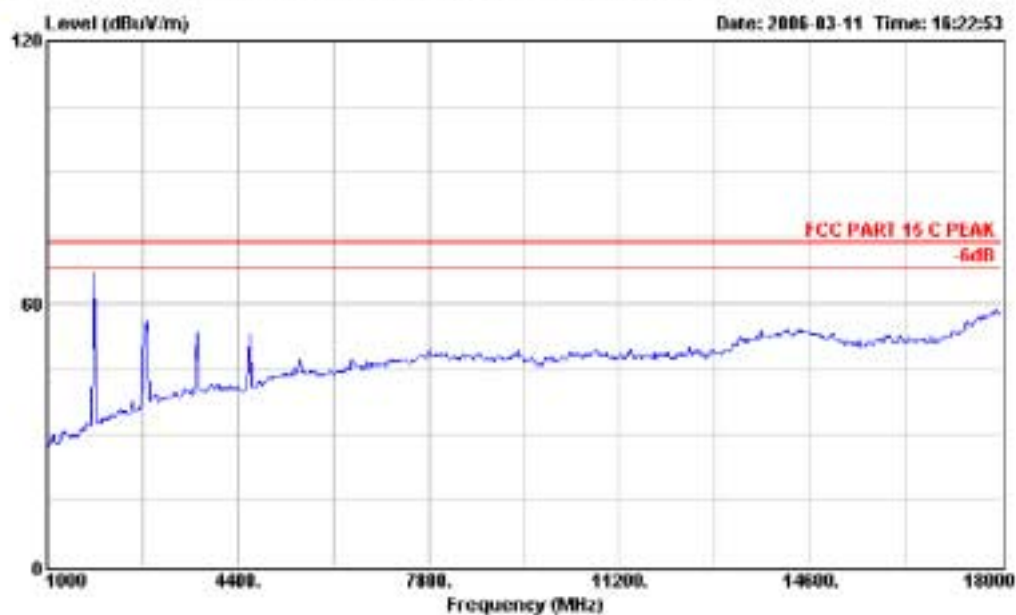

Site : site
 Condition : FCC PART 15 C PEAK 3m 3115 FACTOR VERTICAL
 EUT : VETTA VL110 T2X
 M/N : 00-051801-00(Torpedo)
 Test Spec : DC 3V
 OP Condition : TX Mode
 Test Engineer : Jack
 Comment : Temp:21' Temp:55%