



FCC PART 15.247

TEST REPORT

For

Crestron Electronics Inc

15 Volvo Drive, Rockleigh, New Jersey, 07647, USA

FCC ID: EROAM-3100

Report Type: Original Report	Product Type: Wireless Presentation System
Report Number: RSZ210118001-00B	
Report Date: 2021-04-08	
Reviewed By: RF Engineer	Jacob Kong
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 5F(B-West) ,6F,7F,the 3rd Phase of Wan Li Industrial Building D,Shihua Rd, FuTian Free Trade Zone, Shenzhen, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
DUTY CYCLE	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	11
APPLICABLE STANDARD	11
RESULT	11
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
CORRECTED FACTOR & MARGIN CALCULATION	15
TEST DATA	15
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST DATA	19
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	31
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST DATA	33
FCC §15.247(e) - POWER SPECTRAL DENSITY	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST DATA	34
APPENDIX Wi-Fi.....	35
APPENDIX A: DTS BANDWIDTH	35
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	40
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	45
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	46
APPENDIX E: BAND EDGE MEASUREMENTS.....	55
APPENDIX F: DUTY CYCLE	58
APPENDIX BLE.....	63
APPENDIX A: DTS BANDWIDTH	63
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	66
APPENDIX C: MAXIMUM CONDUCTED PEAK OUTPUT POWER.....	69
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	70
APPENDIX E: BAND EDGE MEASUREMENTS.....	73
APPENDIX F: DUTY CYCLE	75

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Wireless Presentation System
Tested Model	M202018001
SKU	AM-3100-WF(For US), AM-3100-WF-I(For World)
Frequency Range	BLE: 2402-2480MHz Wi-Fi: 2412-2462MHz
Maximum Conducted Peak Output Power	BLE: 7.51Bm(LE 1M), 7.54dBm(LE 2M) Wi-Fi: 24.5dBm(802.11b), 25.7dBm(802.11g), 25.8dBm(802.11n-HT20), 23.8dBm(802.11ax20)
Modulation Technique	BLE: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification*	ANT 1: 4dBi ANT 2: 4dBi(provided by the applicant)
Voltage Range	DC 24V from adapter or DC 48V from POE
Date of Test	2021-01-24 to 2021-04-08
Sample serial number	RSZ210118001-RF-S1(Assigned by BACL, Shenzhen)
Received date	2021-01-18
Sample/EUT Status	Good condition
Applicant	Crestron Electronics Inc
Applicant Address	15 Volvo Drive, Rockleigh, New Jersey, 07647, USA
Manufacturer	Crestron Electronics Inc
Manufacturer Address	15 Volvo Drive, Rockleigh, New Jersey, 07647, USA

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) ,6F,7F,the 3rd Phase of Wan Li Industrial Building D,Shihua Rd, FuTian Free Trade Zone, Shenzhen, China .

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g, 802.11n-HT20 and 802.11ax20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20, 802.11ax20 EUT was tested with Channel 1, 6 and 11.

For LE 1M&LE 2M mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

The EUT has two integral antennas arrangement, the BLE only transmit on antenna 1, the Wi-Fi can transmit on both antennas in MIMO mode.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“SecureCRT*” was use to the EUT tested and power level is default*. The software and power level was provided by the applicant.

Duty cycle

The test result please refer to the Appendix BLE& Appendix Wi-Fi.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
GOSPELL	POE	G0720-480-050	G0720-480-050
Dell	PC 1	Latitude E5430	26913508589
Dell	PC 2	Latitude E5430	42332463482
HIKVISION	Router	DS-3WR03-E	10021642429
SAMSUNG	Monitor	S24E390HL	ZZFRH4ZN303357K
IN ONE SMART TECHNOLOGY (H.K.) LTD	Phone	E11	101642
Grandstream	Camera	GUV3105	Grandstream
Kingston	USB disk	DTSE9H/16G	Kingston

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielded Detachable AC Cable	1.0	LISN	POE
Un-shielded Detachable RJ45Cable	1.0	POE	EUT
Un-shielded Detachable RJ45 Cable	1.0	Router	PC 2
Un-shielded Detachable RJ45 Cable	5.0	POE	Router
UnShielded Detachable HDMI Cable	1.0	EUT	Monitor
Un-shielded Detachable USB Cable	1.2	EUT	Camera
Un-shielded Detachable USB Cable	2.0	EUT	PC 1

Block Diagram of Test Setup

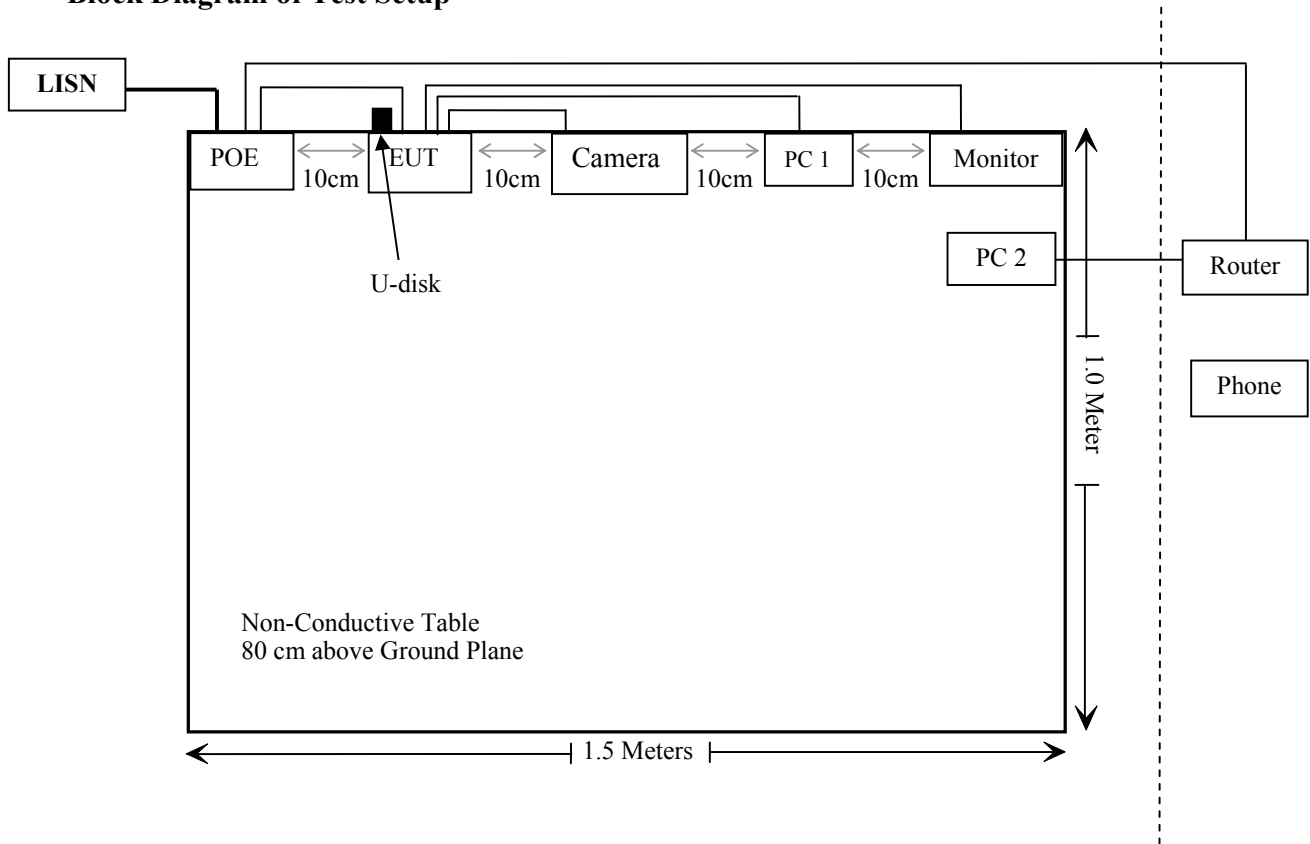

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1091	Maximum Permissible Exposure(MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

Note: the EUT has two types power supply, the adapter and POE, according the test result of FCC Part 15B test result, the POE power supply is worser, so worst case POE power test data was record in report.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2020/08/04	2021/08/03
Rohde & Schwarz	LISN	ENV216	101613	2020/08/04	2021/08/03
Rohde & Schwarz	Transient Limitor	ESH3Z2	DE25985	2020/11/29	2021/11/28
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2020/11/29	2021/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2020/12/22	2023/12/21
Unknown	Cable 2	RF Cable 2	F-03-EM197	2020/11/29	2021/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2020/11/29	2021/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2020/08/04	2021/08/03
COM-POWER	Pre-amplifier	PA-122	181919	2020/11/29	2021/11/28
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2020/11/29	2021/11/28
Sunol Sciences	Horn Antenna	3115	9107-3694	2021/01/15	2024/01/14
Insulated Wire Inc.	RF Cable	SPS-2503-3150	02222010	2020/11/29	2021/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2020/11/29	2021/11/28
SNSD	Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2020/04/20	2021/04/20
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-021304	2020/12/06	2023/12/05
RF Conducted Test					
Tonscend Corporation	RF control Unit	JS0806-2	19D8060154	2020/08/04	2021/08/03
Rohde & Schwarz	Signal and Spectrum Analyzer	FSV40	101473	2020/08/04	2021/08/03
Unknown	RF Cable	Unknown	2301 276	2020/11/29	2021/11/28

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Mode	Frequency (MHz)	Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Bluetooth	2402-2480	4.0	2.51	9.0	7.94	20	0.004	1
BLE	2402-2480	4.0	2.51	8.0	6.31	20	0.003	1
2.4G Wi-Fi	2412-2462	4.0	2.51	26.0	398.11	20	0.199	1
5G Wi-Fi	5150-5250	5.5	3.55	19.0	79.43	20	0.056	1
	5250-5350	5.5	3.55	19.0	79.43	20	0.056	1
	5470-5725	5.5	3.55	19.0	79.43	20	0.056	1
	5725-5850	5.5	3.55	18.0	63.10	20	0.045	1

Note: 1. the tune up conducted power was declared by the applicant
 2. The Bluetooth can transmit at the same time with Wi-Fi, the 2.4G Wi-Fi can't transmit at the same time with the 5G Wi-Fi.

Simultaneous transmitting consideration:

The ratio=MPEWi-Fi/limit + MPEBT/limit=0.199/1+0.004/1=0.203<1.0

So simultaneous exposure comply with the limit.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two integral antennas arrangement, the BLE only transmit on antenna 1, the Wi-Fi can transmit on both antennas. The antenna gain is 4.0dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup



Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$


Test Data

Environmental Conditions

Temperature:	25°C
Relative Humidity:	65%
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2021-03-12.


EUT operation mode: BT&Wi-Fi Link (the worst case is powered by the POE)

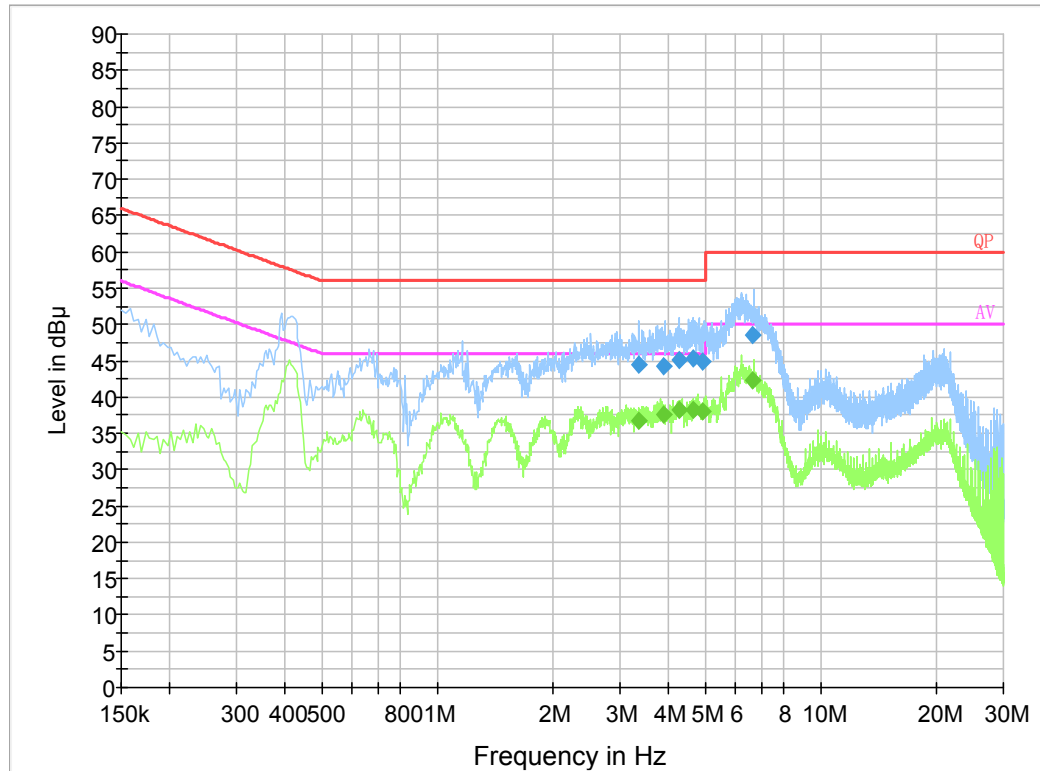AC 120V/60 Hz, Line**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
3.363630	44.5	9.000	L1	19.9	11.5	56.0
3.886870	44.3	9.000	L1	19.9	11.7	56.0
4.269830	45.2	9.000	L1	19.9	10.8	56.0
4.660190	45.3	9.000	L1	19.9	10.7	56.0
4.947270	44.8	9.000	L1	19.9	11.2	56.0
6.617290	48.5	9.000	L1	19.9	11.5	60.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
3.363630	36.8	9.000	L1	19.9	9.2	46.0
3.886870	37.7	9.000	L1	19.9	8.3	46.0
4.269830	38.3	9.000	L1	19.9	7.7	46.0
4.660190	38.3	9.000	L1	19.9	7.7	46.0
4.947270	38.0	9.000	L1	19.9	8.0	46.0
6.617290	42.3	9.000	L1	19.9	7.7	50.0

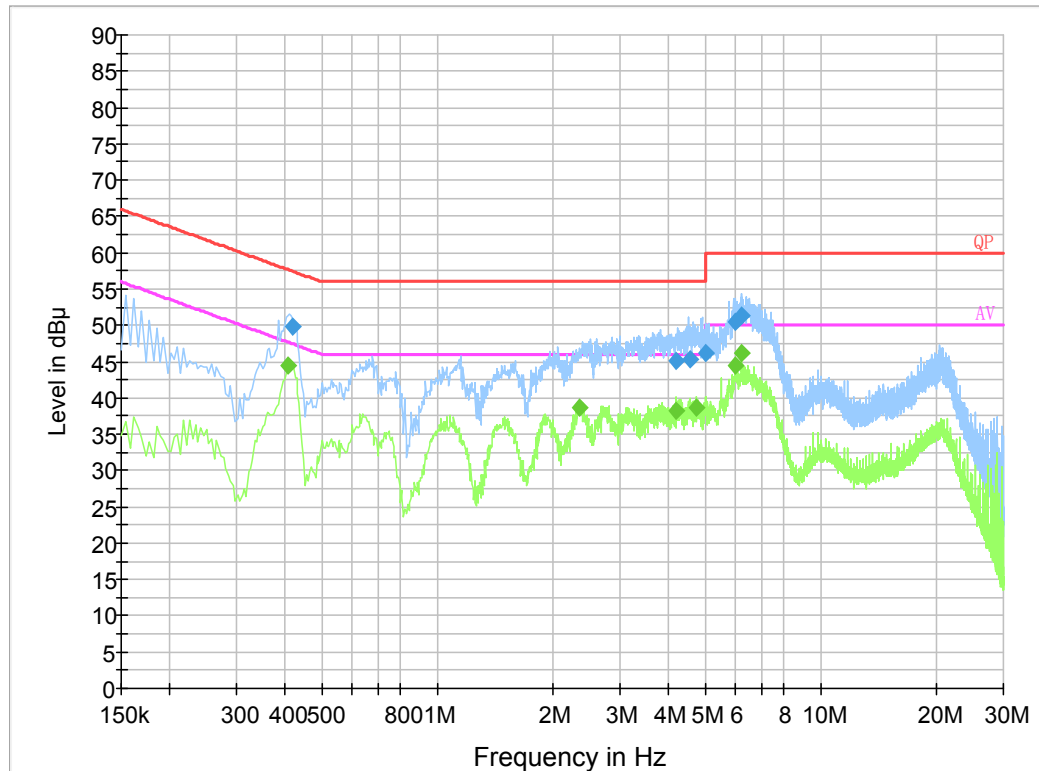AC 120V/60 Hz, Neutral**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.419790	49.9	9.000	N	19.8	7.6	57.5
4.214190	45.2	9.000	N	19.9	10.8	56.0
4.554170	45.3	9.000	N	19.9	10.7	56.0
5.039450	46.1	9.000	N	19.9	13.9	60.0
5.997290	50.4	9.000	N	19.9	9.6	60.0
6.236370	51.4	9.000	N	19.9	8.6	60.0

Final Result 2


Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.410000	44.5	9.000	N	19.8	3.1	47.6
2.358000	38.6	9.000	N	19.8	7.4	46.0
4.218000	38.3	9.000	N	19.9	7.7	46.0
4.762000	38.8	9.000	N	19.9	7.2	46.0
5.998000	44.5	9.000	N	19.9	5.5	50.0
6.238000	46.2	9.000	N	19.9	3.8	50.0

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

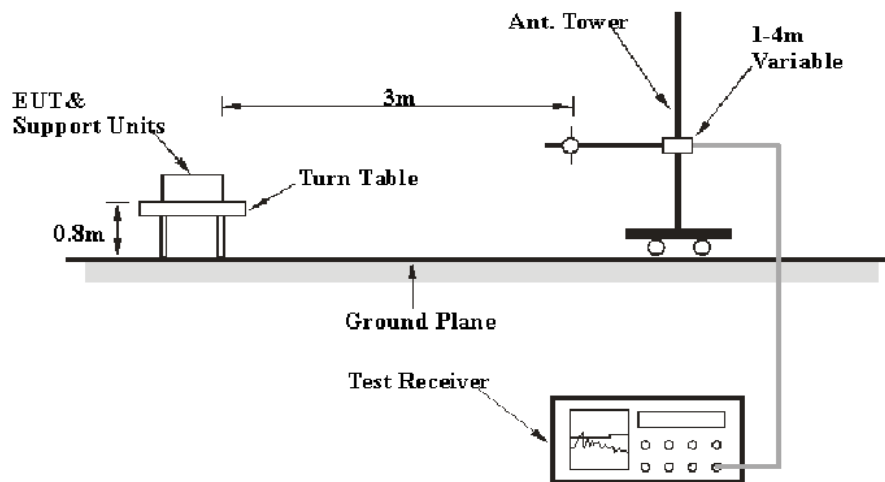

Above 1GHz:

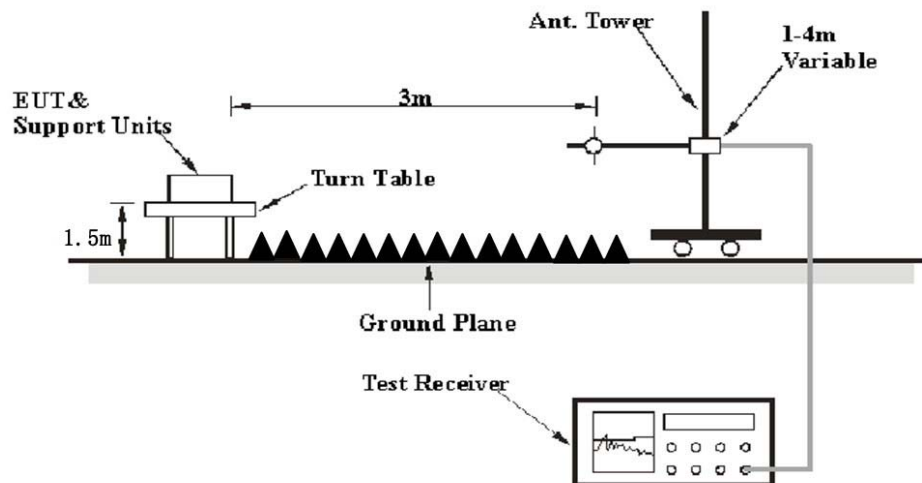

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data


Environmental Conditions

Temperature:	21.7~24 °C
Relative Humidity:	44~55 %
ATM Pressure:	100.9~101.2 kPa

The testing was performed by Kilroy Deng on 2021-04-08 for below 1GHz and Leven Gan on 2021-01-24 for above 1GHz.

EUT operation mode: Transmitting

30 MHz~1 GHz: (EUT operation mode: BT&Wi-Fi Link, the worst case is powered by the POE)

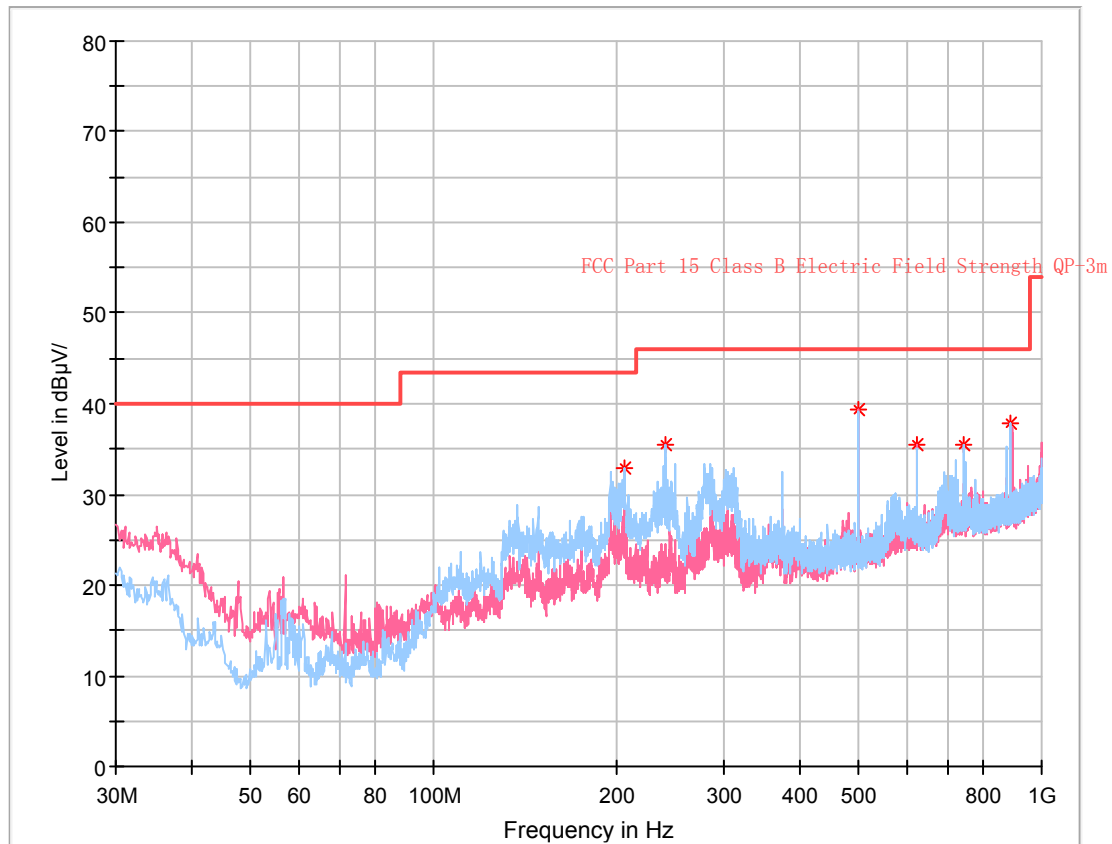

Critical_Freqs

Frequency (MHz)	MaxPeak (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
205.691250	32.96	43.50	10.54	100.0	H	172.0	-11.1
240.247500	35.58	46.00	10.42	200.0	H	247.0	-11.7
499.965000	39.28	46.00	6.72	200.0	V	182.0	-5.1
625.095000	35.54	46.00	10.46	100.0	V	209.0	-2.7
742.465000	35.44	46.00	10.56	100.0	H	235.0	-0.7
890.996250	37.83	46.00	8.17	100.0	H	339.0	0.9

1 GHz-25 GHz (Wi-Fi):**802.11b Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412 MHz)									
2389.12	31.29	PK	314	2.2	V	31.87	63.16	74	10.84
2389.12	17.97	Ave.	314	2.2	V	31.87	49.84	54	4.16
2485.43	29.14	PK	12	2.2	V	32.13	61.27	74	12.73
2485.43	14.39	Ave.	12	2.2	V	32.13	46.52	54	7.48
4824.00	45.46	PK	53	1.9	V	6.28	51.74	74	22.26
4824.00	33.83	Ave.	53	1.9	V	6.28	40.11	54	13.89
Middle Channel (2437MHz)									
4874.00	45.35	PK	276	1.6	V	6.76	52.11	74	21.89
4874.00	33.87	Ave.	276	1.6	V	6.76	40.63	54	13.37
High Channel (2462 MHz)									
2386.64	29.36	PK	241	1.0	V	31.87	61.23	74	12.77
2386.64	14.44	Ave.	241	1.0	V	31.87	46.31	54	7.69
2485.43	32.81	PK	149	2.0	V	32.13	64.94	74	9.06
2485.43	18.05	Ave.	149	2.0	V	32.13	50.18	54	3.82
4924.00	45.42	PK	51	1.4	V	6.76	52.18	74	21.82
4924.00	33.92	Ave.	51	1.4	V	6.76	40.68	54	13.32

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412MHz)									
2389.47	40.83	PK	135	1.7	V	31.87	72.70	74	1.30
2389.47	19.84	Ave.	135	1.7	V	31.87	51.71	54	2.29
2485.65	29.24	PK	165	1.1	V	32.13	61.37	74	12.63
2485.65	15.37	Ave.	165	1.1	V	32.13	47.50	54	6.50
4824.00	43.75	PK	243	1.1	V	6.28	50.03	74	23.97
4824.00	30.49	Ave.	243	1.1	V	6.28	36.77	54	17.23
Middle Channel (2437MHz)									
4874.00	44.24	PK	261	2.1	V	6.76	51.00	74	23.00
4874.00	30.78	Ave.	261	2.1	V	6.76	37.54	54	16.46
High Channel (2462MHz)									
2388.71	28.92	PK	357	2.1	V	31.87	60.79	74	13.21
2388.71	15.23	Ave.	357	2.1	V	31.87	47.10	54	6.90
2483.53	40.41	PK	190	1.6	V	32.13	72.54	74	1.46
2483.53	19.31	Ave.	190	1.6	V	32.13	51.44	54	2.56
4924.00	43.84	PK	107	1.8	V	6.76	50.60	74	23.40
4924.00	30.43	Ave.	107	1.8	V	6.76	37.19	54	16.81

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412MHz)									
2389.91	41.04	PK	3	2.0	V	31.87	72.91	74	1.09
2389.91	18.12	Ave.	3	2.0	V	31.87	49.99	54	4.01
2485.67	29.24	PK	320	2.5	V	32.13	61.37	74	12.63
2485.67	15.28	Ave.	320	2.5	V	32.13	47.41	54	6.59
4824.00	43.84	PK	100	1.4	V	6.28	50.12	74	23.88
4824.00	30.51	Ave.	100	1.4	V	6.28	36.79	54	17.21
Middle Channel (2437MHz)									
4874.00	44.53	PK	29	1.2	V	6.76	51.29	74	22.71
4874.00	30.85	Ave.	29	1.2	V	6.76	37.61	54	16.39
High Channel (2462MHz)									
2389.91	28.99	PK	252	1.9	V	31.87	60.86	74	13.14
2389.91	15.25	Ave.	252	1.9	V	31.87	47.12	54	6.88
2483.52	40.76	PK	342	1.9	V	32.13	72.89	74	1.11
2483.52	18.24	Ave.	342	1.9	V	32.13	50.37	54	3.63
4924.00	43.69	PK	291	1.4	V	6.76	50.45	74	23.55
4924.00	30.48	Ave.	291	1.4	V	6.76	37.24	54	16.76

802.11ax20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412MHz)									
2389.37	41.08	PK	248	1.4	V	31.87	72.95	74	1.05
2389.37	20.56	Ave.	248	1.4	V	31.87	52.43	54	1.57
2485.52	29.07	PK	247	1.4	V	32.13	61.20	74	12.80
2485.52	15.24	Ave.	247	1.4	V	32.13	47.37	54	6.63
4824.00	43.93	PK	272	1.8	V	6.28	50.21	74	23.79
4824.00	30.49	Ave.	272	1.8	V	6.28	36.77	54	17.23
Middle Channel (2437MHz)									
4874.00	44.39	PK	192	1.7	V	6.76	51.15	74	22.85
4874.00	30.77	Ave.	192	1.7	V	6.76	37.53	54	16.47
High Channel (2462MHz)									
2388.45	29.25	PK	249	2.4	V	31.87	61.12	74	12.88
2388.45	15.29	Ave.	249	2.4	V	31.87	47.16	54	6.84
2483.62	40.89	PK	106	2.4	V	32.13	73.02	74	0.98
2483.62	20.72	Ave.	106	2.4	V	32.13	52.85	54	1.15
4924.00	44.05	PK	259	1.6	V	6.76	50.81	74	23.19
4924.00	30.51	Ave.	259	1.6	V	6.76	37.27	54	16.73

1 GHz-25 GHz (LE 1M):

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2389.45	28.76	PK	100	2.3	V	31.87	60.63	74	13.37
2389.45	14.83	Ave.	100	2.3	V	31.87	46.70	54	7.30
2484.36	29.12	PK	263	1.8	V	32.13	61.25	74	12.75
2484.36	14.85	Ave.	263	1.8	V	32.13	46.98	54	7.02
4804.00	44.30	PK	33	1.0	V	6.28	50.58	74	23.42
4804.00	30.88	Ave.	33	1.0	V	6.28	37.16	54	16.84
Middle Channel (2440 MHz)									
4880.00	44.24	PK	184	1.8	V	6.76	51.00	74	23.00
4880.00	30.92	Ave.	184	1.8	V	6.76	37.68	54	16.32
High Channel (2480 MHz)									
2387.27	29.13	PK	155	1.3	V	31.87	61.00	74	13.00
2387.27	14.83	Ave.	155	1.3	V	31.87	46.70	54	7.30
2484.10	29.24	PK	344	1.6	V	32.13	61.37	74	12.63
2484.10	14.87	Ave.	344	1.6	V	32.13	47.00	54	7.00
4960.00	44.47	PK	20	2.0	V	6.80	51.27	74	22.73
4960.00	31.04	Ave.	20	2.0	V	6.80	37.84	54	16.16

1 GHz-25 GHz (LE 2M):

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2388.65	29.31	PK	317	2.0	V	31.87	61.18	74	12.82
2388.65	14.89	Ave.	317	2.0	V	31.87	46.76	54	7.24
2484.53	29.53	PK	225	1.1	V	32.13	61.66	74	12.34
2484.53	14.91	Ave.	225	1.1	V	32.13	47.04	54	6.96
4804.00	44.24	PK	327	1.7	V	6.28	50.52	74	23.48
4804.00	30.71	Ave.	327	1.7	V	6.28	36.99	54	17.01
Middle Channel (2440 MHz)									
4880.00	44.49	PK	344	1.9	V	6.76	51.25	74	22.75
4880.00	30.85	Ave.	344	1.9	V	6.76	37.61	54	16.39
High Channel (2480 MHz)									
2387.79	29.24	PK	146	1.5	V	31.87	61.11	74	12.89
2387.79	14.88	Ave.	146	1.5	V	31.87	46.75	54	7.25
2484.02	29.44	PK	99	1.2	V	32.13	61.57	74	12.43
2484.02	14.96	Ave.	99	1.2	V	32.13	47.09	54	6.91
4960.00	44.68	PK	250	2.0	V	6.80	51.48	74	22.52
4960.00	30.87	Ave.	250	2.0	V	6.80	37.67	54	16.33

Note:



Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading



Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB to the limit was not recorded.



**Pre-scan with Wi-Fi high channel in 802.11b mode
Horizontal**

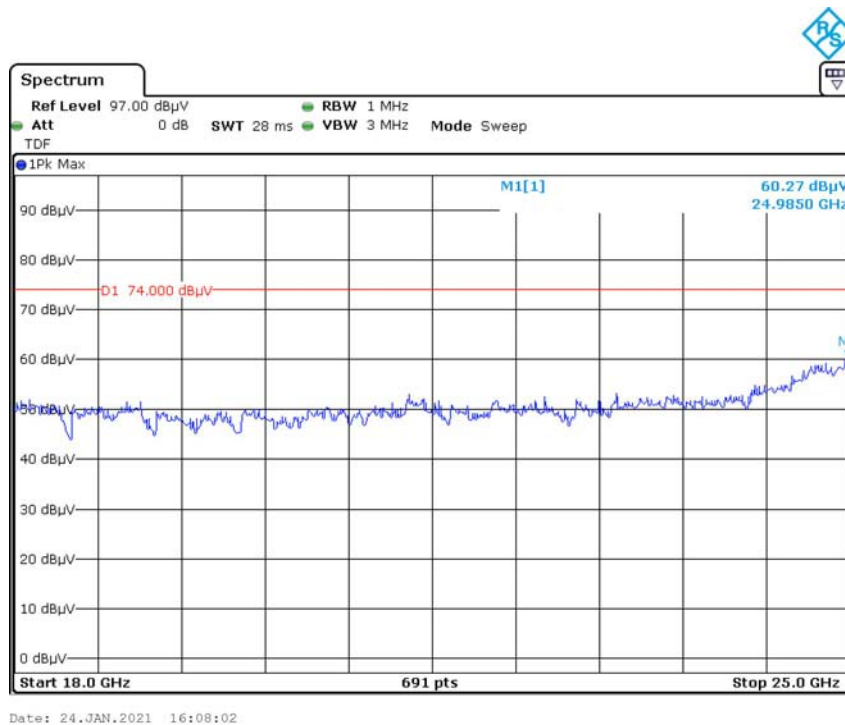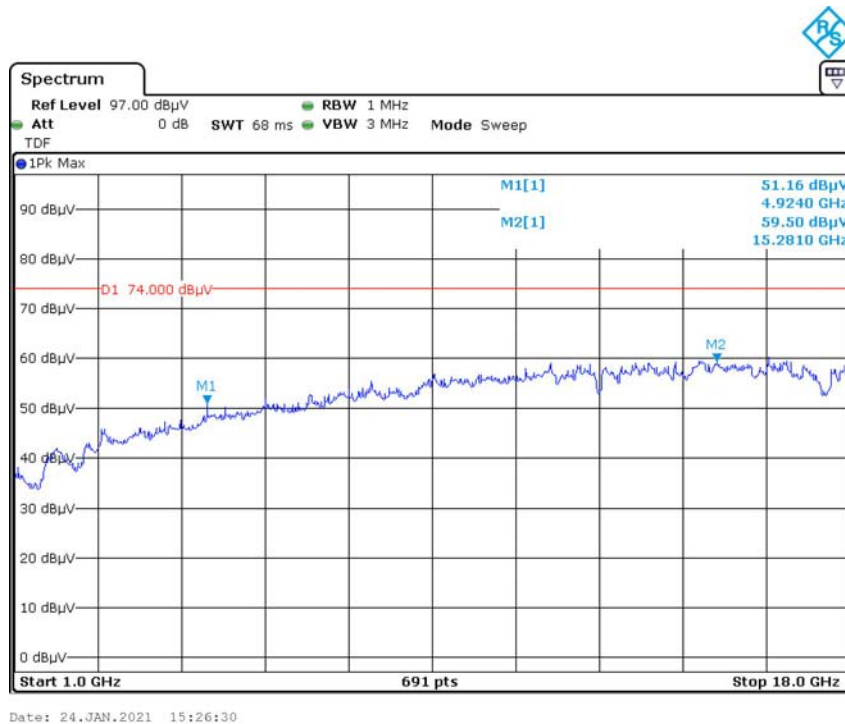


Vertical

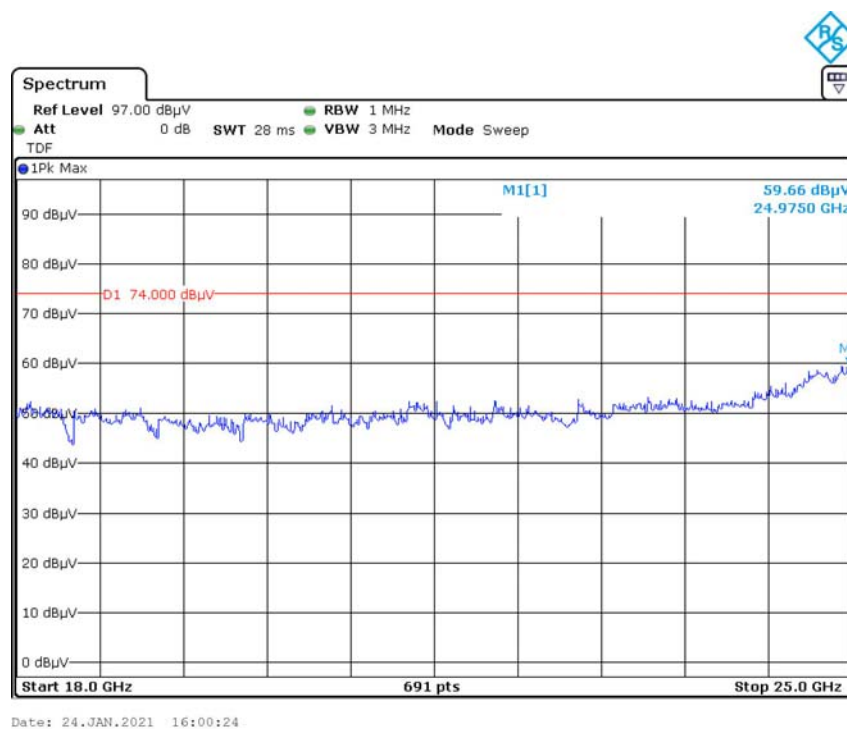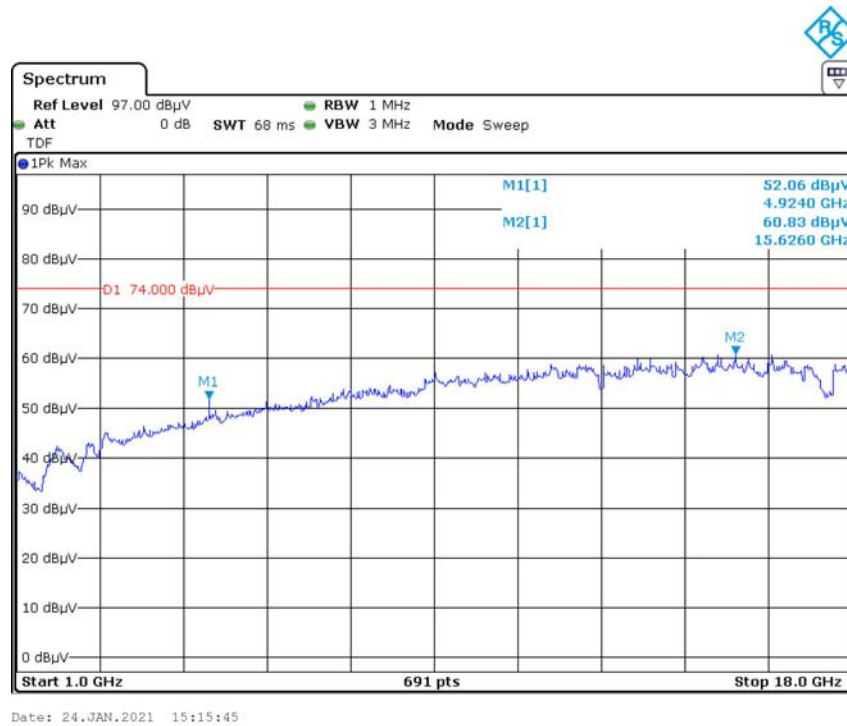


Average Horizontal

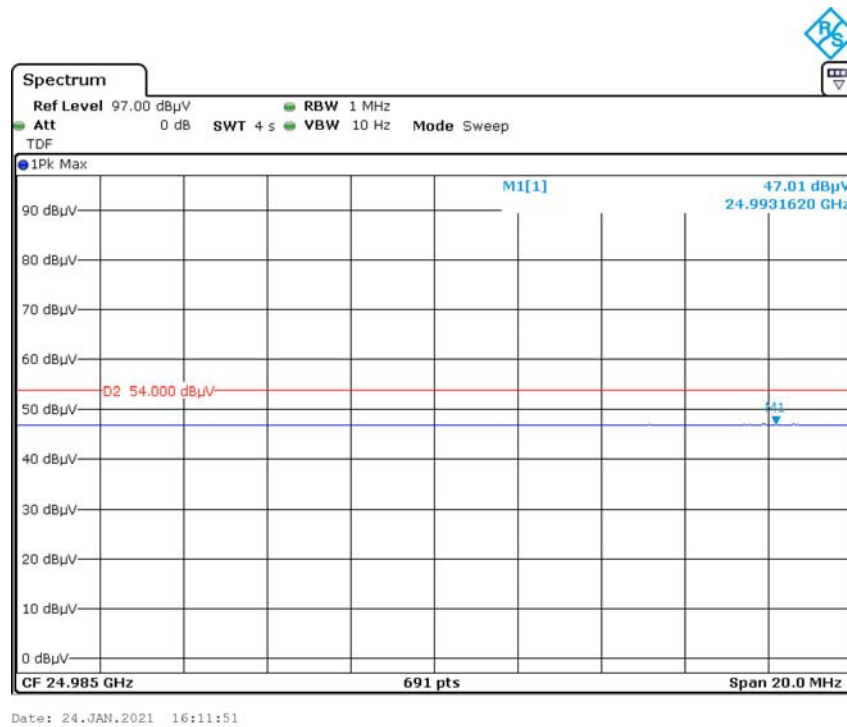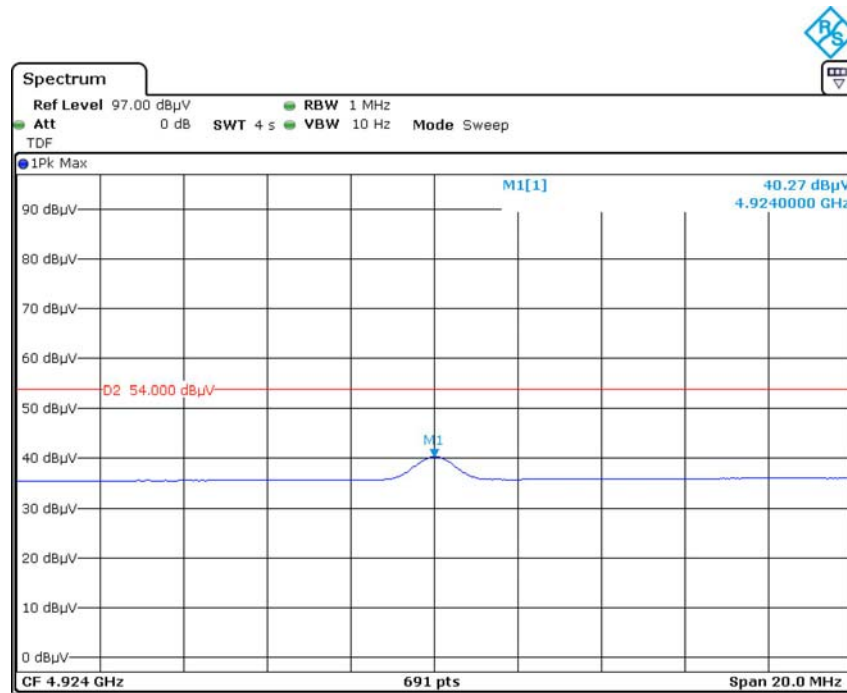

Vertical

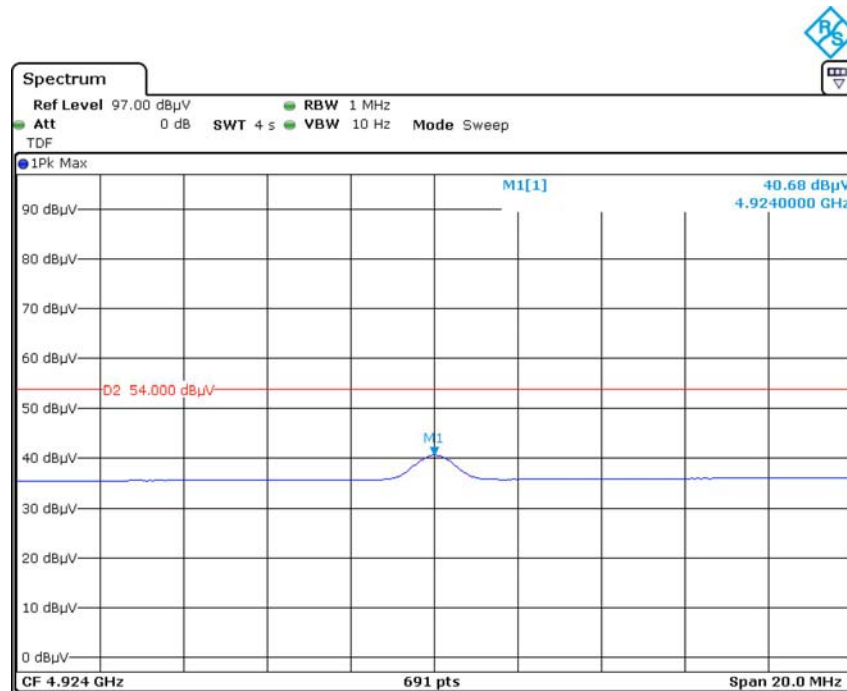

Date: 24.JAN.2021 15:19:22

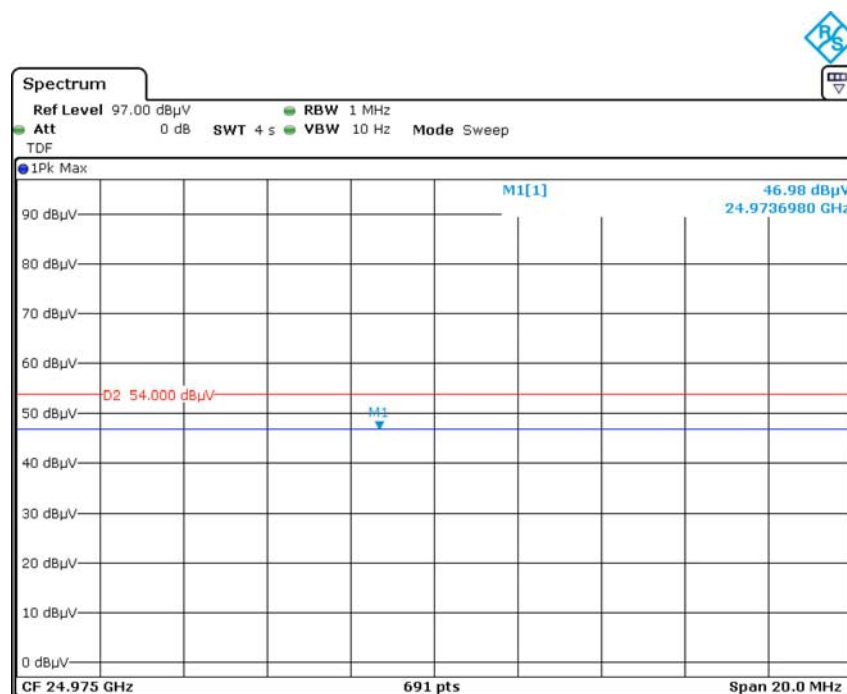

Date: 24.JAN.2021 16:04:43


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	56 %-57%
ATM Pressure:	101.0 kPa

The testing was performed by Coco Liu on 2021-03-06.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

Note: for Wi-Fi mode, worst case is ANT 1 was recorded.


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	56 %-57%
ATM Pressure:	101.0 kPa

The testing was performed by Coco Liu on 2021-03-06.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	56 %-57%
ATM Pressure:	101.0 kPa

The testing was performed by Coco Liu from 2021-03-06 to 2021-03-12.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

Note: for Wi-Fi mode, the worst case is ANT 1 for higher output power in ANT 1


FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	56 %-57%
ATM Pressure:	101.0 kPa

The testing was performed by Coco Liu on 2021-03-06.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.


APPENDIX Wi-Fi

Appendix A: DTS Bandwidth Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
11BMIMO	Ant1	2412	7.160	0.5	PASS
		2437	7.160	0.5	PASS
		2462	7.160	0.5	PASS
11GMIMO	Ant1	2412	16.360	0.5	PASS
		2437	16.400	0.5	PASS
		2462	16.440	0.5	PASS
11N20MIMO	Ant1	2412	17.640	0.5	PASS
		2437	17.640	0.5	PASS
		2462	17.640	0.5	PASS
11AX20MIMO	Ant1	2412	19.160	0.5	PASS
		2437	19.160	0.5	PASS
		2462	19.200	0.5	PASS


Test Graphs

11BMIMO_Ant1_2412

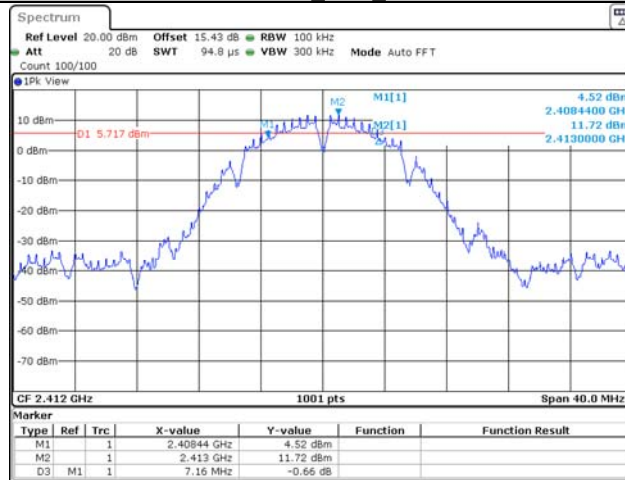


Date: 6.MAR.2021 16:25:38

11BMIMO_Ant1_2437

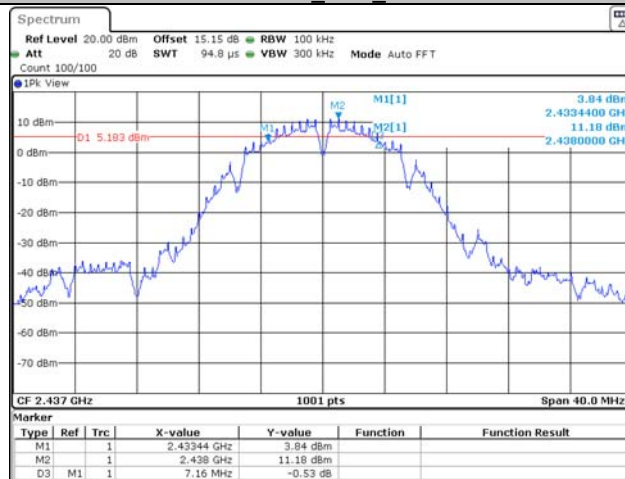


Date: 6.MAR.2021 16:31:03

11BMIMO_Ant1_2462

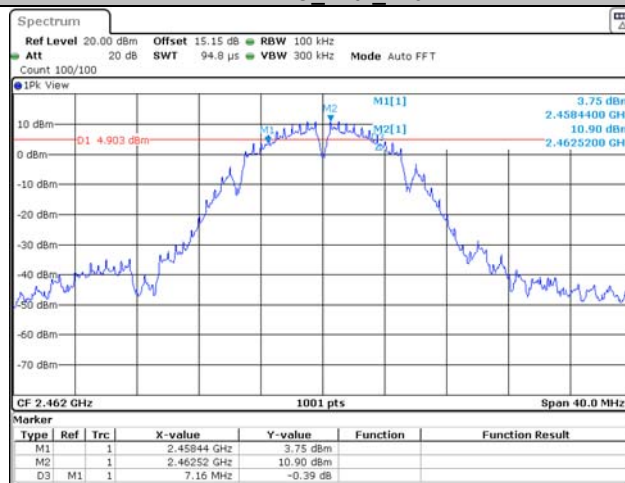


Date: 6.MAR.2021 16:32:39

11GMIMO_Ant1_2412

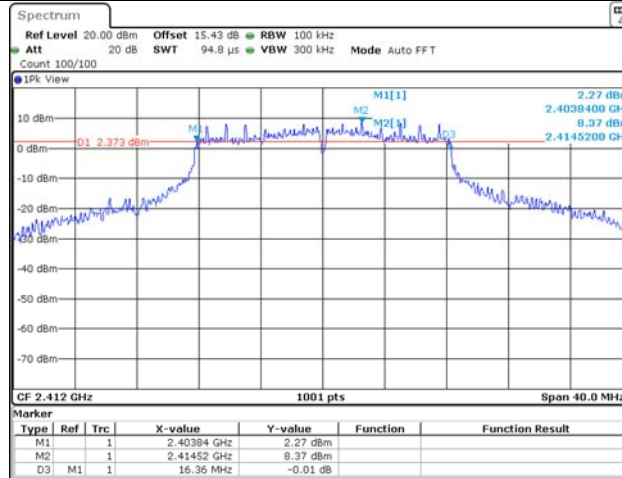


Date: 6.MAR.2021 16:36:39

11GMIMO_Ant1_2437

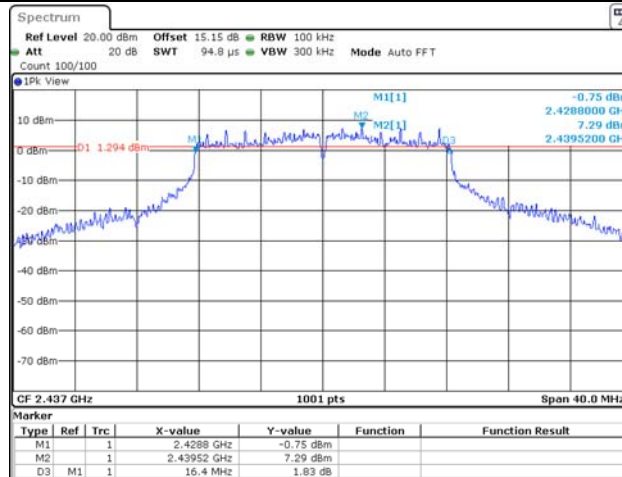



Date: 6.MAR.2021 16:38:49

11GMIMO_Ant1_2462

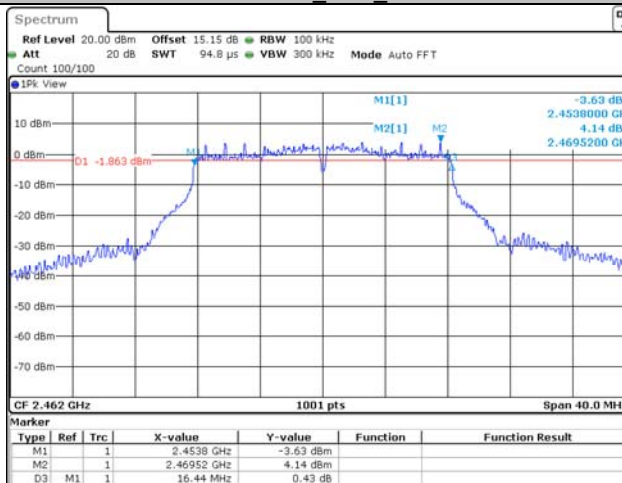

Date: 6.MAR.2021 16:40:53

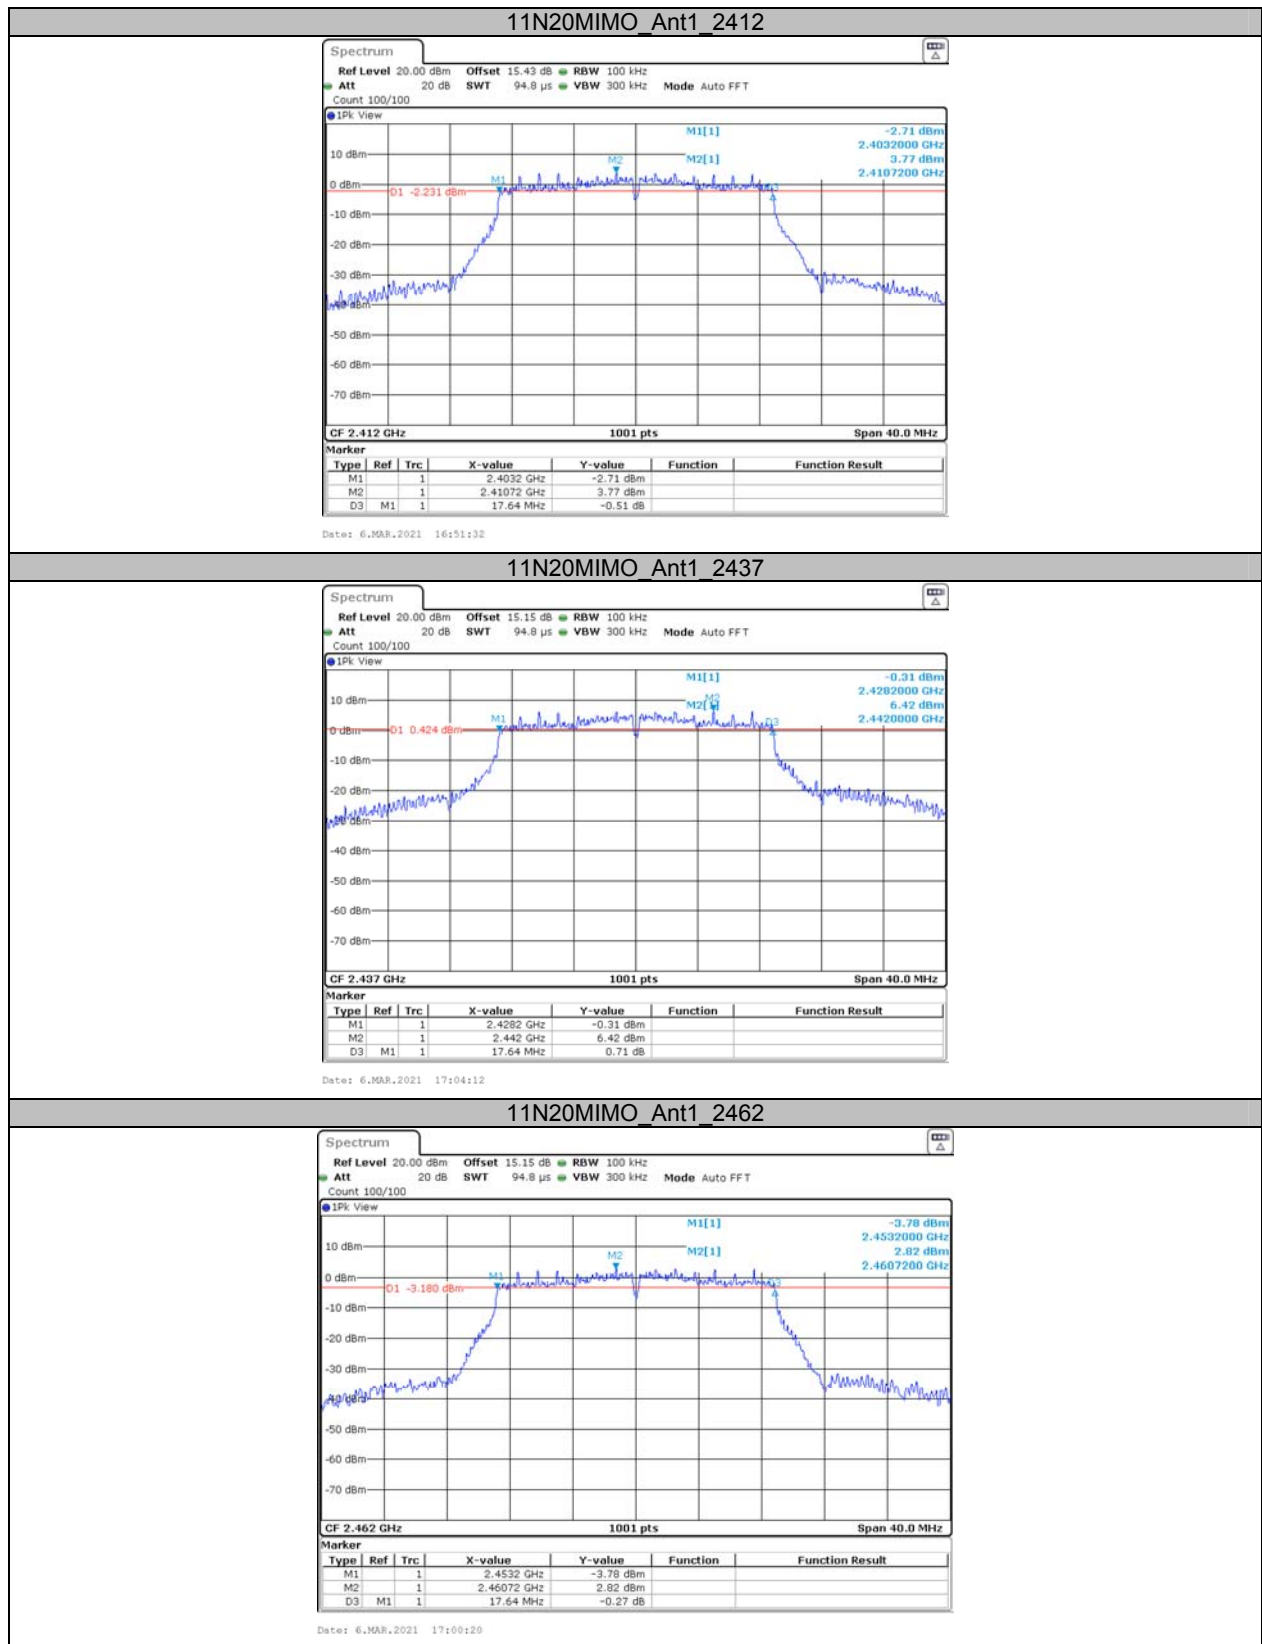


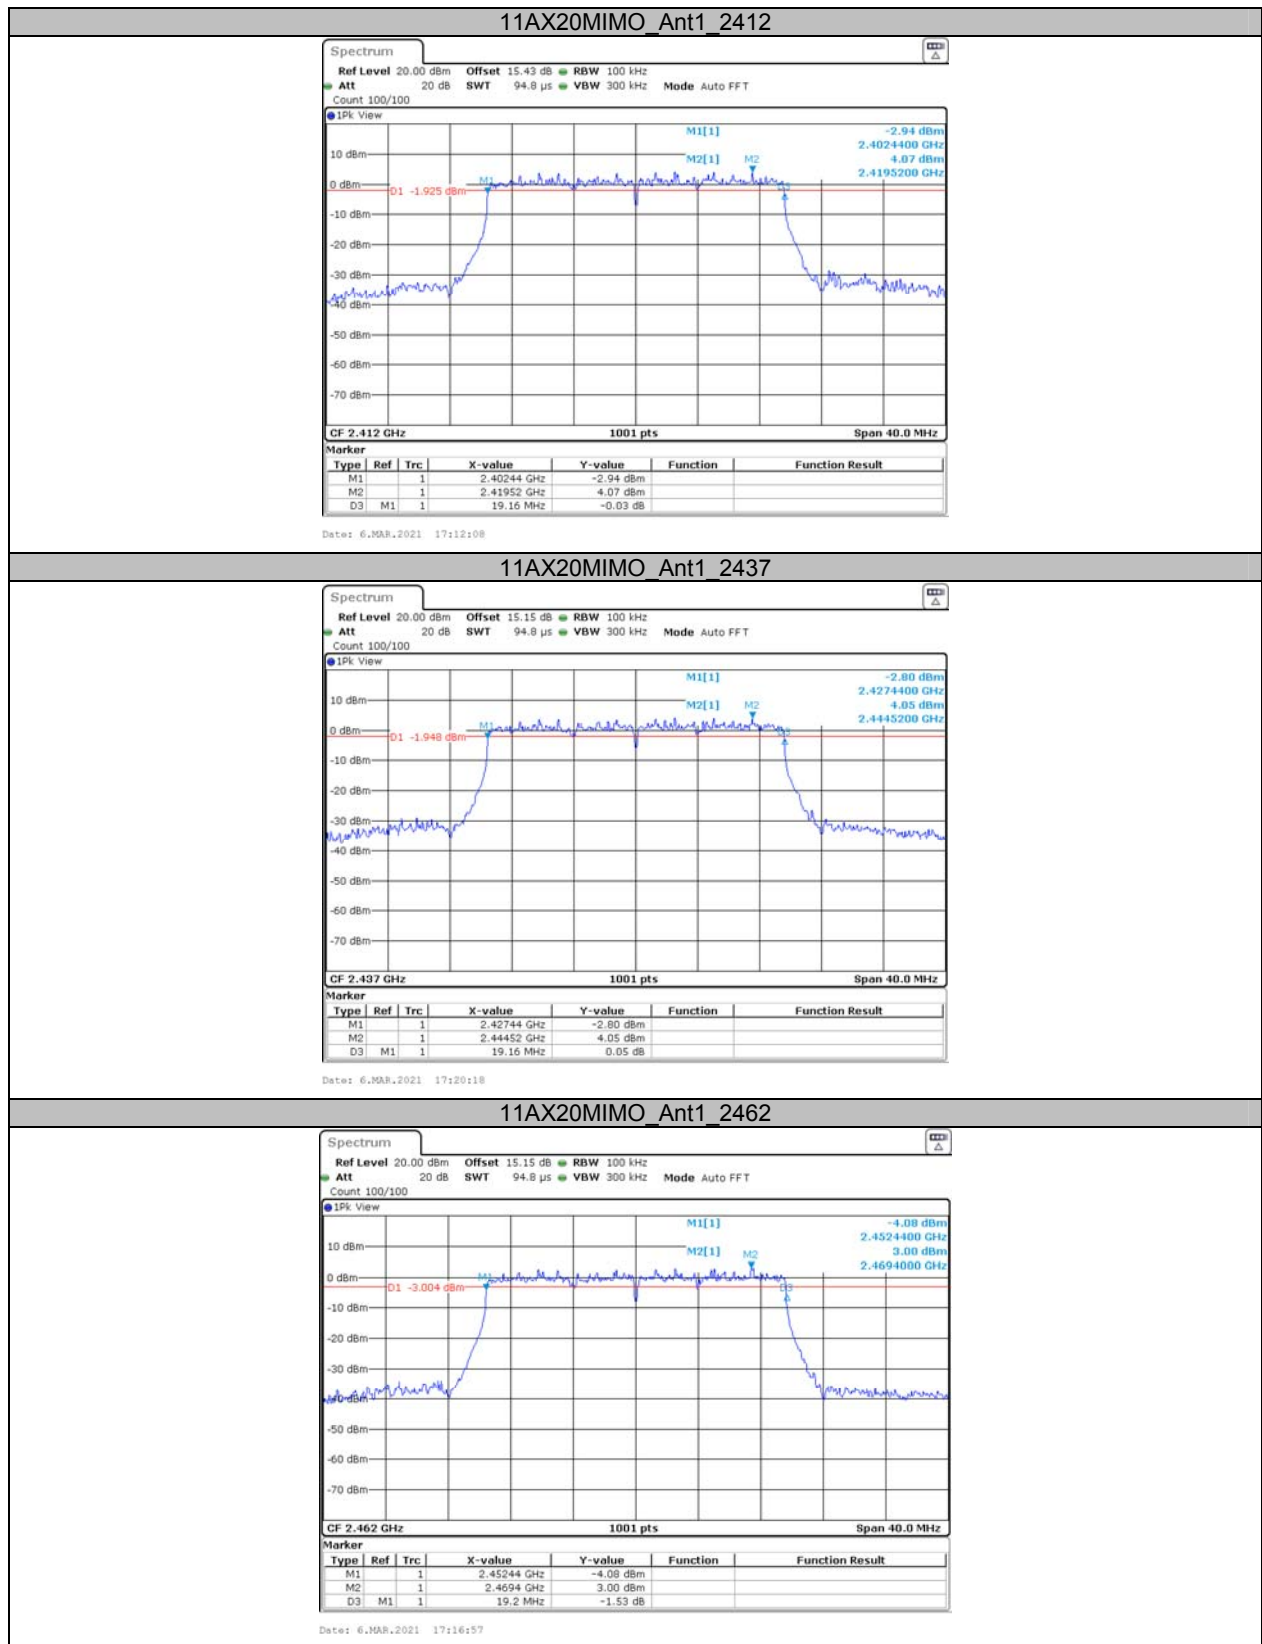


**Appendix B: Occupied Channel Bandwidth
Test Result**

TestMode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
11BMIMO	Ant1	2412	11.988	---	PASS
		2437	11.788	---	PASS
		2462	11.548	---	PASS
11GMIMO	Ant1	2412	19.261	---	PASS
		2437	18.901	---	PASS
		2462	18.022	---	PASS
11N20MIMO	Ant1	2412	18.781	---	PASS
		2437	19.381	---	PASS
		2462	18.741	---	PASS
11AX20MIMO	Ant1	2412	19.261	---	PASS
		2437	19.301	---	PASS
		2462	19.261	---	PASS

Test Graphs

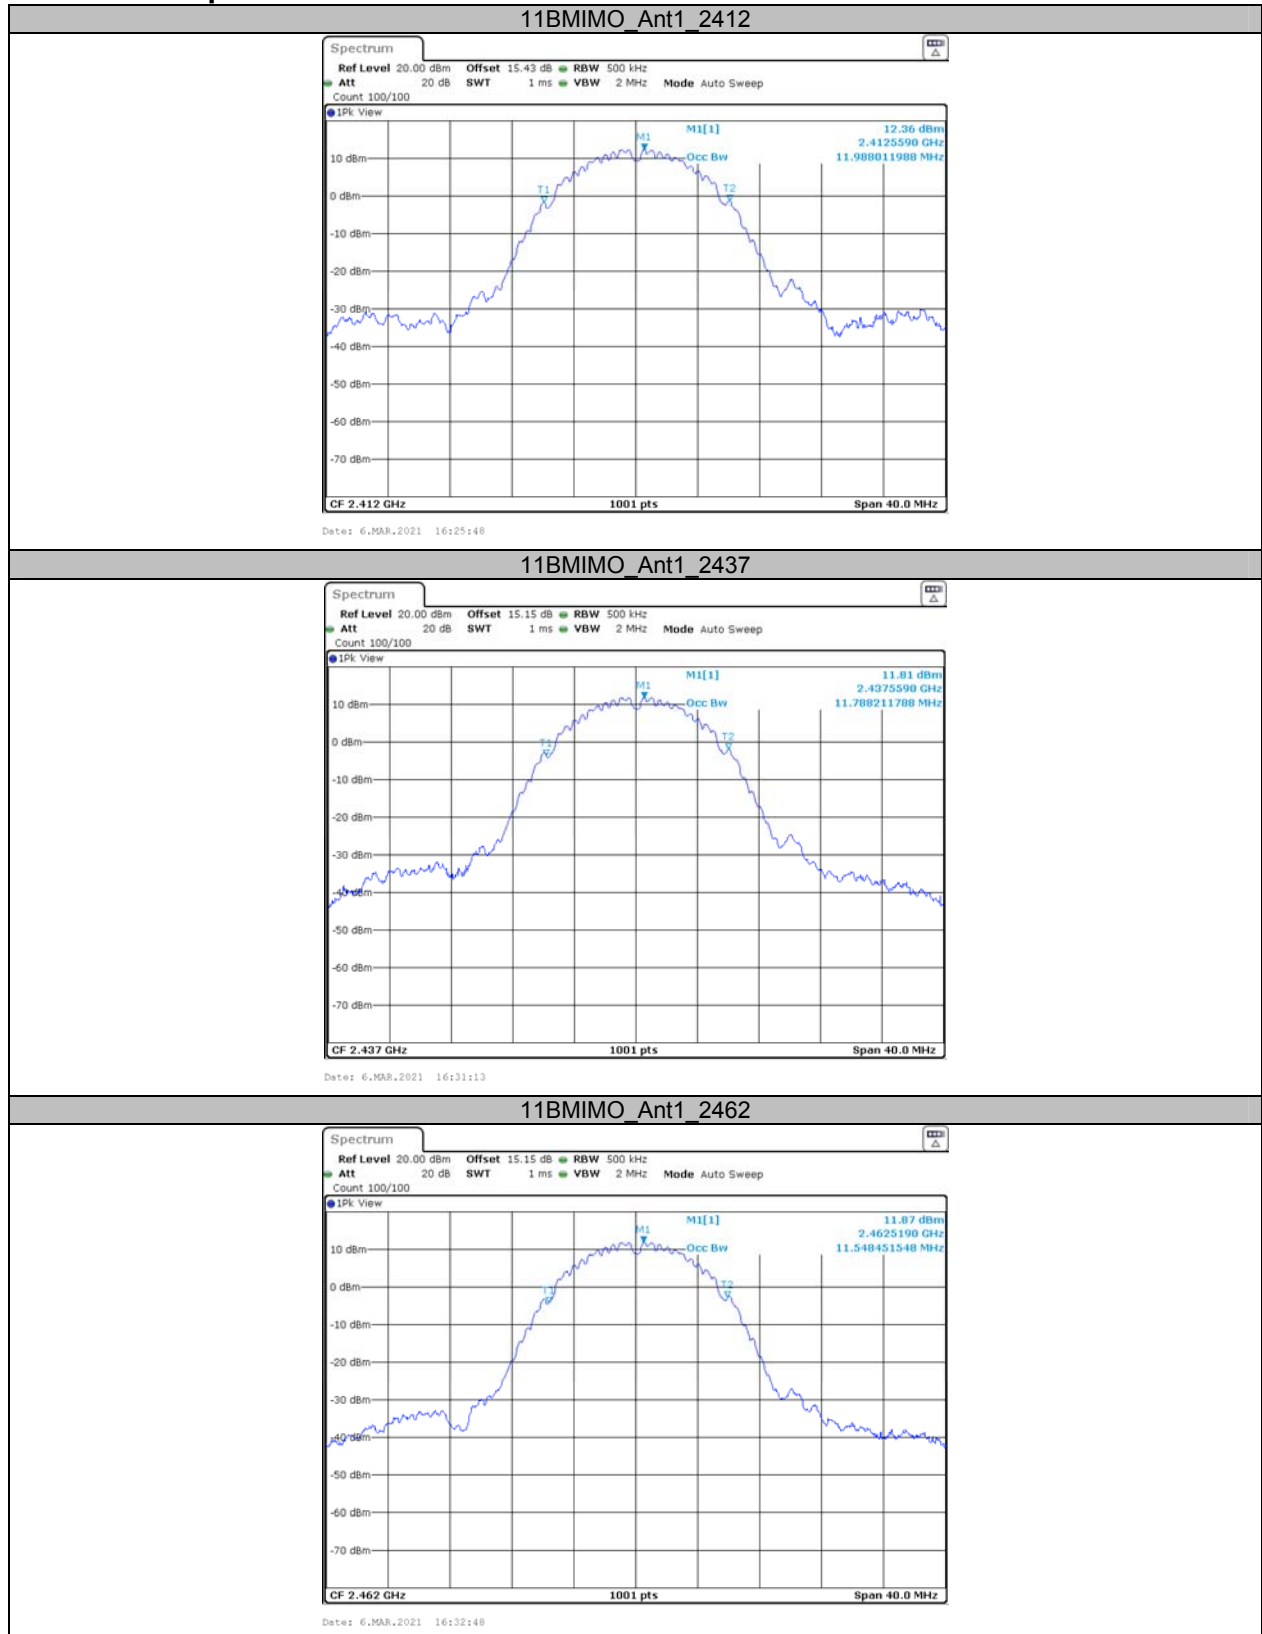


11GMIMO_Ant1_2412

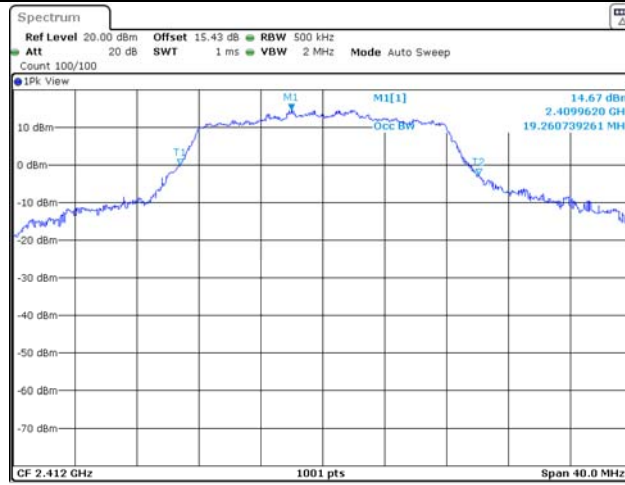

Date: 6.MAR.2021 16:37:06

11GMIMO_Ant1_2437

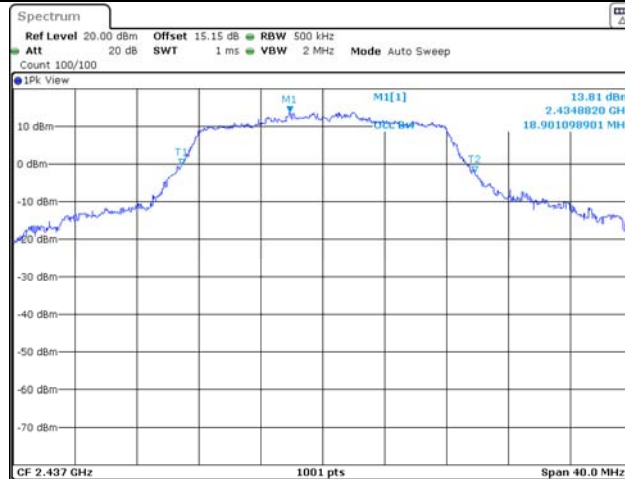


Date: 6.MAR.2021 16:38:59

11GMIMO_Ant1_2462




Date: 6.MAR.2021 16:41:03

11N20MIMO_Ant1_2412

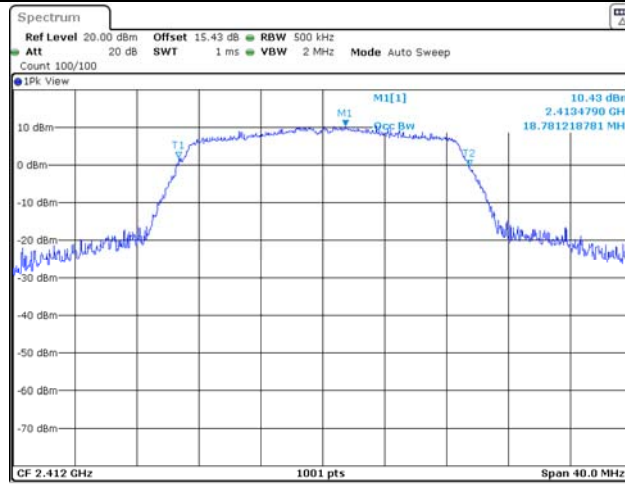


11N20MIMO_Ant1_2437

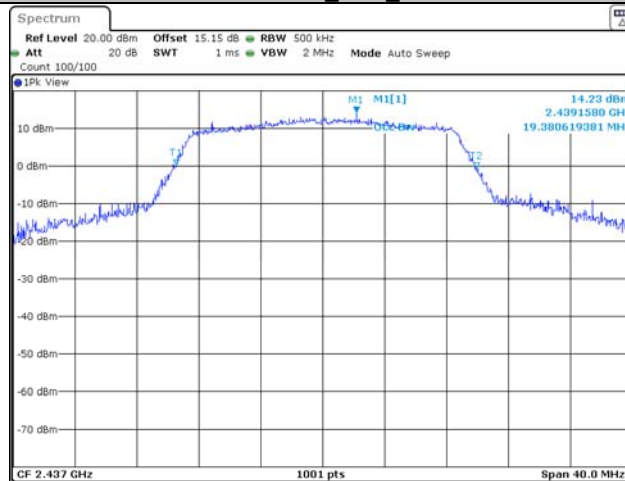

11N20MIMO_Ant1_2462



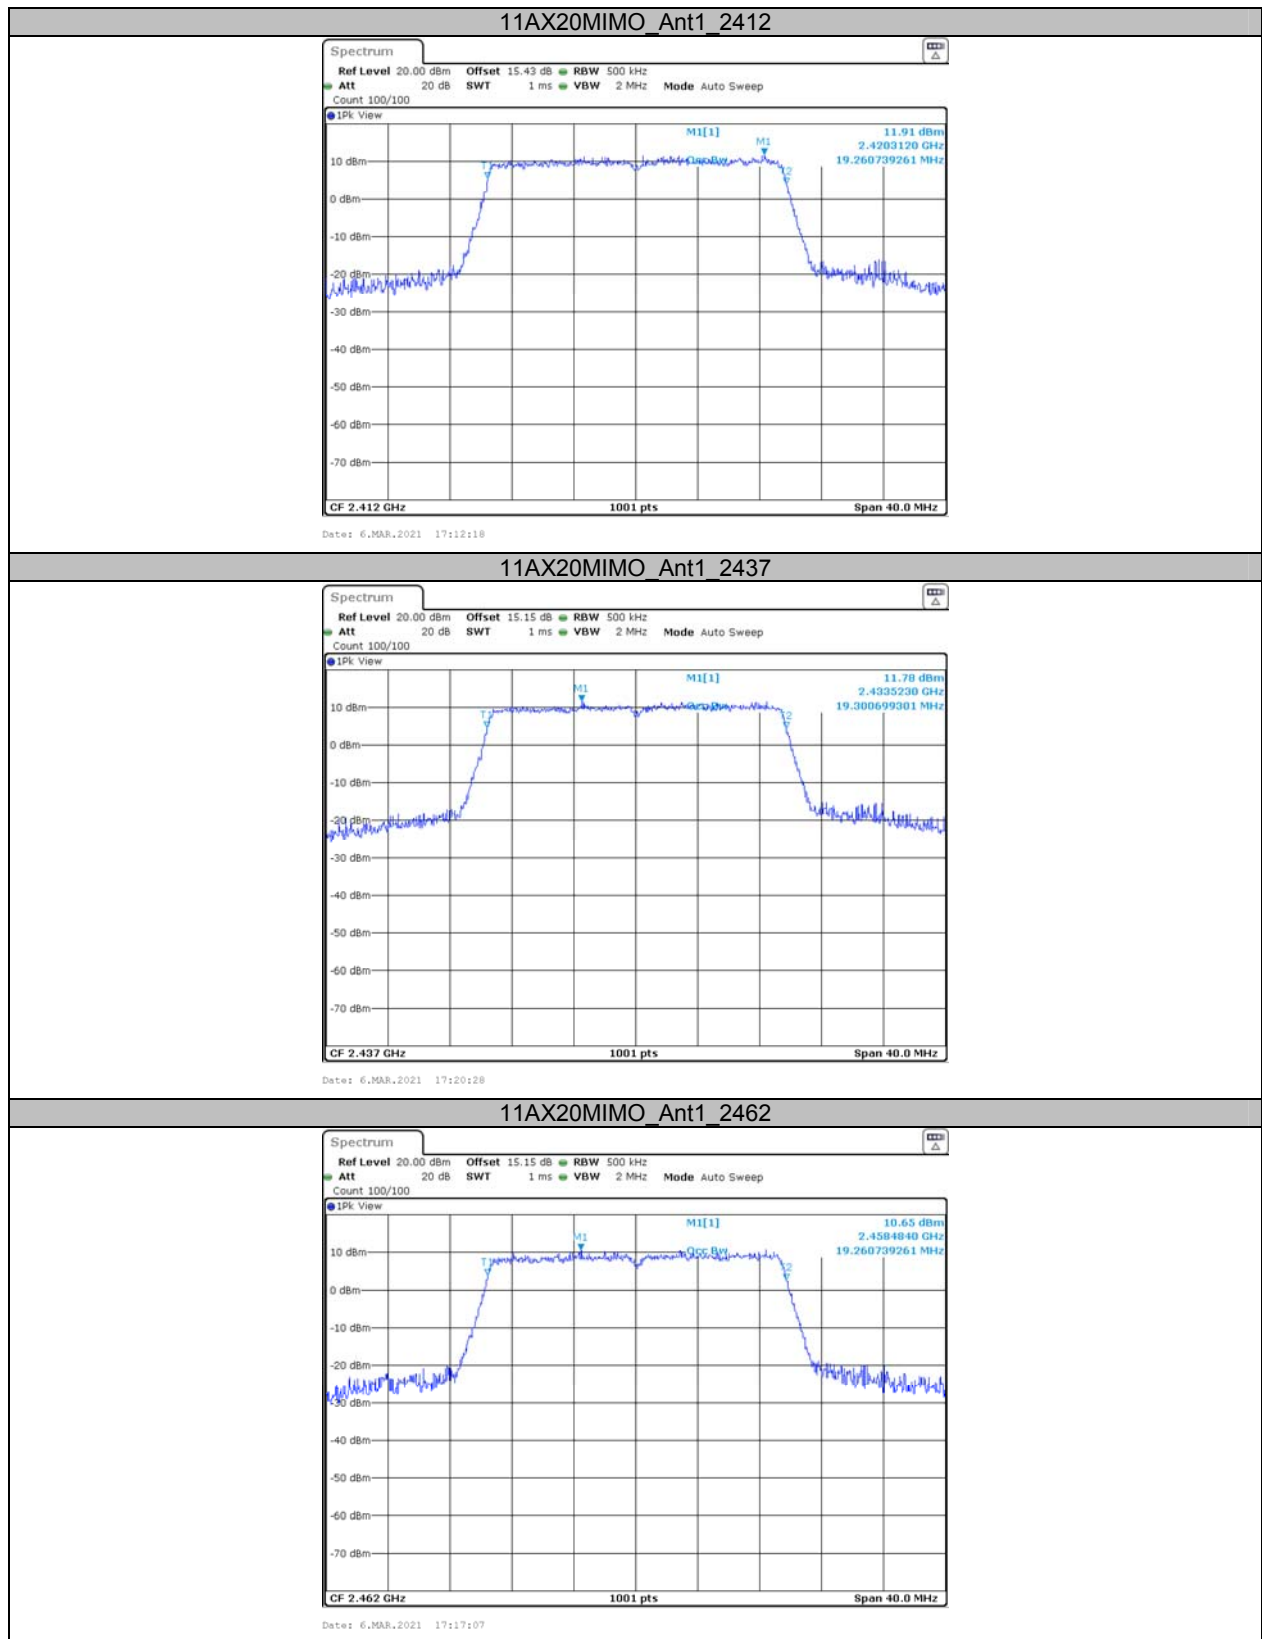

Appendix C: Maximum conducted output power Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11BMIMO	Ant1	2412	21.86	<=30	PASS
	Ant2	2412	20.99	<=30	PASS
	total	2412	24.5	<=30	PASS
	Ant1	2437	21.40	<=30	PASS
	Ant2	2437	20.73	<=30	PASS
	total	2437	24.1	<=30	PASS
	Ant1	2462	21.60	<=30	PASS
	Ant2	2462	20.89	<=30	PASS
11GMIMO	total	2462	24.3	<=30	PASS
	Ant1	2412	23.04	<=30	PASS
	Ant2	2412	22.37	<=30	PASS
	total	2412	25.7	<=30	PASS
	Ant1	2437	23.09	<=30	PASS
	Ant2	2437	22.33	<=30	PASS
	total	2437	25.7	<=30	PASS
	Ant1	2462	21.13	<=30	PASS
11N20MIMO	Ant2	2462	21.76	<=30	PASS
	total	2462	24.5	<=30	PASS
	Ant1	2412	20.23	<=30	PASS
	Ant2	2412	20.92	<=30	PASS
	total	2412	23.6	<=30	PASS
	Ant1	2437	23.18	<=30	PASS
	Ant2	2437	22.84	<=30	PASS
	total	2437	25.8	<=30	PASS
11AX20MIMO	Ant1	2462	22.61	<=30	PASS
	Ant2	2462	22.23	<=30	PASS
	total	2462	25.4	<=30	PASS
	Ant1	2412	20.26	<=30	PASS
	Ant2	2412	20.13	<=30	PASS
	total	2412	23.2	<=30	PASS
	Ant1	2437	21.19	<=30	PASS
	Ant2	2437	20.39	<=30	PASS
	total	2437	23.8	<=30	PASS
	Ant1	2462	19.72	<=30	PASS
	Ant2	2462	19.99	<=30	PASS
	total	2462	22.9	<=30	PASS

Note: EUT employ Cyclic Delay Diversity
 Directional gain= $G_{ANT} + \text{Array Gain}$
 For power measurements,
 Array Gain=0dB for $N_{ANT} \leq 4$, so
 Directional gain=4dBi<6dBi

Appendix D: Maximum power spectral density Test Result

TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11BMIMO	Ant1	2412	-0.24	≤ 7	PASS
	Ant2	2412	-1.61	≤ 7	PASS
	total	2412	2.14	≤ 7	PASS
	Ant1	2437	-1.85	≤ 7	PASS
	Ant2	2437	-2.09	≤ 7	PASS
	total	2437	1.04	≤ 7	PASS
	Ant1	2462	-2.31	≤ 7	PASS
	Ant2	2462	-1.96	≤ 7	PASS
11GMIMO	total	2462	0.88	≤ 7	PASS
	Ant1	2412	-4.72	≤ 7	PASS
	Ant2	2412	-5.94	≤ 7	PASS
	total	2412	-2.28	≤ 7	PASS
	Ant1	2437	-5.03	≤ 7	PASS
	Ant2	2437	-6.97	≤ 7	PASS
	total	2437	-2.88	≤ 7	PASS
	Ant1	2462	-7.65	≤ 7	PASS
11N20MIMO	Ant2	2462	-7.1	≤ 7	PASS
	total	2462	-4.36	≤ 7	PASS
	Ant1	2412	-8.56	≤ 7	PASS
	Ant2	2412	-9.09	≤ 7	PASS
	total	2412	-5.81	≤ 7	PASS
	Ant1	2437	-5.45	≤ 7	PASS
	Ant2	2437	-6.85	≤ 7	PASS
	total	2437	-3.25	≤ 7	PASS
11AX20MIMO	Ant1	2462	-9.2	≤ 7	PASS
	Ant2	2462	-9.42	≤ 7	PASS
	total	2462	-6.30	≤ 7	PASS
	Ant1	2412	-10.42	≤ 7	PASS
	Ant2	2412	-11.67	≤ 7	PASS
	total	2412	-7.99	≤ 7	PASS
	Ant1	2437	-10.84	≤ 7	PASS
	Ant2	2437	-11.83	≤ 7	PASS
	total	2437	-8.30	≤ 7	PASS
	Ant1	2462	-11.96	≤ 7	PASS
	Ant2	2462	-11.71	≤ 7	PASS
	total	2462	-8.82	≤ 7	PASS

Note: EUT employ Cyclic Delay Diversity


Directional gain= G_{ANT} + Array Gain

For power spectral density measurements,


Array Gain= $10 \cdot \log(N_{ANT})$ dB, so

Directional gain=4dBi+ $10 \cdot \log(2)$ dB=7dBi>6dBi, the limit should reduced 1dB


Test Graphs

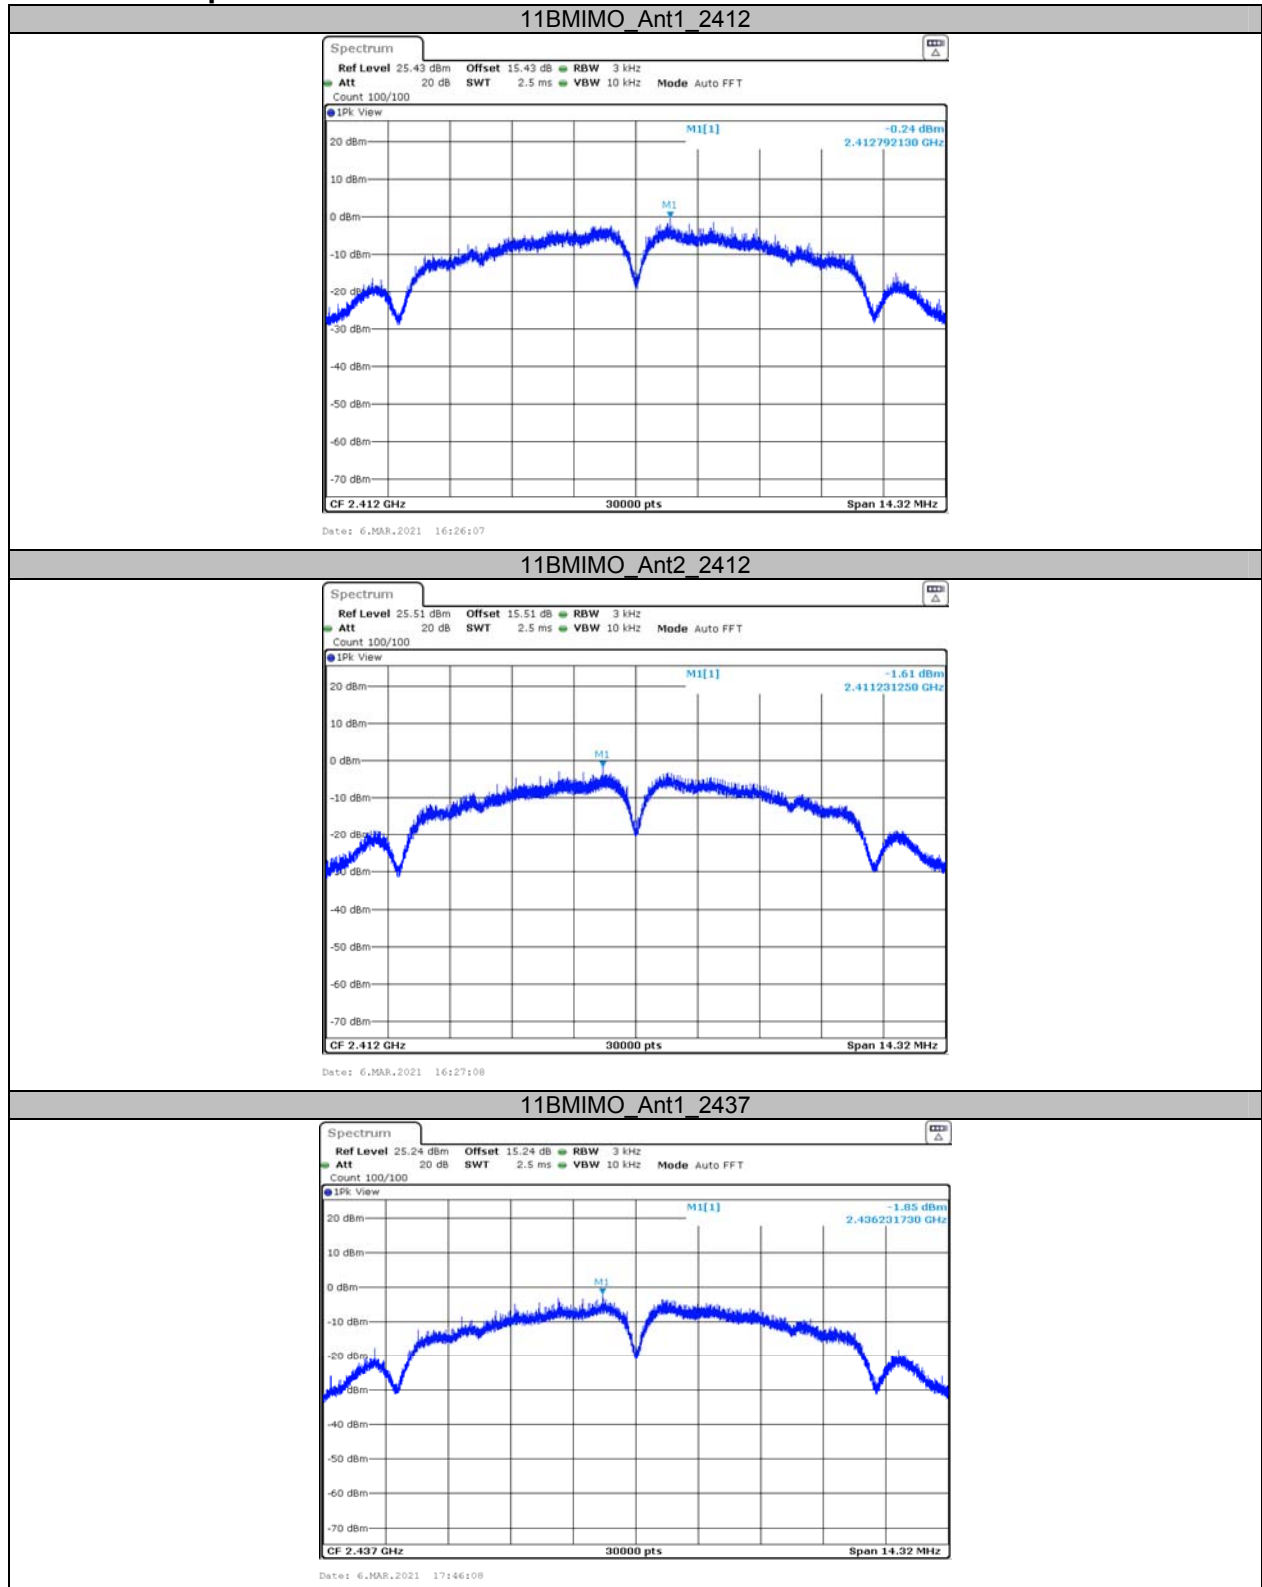


11BMIMO_Ant2_2437

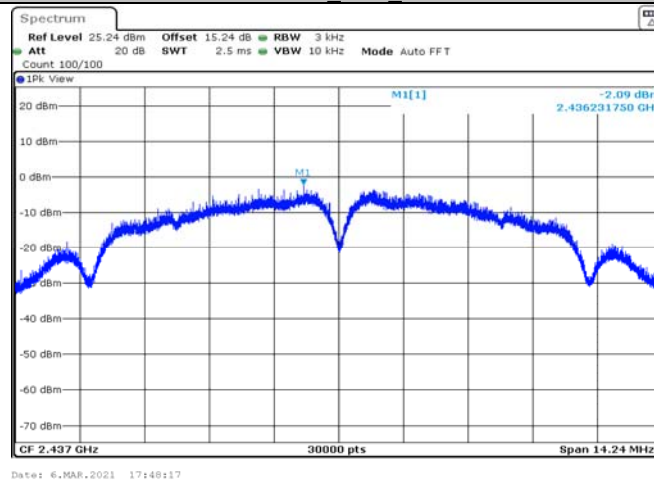


11BMIMO_Ant1_2462

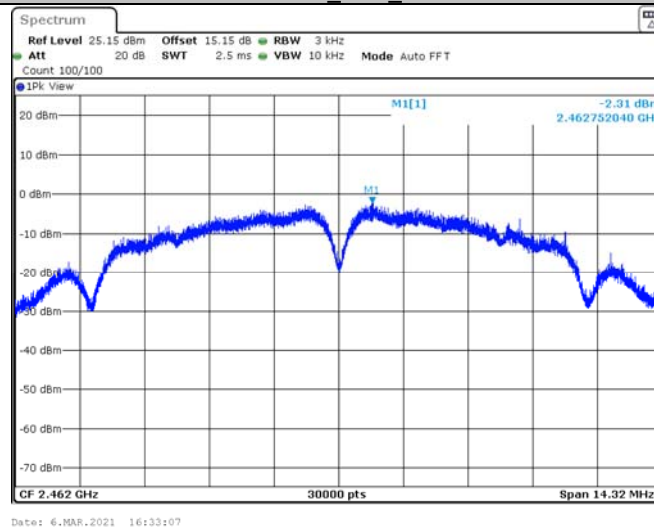

11BMIMO_Ant2_2462

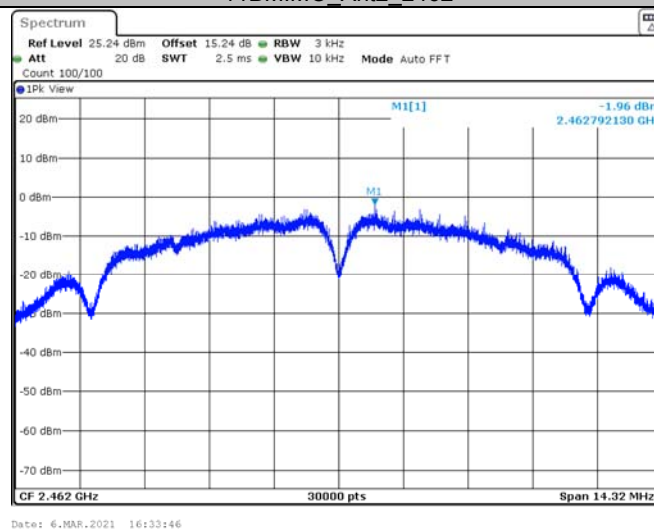


11GMIMO_Ant1_2412

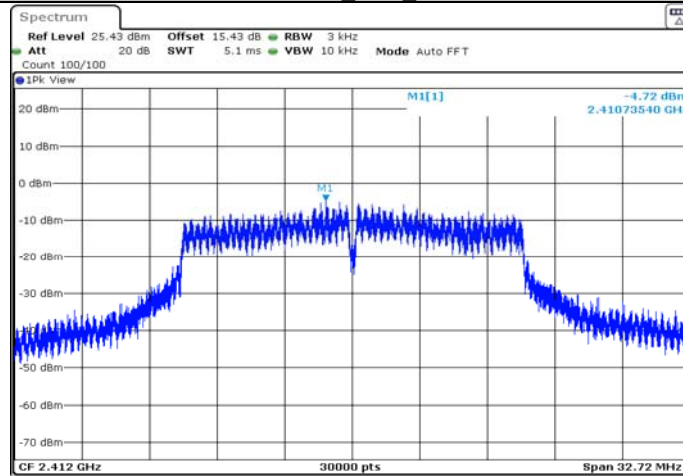


Date: 6.MAR.2021 17:36:00

11GMIMO_Ant2_2412

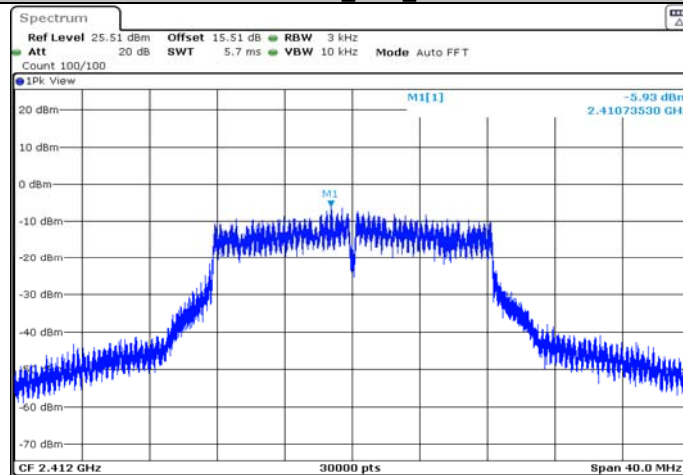


Date: 6.MAR.2021 17:39:28


11GMIMO_Ant1_2437

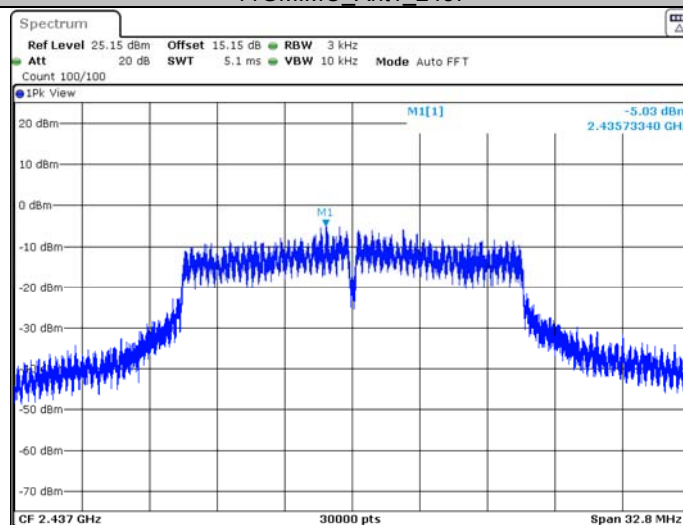

Date: 6.MAR.2021 16:39:18

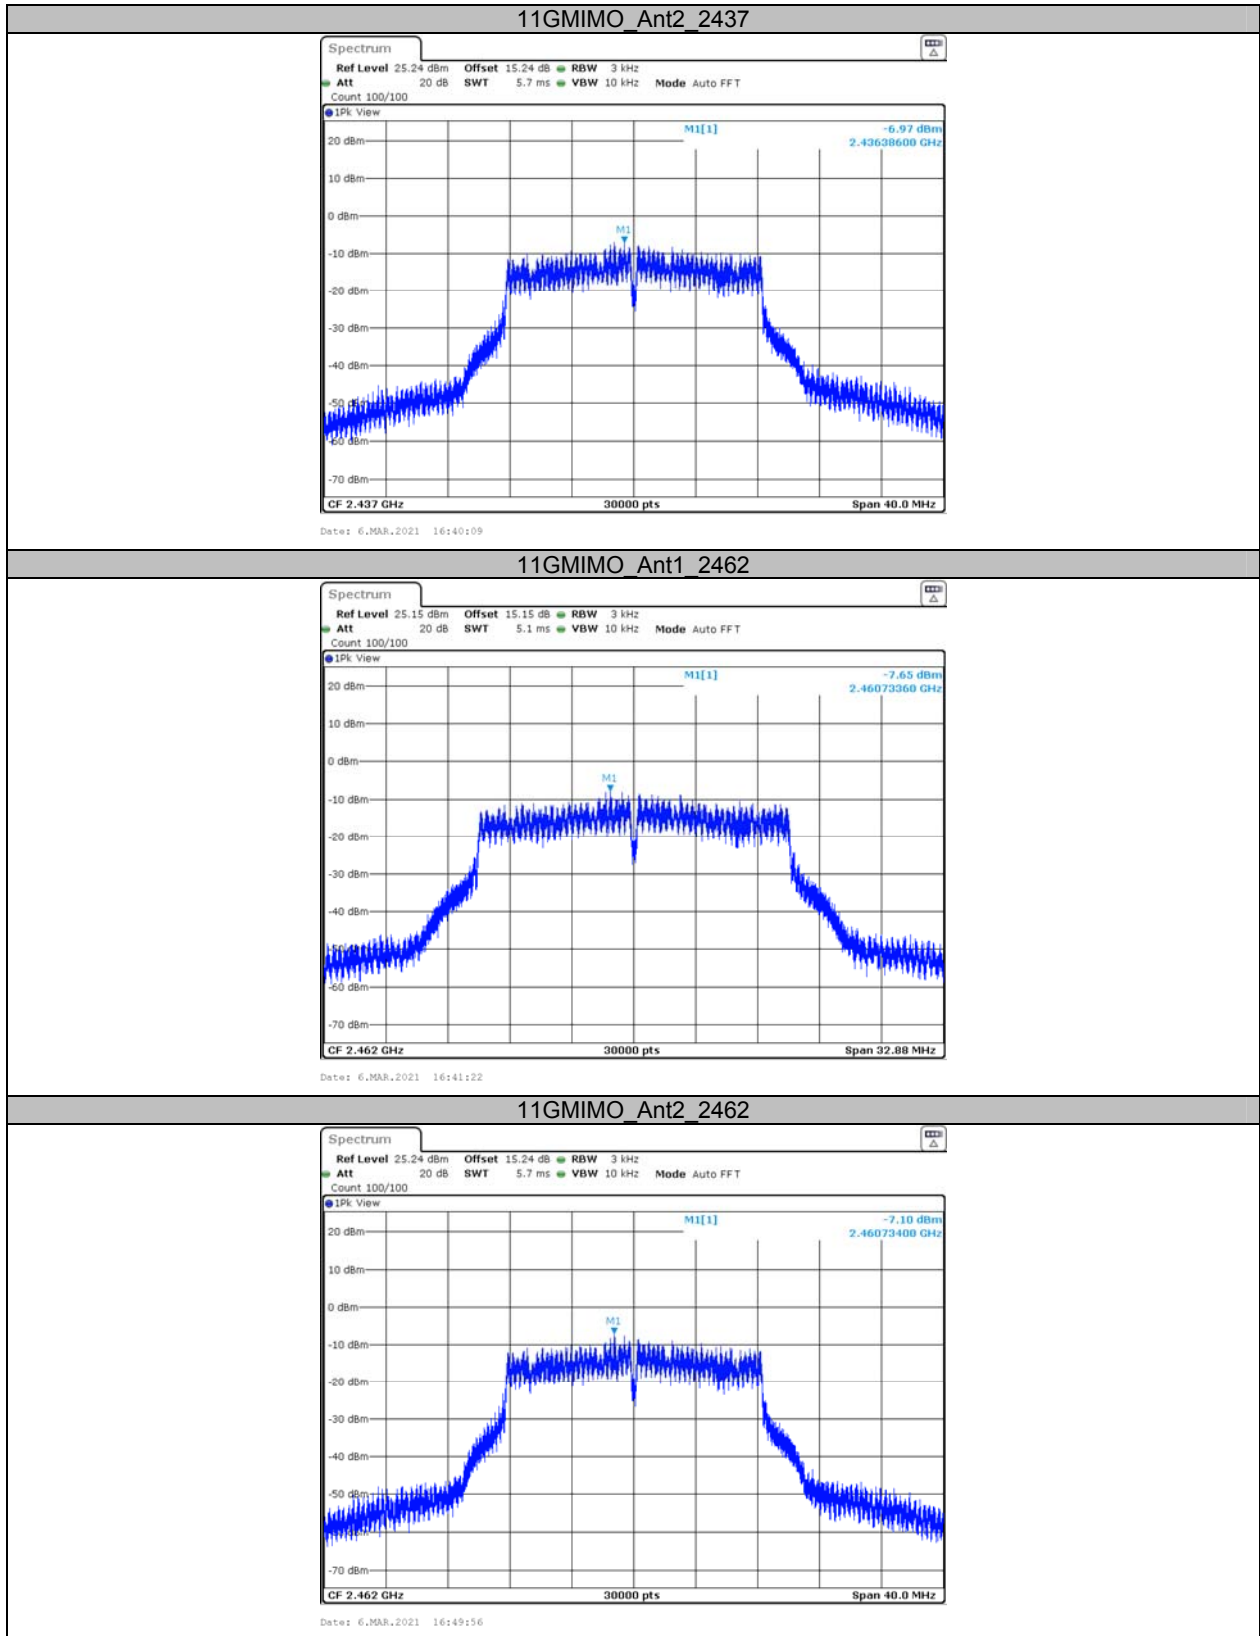


11N20MIMO_Ant1_2412

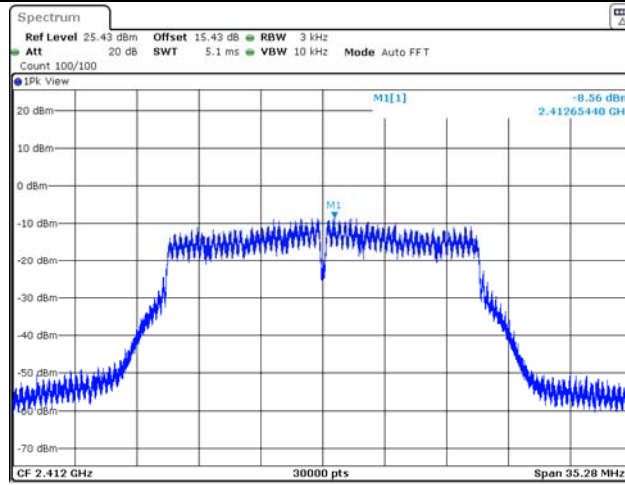


Date: 6.MAR.2021 17:31:14

11N20MIMO_Ant2_2412

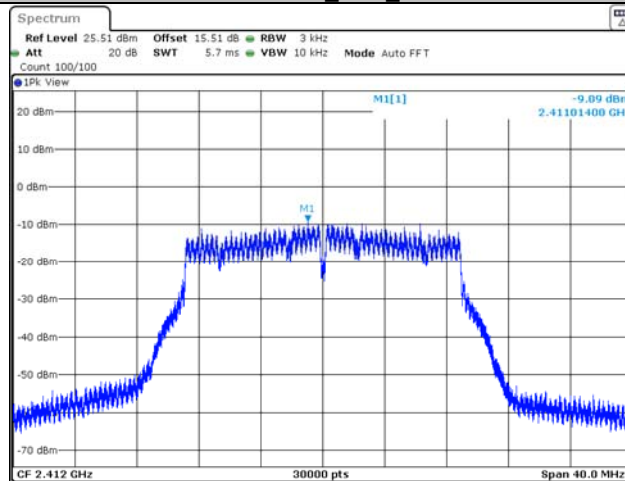



Date: 6.MAR.2021 17:32:18


11N20MIMO_Ant1_2437

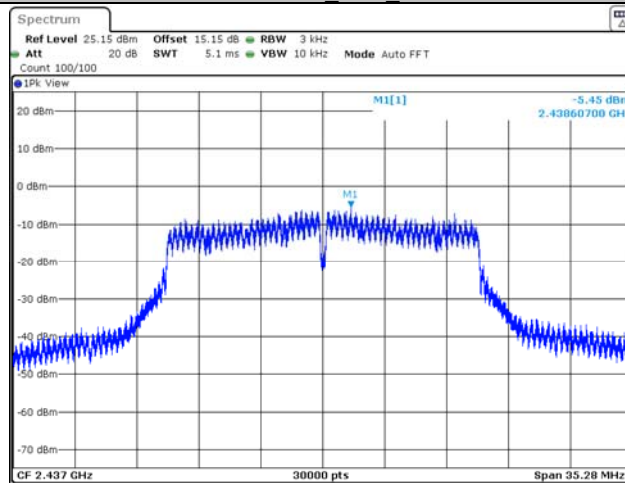

Date: 6.MAR.2021 17:29:36

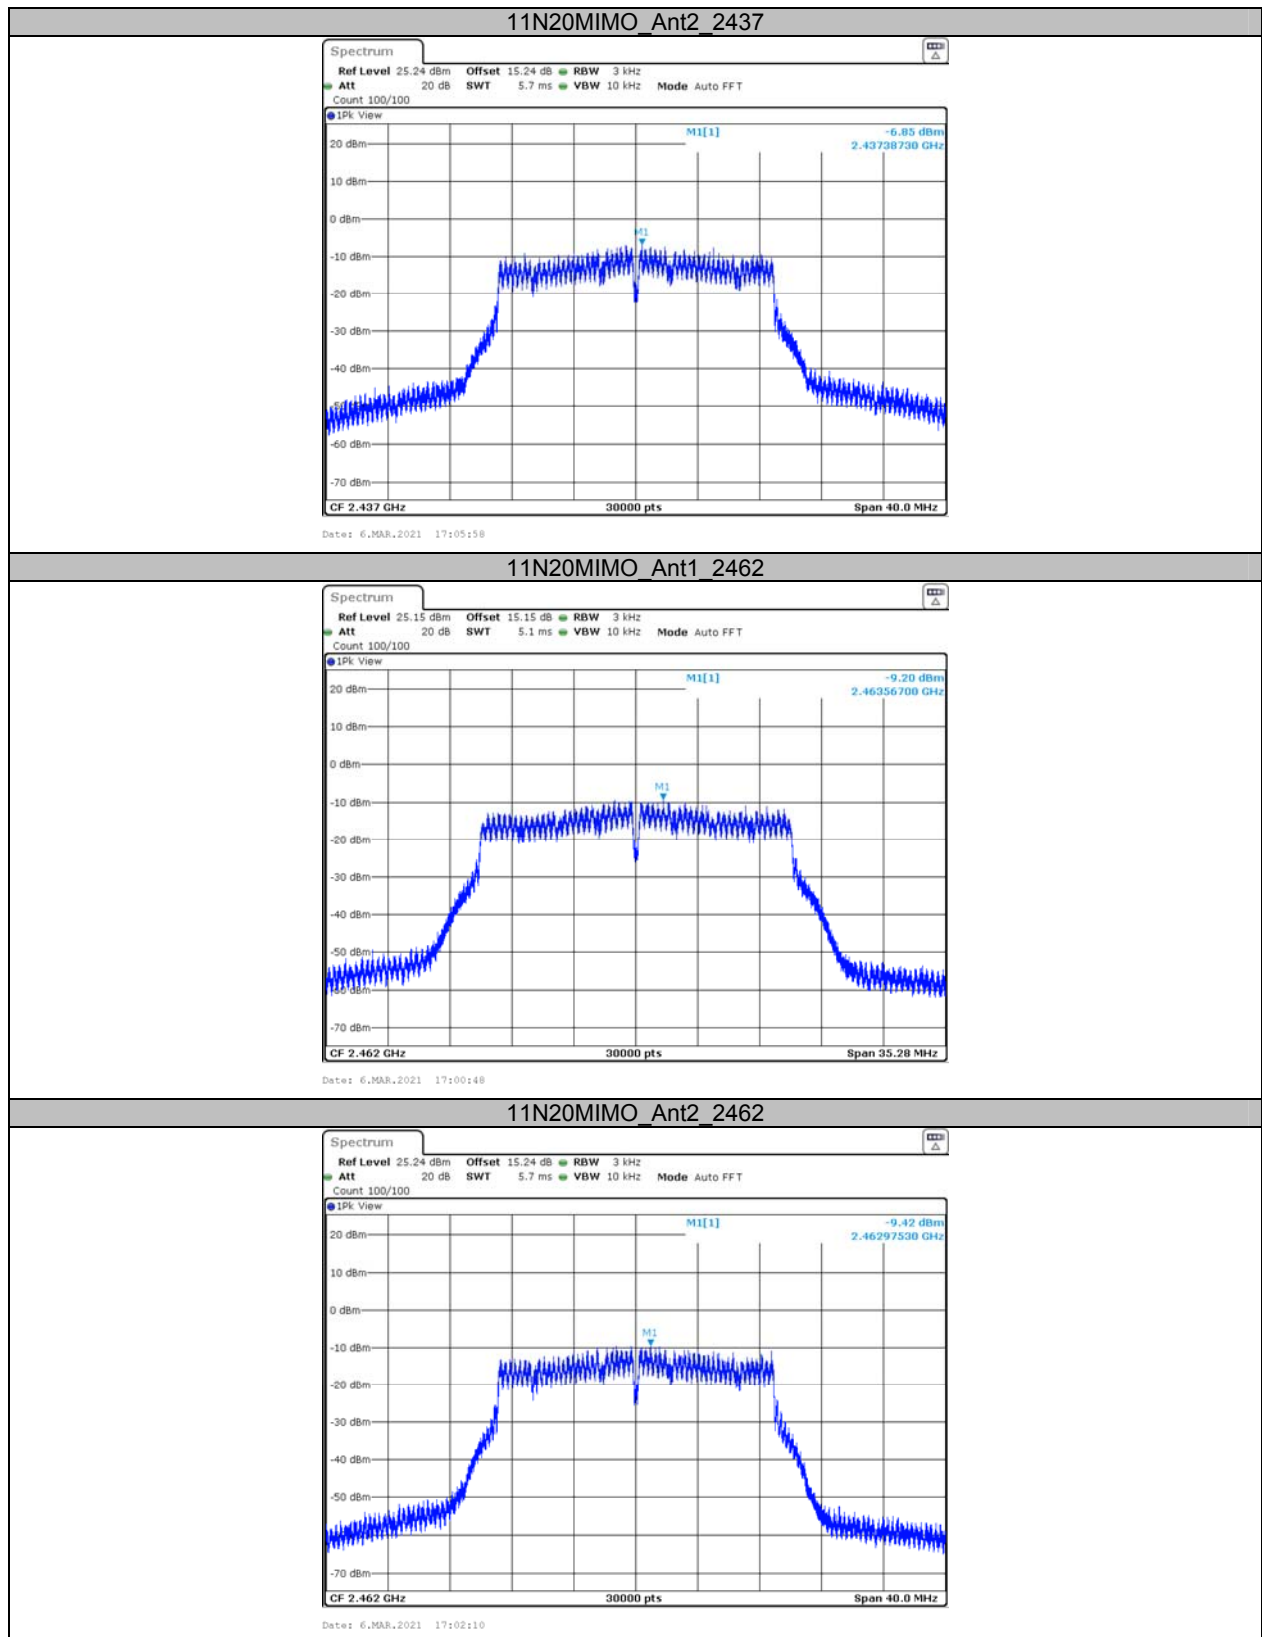


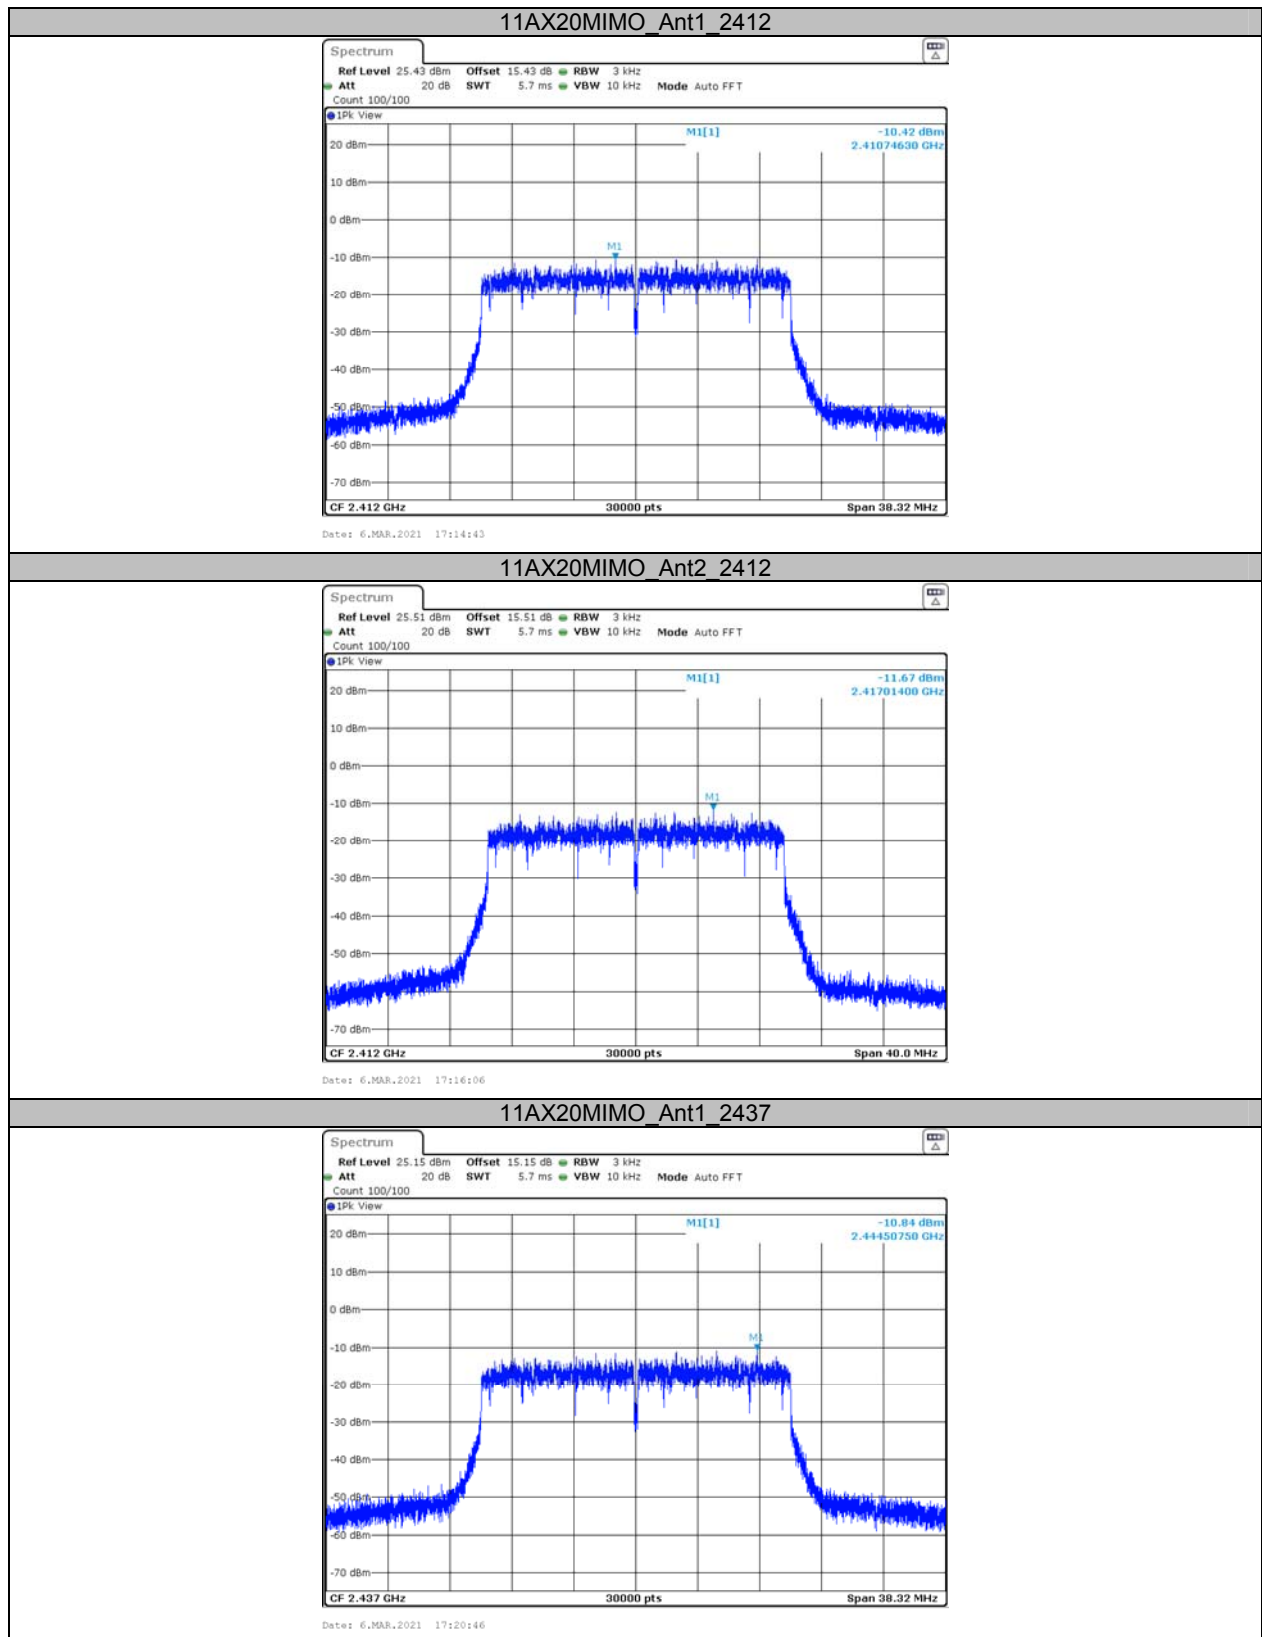

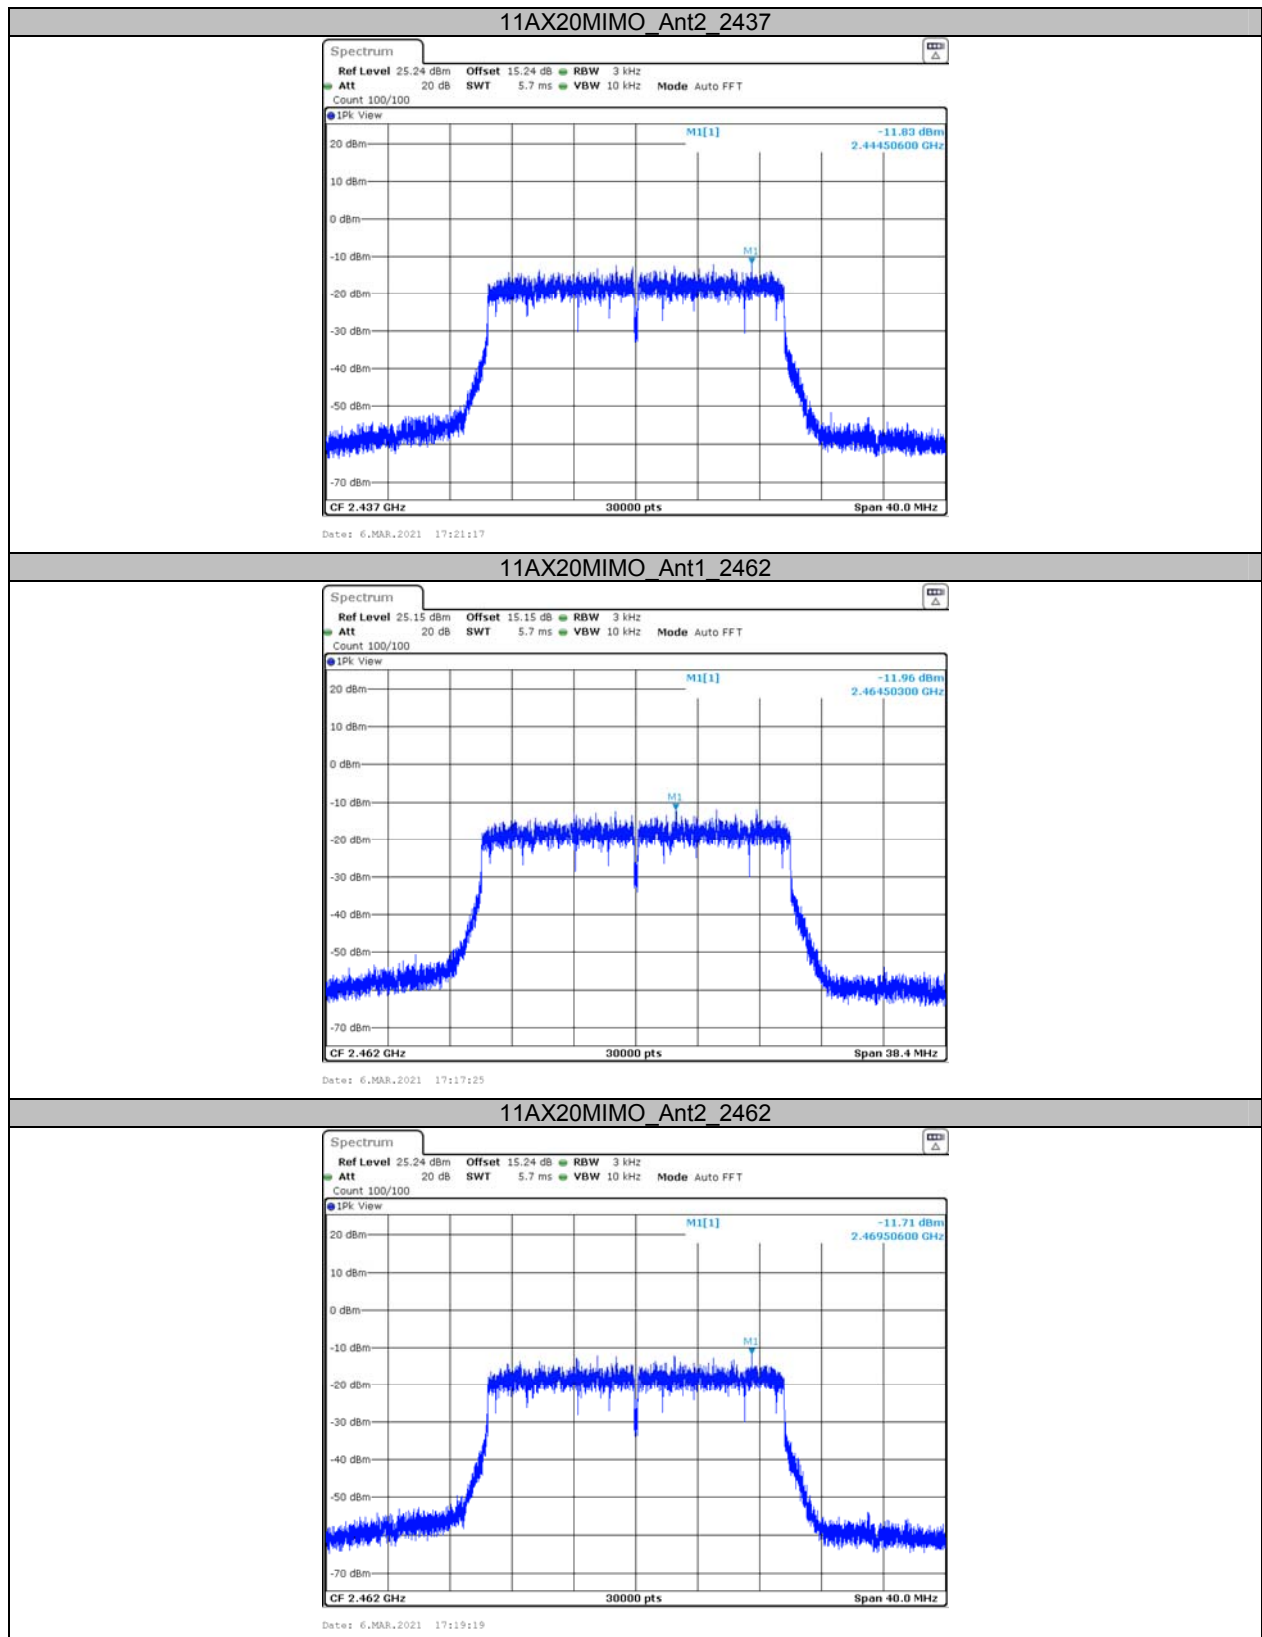


Appendix E: Band edge measurements


Test Graphs

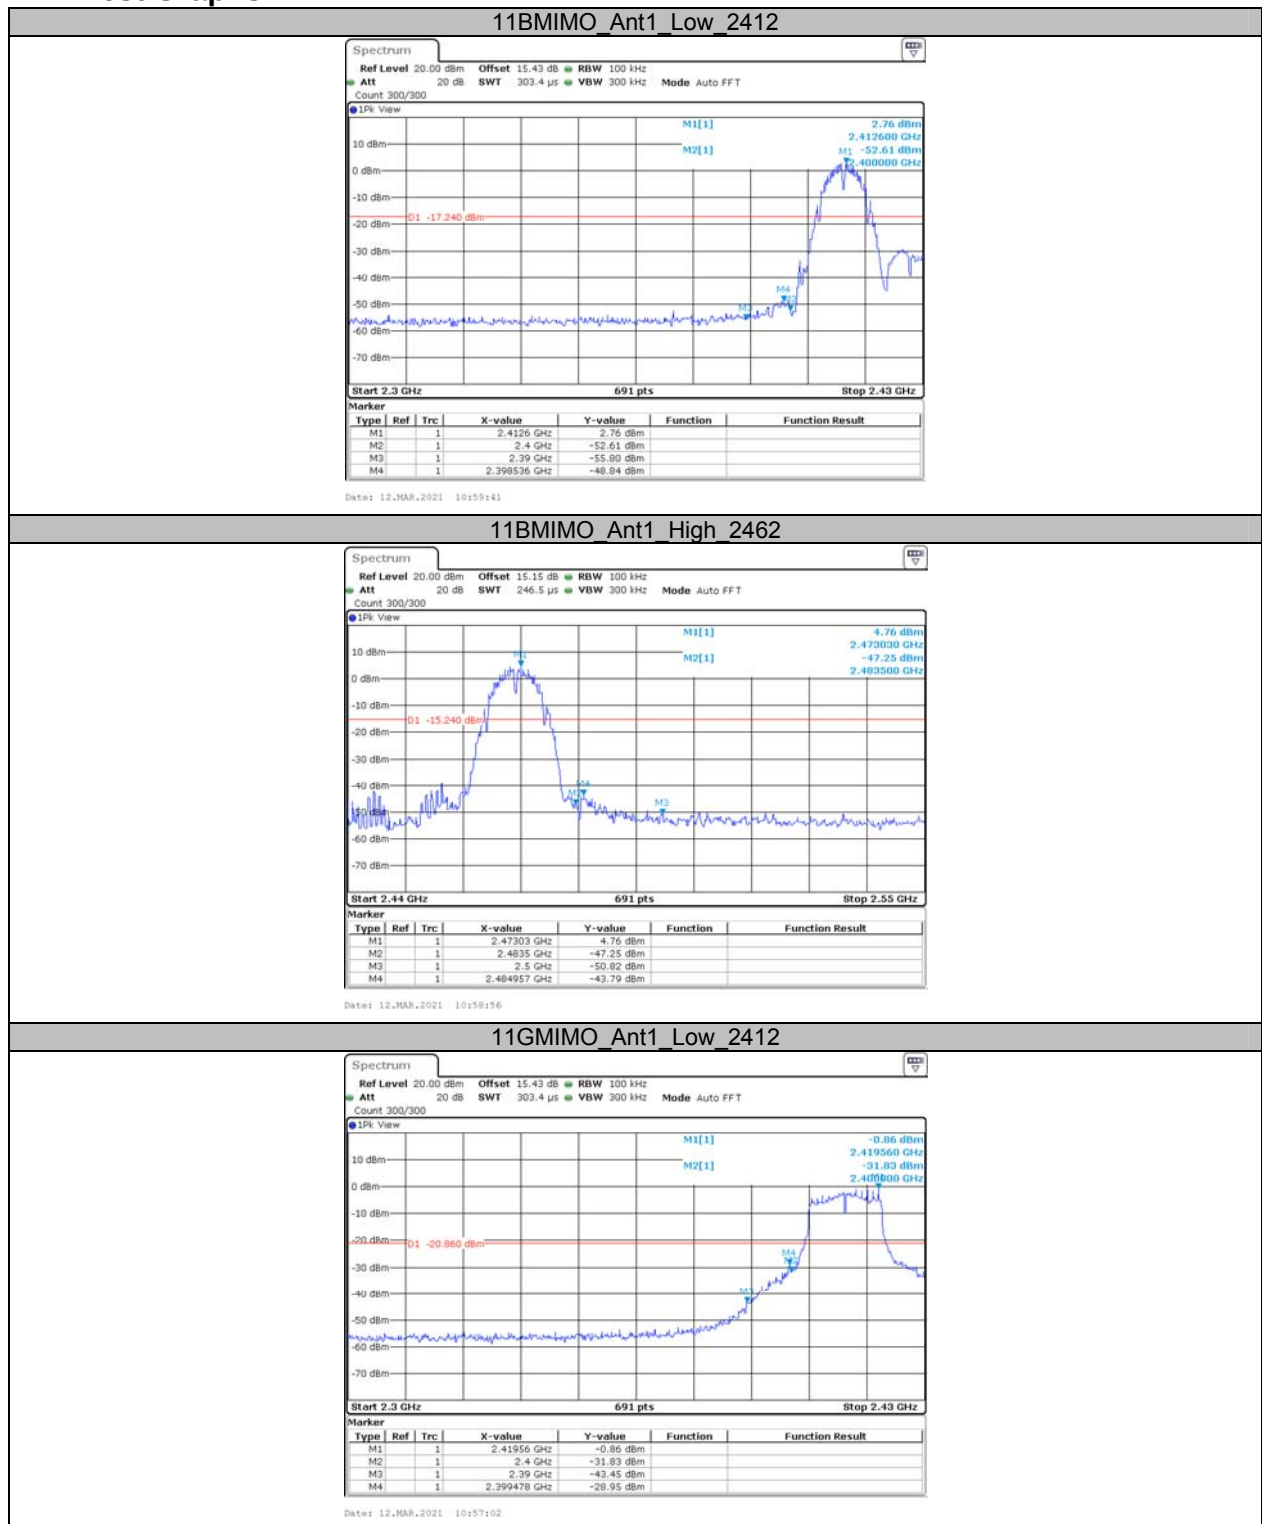


11GMIMO_Ant1_High_2462

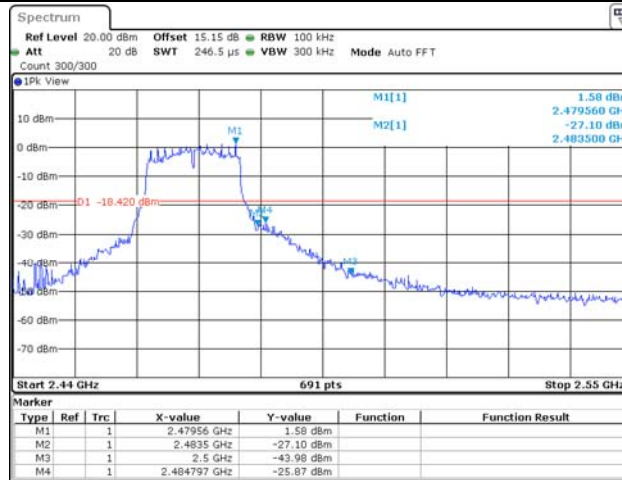


11N20MIMO_Ant1_Low_2412

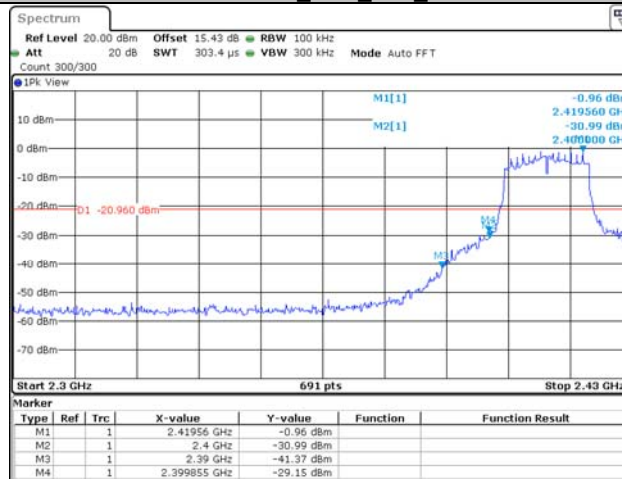

11N20MIMO_Ant1_High_2462

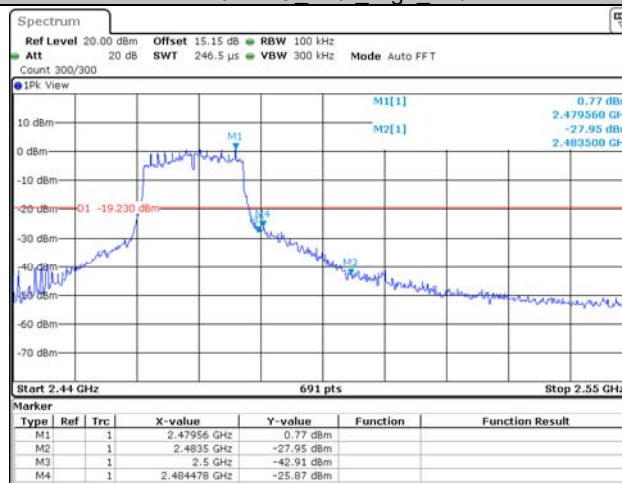


11AX20MIMO Ant1 Low 2412

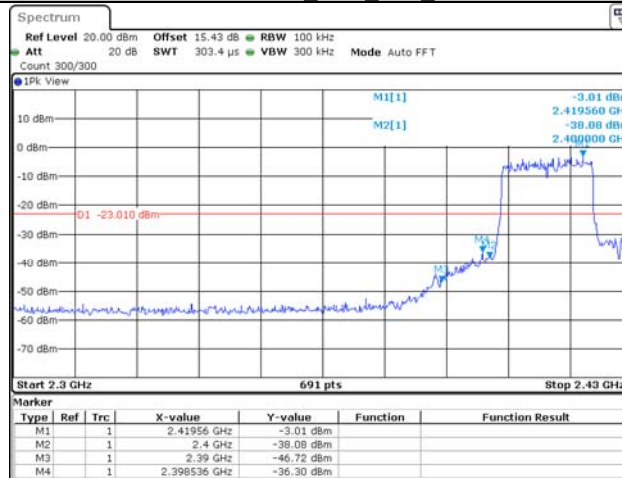

Date: 12, MAR, 2021 11:03:23

11AX20MIMO Ant1 High 2462

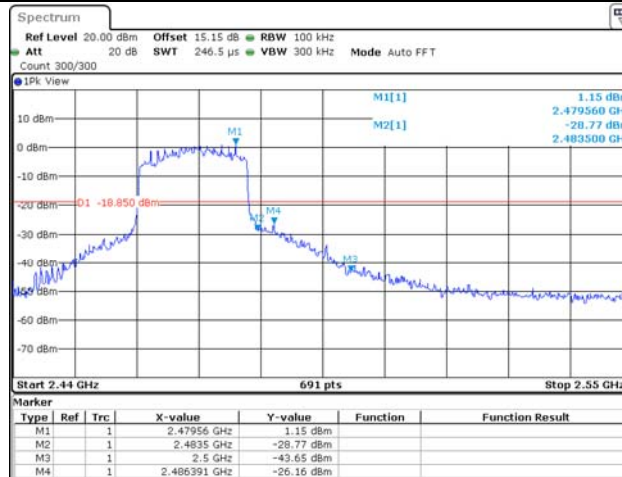


Date: 12, MAR, 2021 11:04:13

**Appendix F: Duty Cycle
Test Result**

TestMode	Antenna	Channel	TransmissionDuration [ms]	Transmission Period [ms]	Duty Cycle [%]
11BMIMO	Ant1	2412	8.38	8.50	98.59
		2437	8.38	8.52	98.36
		2462	8.38	8.52	98.36
11GMIMO	Ant1	2412	1.38	1.50	92.00
		2437	1.37	1.49	91.95
		2462	1.37	1.49	91.95
11N20MIMO	Ant1	2412	1.29	1.41	91.49
		2437	1.29	1.41	91.49
		2462	1.29	1.41	91.49
11AX20MIMO	Ant1	2412	1.00	1.12	89.29
		2437	1.00	1.12	89.29
		2462	1.00	1.12	89.29


Test Graphs

11BMIMO_Ant1_2412

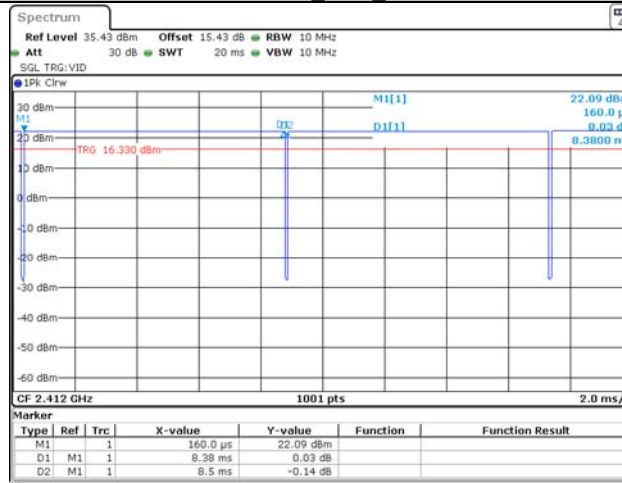


Date: 6.MAR.2021 16:25:30

11BMIMO_Ant1_2437

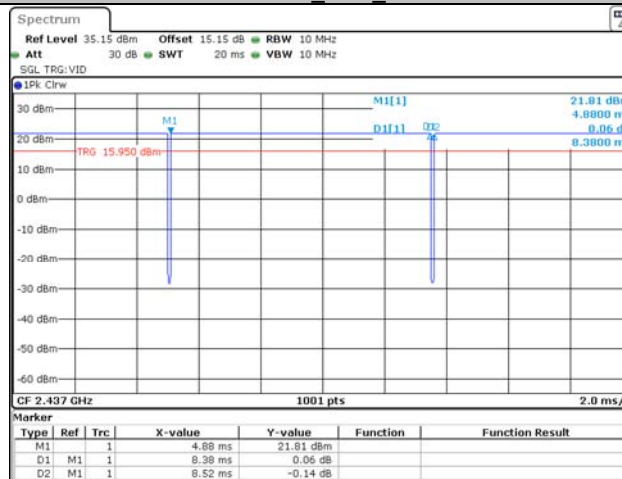

Date: 6.MAR.2021 16:30:55


11BMIMO_Ant1_2462

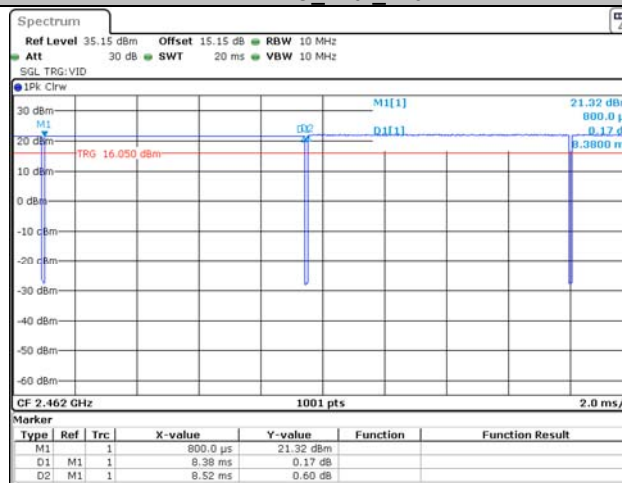


Date: 6.MAR.2021 16:32:30




11N20MIMO_Ant1_2412

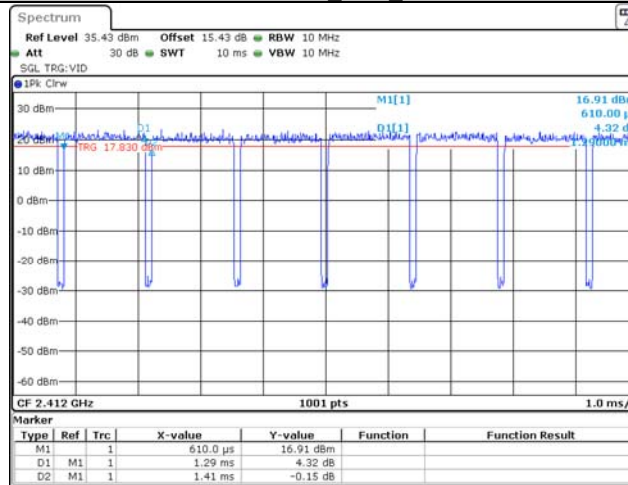


11N20MIMO_Ant1_2437

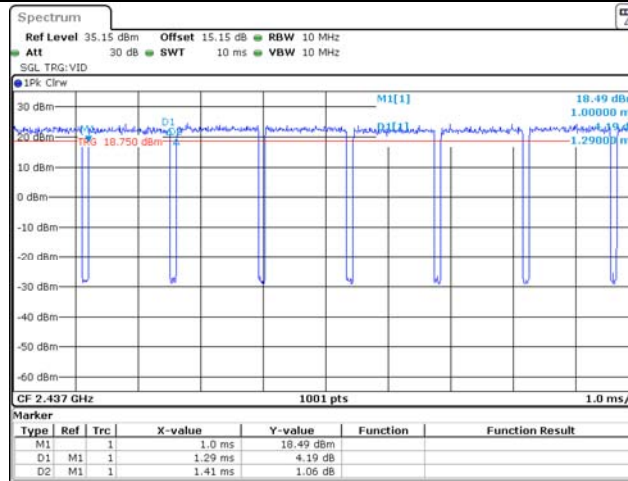


11N20MIMO_Ant1_2462

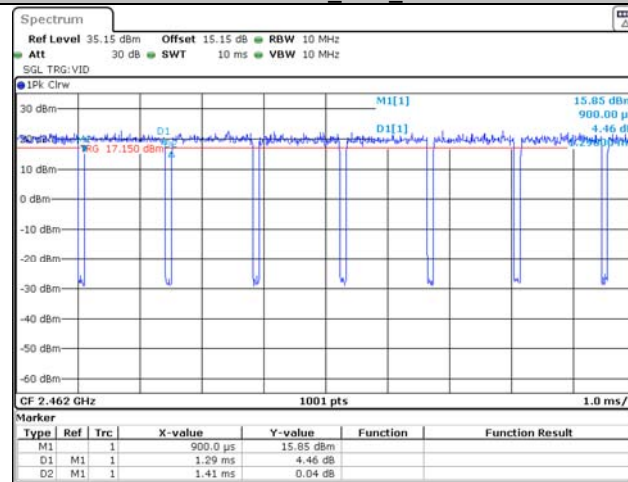


11AX20MIMO Ant1_2412

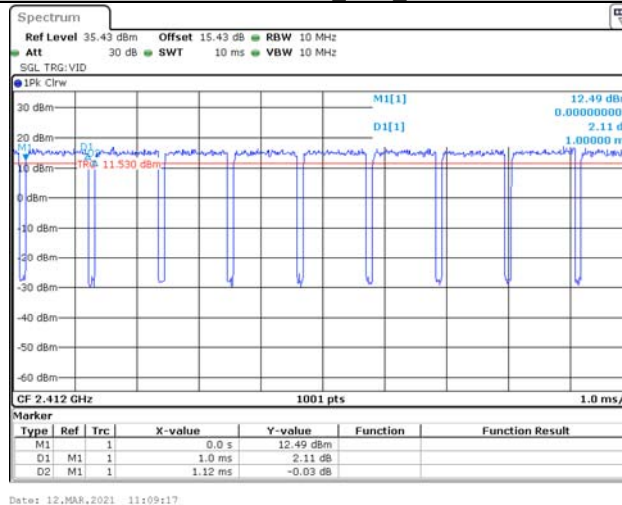

11AX20MIMO Ant1_2437

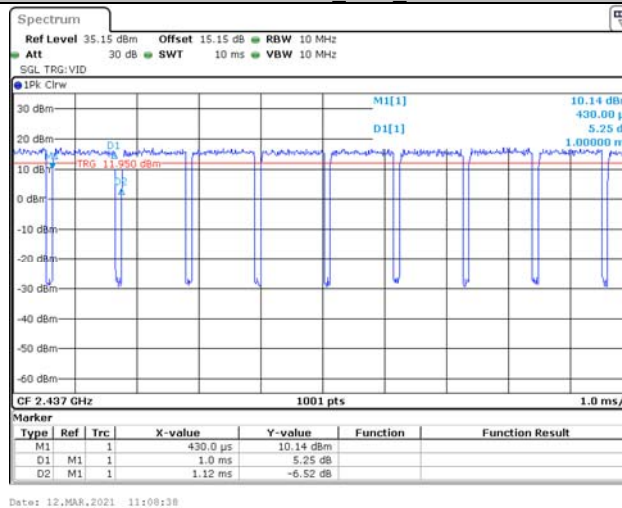

11AX20MIMO Ant1_2462

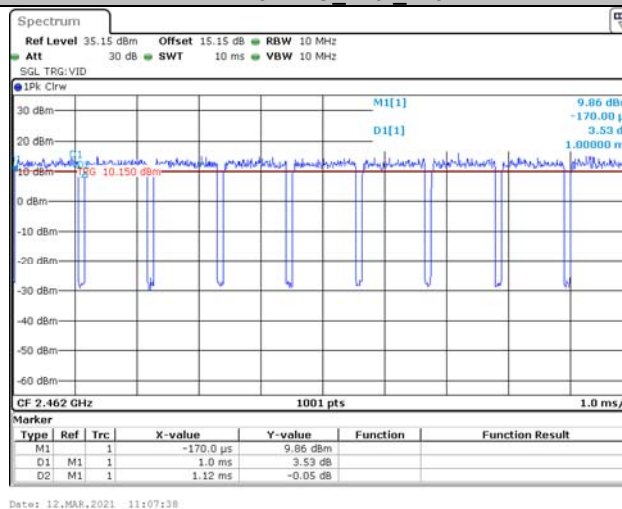



APPENDIX BLE

Appendix A: DTS Bandwidth Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.692	0.5	PASS
		2440	0.696	0.5	PASS
		2480	0.700	0.5	PASS
BLE_2M	Ant1	2402	1.184	0.5	PASS
		2440	1.188	0.5	PASS
		2480	1.188	0.5	PASS

Test Graphs

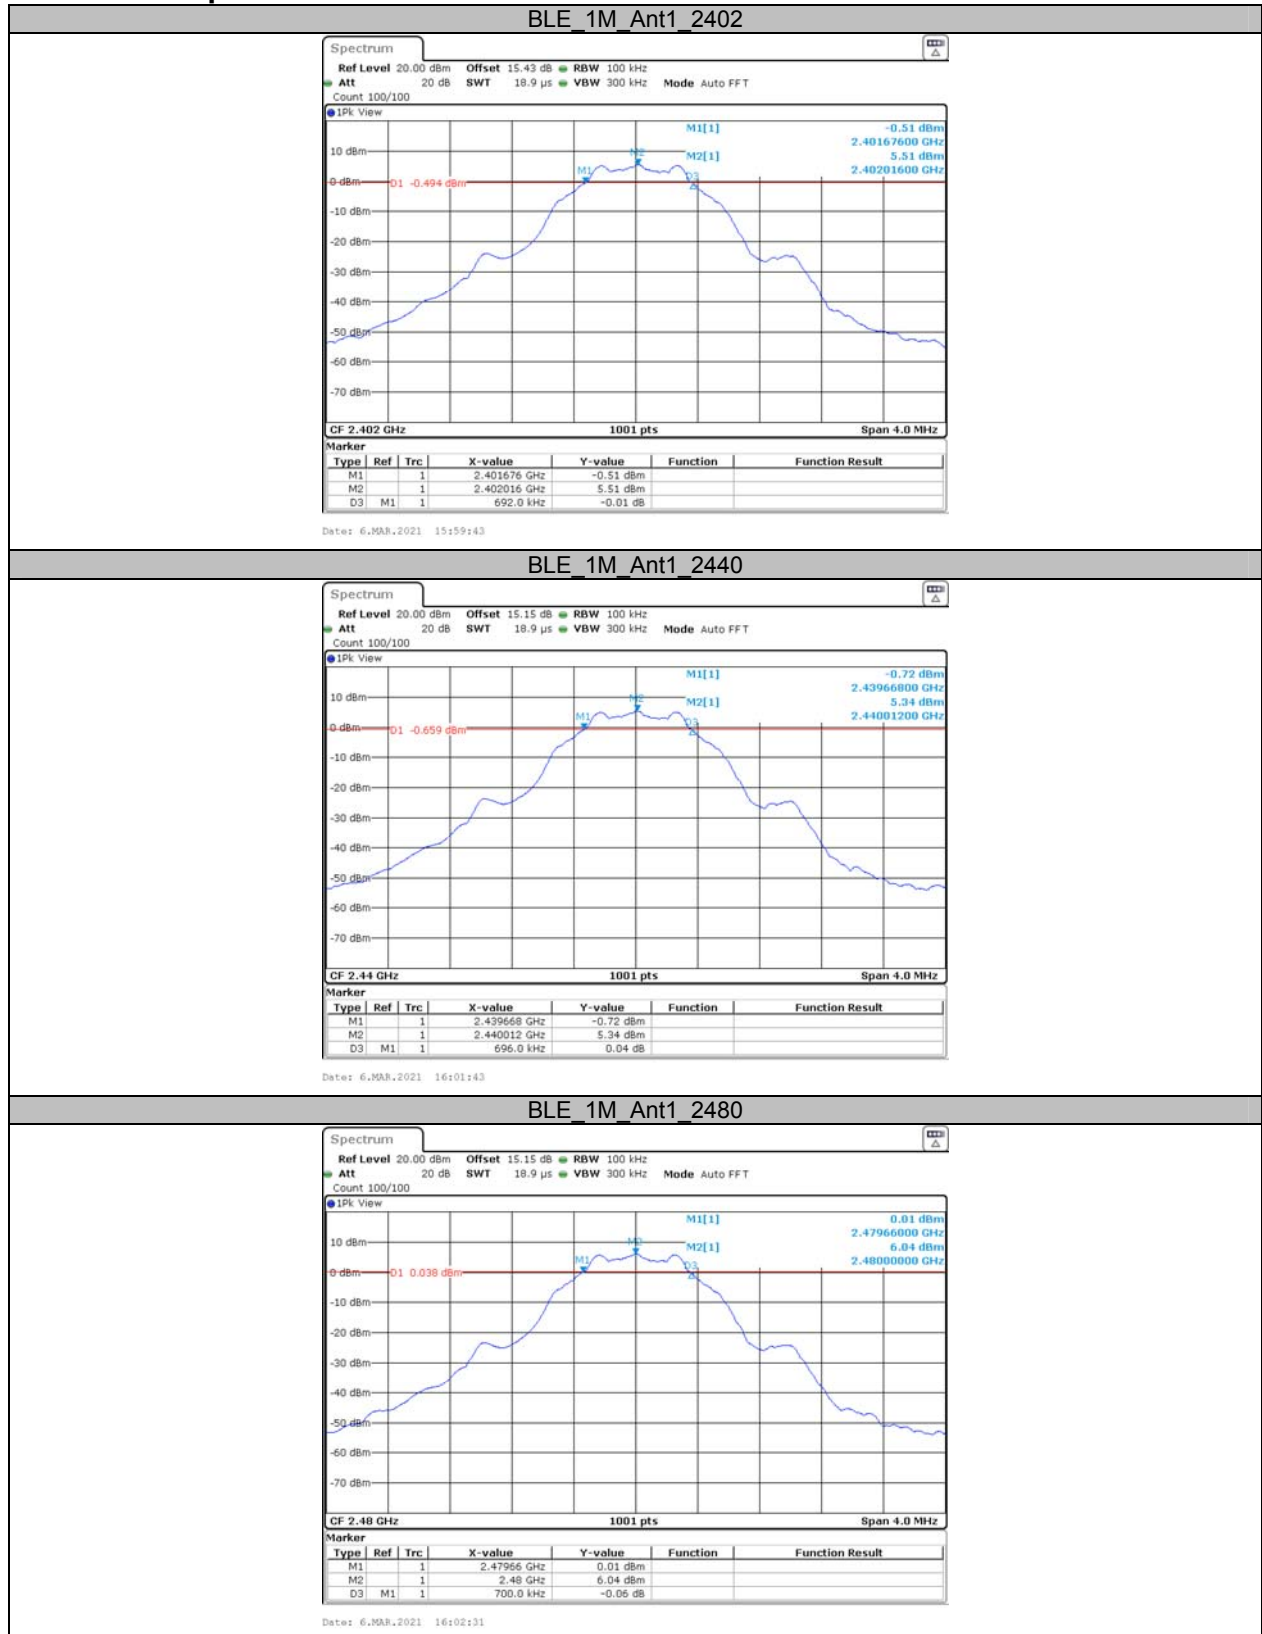


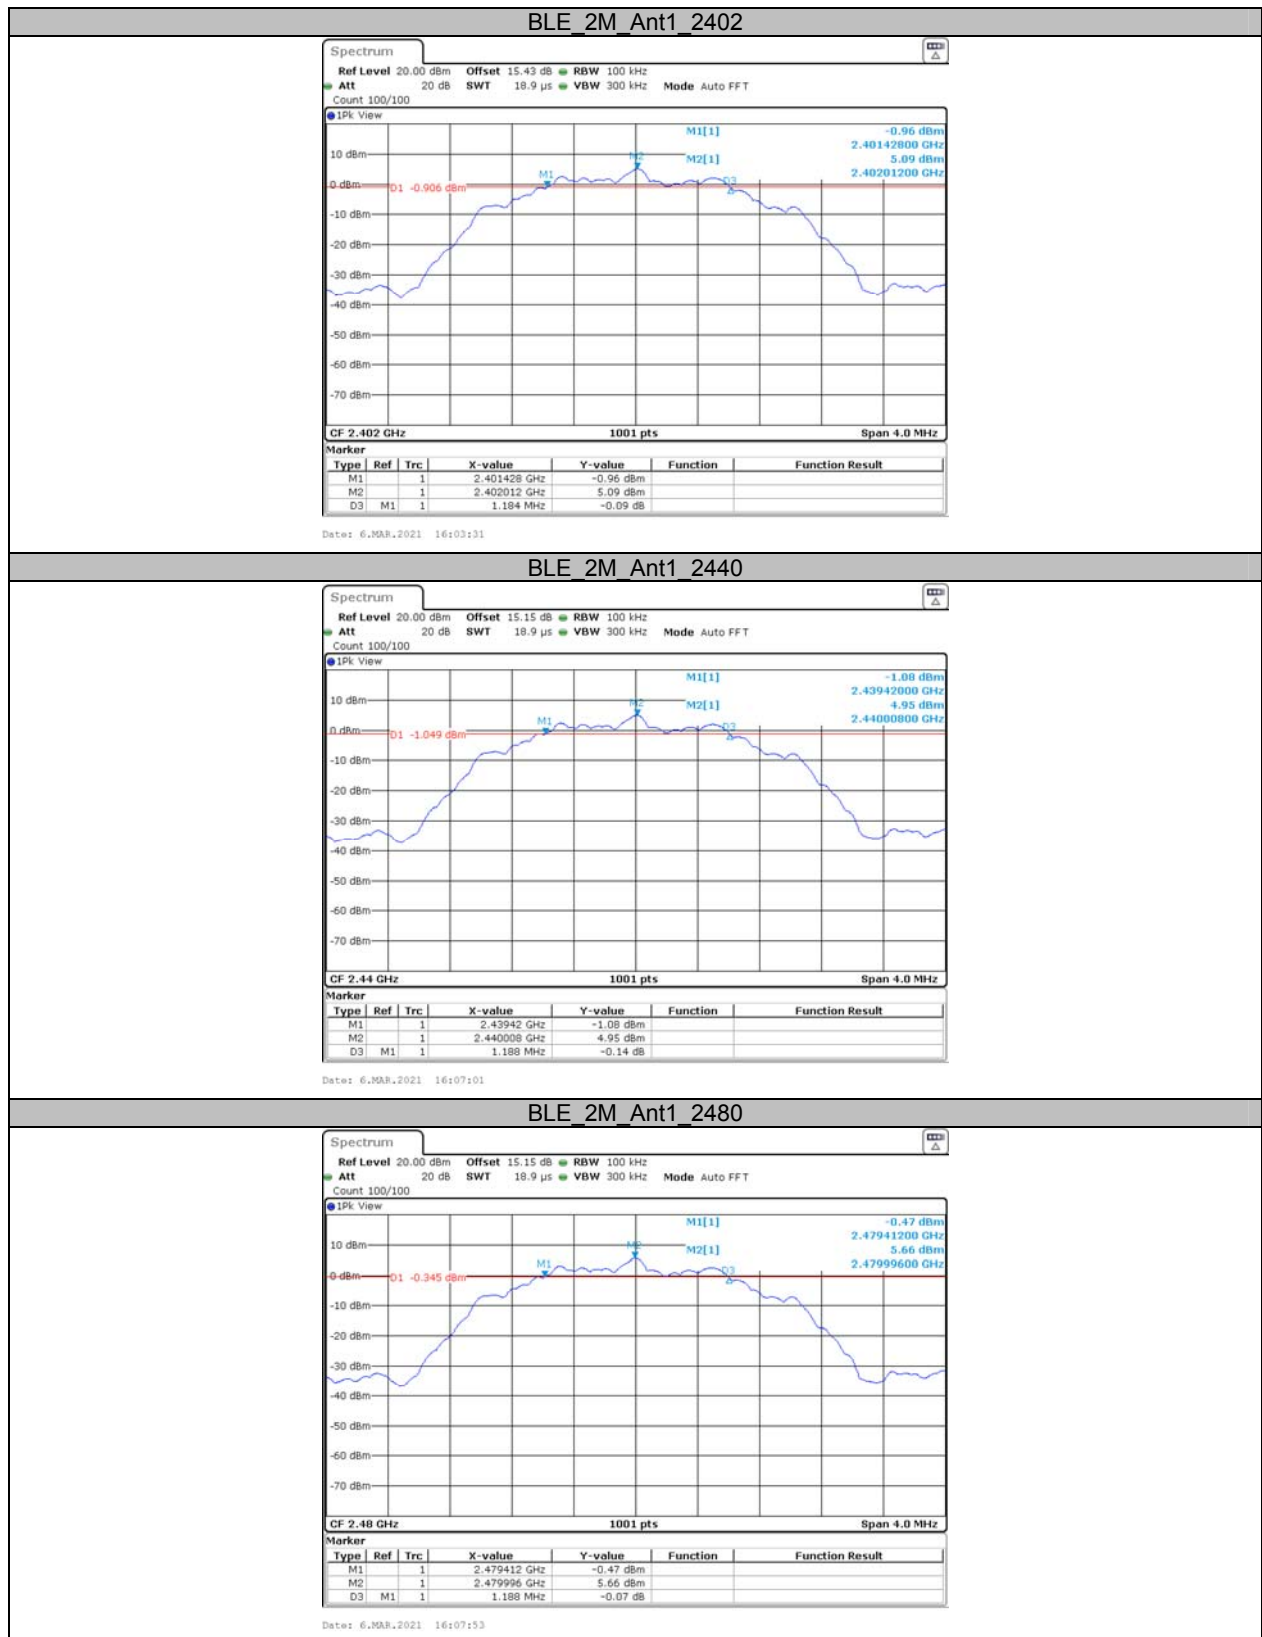


**Appendix B: Occupied Channel Bandwidth
Test Result**

TestMode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.051	---	PASS
		2440	1.055	---	PASS
		2480	1.051	---	PASS
BLE_2M	Ant1	2402	2.046	---	PASS
		2440	2.042	---	PASS
		2480	2.046	---	PASS

Test Graphs

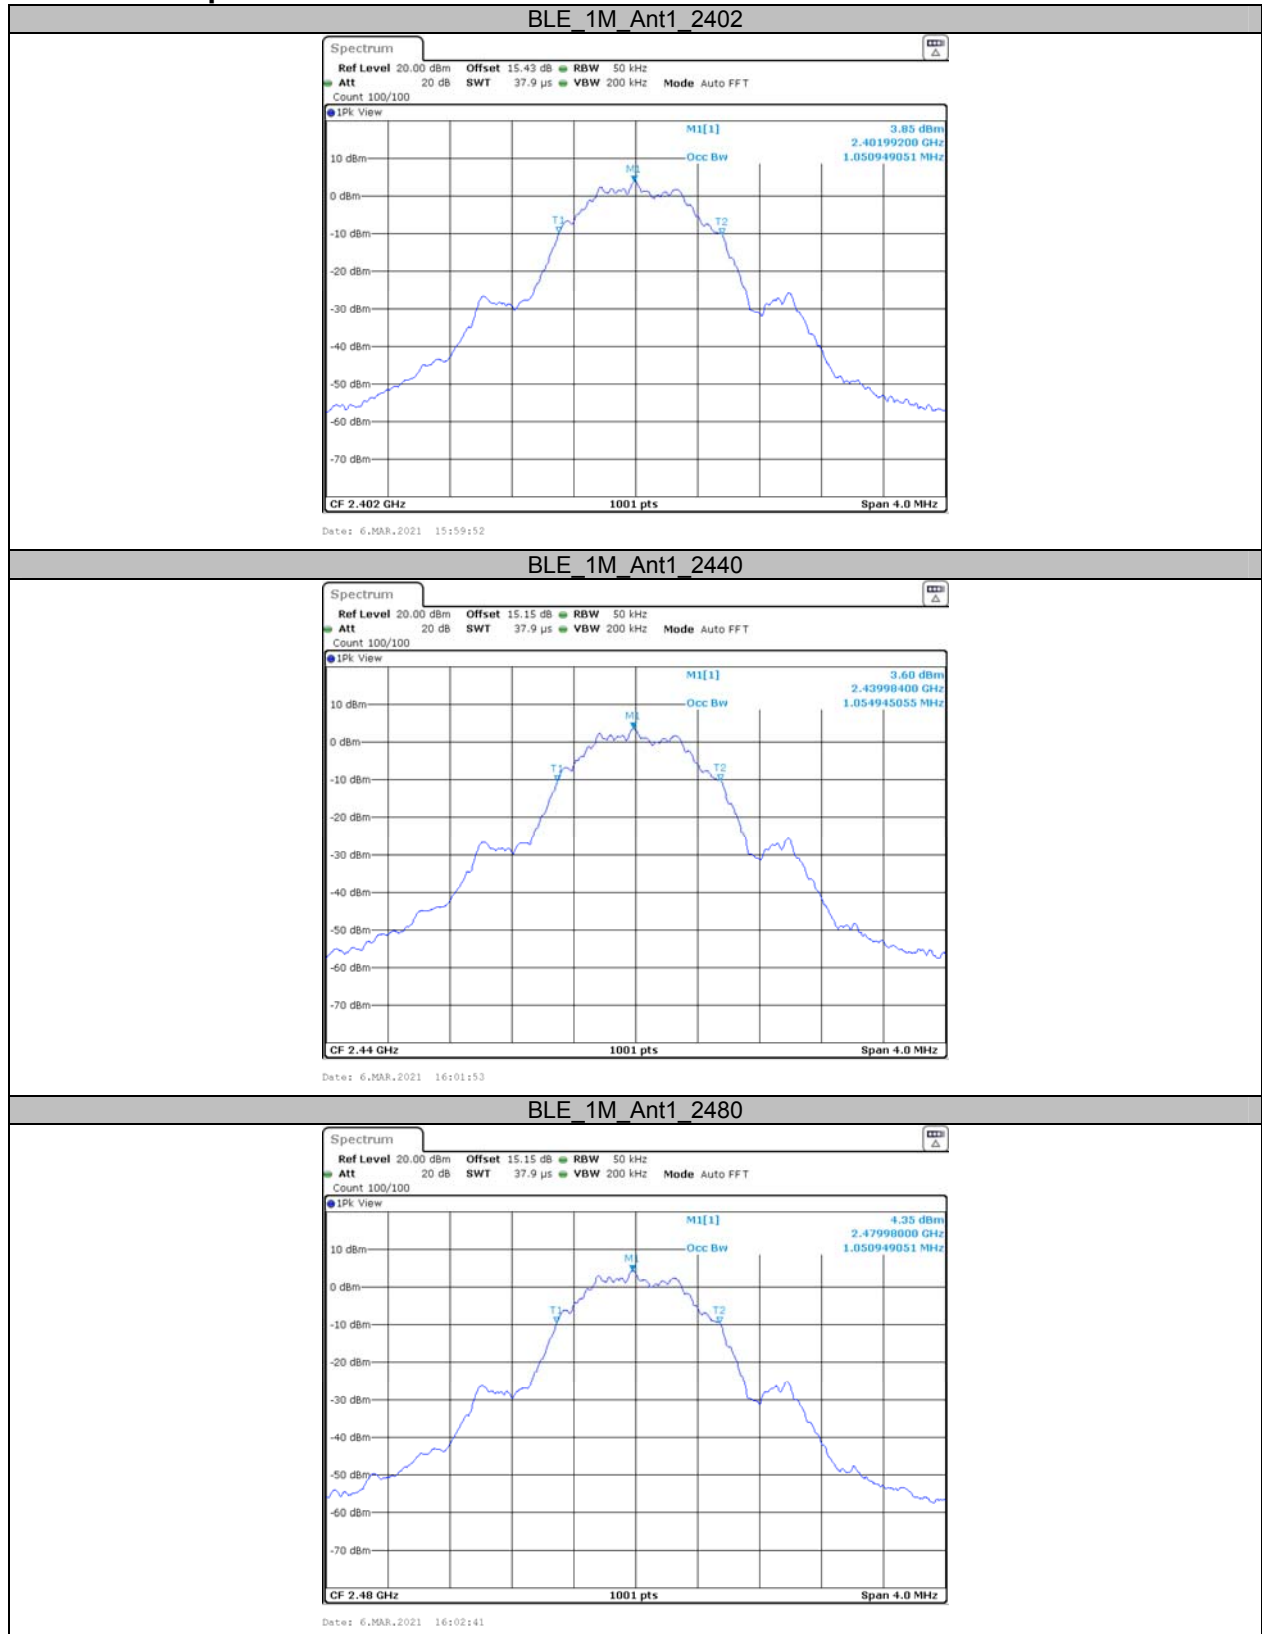

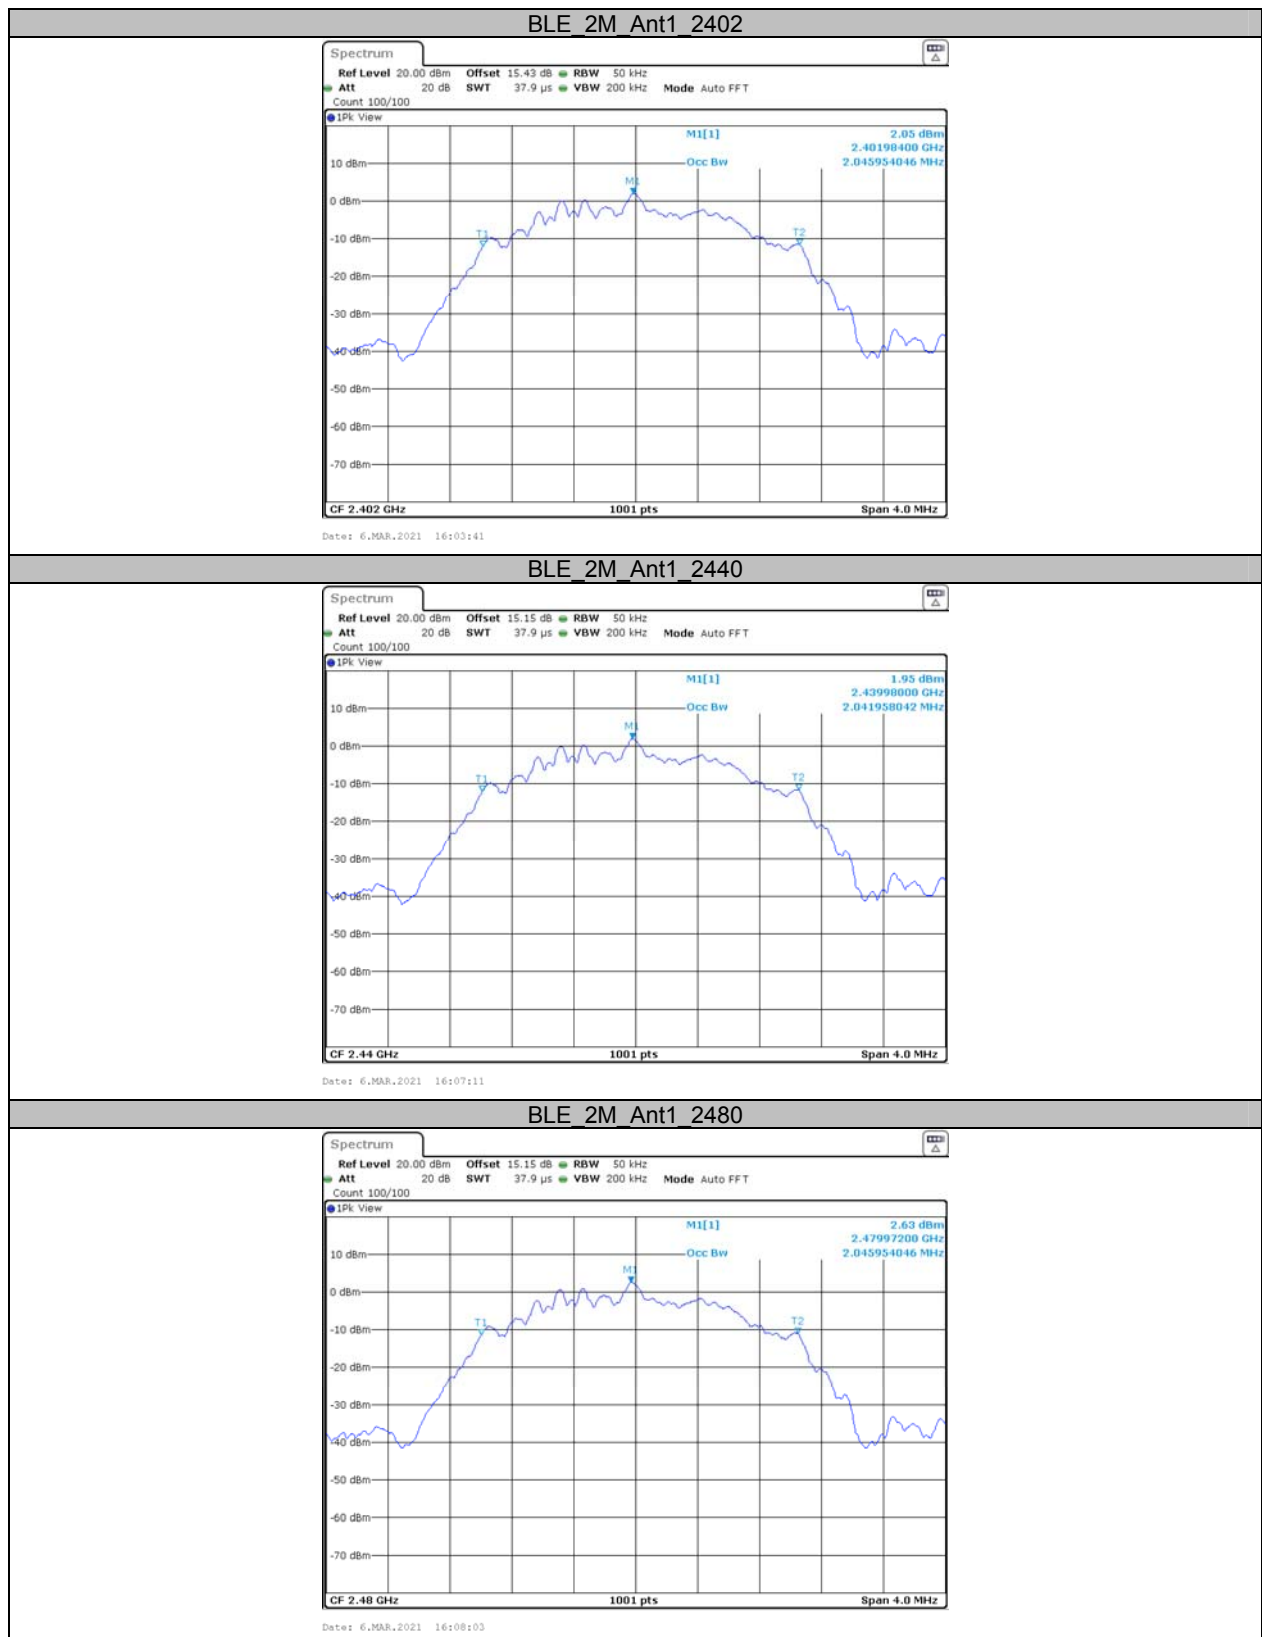


Appendix C: Maximum conducted Peak output power**Test Result**


TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	6.58	<=30	PASS
		2440	6.92	<=30	PASS
		2480	7.51	<=30	PASS
BLE_2M	Ant1	2402	6.61	<=30	PASS
		2440	6.95	<=30	PASS
		2480	7.54	<=30	PASS

**Appendix D: Maximum power spectral density
Test Result**

TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-9.67	<=8	PASS
		2440	-9.73	<=8	PASS
		2480	-9.04	<=8	PASS
BLE_2M	Ant1	2402	-12.01	<=8	PASS
		2440	-12.03	<=8	PASS
		2480	-11.34	<=8	PASS


Test Graphs

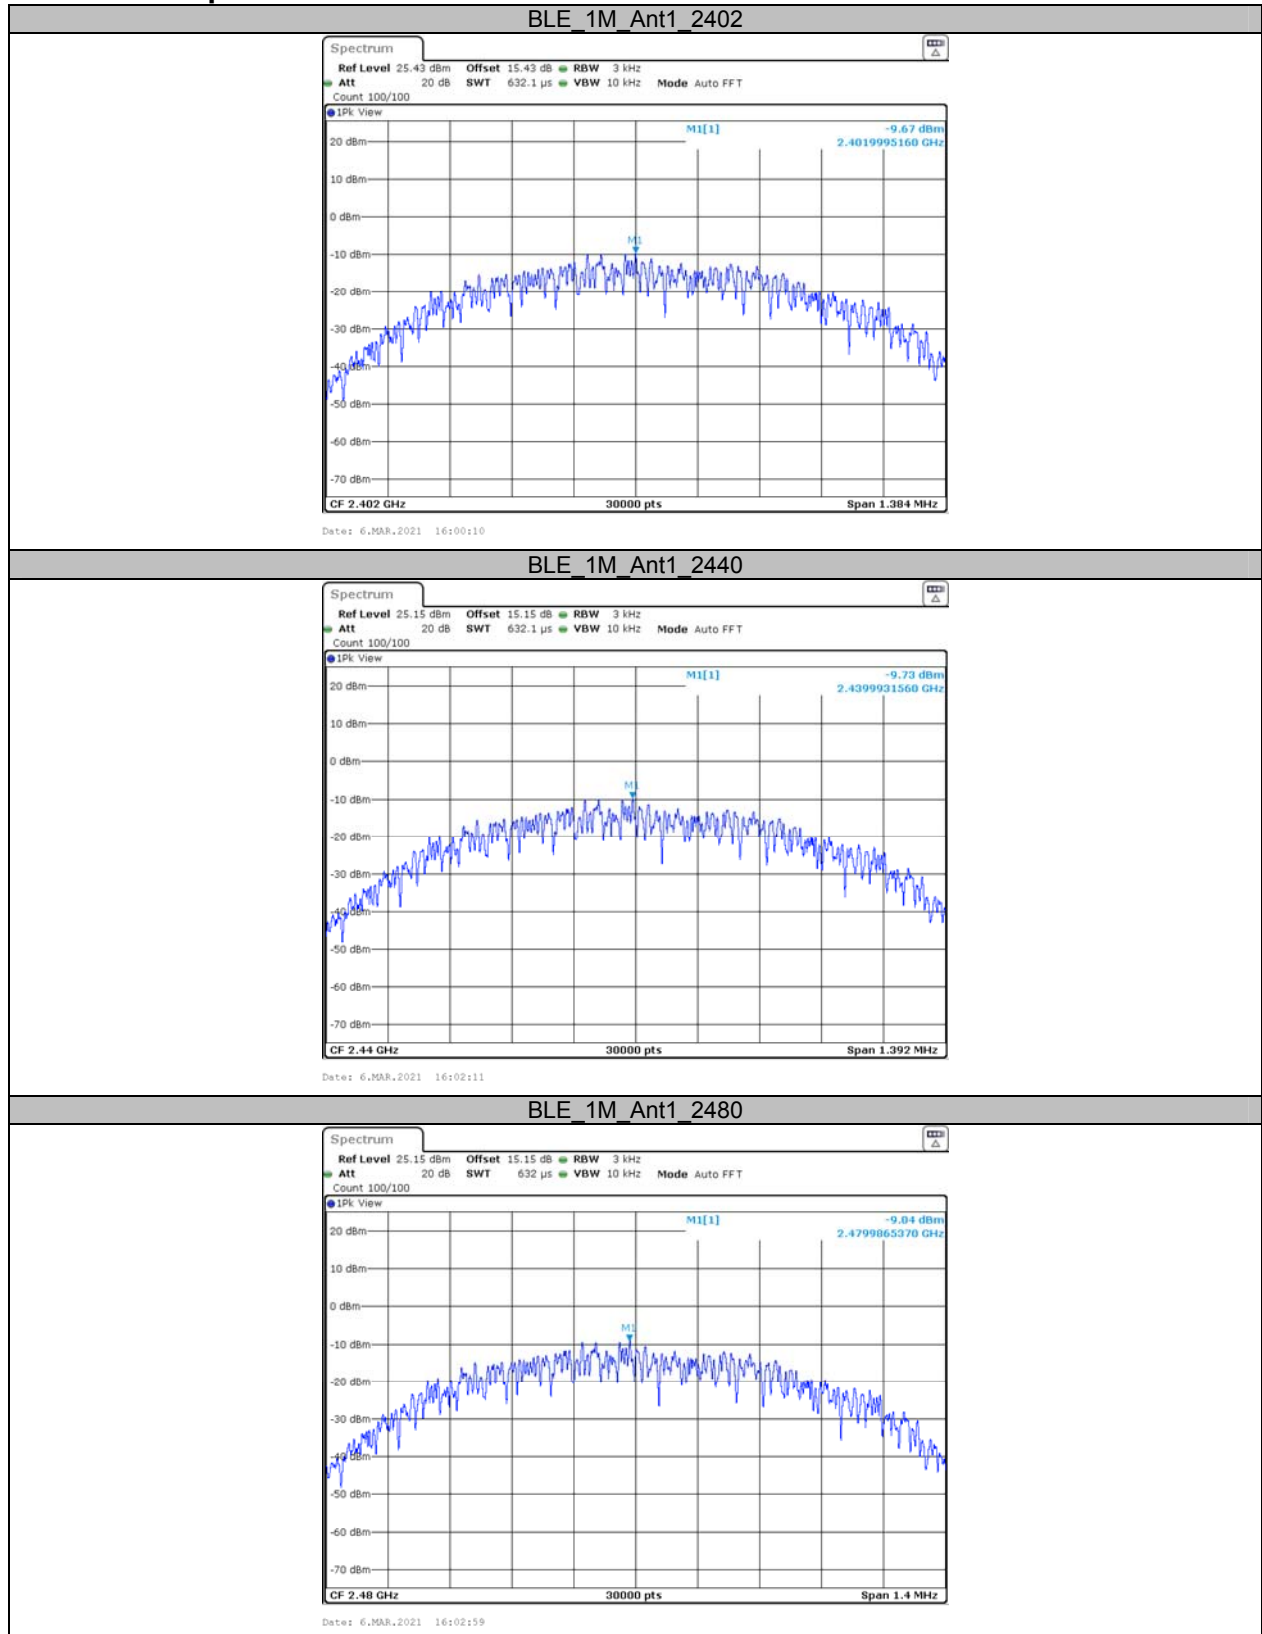


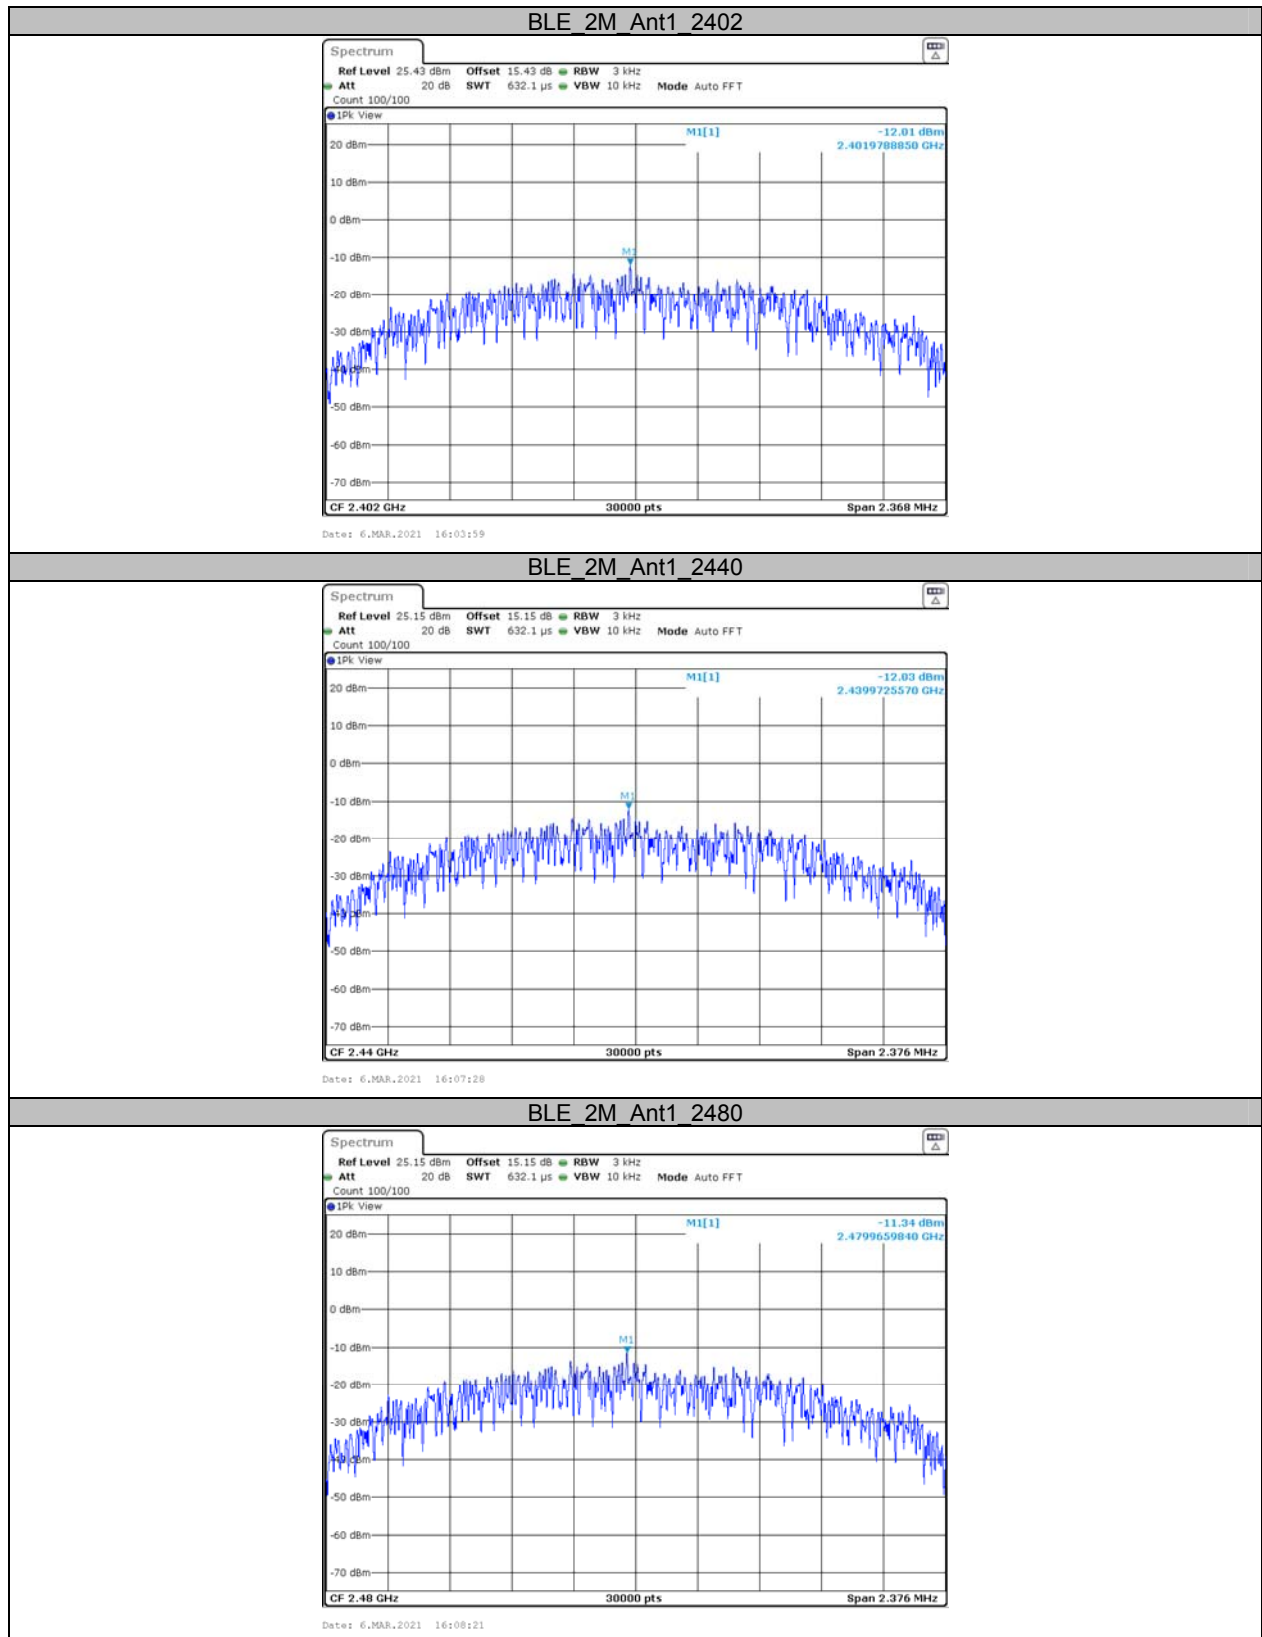

Appendix E: Band edge measurements

Test Graphs

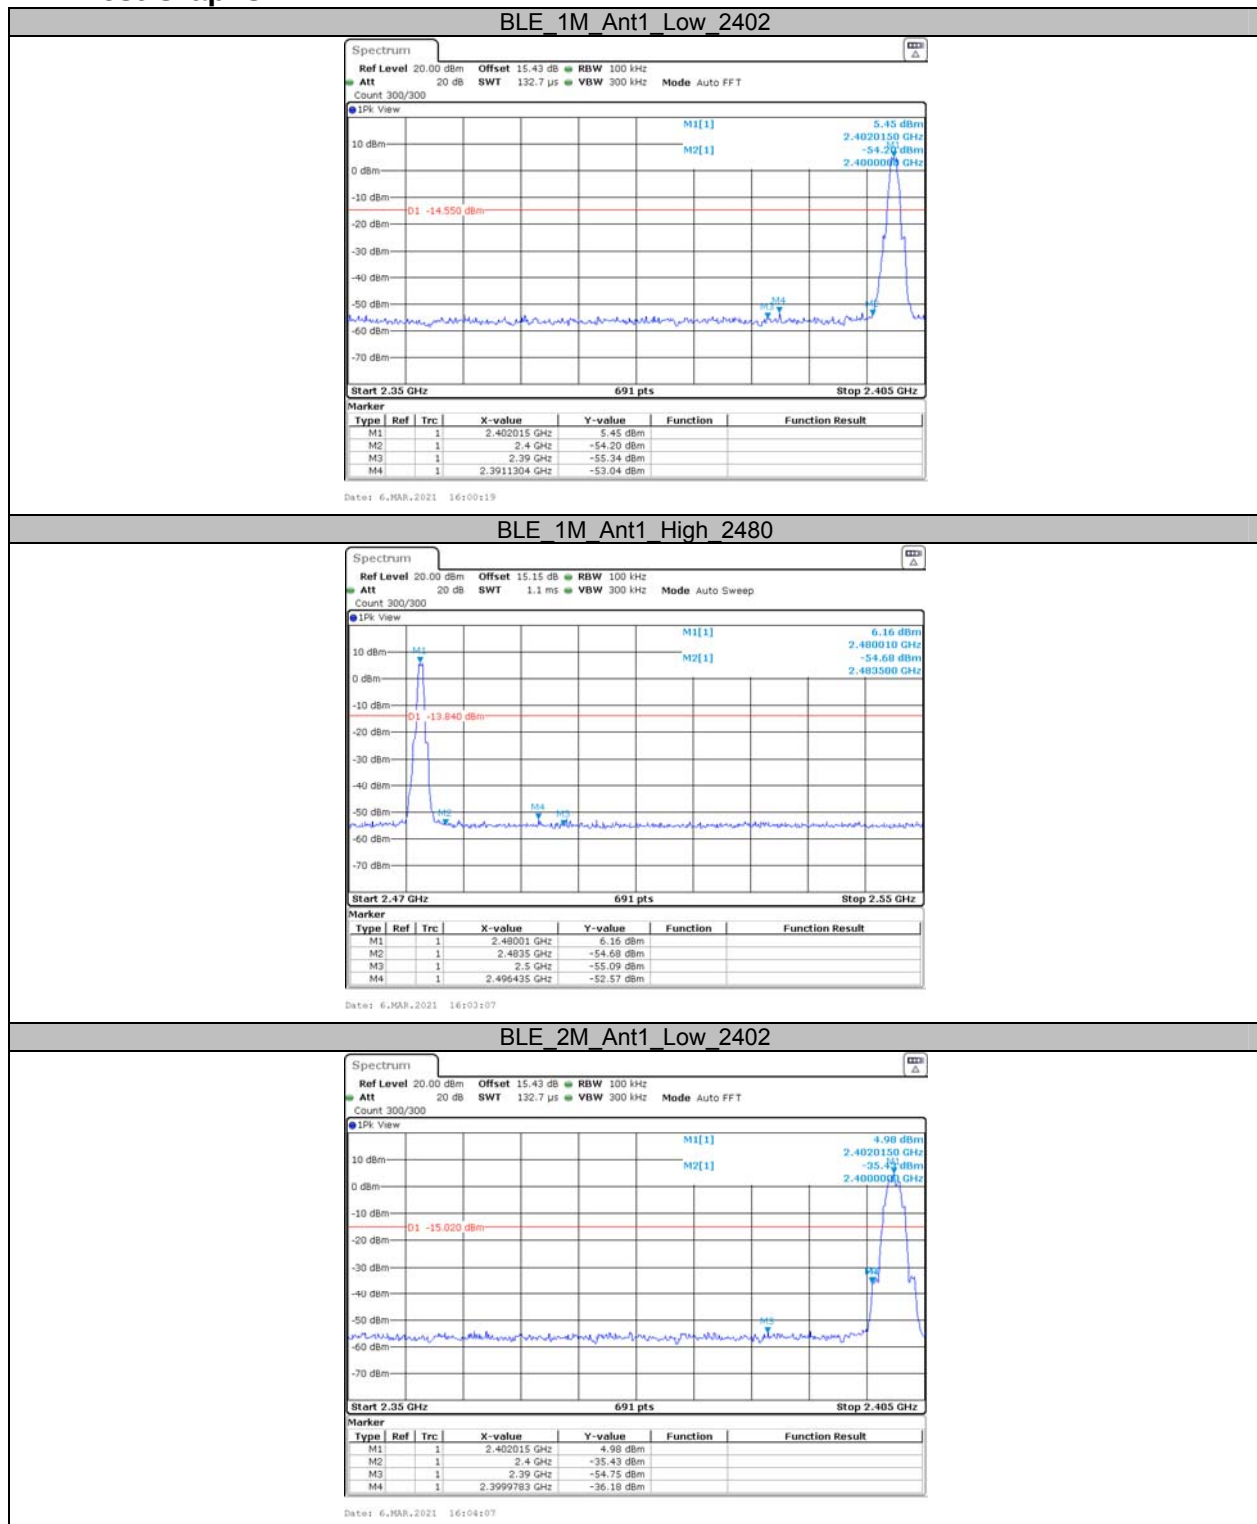


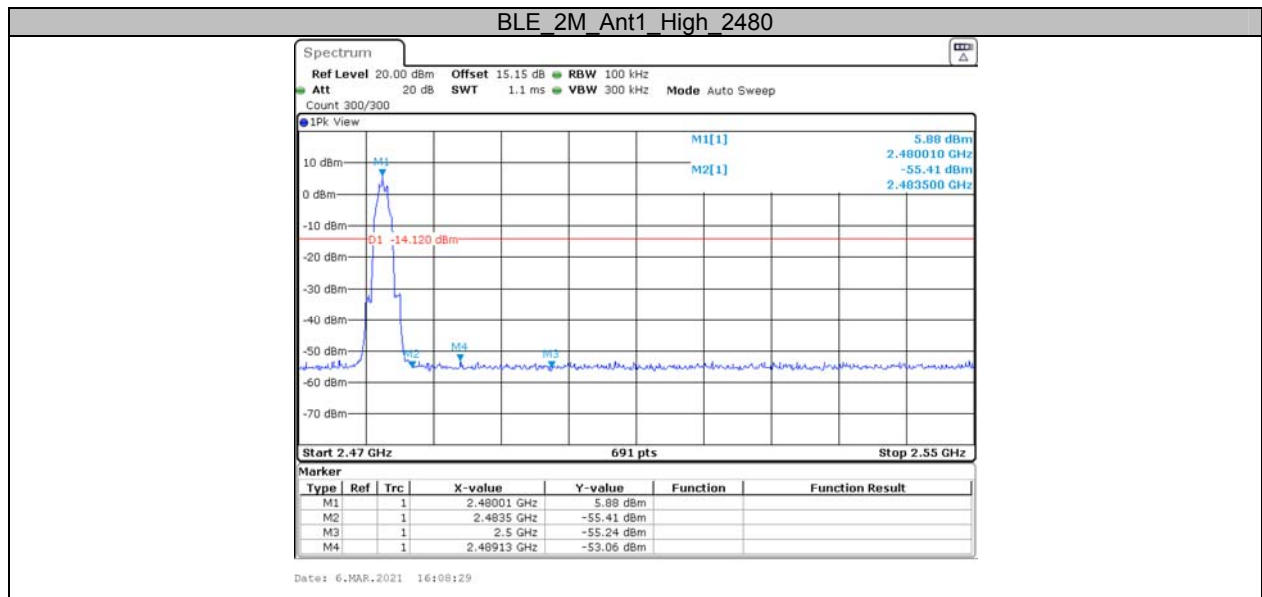

Appendix F: Duty Cycle Test Result

TestMode	Antenna	Channel	TransmissionDuration [ms]	Transmission Period [ms]	Duty Cycle [%]
BLE_1M	Ant1	2440	0.37	0.63	58.73
BLE_2M	Ant1	2440	0.19	0.63	30.16

Test Graphs

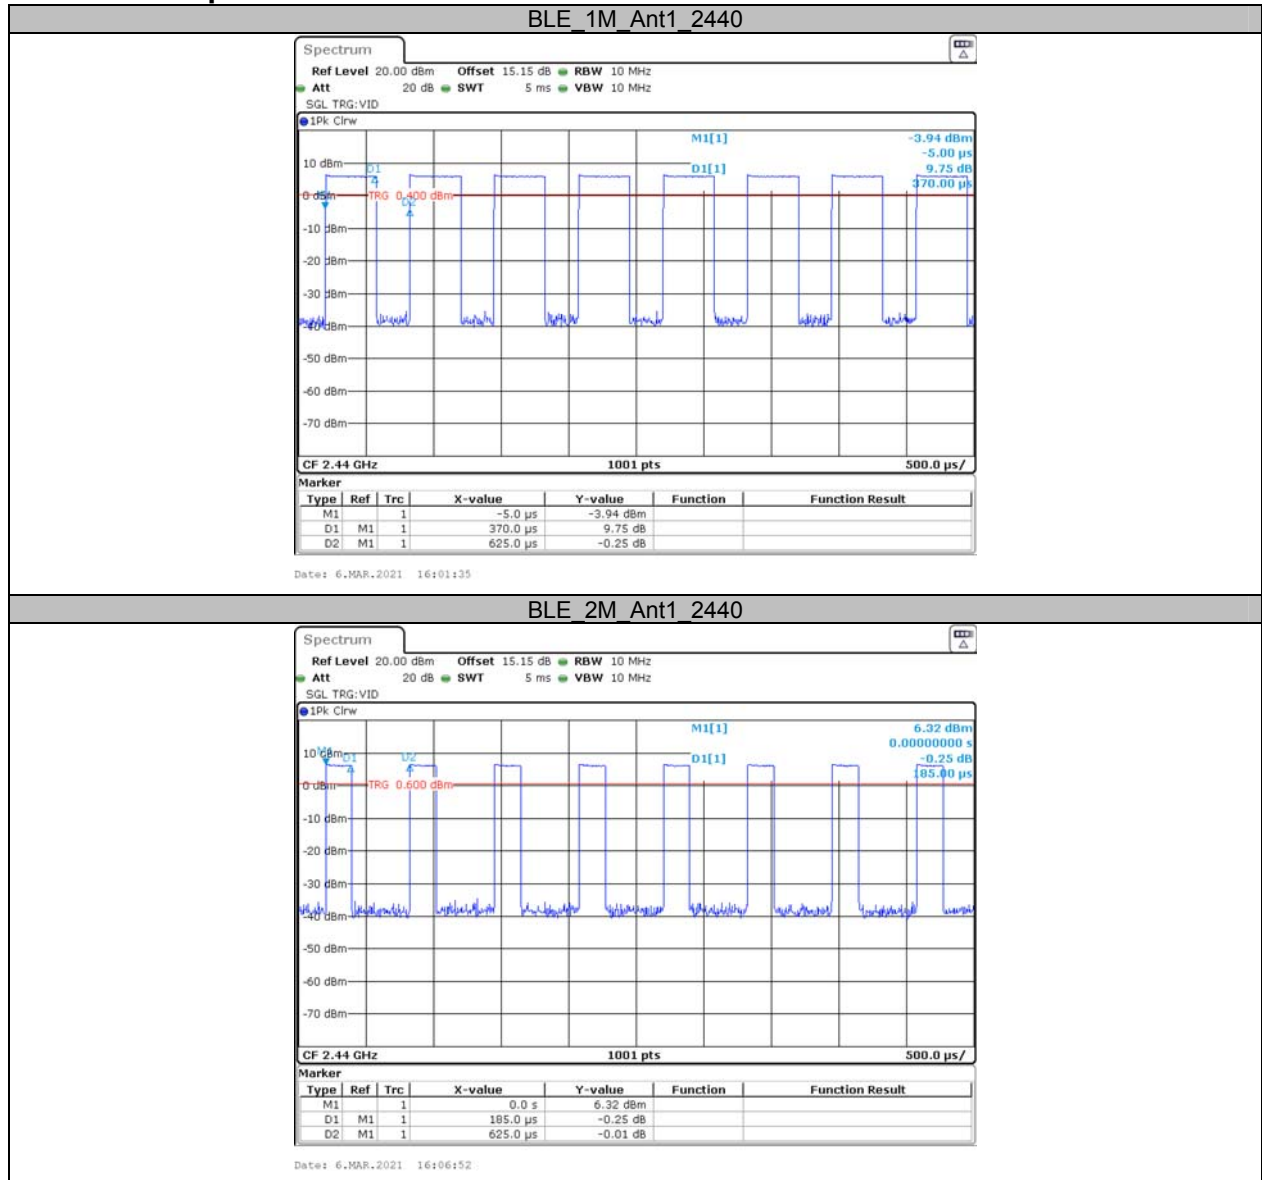

***** END OF REPORT *****