



Test Mode	IEEE 802.11ax (HE80)_ Main Antenna
-----------	------------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
5985	81.85	77.38	80	Pass
6145	82.25	77.39	80	Pass
6385	82.24	77.26	80	Pass


5985 MHz

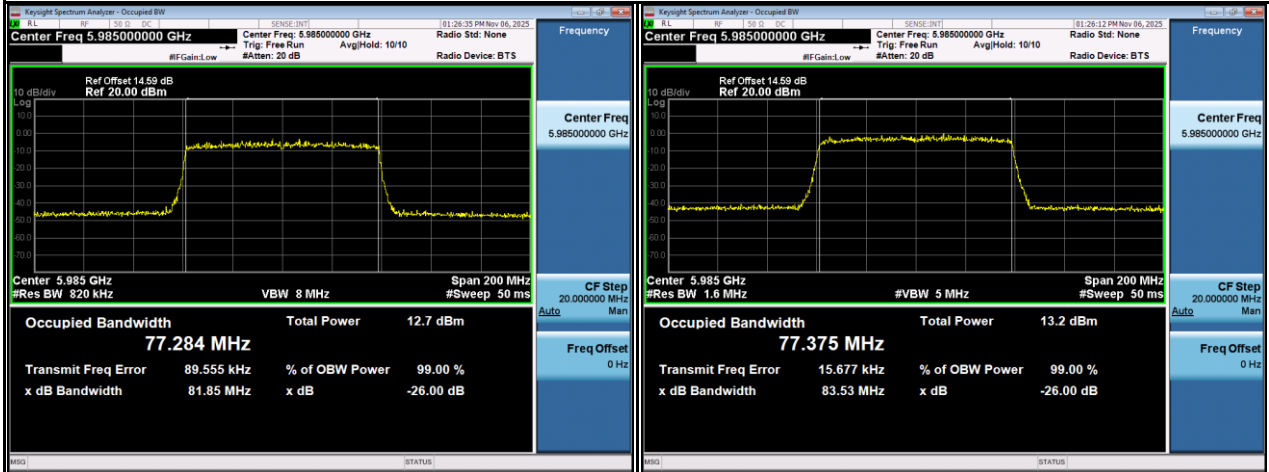


6145 MHz

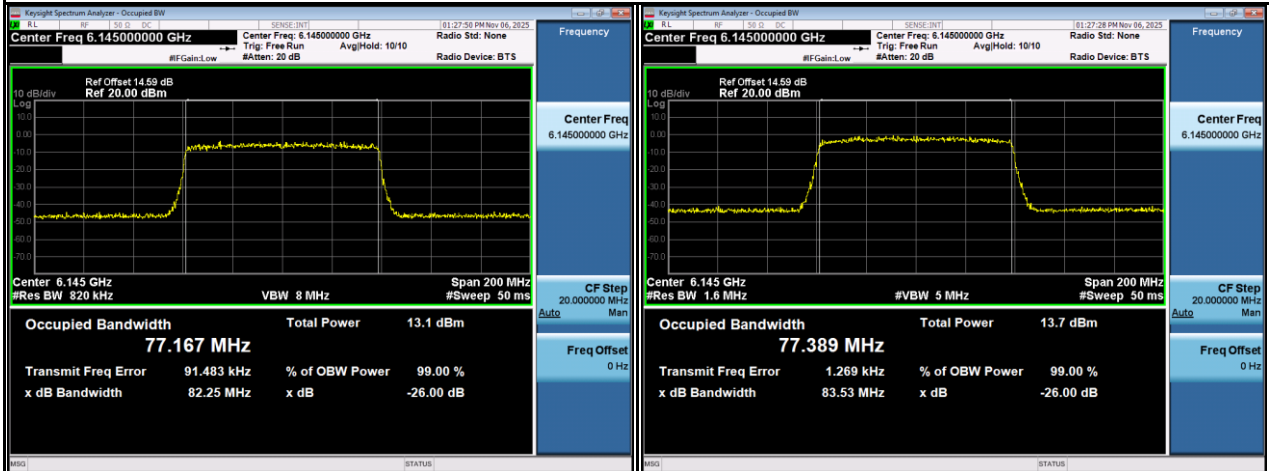

6385 MHz

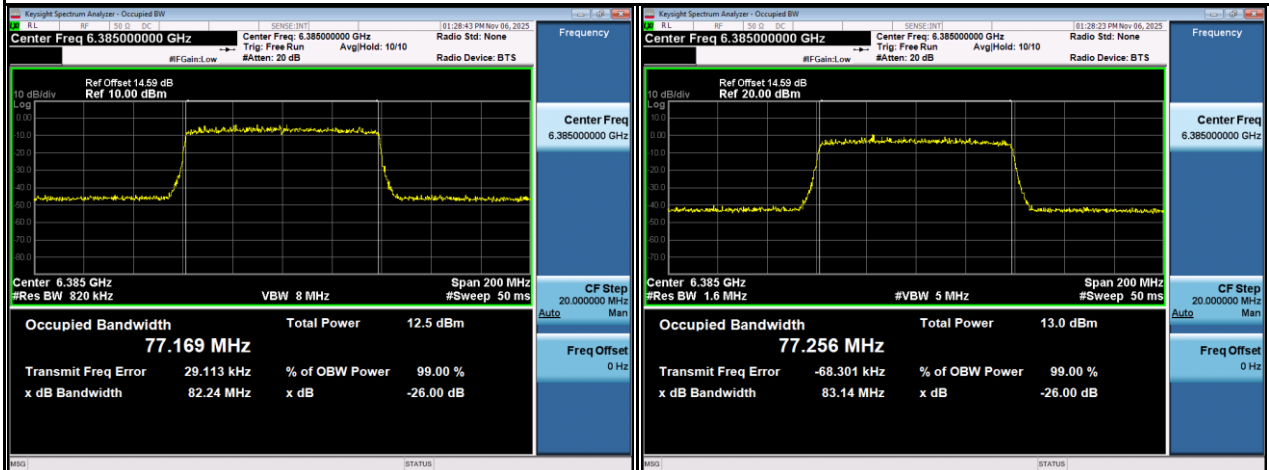


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
6465	82.35	77.54	80	Pass

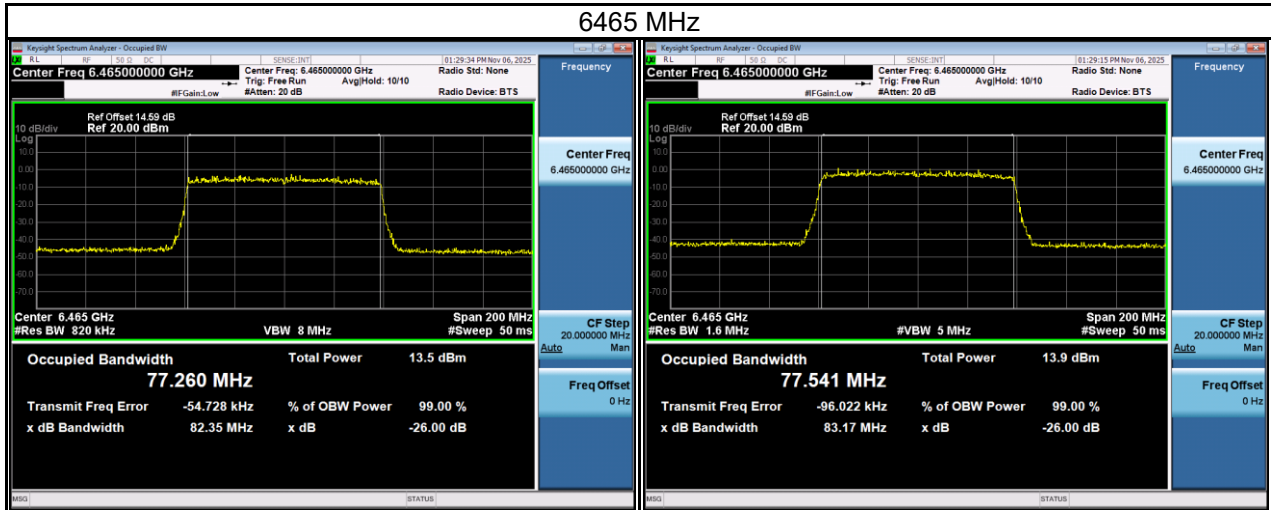


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
6545	81.81	77.49	80	Pass
6625	81.57	77.34	80	Pass
6705	81.67	77.39	80	Pass
6785	82.26	77.27	80	Pass


6545 MHz

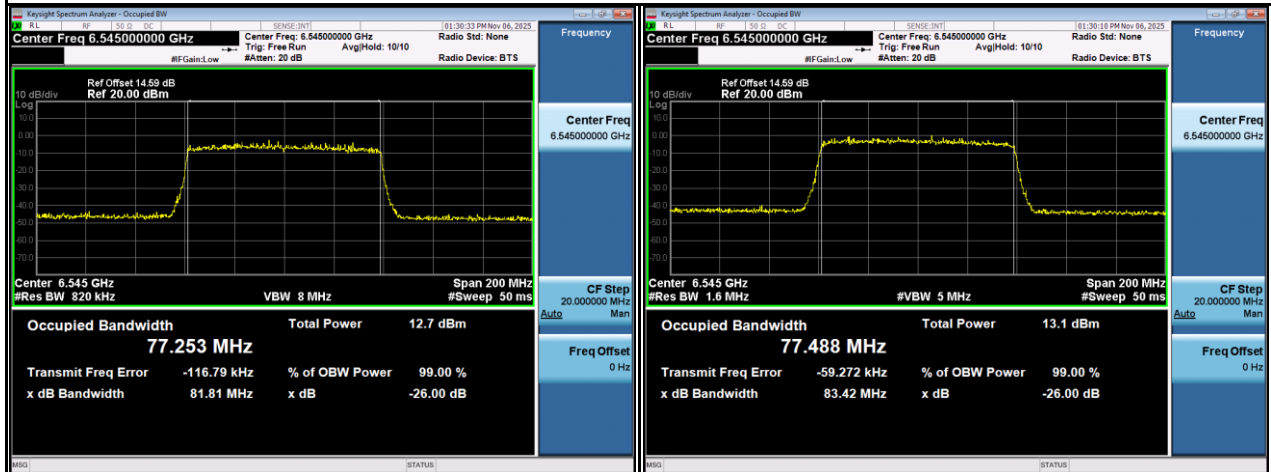


6625 MHz

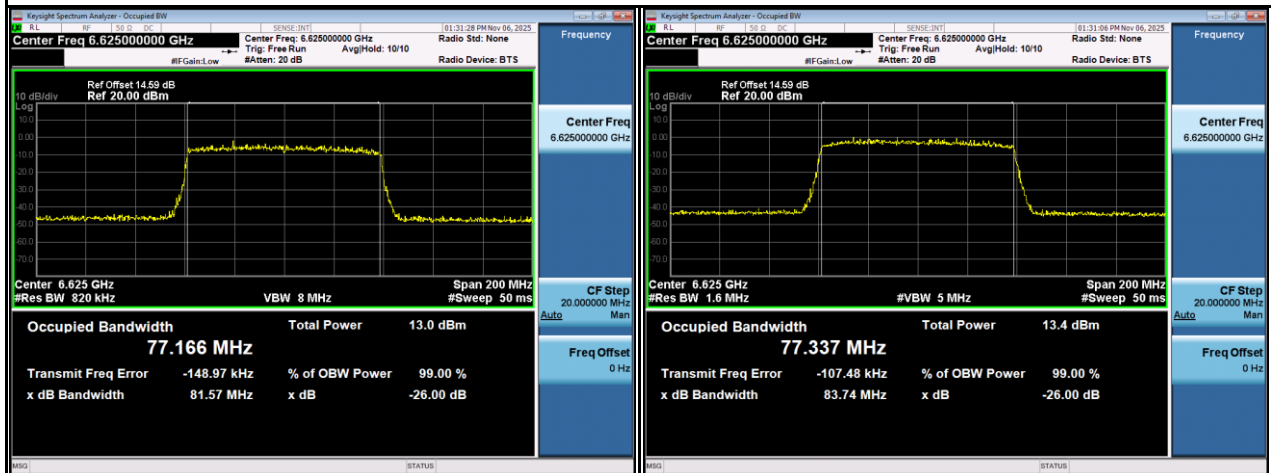


6705 MHz

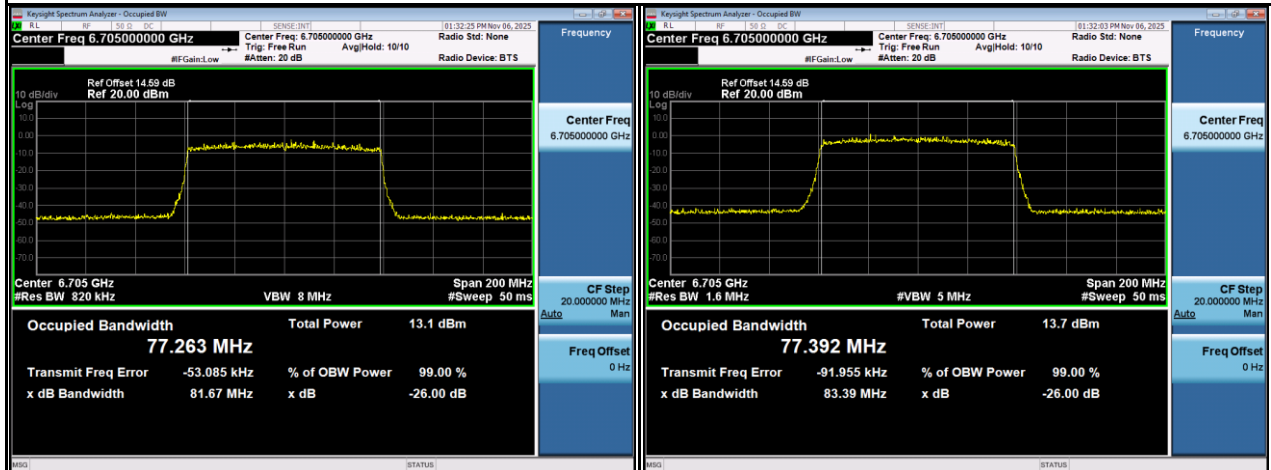

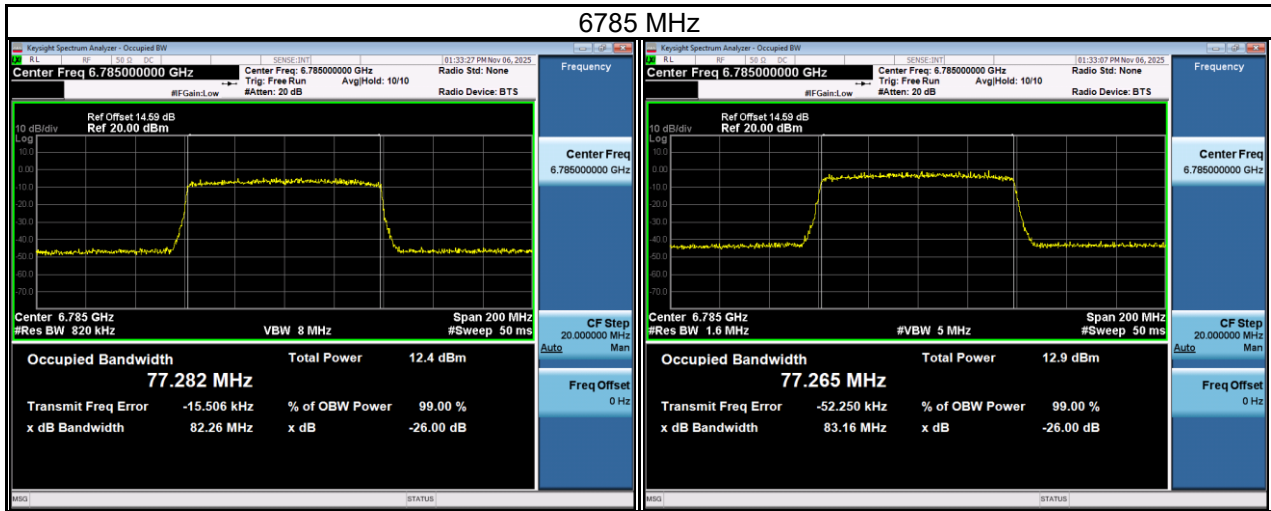


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
6865	81.90	77.52	80	Pass
6945	82.07	77.49	80	Pass
7025	82.22	77.27	80	Pass


6865 MHz

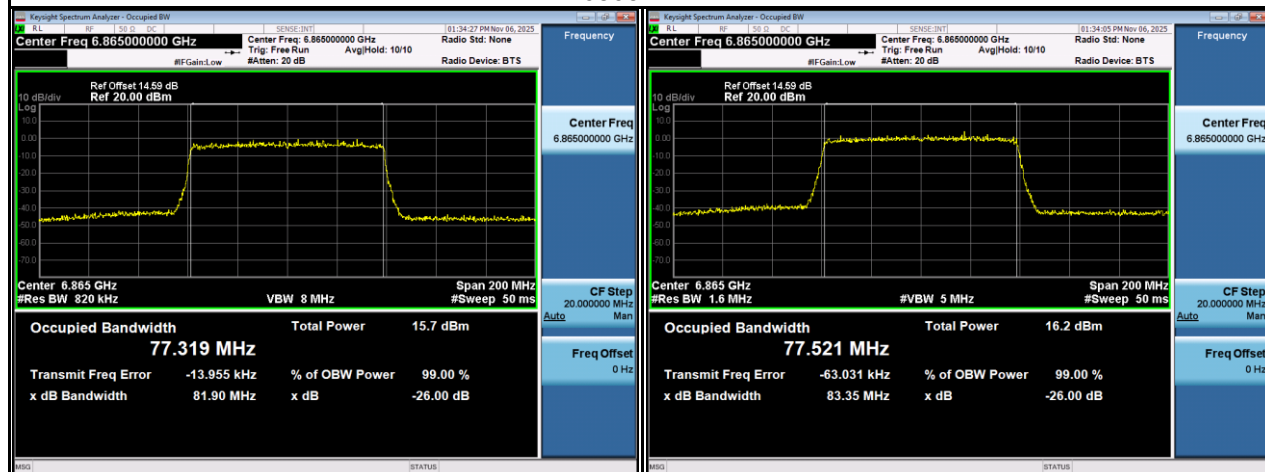

6945 MHz

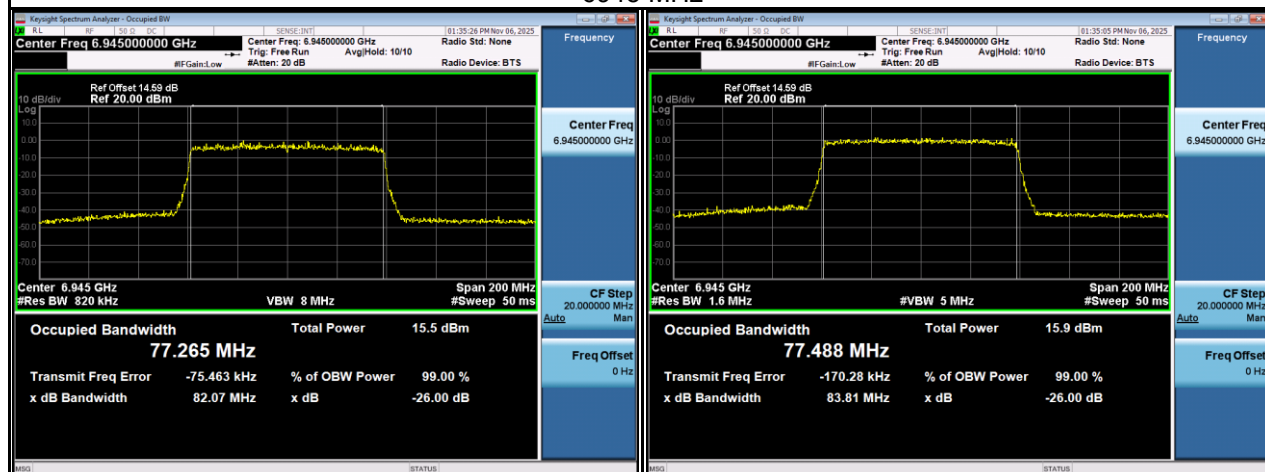

7025 MHz

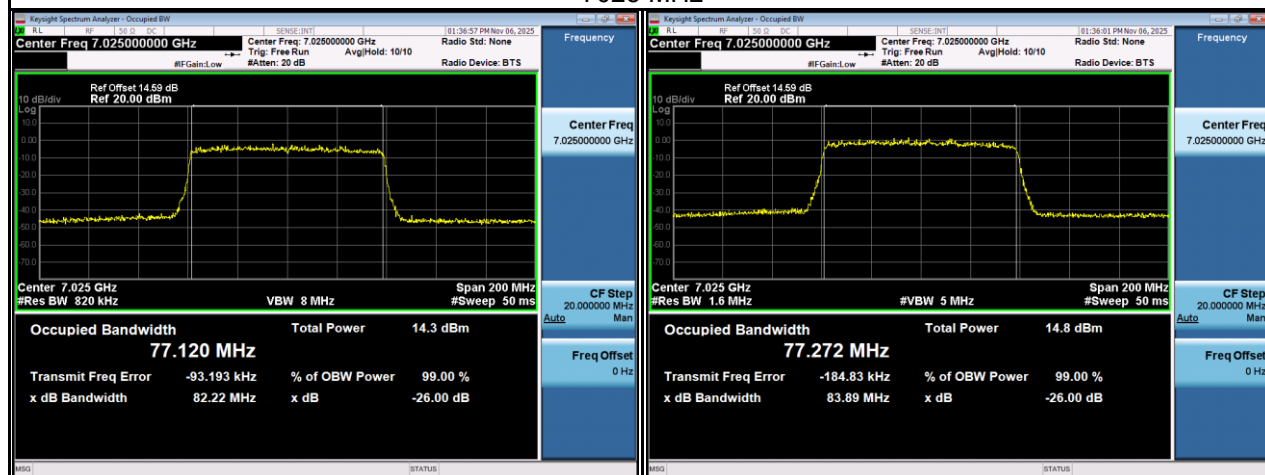


Test Mode	IEEE 802.11ax (HE160)_ Main Antenna
-----------	-------------------------------------


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
6025	166.10	156.54	160	Pass
6345	164.50	156.34	160	Pass




Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
6505	165.20	156.41	160	Pass

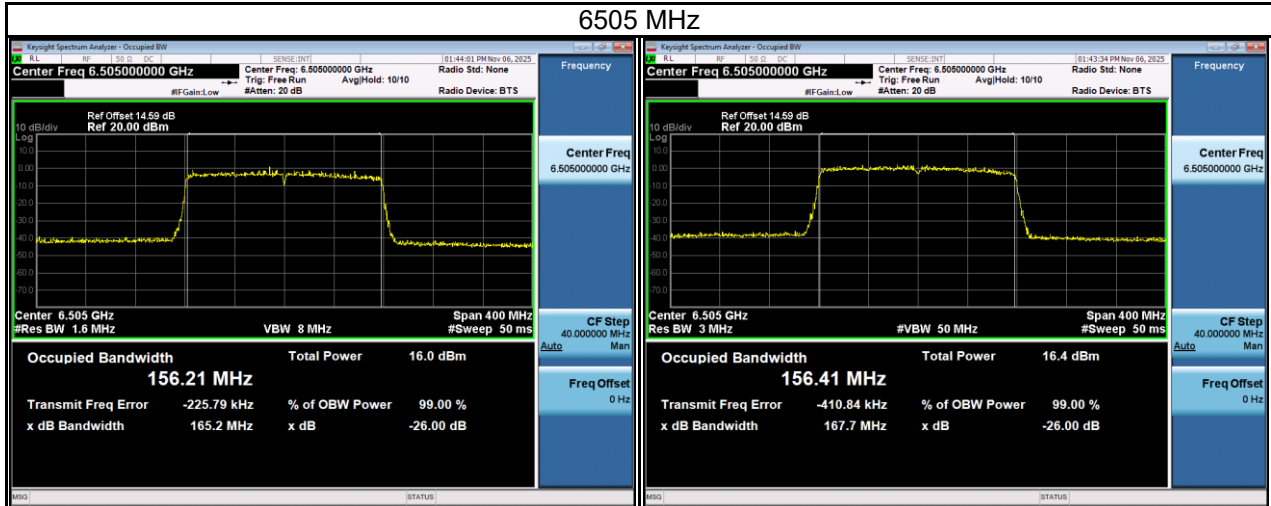

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
6665	164.60	156.19	160	Pass

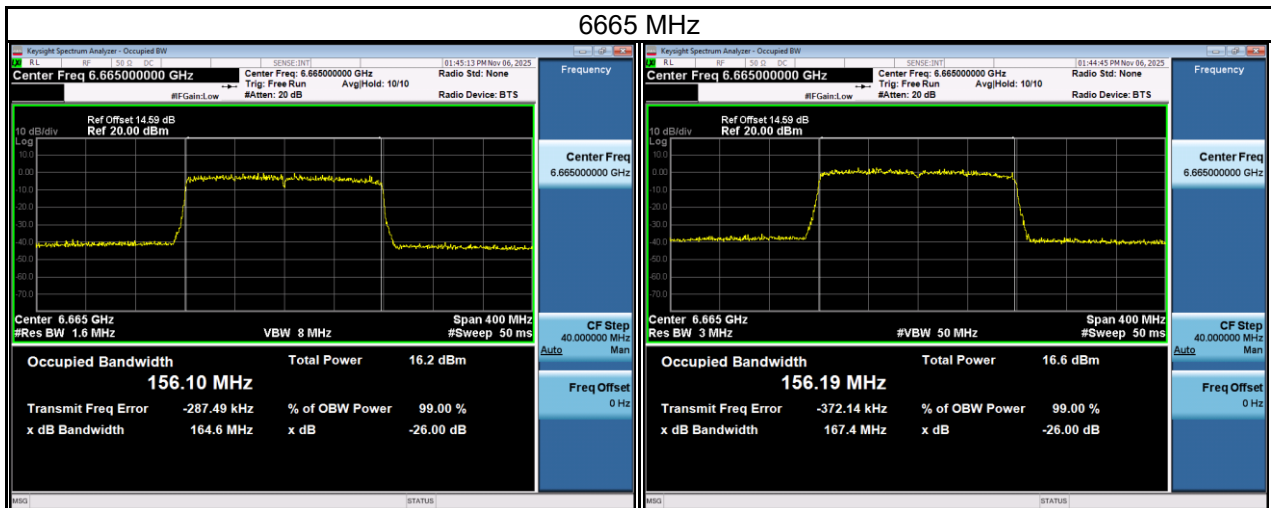


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
6985	166.30	156.49	160	Pass

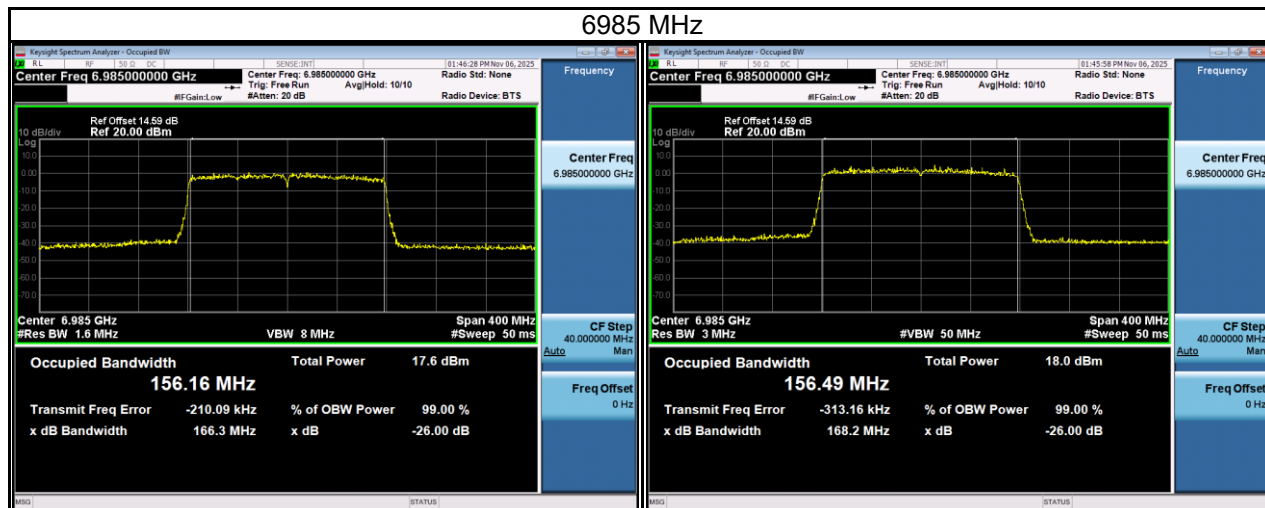


APPENDIX C MAXIMUM POWER SPECTRAL DENSIT

Test Mode	IEEE 802.11ax (HE20)_ Main Antenna
-----------	------------------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5955	-12.54	0.02	-12.52	8.27	-4.25	-1.00	Pass
6175	-12.39	0.02	-12.37	8.27	-4.10	-1.00	Pass
6415	-12.64	0.02	-12.61	8.27	-4.34	-1.00	Pass

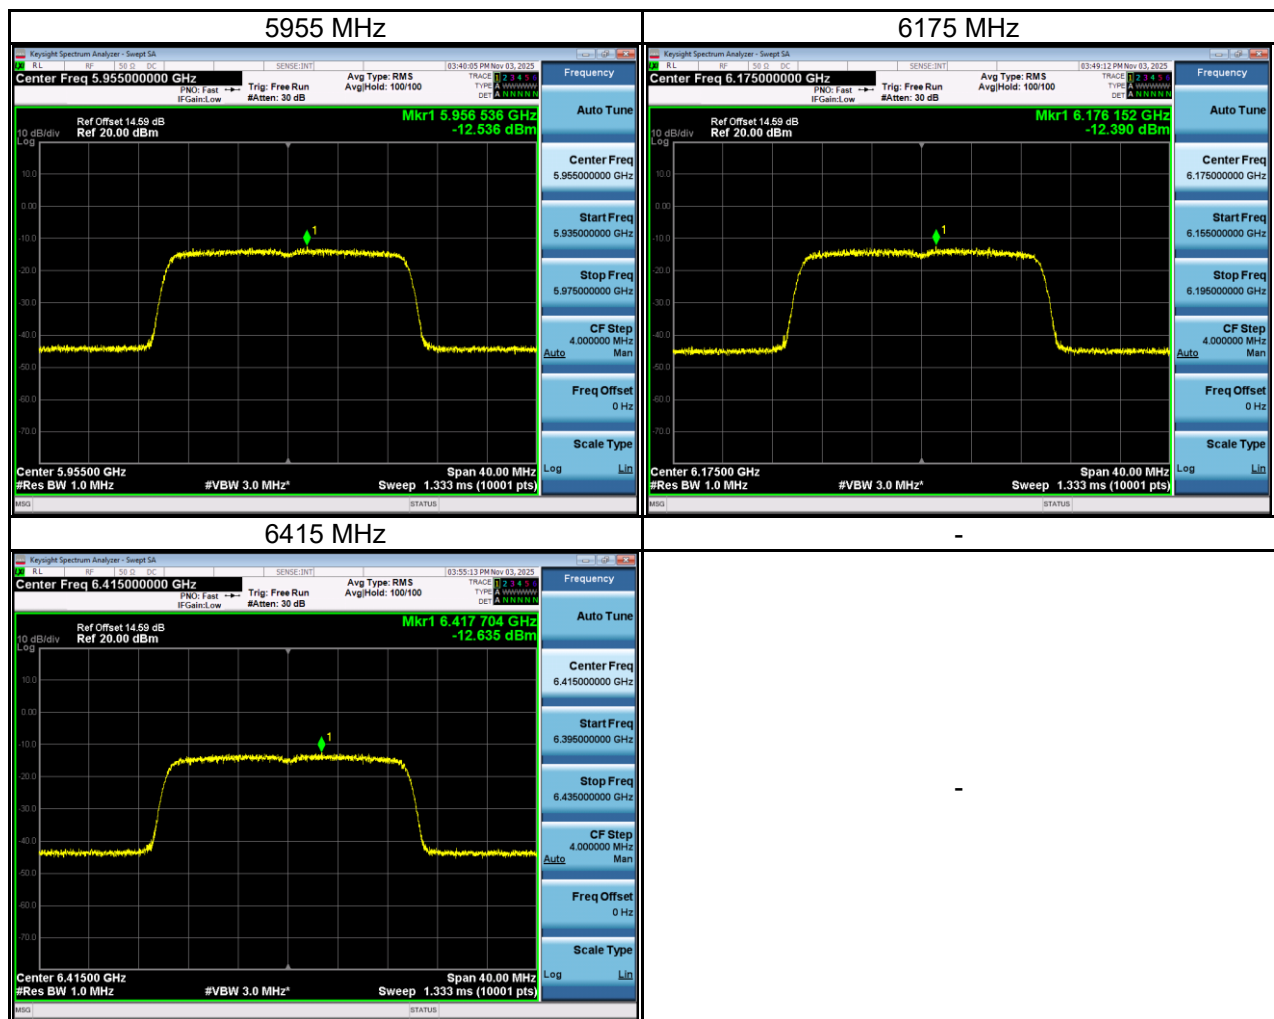


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6435	-12.41	0.02	-12.39	7.96	-4.43	-1.00	Pass
6475	-12.03	0.02	-12.01	7.96	-4.05	-1.00	Pass
6515	-12.08	0.02	-12.06	7.96	-4.10	-1.00	Pass

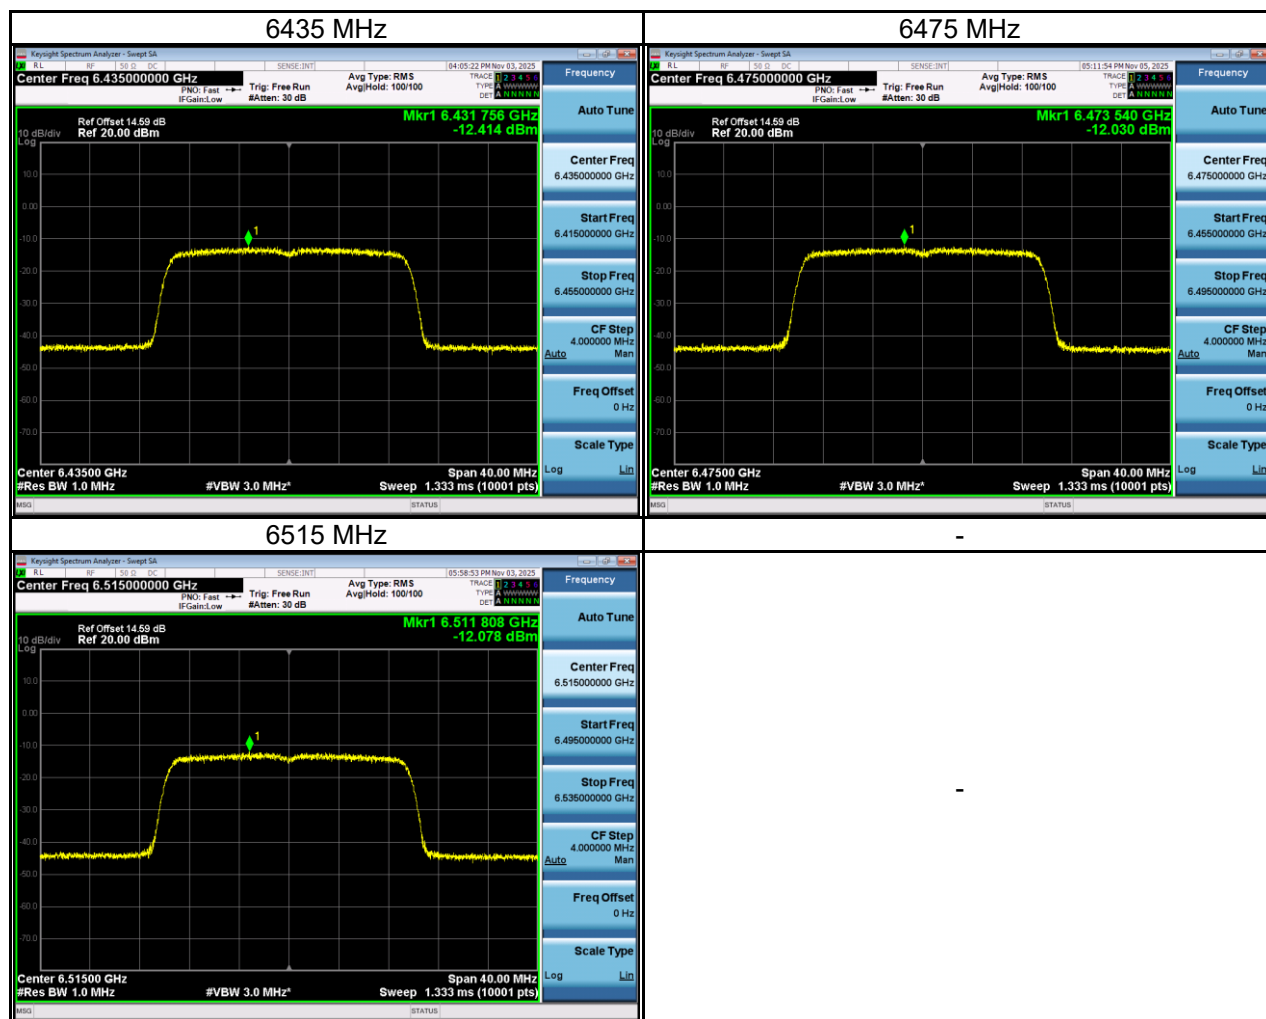

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6535	-12.49	0.02	-12.47	8.28	-4.19	-1.00	Pass
6695	-13.60	0.02	-13.58	8.28	-5.30	-1.00	Pass
6855	-13.53	0.02	-13.51	8.28	-5.23	-1.00	Pass

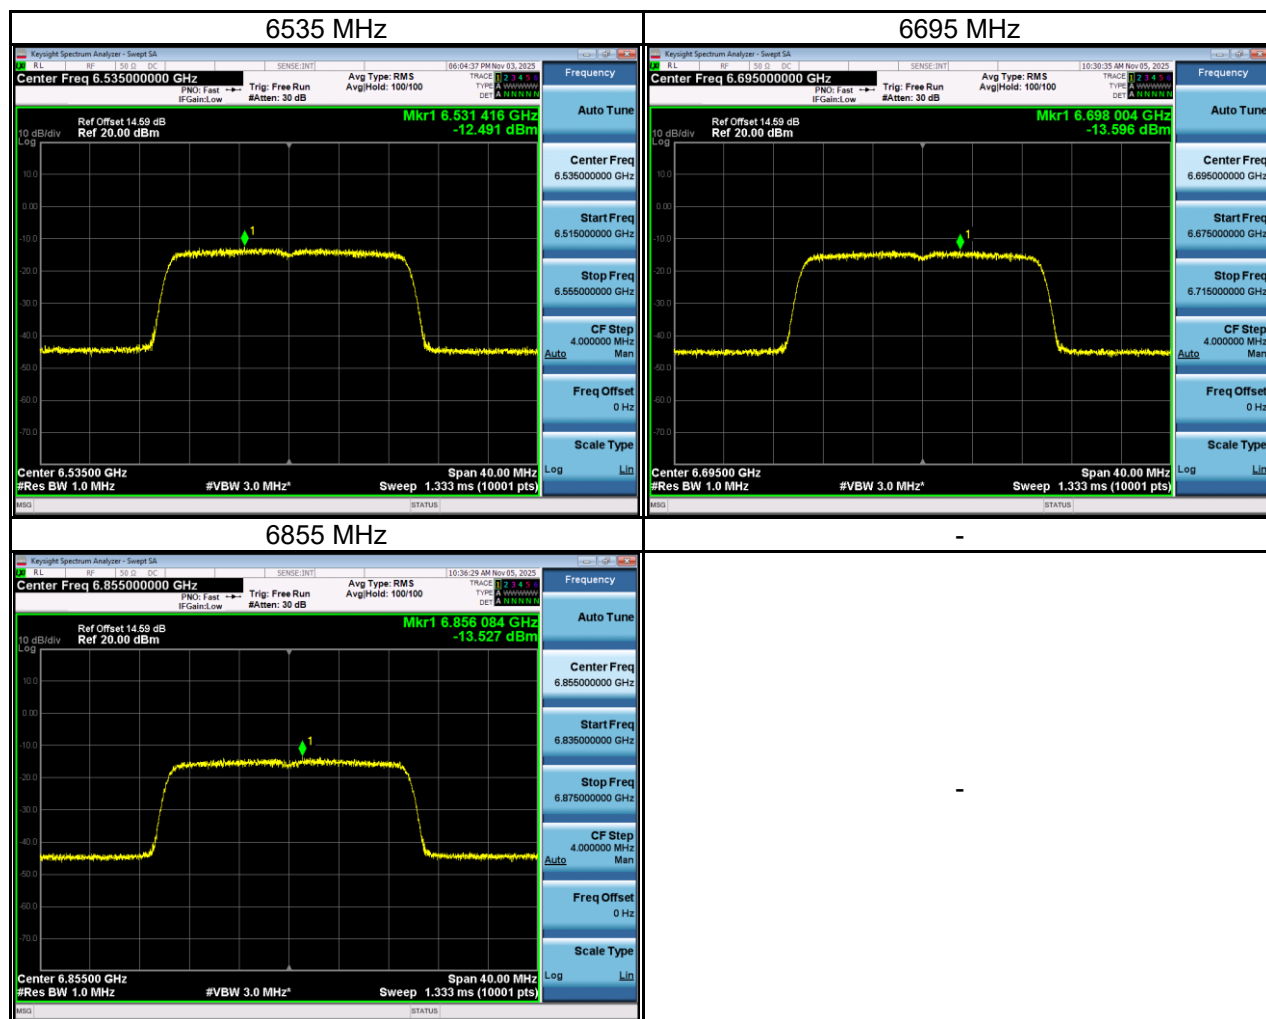


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6875	-11.23	0.02	-11.21	5.74	-5.47	-1.00	Pass
6995	-10.99	0.02	-10.97	5.74	-5.23	-1.00	Pass
7115	-22.30	0.02	-22.28	5.74	-16.54	-1.00	Pass

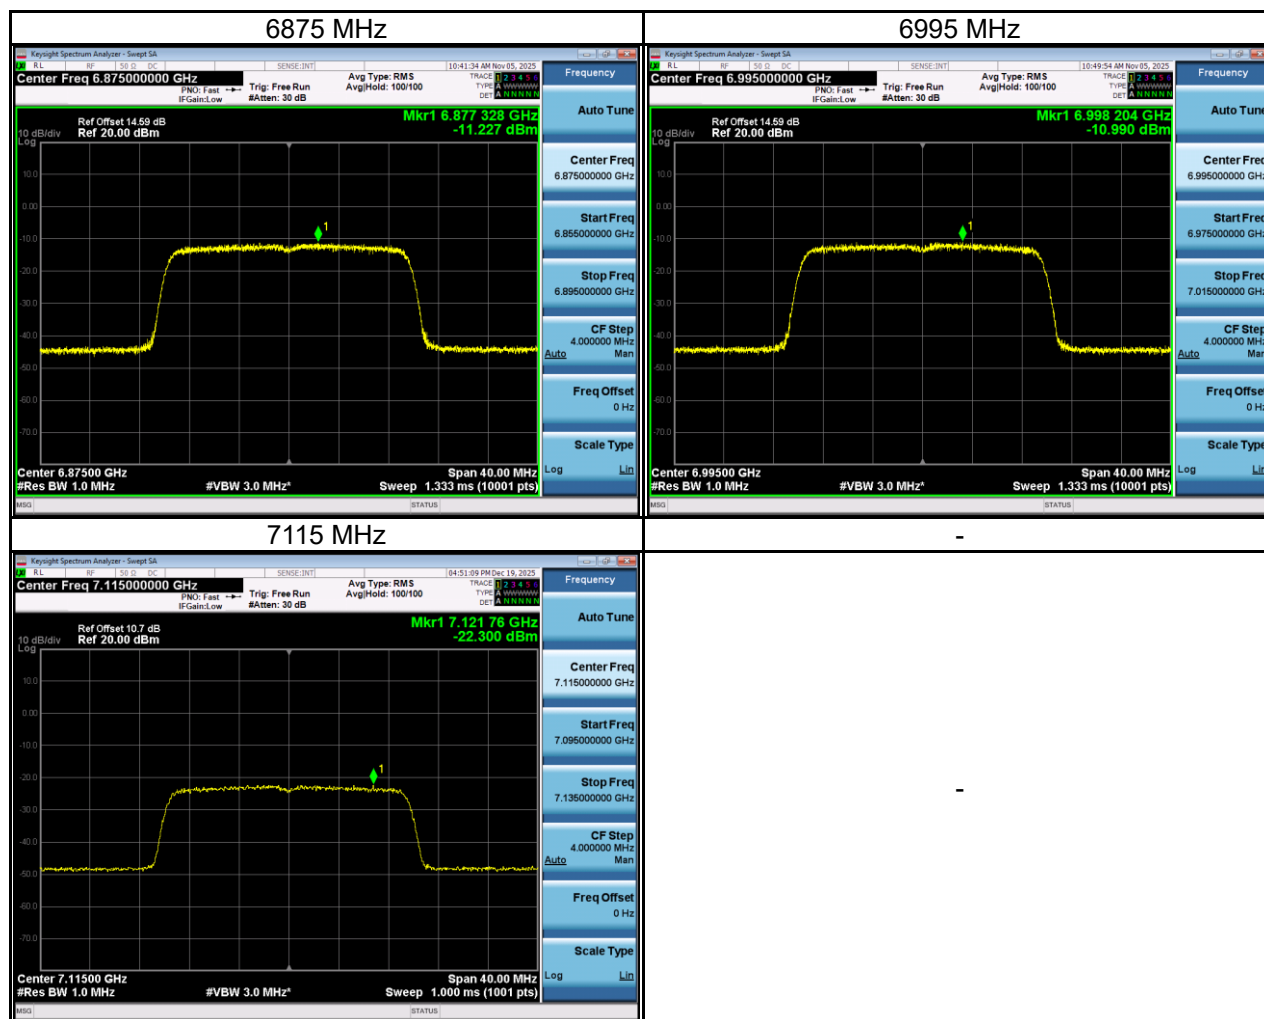


Test Mode	IEEE 802.11ax (HE20)_ Aux Antenna
-----------	-----------------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5955	-12.33	0.02	-12.31	8.27	-4.04	-1.00	Pass
6175	-12.42	0.02	-12.40	8.27	-4.13	-1.00	Pass
6415	-12.34	0.02	-12.32	8.27	-4.05	-1.00	Pass

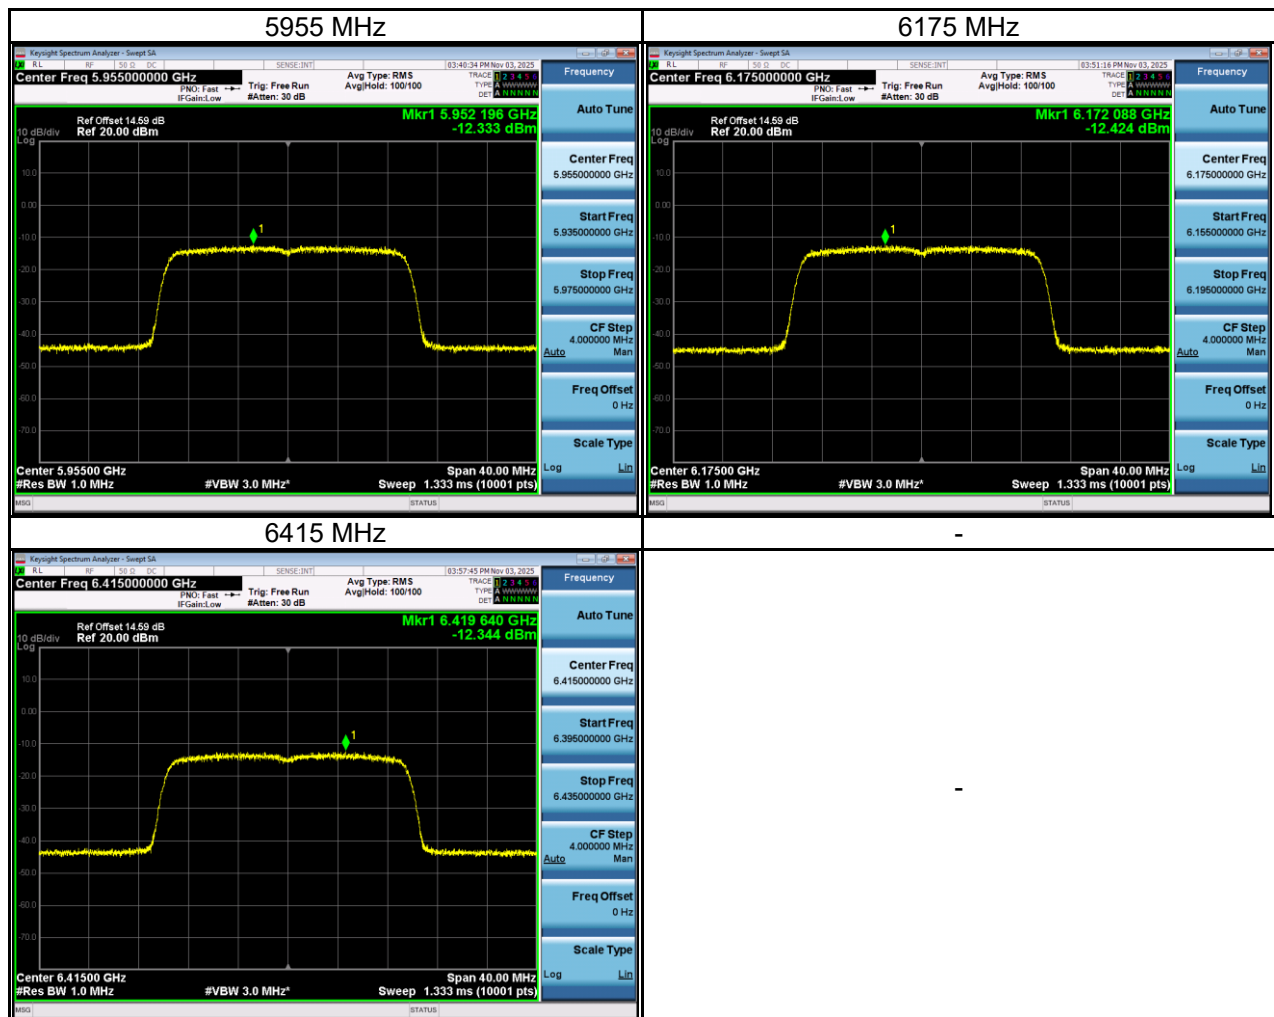


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6435	-12.17	0.02	-12.14	7.96	-4.18	-1.00	Pass
6475	-12.65	0.02	-12.63	7.96	-4.67	-1.00	Pass
6515	-12.33	0.02	-12.31	7.96	-4.35	-1.00	Pass

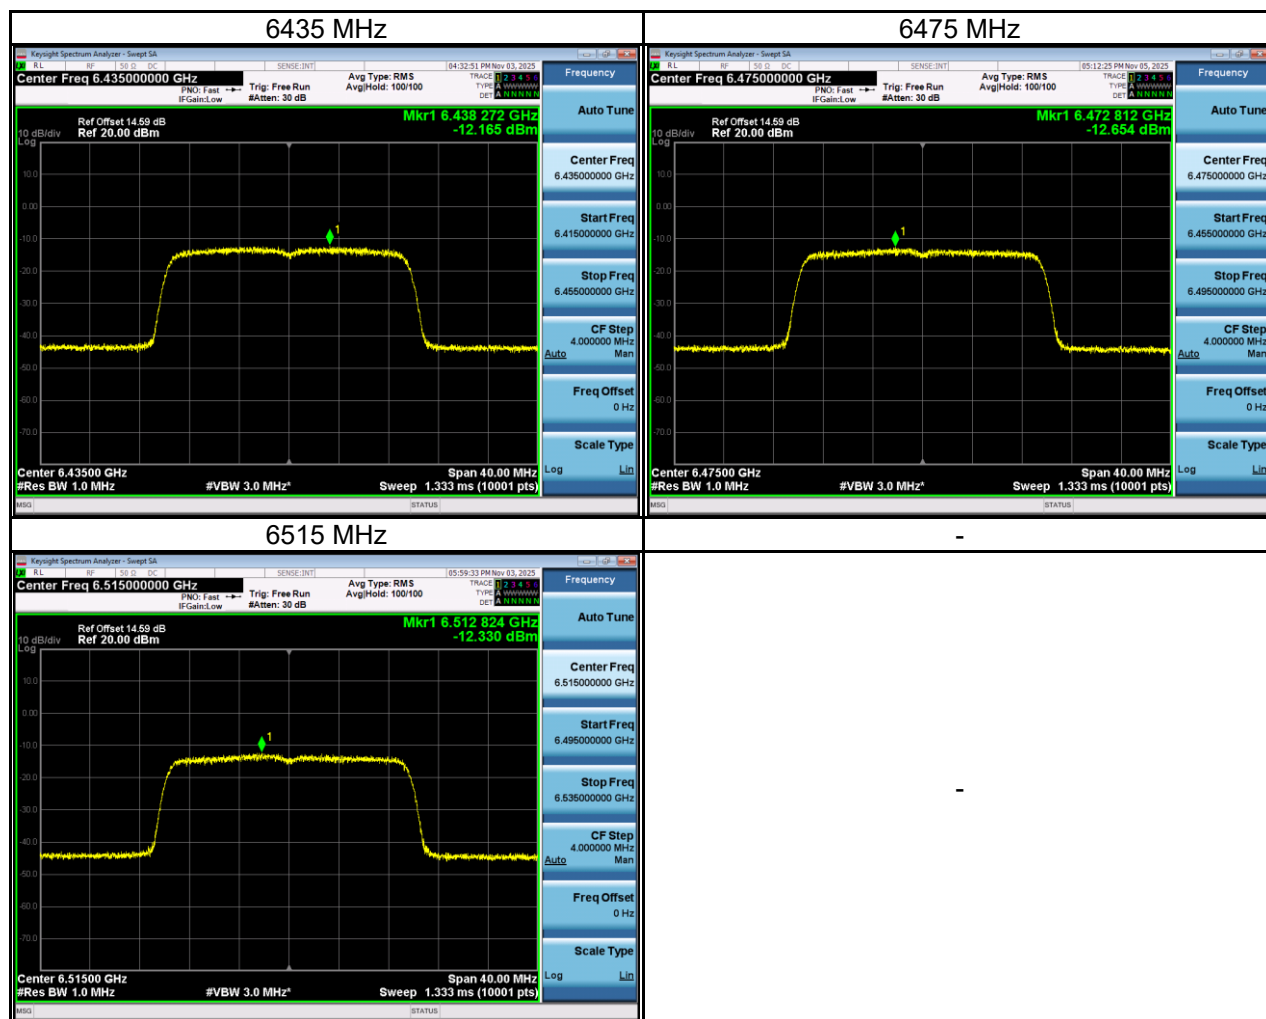

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6535	-12.86	0.02	-12.84	8.28	-4.56	-1.00	Pass
6695	-12.14	0.02	-12.12	8.28	-3.84	-1.00	Pass
6855	-11.76	0.02	-11.74	8.28	-3.46	-1.00	Pass

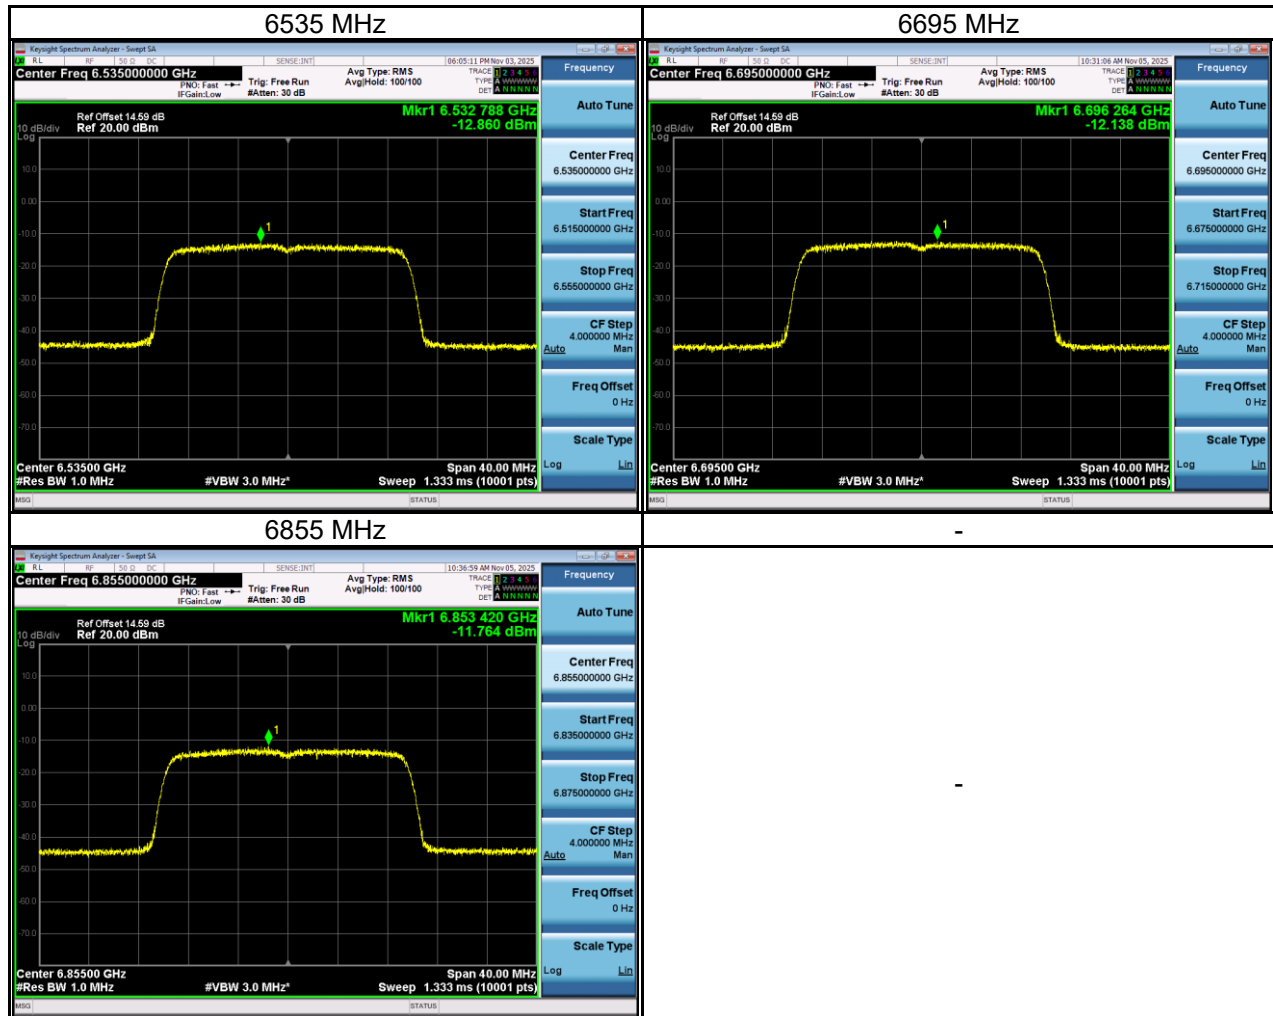

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6875	-9.39	0.02	-9.37	5.74	-3.63	-1.00	Pass
6995	-9.24	0.02	-9.22	5.74	-3.48	-1.00	Pass
7115	-21.45	0.02	-21.42	5.74	-15.68	-1.00	Pass

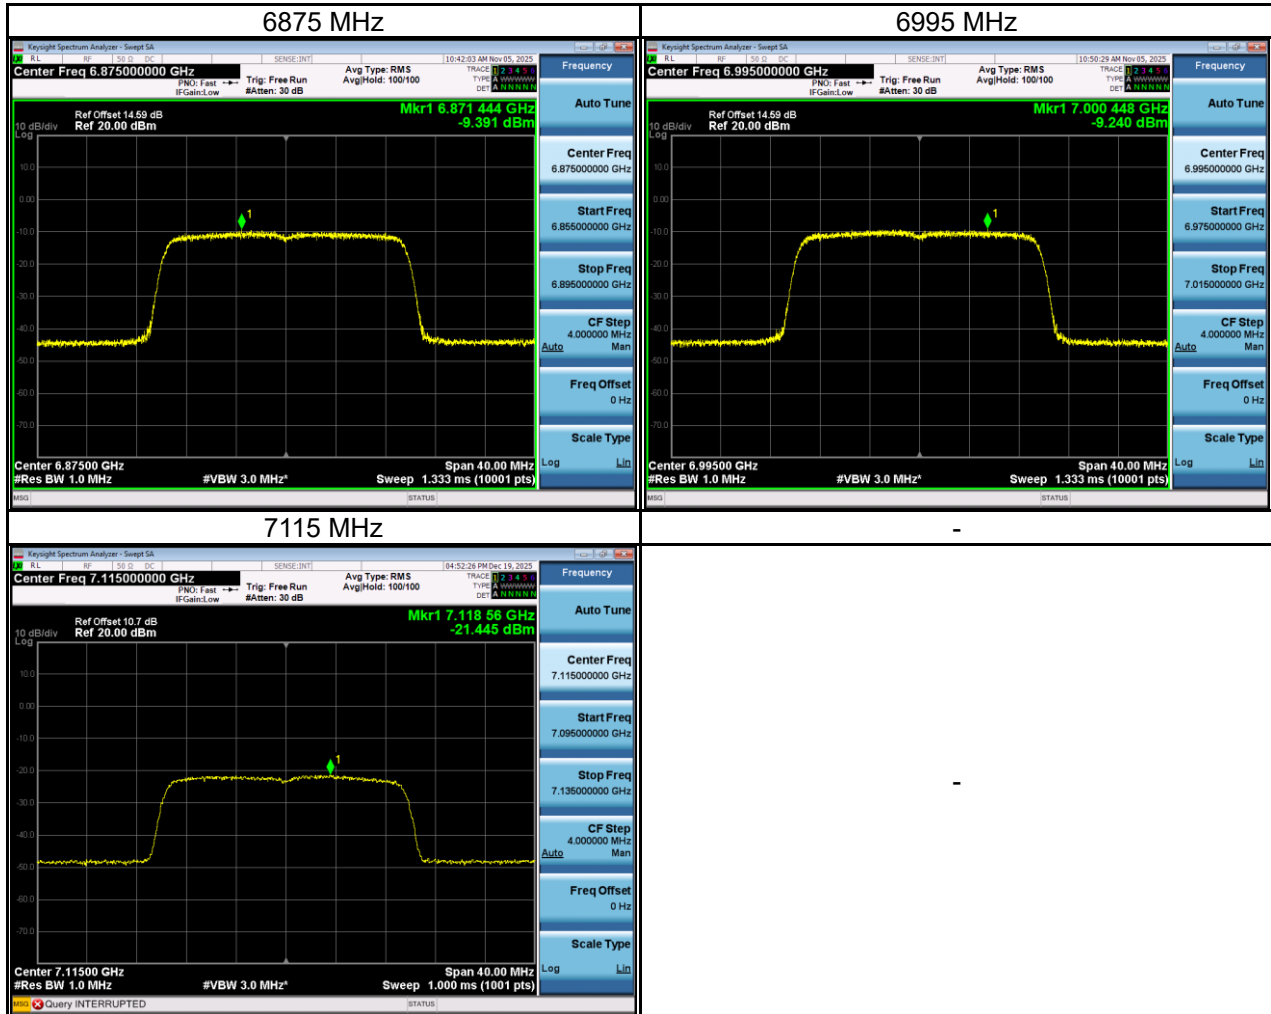


Test Mode	IEEE 802.11ax (HE20)_ Total
-----------	-----------------------------

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5955	-9.42	0.02	-9.40	8.27	-1.13	-1.00	Pass
6175	-9.40	0.02	-9.38	8.27	-1.11	-1.00	Pass
6415	-9.48	0.02	-9.46	8.27	-1.19	-1.00	Pass
6435	-9.28	0.02	-9.26	7.96	-1.30	-1.00	Pass
6475	-9.32	0.02	-9.30	7.96	-1.34	-1.00	Pass
6515	-9.19	0.02	-9.17	7.96	-1.21	-1.00	Pass
6535	-9.66	0.02	-9.64	8.28	-1.36	-1.00	Pass
6695	-9.80	0.02	-9.78	8.28	-1.50	-1.00	Pass
6855	-9.55	0.02	-9.53	8.28	-1.25	-1.00	Pass
6875	-7.20	0.02	-7.18	5.74	-1.44	-1.00	Pass
6995	-7.02	0.02	-7.00	5.74	-1.26	-1.00	Pass
7115	-18.84	0.02	-18.82	5.74	-13.08	-1.00	Pass

Test Mode	IEEE 802.11ax (HE40)_ Main Antenna
-----------	------------------------------------

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5965	-12.97	0.04	-12.93	8.27	-4.66	-1.00	Pass
6165	-12.87	0.04	-12.83	8.27	-4.56	-1.00	Pass
6405	-12.82	0.04	-12.78	8.27	-4.51	-1.00	Pass

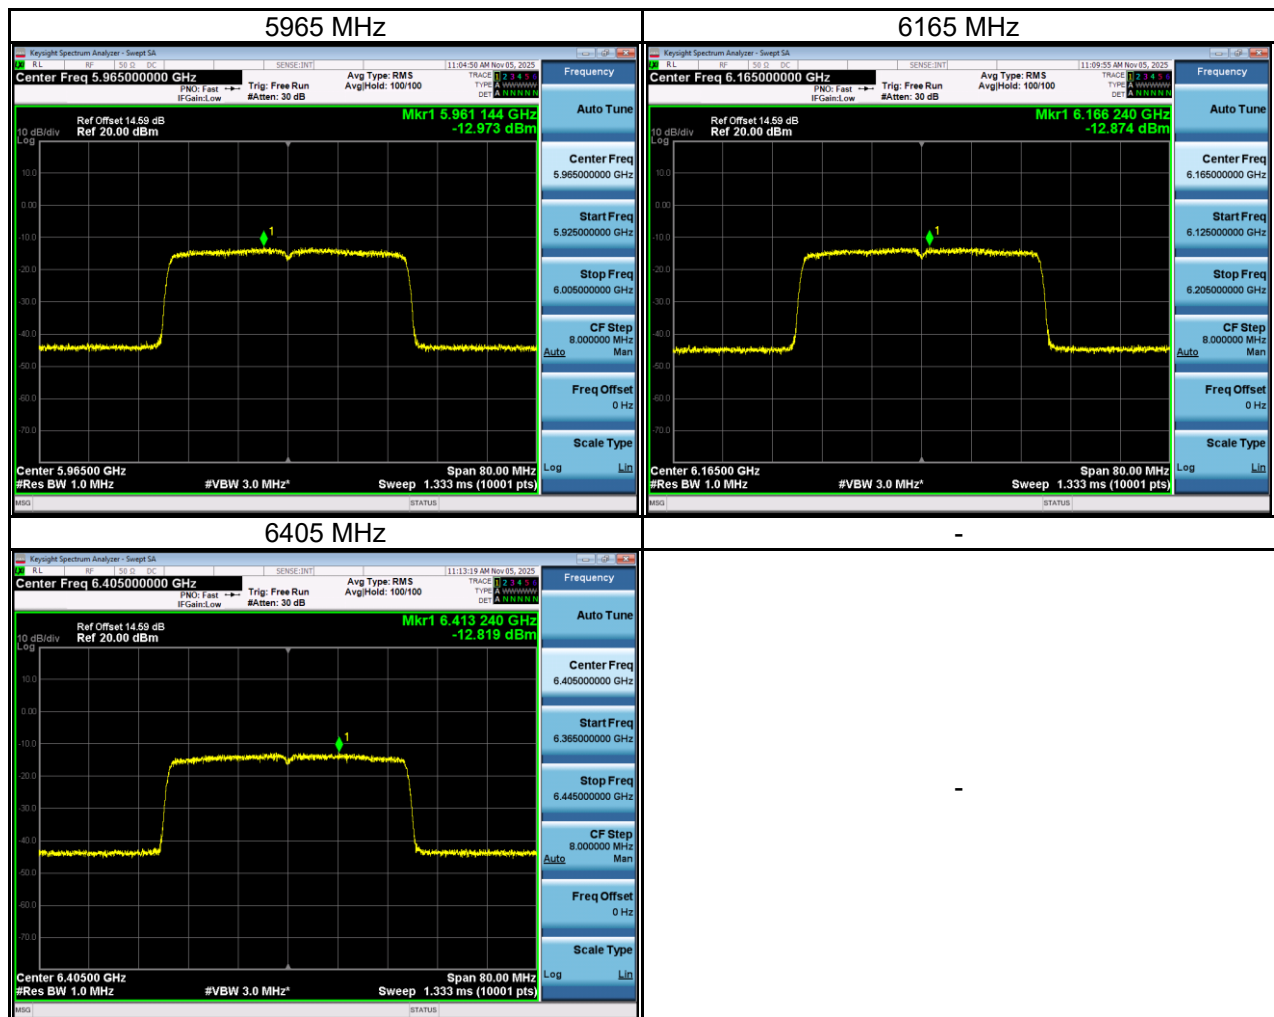

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6445	-12.07	0.04	-12.02	7.96	-4.06	-1.00	Pass
6485	-12.35	0.04	-12.30	7.96	-4.34	-1.00	Pass

