Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6525	-12.71	0.04	-12.67	8.28	-4.39	-1.00	Pass
6685	-13.49	0.04	-13.45	8.28	-5.17	-1.00	Pass
6845	-14.52	0.04	-14.47	8.28	-6.19	-1.00	Pass

6525 MHz	6685 MHz
	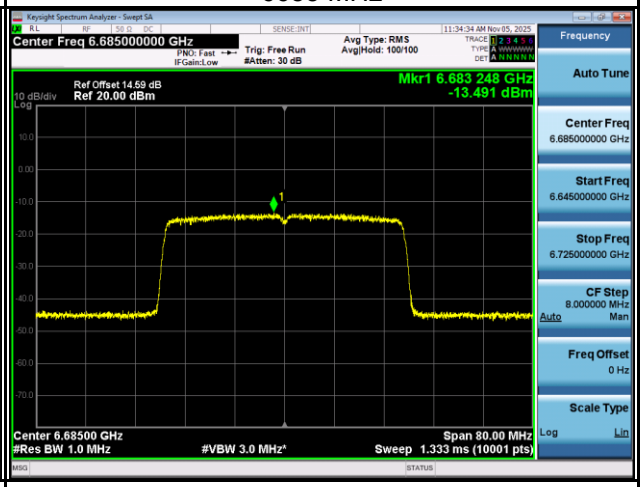
6845 MHz	-
	-

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6885	-10.35	0.04	-10.30	5.74	-4.56	-1.00	Pass
6965	-10.90	0.04	-10.86	5.74	-5.12	-1.00	Pass
7085	-11.13	0.04	-11.08	5.74	-5.34	-1.00	Pass

6885 MHz	6965 MHz
7085 MHz	-
	-

Test Mode	IEEE 802.11ax (HE40)_ Aux Antenna

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5965	-12.26	0.04	-12.22	8.27	-3.95	-1.00	Pass
6165	-12.26	0.04	-12.21	8.27	-3.94	-1.00	Pass
6405	-12.72	0.04	-12.68	8.27	-4.41	-1.00	Pass

5965 MHz	6165 MHz
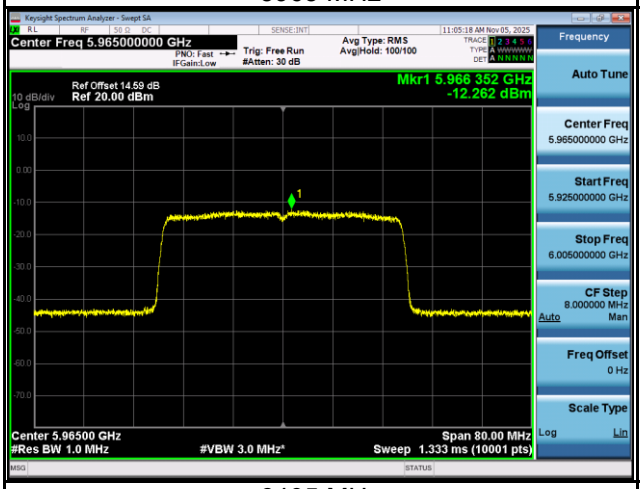	
6405 MHz	-
	-

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6445	-12.35	0.04	-12.30	7.96	-4.34	-1.00	Pass
6485	-12.39	0.04	-12.35	7.96	-4.39	-1.00	Pass

6445 MHz	6485 MHz

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6525	-12.48	0.04	-12.44	8.28	-4.16	-1.00	Pass
6685	-12.63	0.04	-12.59	8.28	-4.31	-1.00	Pass
6845	-12.70	0.04	-12.65	8.28	-4.37	-1.00	Pass

6525 MHz	6685 MHz
6845 MHz	-
	-

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6885	-9.34	0.04	-9.30	5.74	-3.56	-1.00	Pass
6965	-9.07	0.04	-9.03	5.74	-3.29	-1.00	Pass
7085	-9.48	0.04	-9.43	5.74	-3.69	-1.00	Pass

6885 MHz	6965 MHz
7085 MHz	-
	-

Test Mode	IEEE 802.11ax (HE40)_ Total

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5965	-9.59	0.04	-9.55	8.27	-1.28	-1.00	Pass
6165	-9.54	0.04	-9.50	8.27	-1.23	-1.00	Pass
6405	-9.76	0.04	-9.72	8.27	-1.45	-1.00	Pass
6445	-9.19	0.04	-9.15	7.96	-1.19	-1.00	Pass
6485	-9.36	0.04	-9.32	7.96	-1.36	-1.00	Pass
6525	-9.58	0.04	-9.54	8.28	-1.26	-1.00	Pass
6685	-10.03	0.04	-9.99	8.28	-1.71	-1.00	Pass
6845	-10.50	0.04	-10.46	8.28	-2.18	-1.00	Pass
6885	-6.80	0.04	-6.76	5.74	-1.02	-1.00	Pass
6965	-6.88	0.04	-6.84	5.74	-1.10	-1.00	Pass
7085	-7.21	0.04	-7.17	5.74	-1.43	-1.00	Pass

Test Mode	IEEE 802.11ax (HE80)_ Main Antenna

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5985	-13.11	0.04	-13.07	8.27	-4.80	-1.00	Pass
6145	-12.92	0.04	-12.88	8.27	-4.61	-1.00	Pass
6385	-13.51	0.04	-13.47	8.27	-5.20	-1.00	Pass

5985 MHz	6145 MHz
6385 MHz	-
	-

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6465	-12.26	0.04	-12.22	7.96	-4.26	-1.00	Pass

6465 MHz	-
	-

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6545	-12.68	0.04	-12.63	8.28	-4.35	-1.00	Pass
6625	-12.24	0.04	-12.20	8.28	-3.92	-1.00	Pass
6705	-12.62	0.04	-12.57	8.28	-4.29	-1.00	Pass
6785	-13.55	0.04	-13.51	5.74	-7.77	-1.00	Pass

6545 MHz

6625 MHz

6705 MHz

6785 MHz

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6865	-10.80	0.04	-10.75	5.74	-5.01	-1.00	Pass
6945	-10.95	0.04	-10.91	5.74	-5.17	-1.00	Pass
7025	-11.95	0.04	-11.91	5.74	-6.17	-1.00	Pass

6865 MHz	6945 MHz
7025 MHz	-
	-

Test Mode	IEEE 802.11ax (HE80)_ Aux Antenna

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5985	-12.61	0.04	-12.57	8.27	-4.30	-1.00	Pass
6145	-11.84	0.04	-11.80	8.27	-3.53	-1.00	Pass
6385	-12.27	0.04	-12.23	8.27	-3.96	-1.00	Pass

5985 MHz	6145 MHz
6385 MHz	-
	-

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6465	-12.09	0.04	-12.05	7.96	-4.09	-1.00	Pass

6465 MHz	-
	-

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6545	-12.12	0.04	-12.07	8.28	-3.79	-1.00	Pass
6625	-12.47	0.04	-12.42	8.28	-4.14	-1.00	Pass
6705	-12.26	0.04	-12.21	8.28	-3.93	-1.00	Pass
6785	-11.98	0.04	-11.94	8.28	-3.66	-1.00	Pass

6545 MHz

6625 MHz

6705 MHz

6785 MHz

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6865	-9.00	0.04	-8.96	5.74	-3.22	-1.00	Pass
6945	-9.18	0.04	-9.14	5.74	-3.40	-1.00	Pass
7025	-8.92	0.04	-8.87	5.74	-3.13	-1.00	Pass

6865 MHz	6945 MHz
7025 MHz	-
	-

Test Mode	IEEE 802.11ax (HE80)_ Total

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5985	-9.84	0.04	-9.80	8.27	-1.53	-1.00	Pass
6145	-9.34	0.04	-9.29	8.27	-1.02	-1.00	Pass
6385	-9.84	0.04	-9.79	8.27	-1.52	-1.00	Pass
6465	-9.16	0.04	-9.12	7.96	-1.16	-1.00	Pass
6545	-9.38	0.04	-9.33	8.28	-1.05	-1.00	Pass
6625	-9.34	0.04	-9.30	8.28	-1.02	-1.00	Pass
6705	-9.42	0.04	-9.38	8.28	-1.10	-1.00	Pass
6785	-9.68	0.04	-9.64	8.28	-1.36	-1.00	Pass
6865	-6.80	0.04	-6.75	5.74	-1.01	-1.00	Pass
6945	-6.97	0.04	-6.92	5.74	-1.18	-1.00	Pass
7025	-7.16	0.04	-7.12	5.74	-1.38	-1.00	Pass

Test Mode	IEEE 802.11ax (HE160)_ Main Antenna

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6025	-13.03	0.02	-13.01	8.27	-4.74	-1.00	Pass
6345	-12.57	0.02	-12.54	8.27	-4.27	-1.00	Pass

6025 MHz	6345 MHz

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6505	-12.20	0.02	-12.18	7.96	-4.22	-1.00	Pass

6505 MHz	-
	-

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6665	-12.55	0.02	-12.53	8.28	-4.25	-1.00	Pass

6665 MHz	-
	-

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6985	-11.75	0.02	-11.73	5.74	-5.99	-1.00	Pass

6985 MHz	-
	-

Test Mode	IEEE 802.11ax (HE160)_ Aux Antenna

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6025	-12.55	0.02	-12.52	8.27	-4.25	-1.00	Pass
6345	-12.33	0.02	-12.31	8.27	-4.04	-1.00	Pass

6025 MHz	6345 MHz
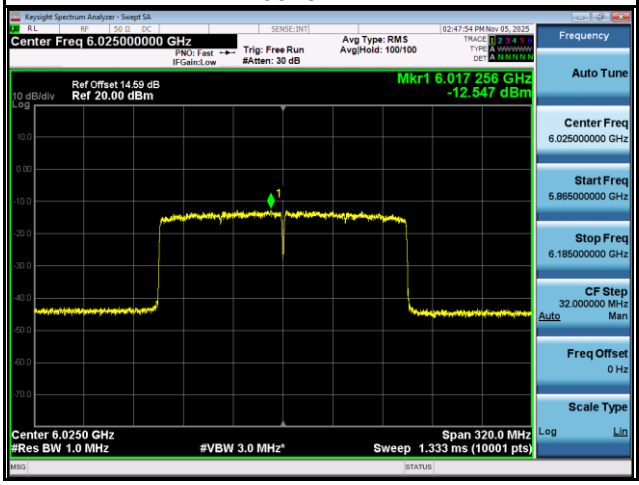	

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6505	-12.16	0.02	-12.14	7.96	-4.18	-1.00	Pass

6505 MHz	-
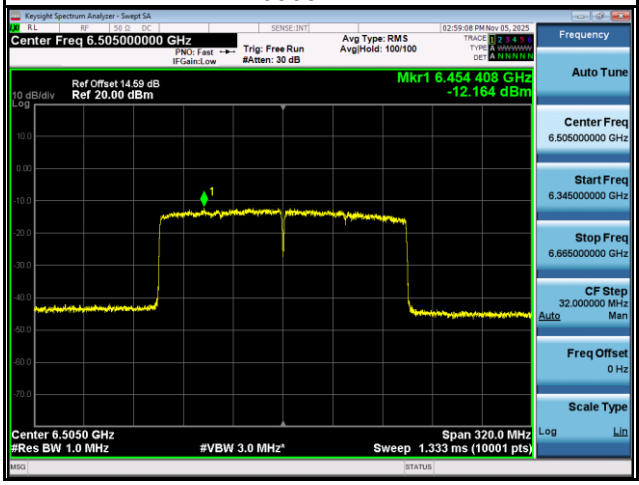	-

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6665	-12.28	0.02	-12.26	8.28	-3.98	-1.00	Pass

6665 MHz	-
	-

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6985	-8.79	0.02	-8.76	5.74	-3.02	-1.00	Pass

6985 MHz	-
	-

Test Mode	IEEE 802.11ax (HE160)_ Total

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6025	-9.77	0.02	-9.75	8.27	-1.48	-1.00	Pass
6345	-9.44	0.02	-9.41	8.27	-1.14	-1.00	Pass
6505	-9.17	0.02	-9.15	7.96	-1.19	-1.00	Pass
6665	-9.40	0.02	-9.38	8.28	-1.10	-1.00	Pass
6985	-7.01	0.02	-6.99	5.74	-1.25	-1.00	Pass

For RU Configuration:

Test Mode	IEEE 802.11ax (HE20)_ Main Antenna

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5955_full	-13.06	0.02	-13.04	8.27	-4.77	-1.00	Pass
26_Tones	-13.35	0.02	-13.32	8.27	-5.05	-1.00	Pass
52_Tones	-13.67	0.02	-13.65	8.27	-5.38	-1.00	Pass
106_Tones	-13.42	0.02	-13.40	8.27	-5.13	-1.00	Pass

5955_full

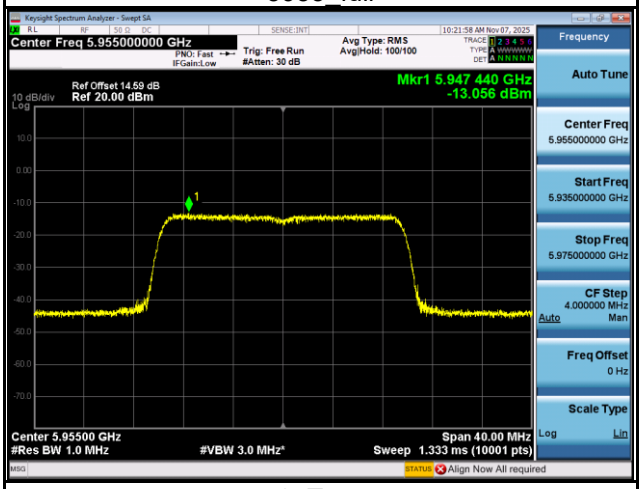

26_Tones

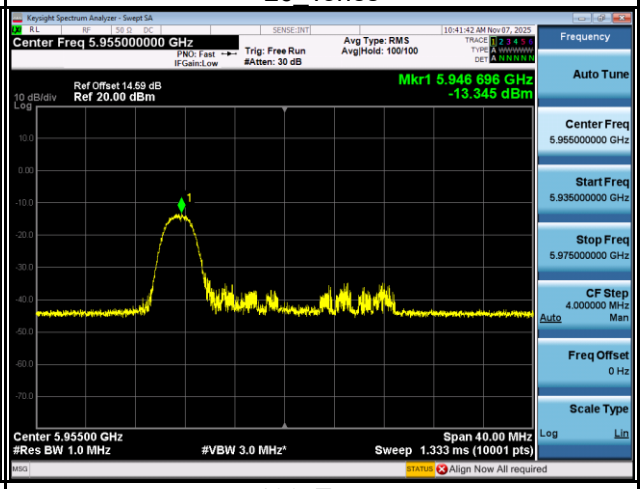

52_Tones

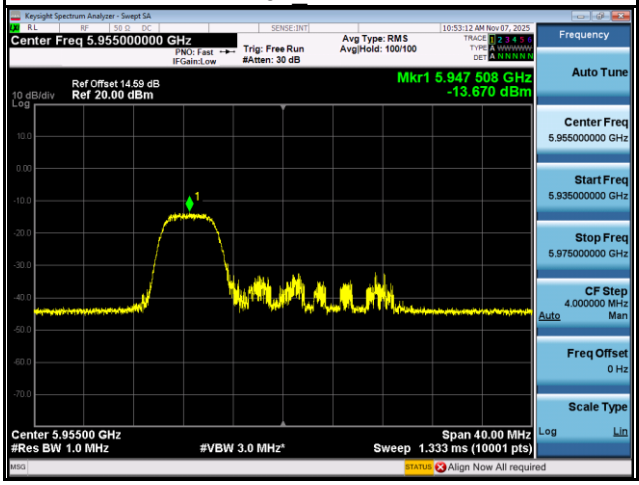

106_Tones

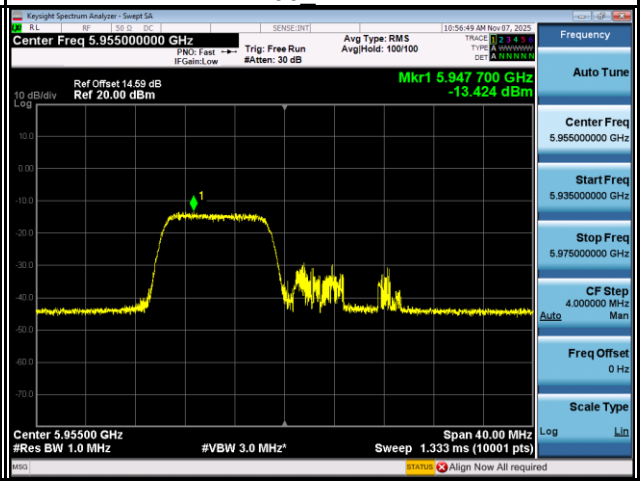

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6435_full	-12.44	0.02	-12.42	7.96	-4.46	-1.00	Pass
26_Tones	-12.75	0.02	-12.73	7.96	-4.77	-1.00	Pass
52_Tones	-12.49	0.02	-12.47	7.96	-4.51	-1.00	Pass
106_Tones	-12.63	0.02	-12.61	7.96	-4.65	-1.00	Pass

6435_full

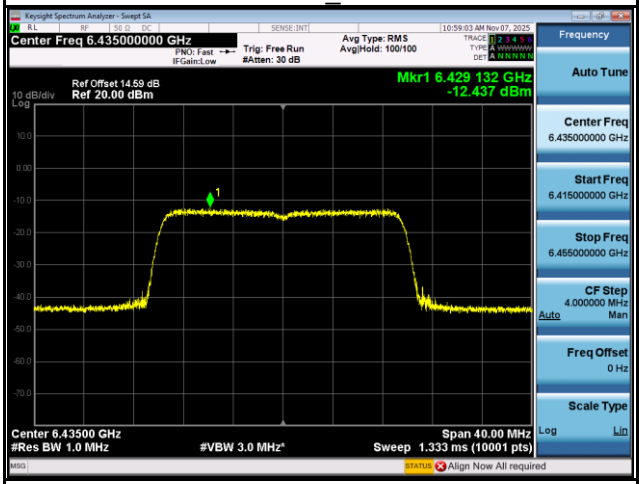

26_Tones

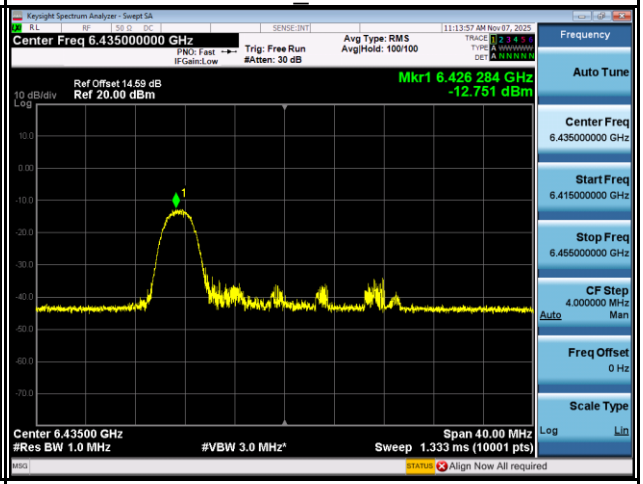

52_Tones

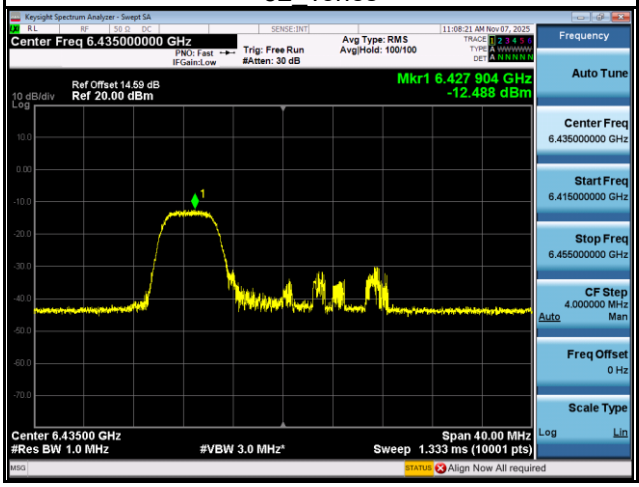

106_Tones

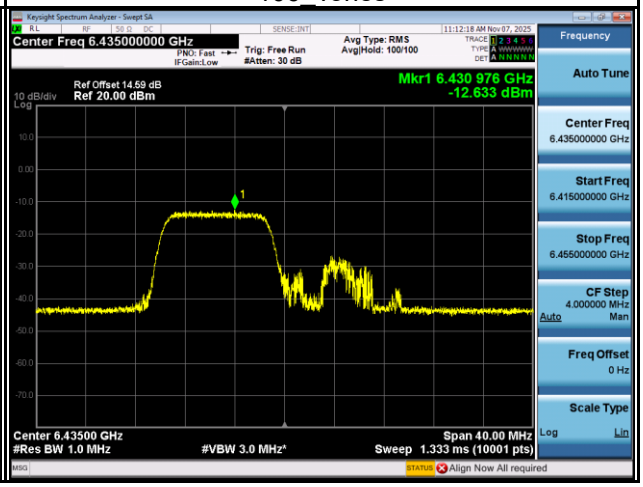

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6535_full	-12.54	0.02	-12.52	8.28	-4.24	-1.00	Pass
26_Tones	-12.77	0.02	-12.75	8.28	-4.47	-1.00	Pass
52_Tones	-13.08	0.02	-13.06	8.28	-4.78	-1.00	Pass
106_Tones	-13.17	0.02	-13.15	8.28	-4.87	-1.00	Pass

6535_full

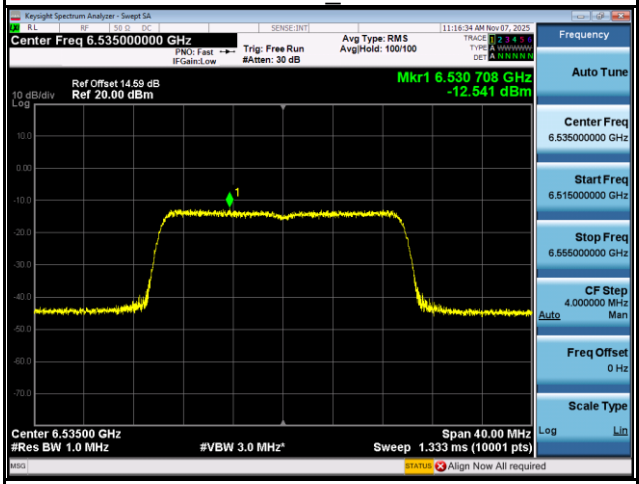

26_Tones

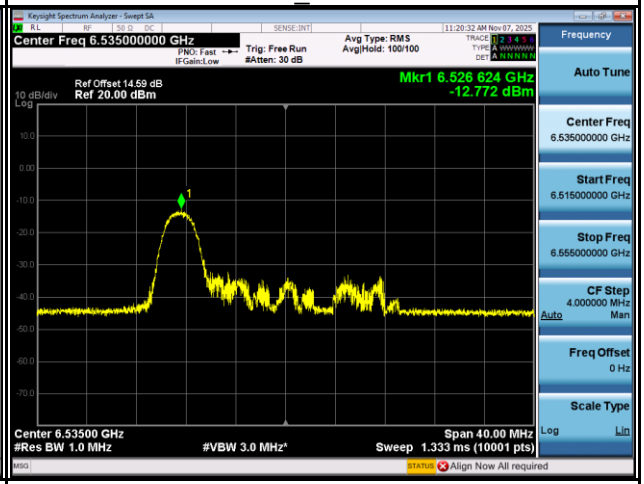

52_Tones

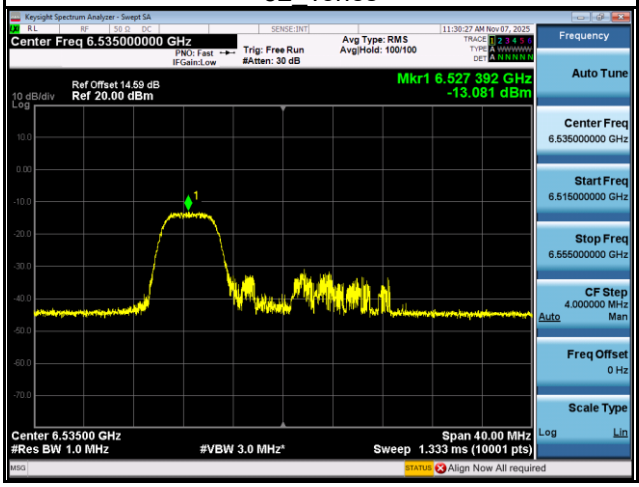
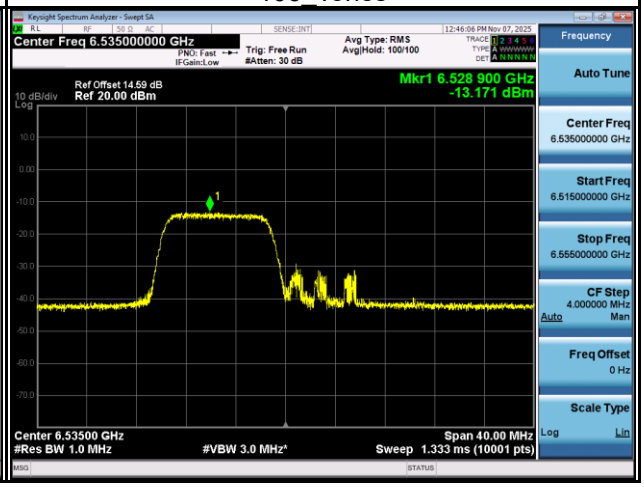
106_Tones