



Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6875_full	-11.50	0.02	-11.48	5.74	-5.74	-1.00	Pass
26_Tones	-12.08	0.02	-12.05	5.74	-6.31	-1.00	Pass
52_Tones	-12.12	0.02	-12.10	5.74	-6.36	-1.00	Pass
106_Tones	-11.96	0.02	-11.94	5.74	-6.20	-1.00	Pass

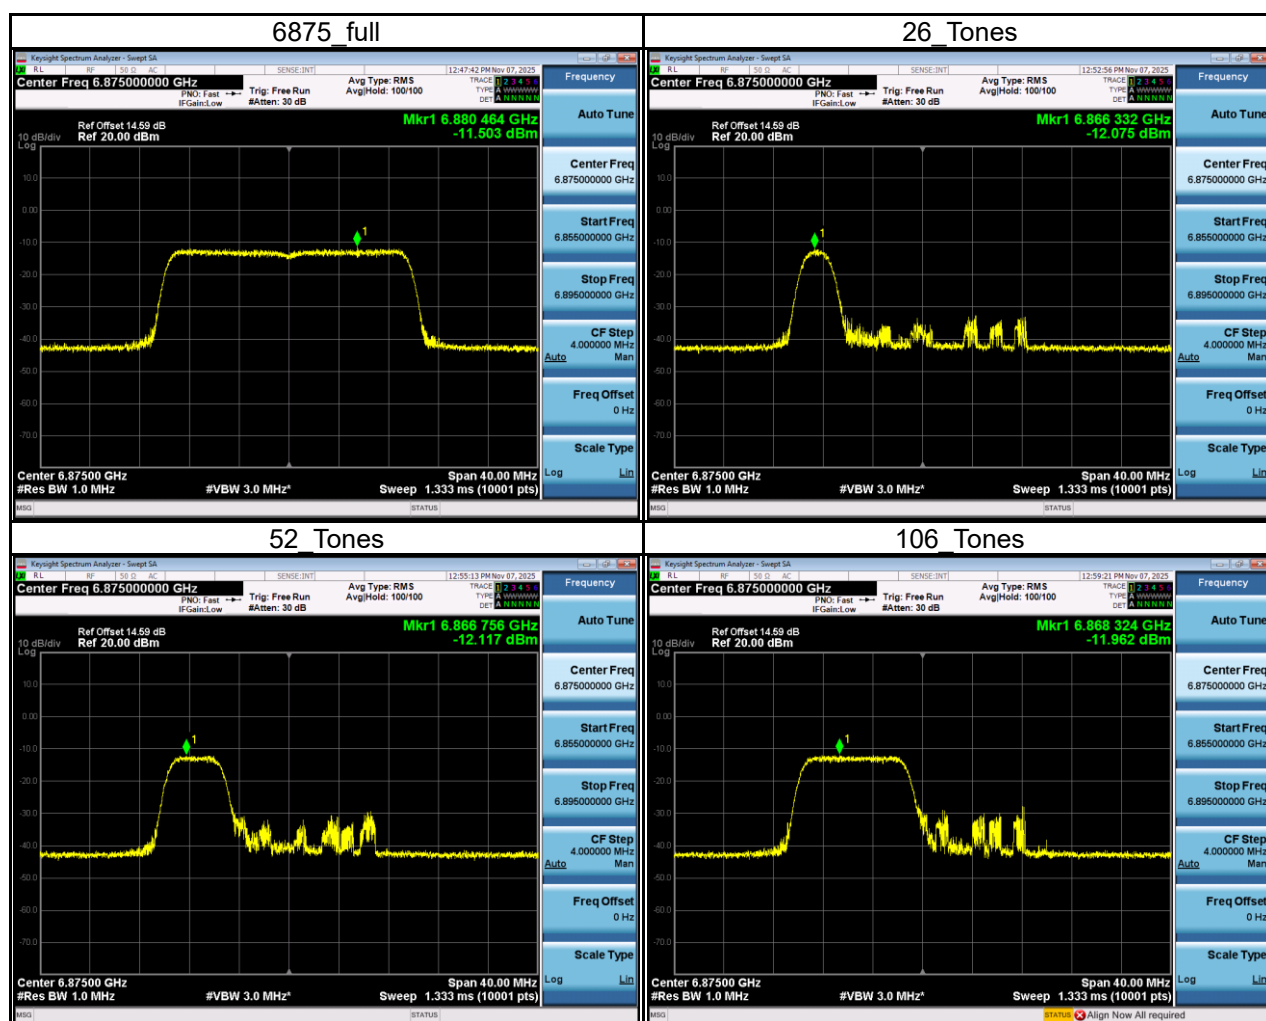


Test Mode	IEEE 802.11ax (HE20)_ Aux Antenna
-----------	-----------------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5955_full	-12.66	0.02	-12.64	8.27	-4.37	-1.00	Pass
26_Tones	-12.54	0.02	-12.52	8.27	-4.25	-1.00	Pass
52_Tones	-12.75	0.02	-12.73	8.27	-4.46	-1.00	Pass
106_Tones	-12.89	0.02	-12.87	8.27	-4.60	-1.00	Pass

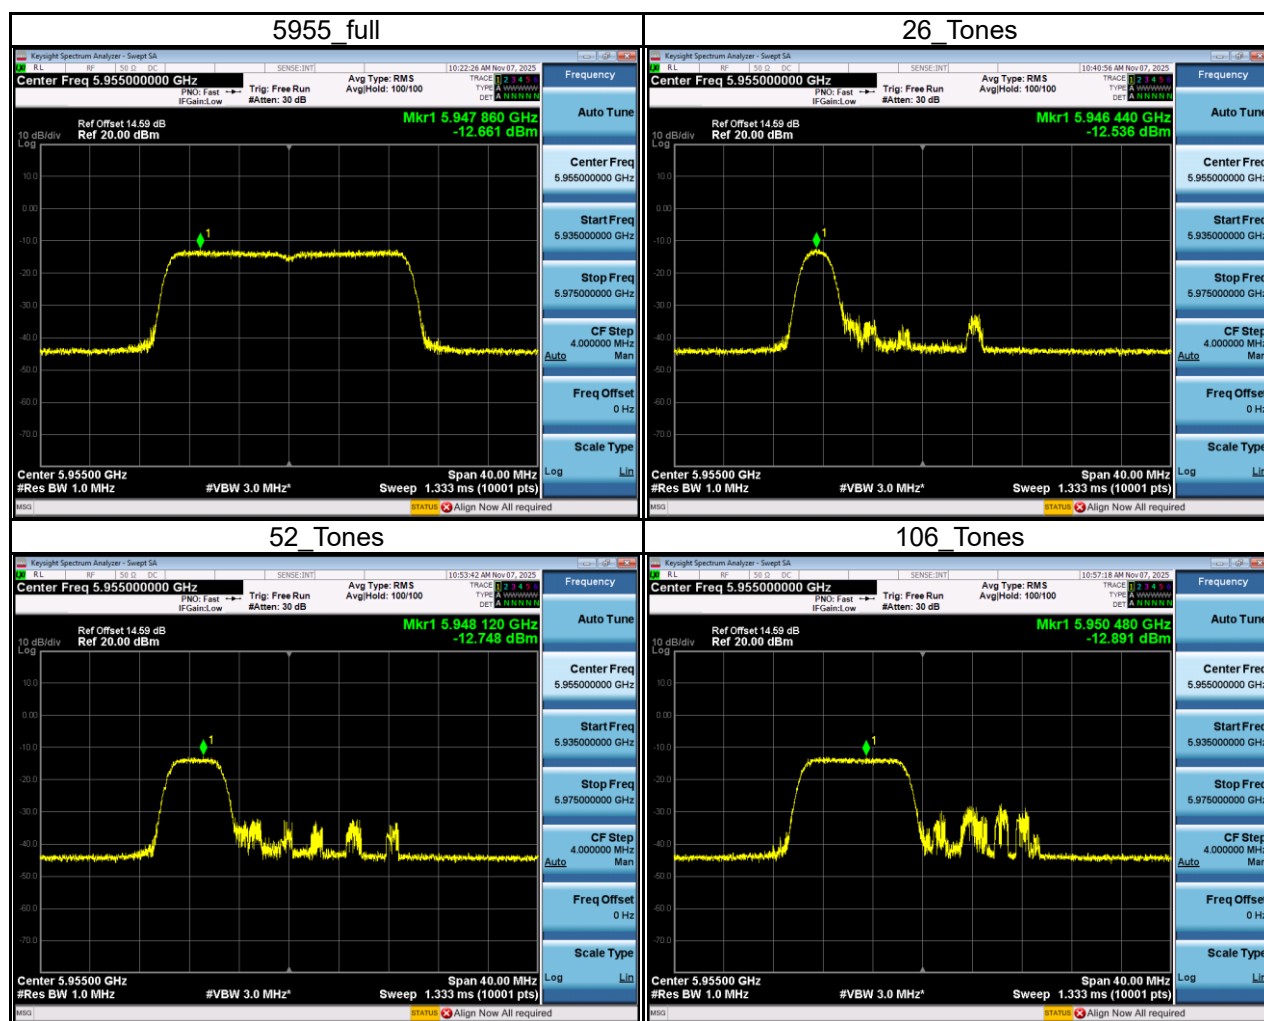


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6435_full	-12.41	0.02	-12.39	7.96	-4.43	-1.00	Pass
26_Tones	-12.47	0.02	-12.45	7.96	-4.49	-1.00	Pass
52_Tones	-12.49	0.02	-12.47	7.96	-4.51	-1.00	Pass
106_Tones	-12.74	0.02	-12.72	7.96	-4.76	-1.00	Pass

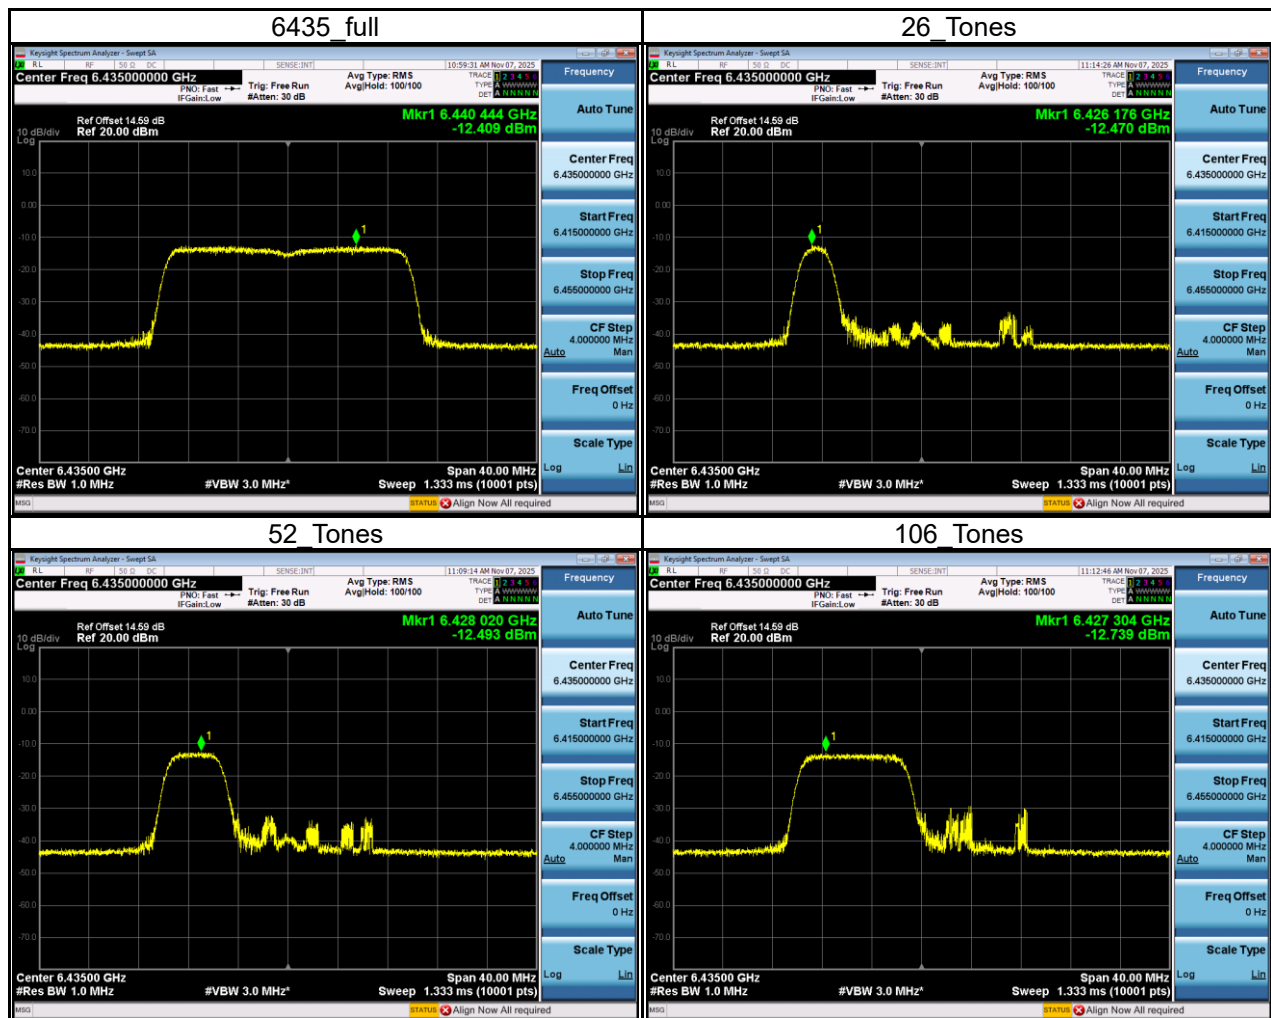

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6535_full	-12.73	0.02	-12.71	8.28	-4.43	-1.00	Pass
26_Tones	-12.91	0.02	-12.89	8.28	-4.61	-1.00	Pass
52_Tones	-12.51	0.02	-12.49	8.28	-4.21	-1.00	Pass
106_Tones	-12.69	0.02	-12.67	8.28	-4.39	-1.00	Pass

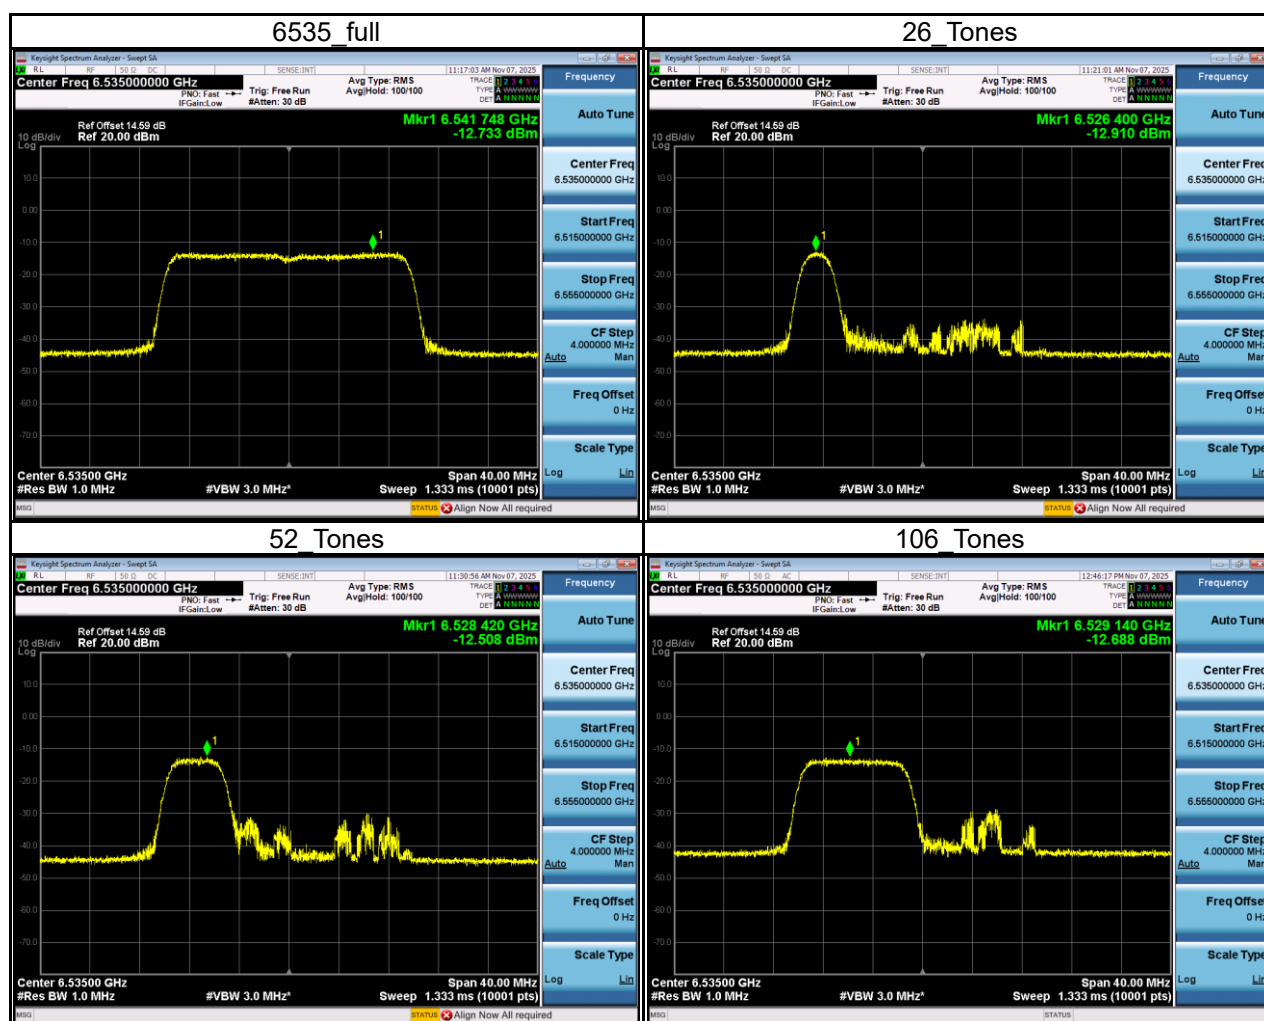

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6875_full	-9.90	0.02	-9.88	5.74	-4.14	-1.00	Pass
26_Tones	-9.84	0.02	-9.82	5.74	-4.08	-1.00	Pass
52_Tones	-9.92	0.02	-9.90	5.74	-4.16	-1.00	Pass
106_Tones	-9.69	0.02	-9.67	5.74	-3.93	-1.00	Pass

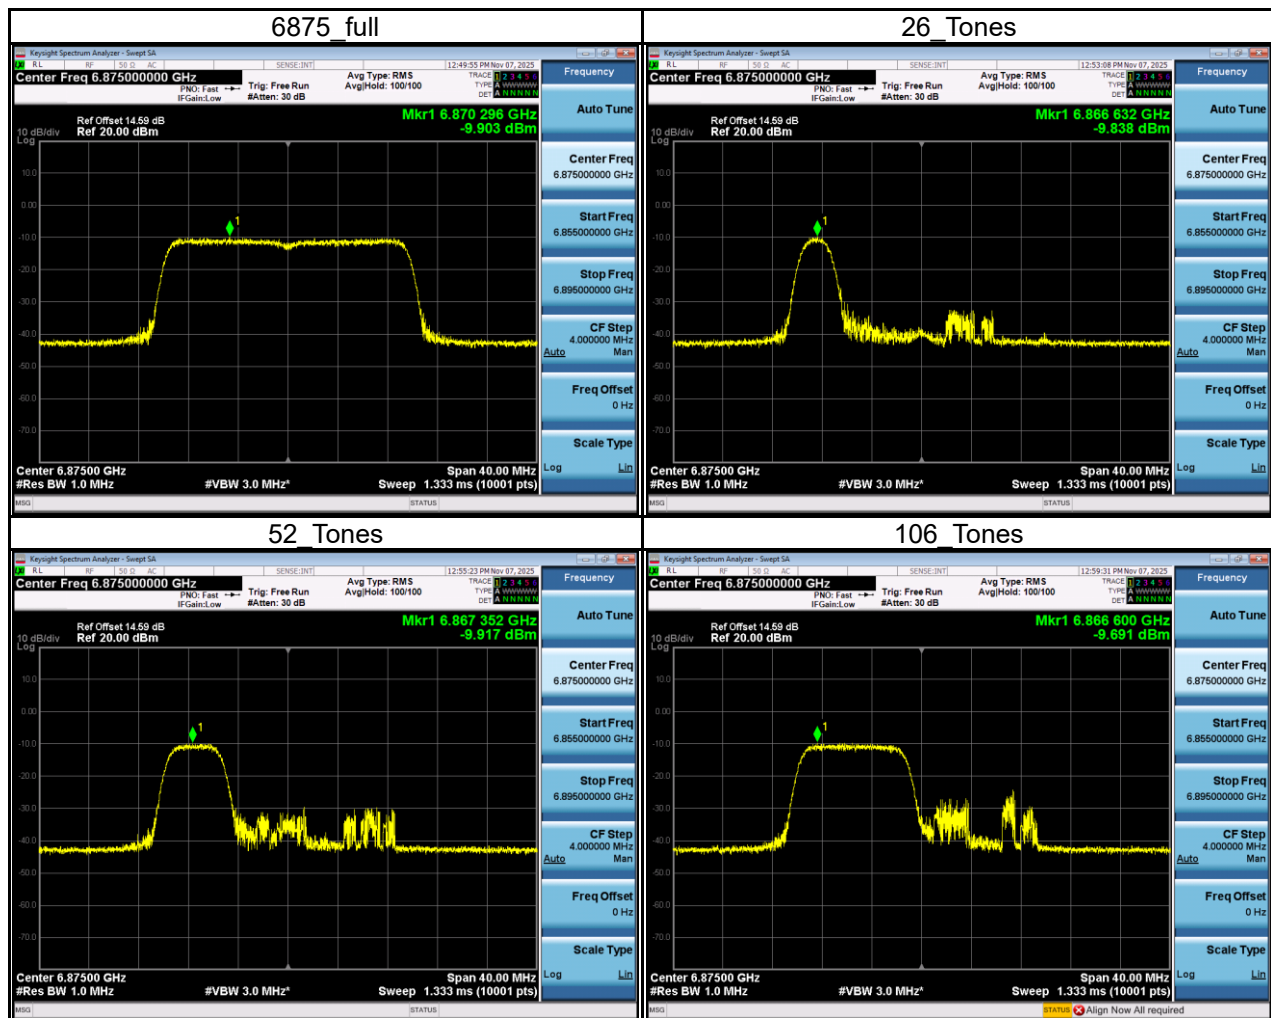


Test Mode	IEEE 802.11ax (HE20)_ Total
-----------	-----------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5955_full	-9.84	0.02	-9.82	8.27	-1.55	-1.00	Pass
26_Tones	-9.91	0.02	-9.89	8.27	-1.62	-1.00	Pass
52_Tones	-10.17	0.02	-10.15	8.27	-1.88	-1.00	Pass
106_Tones	-10.14	0.02	-10.12	8.27	-1.85	-1.00	Pass
6435_full	-9.41	0.02	-9.39	7.96	-1.43	-1.00	Pass
26_Tones	-9.60	0.02	-9.58	7.96	-1.62	-1.00	Pass
52_Tones	-9.48	0.02	-9.46	7.96	-1.50	-1.00	Pass
106_Tones	-9.68	0.02	-9.65	7.96	-1.69	-1.00	Pass
6535_full	-9.63	0.02	-9.60	8.28	-1.32	-1.00	Pass
26_Tones	-9.83	0.02	-9.81	8.28	-1.53	-1.00	Pass
52_Tones	-9.77	0.02	-9.75	8.28	-1.47	-1.00	Pass
106_Tones	-9.91	0.02	-9.89	8.28	-1.61	-1.00	Pass
6875_full	-7.62	0.02	-7.60	5.74	-1.86	-1.00	Pass
26_Tones	-7.80	0.02	-7.78	5.74	-2.04	-1.00	Pass
52_Tones	-7.87	0.02	-7.85	5.74	-2.11	-1.00	Pass
106_Tones	-7.67	0.02	-7.65	5.74	-1.91	-1.00	Pass

Test Mode	IEEE 802.11ax (HE40)_ Main Antenna
-----------	------------------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5965_full	-13.39	0.04	-13.34	8.27	-5.07	-1.00	Pass
242_Tones	-13.46	0.04	-13.42	8.27	-5.15	-1.00	Pass

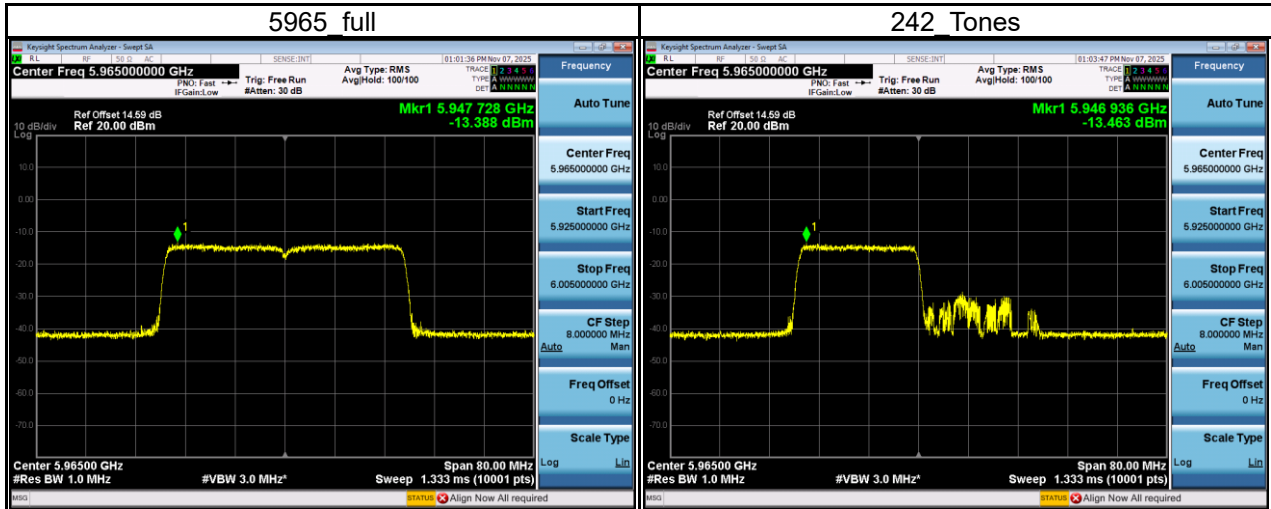


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6445_full	-12.11	0.04	-12.07	7.96	-4.11	-1.00	Pass
242_Tones	-12.05	0.04	-12.01	7.96	-4.05	-1.00	Pass

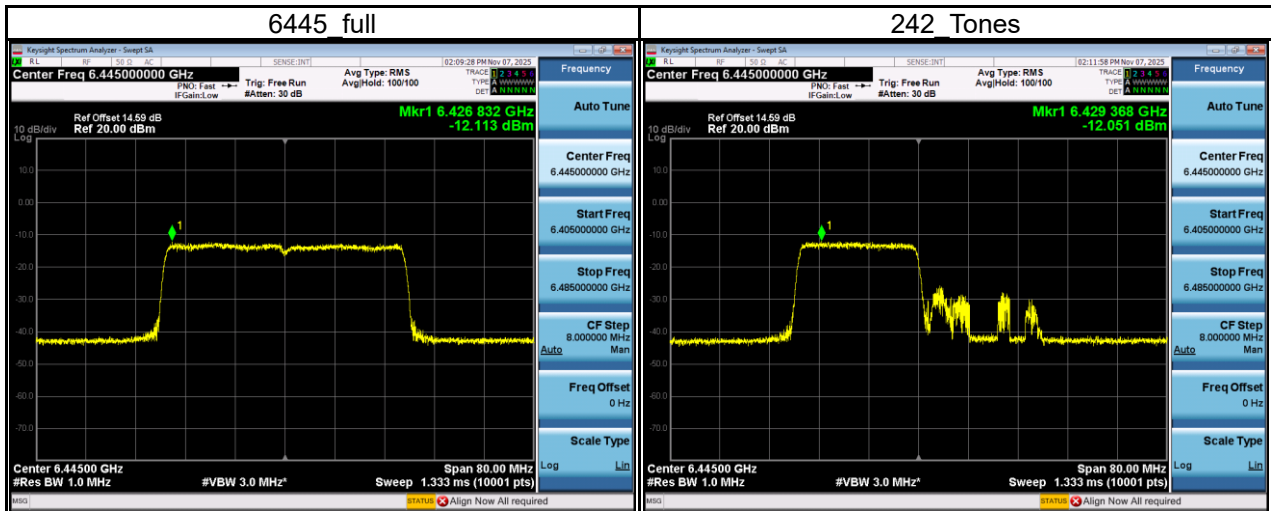

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6525_full	-13.12	0.04	-13.07	8.28	-4.79	-1.00	Pass
242_Tones	-13.74	0.04	-13.70	8.28	-5.42	-1.00	Pass

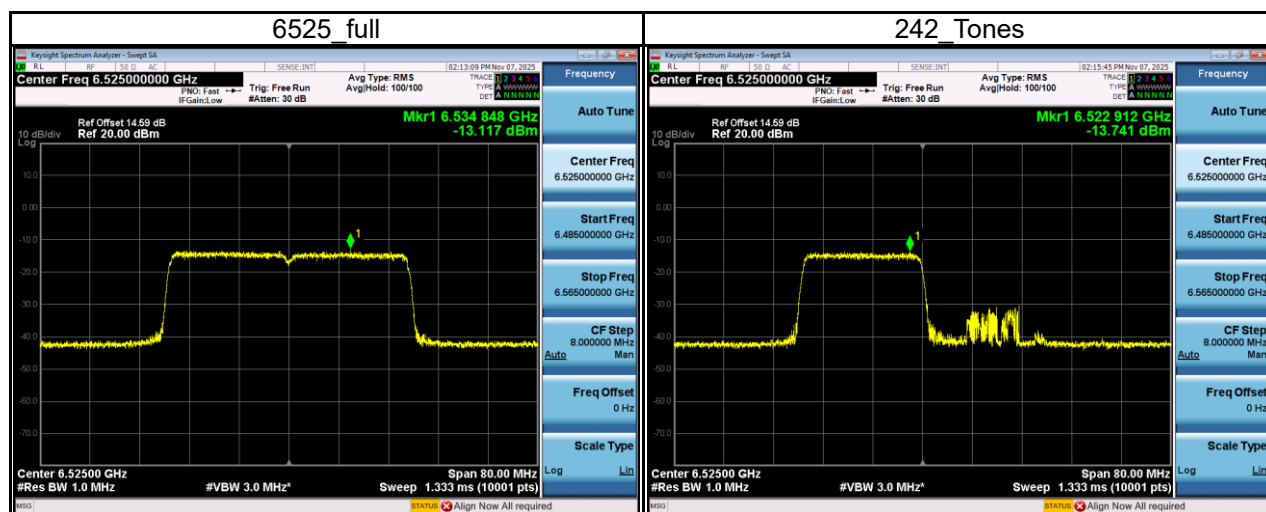


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6885_full	-11.08	0.04	-11.04	5.74	-5.30	-1.00	Pass
242_Tones	-11.83	0.04	-11.79	5.74	-6.05	-1.00	Pass

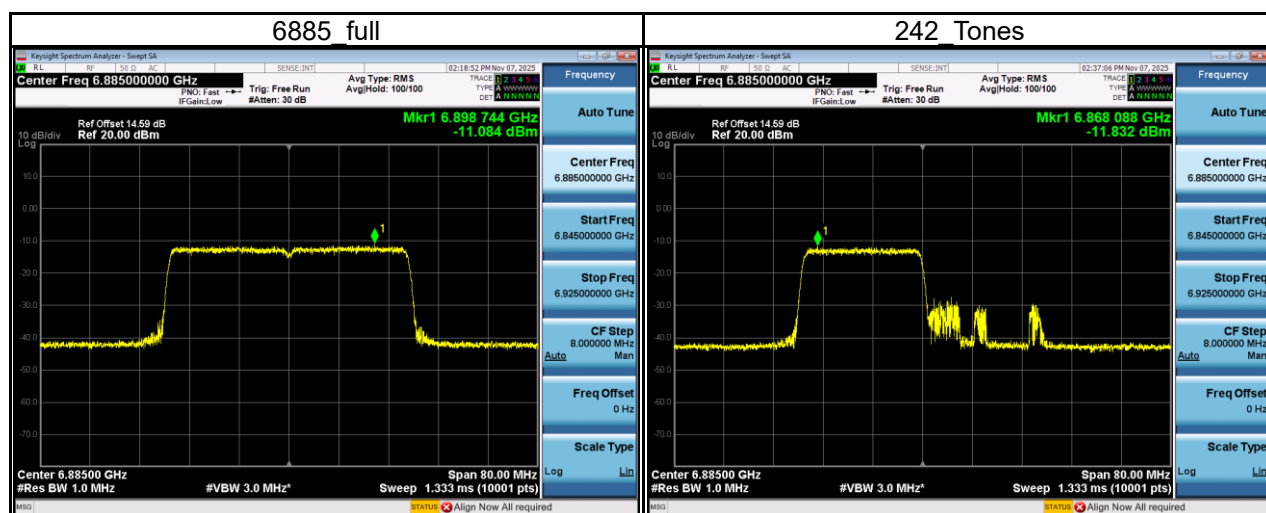


Test Mode	IEEE 802.11ax (HE40)_ Aux Antenna
-----------	-----------------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5965_full	-12.62	0.04	-12.58	8.27	-4.31	-1.00	Pass
242_Tones	-12.97	0.04	-12.93	8.27	-4.66	-1.00	Pass

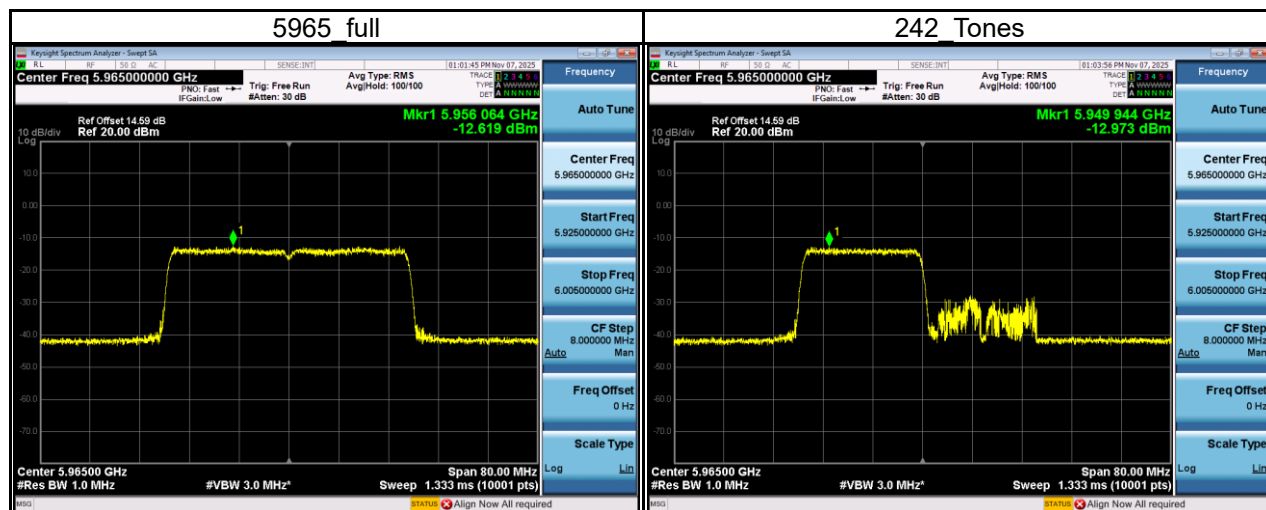


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6445_full	-12.10	0.04	-12.05	7.96	-4.09	-1.00	Pass
242_Tones	-12.54	0.04	-12.50	7.96	-4.54	-1.00	Pass

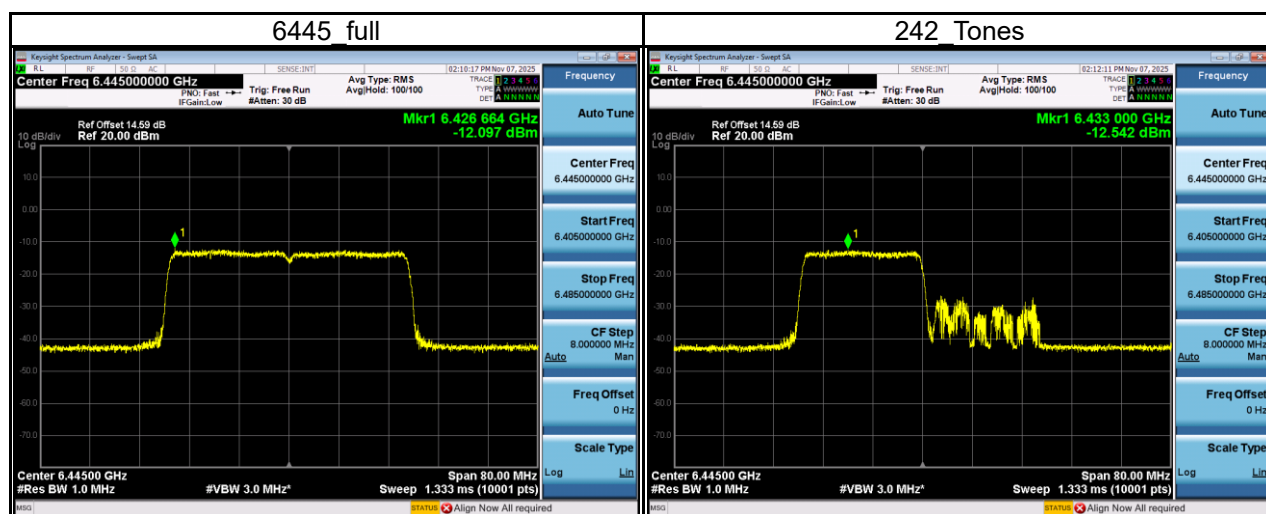

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6525_full	-13.21	0.04	-13.16	8.28	-4.88	-1.00	Pass
242_Tones	-13.69	0.04	-13.65	8.28	-5.37	-1.00	Pass

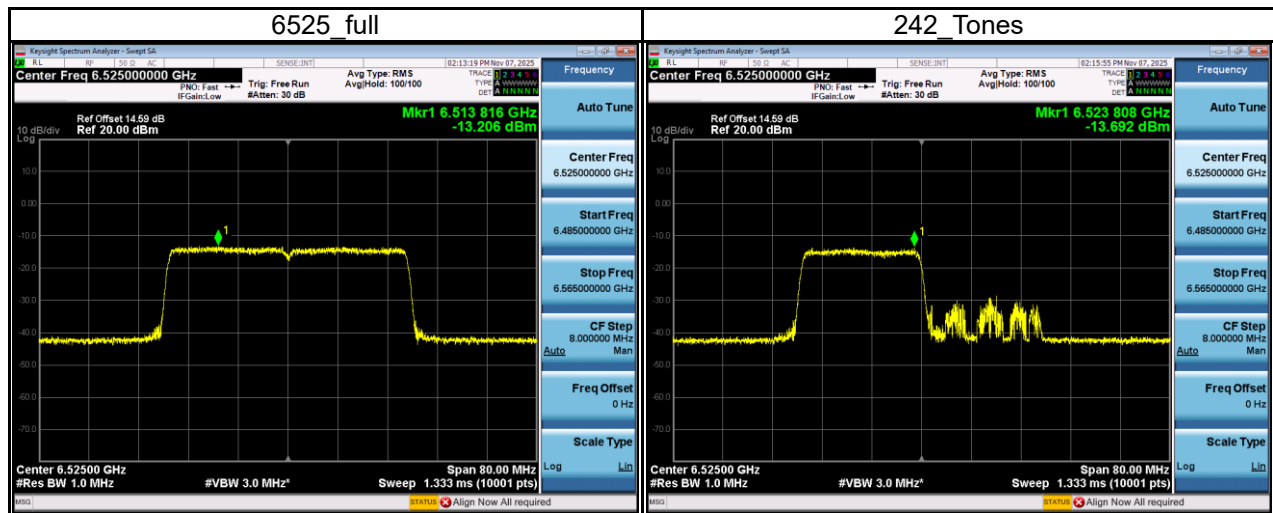

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6885_full	-9.51	0.04	-9.46	5.74	-3.72	-1.00	Pass
242_Tones	-9.40	0.04	-9.35	5.74	-3.61	-1.00	Pass

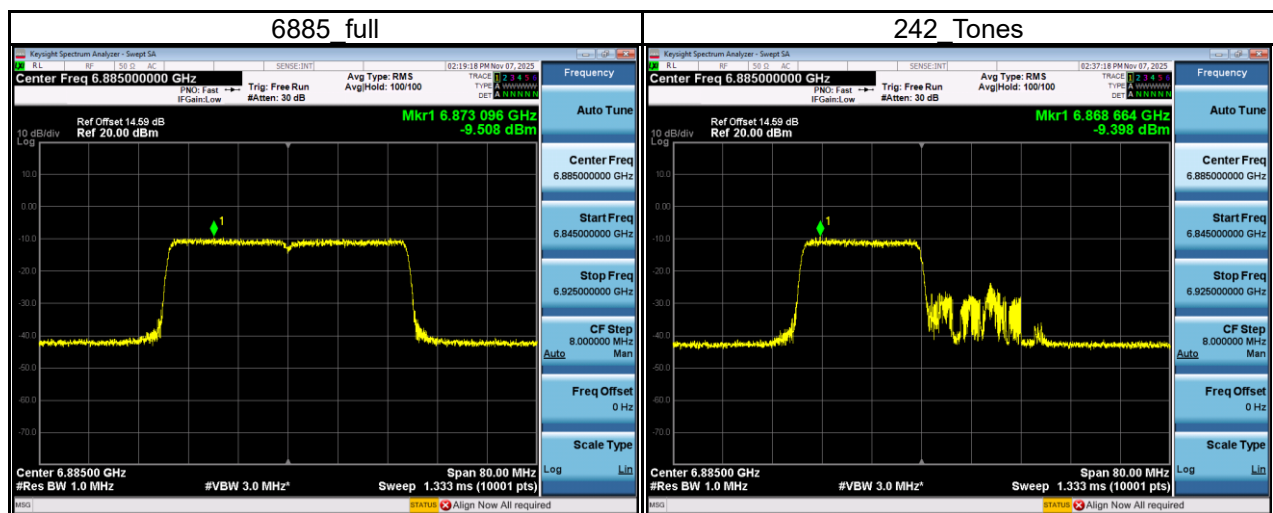


Test Mode	IEEE 802.11ax (HE40)_ Total
-----------	-----------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5965_full	-9.98	0.04	-9.93	8.27	-1.66	-1.00	Pass
242_Tones	-10.20	0.04	-10.16	8.27	-1.89	-1.00	Pass
6445_full	-9.09	0.04	-9.05	7.96	-1.09	-1.00	Pass
242_Tones	-9.28	0.04	-9.24	7.96	-1.28	-1.00	Pass
6525_full	-10.15	0.04	-10.11	8.28	-1.83	-1.00	Pass
242_Tones	-10.71	0.04	-10.66	8.28	-2.38	-1.00	Pass
6885_full	-7.21	0.04	-7.17	5.74	-1.43	-1.00	Pass
242_Tones	-7.44	0.04	-7.39	5.74	-1.65	-1.00	Pass

Test Mode	IEEE 802.11ax (HE80)_ Main Antenna
-----------	------------------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5985_full	-13.98	0.04	-13.94	8.27	-5.67	-1.00	Pass
484_Tones	-14.26	0.04	-14.22	8.27	-5.95	-1.00	Pass

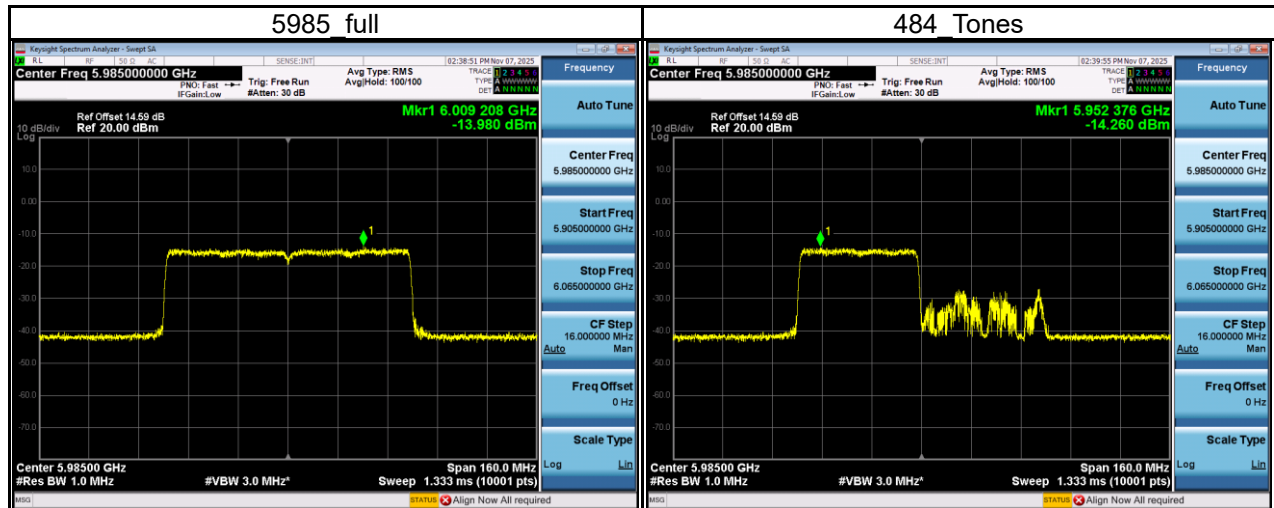


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6465_full	-12.99	0.04	-12.95	7.96	-4.99	-1.00	Pass
484_Tones	-12.89	0.04	-12.85	7.96	-4.89	-1.00	Pass

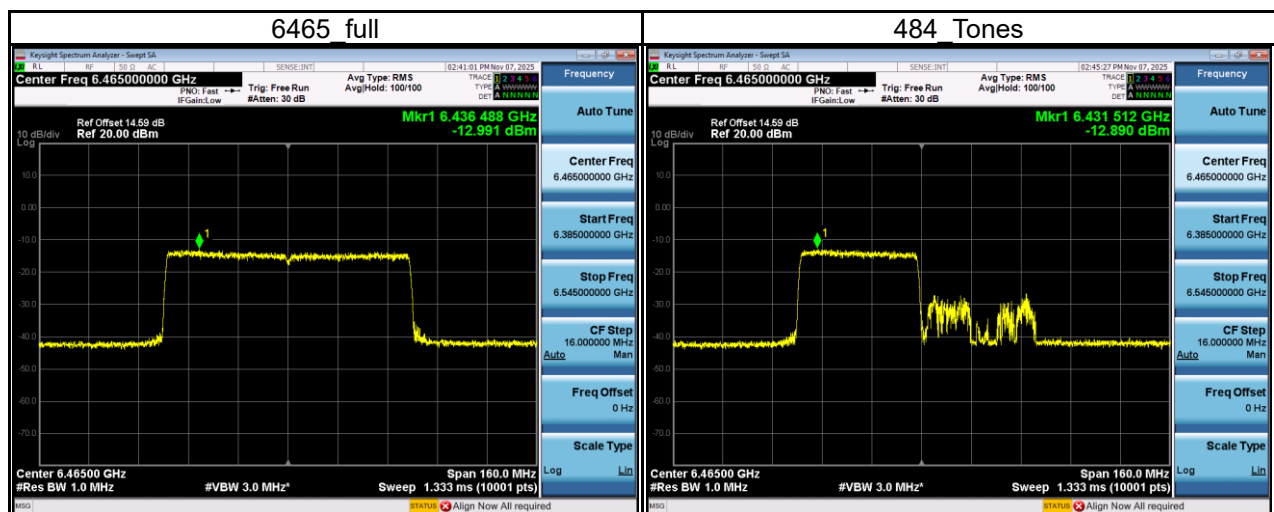

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6545_full	-13.70	0.04	-13.65	8.28	-5.37	-1.00	Pass
484_Tones	-14.03	0.04	-13.99	8.28	-5.71	-1.00	Pass

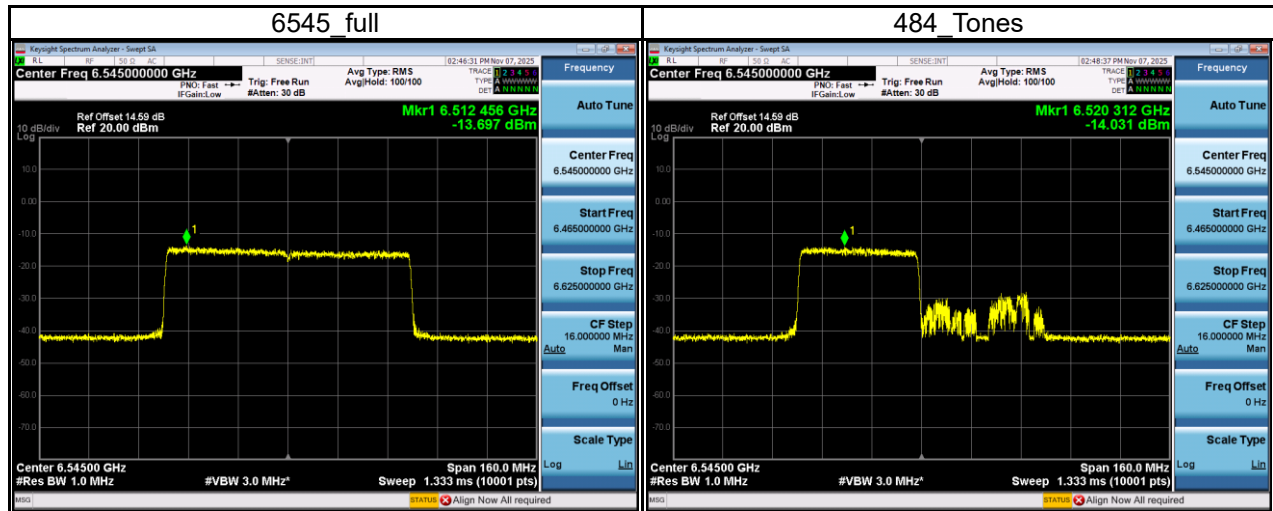


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6865_full	-11.11	0.04	-11.07	5.74	-5.33	-1.00	Pass
484_Tones	-11.50	0.04	-11.46	5.74	-5.72	-1.00	Pass

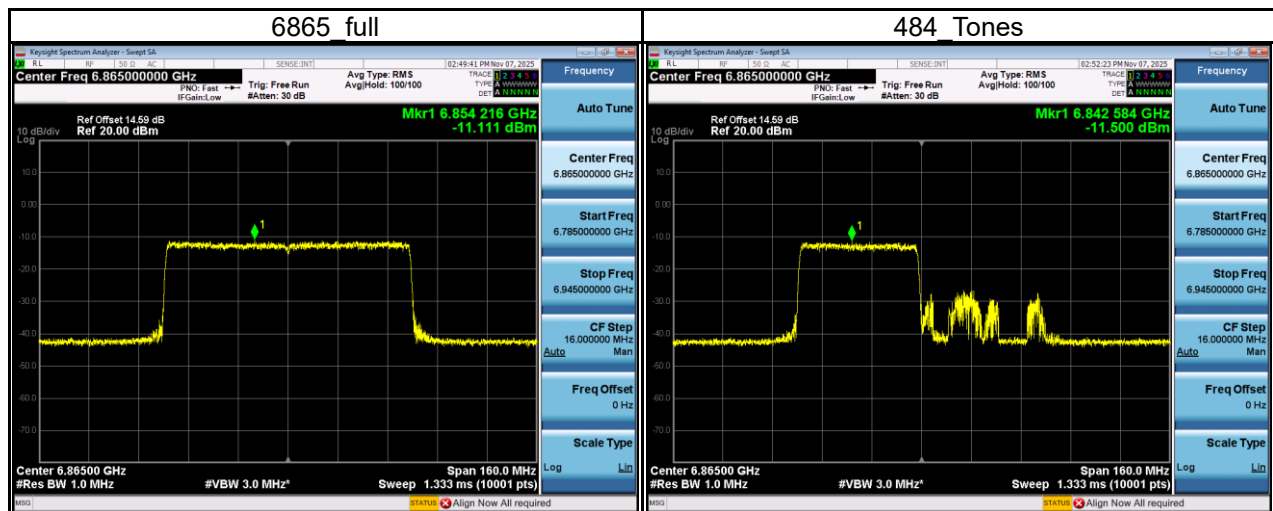


Test Mode	IEEE 802.11ax (HE80)_ Aux Antenna
-----------	-----------------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5985_full	-13.21	0.04	-13.16	8.27	-4.89	-1.00	Pass
484_Tones	-13.01	0.04	-12.96	8.27	-4.69	-1.00	Pass

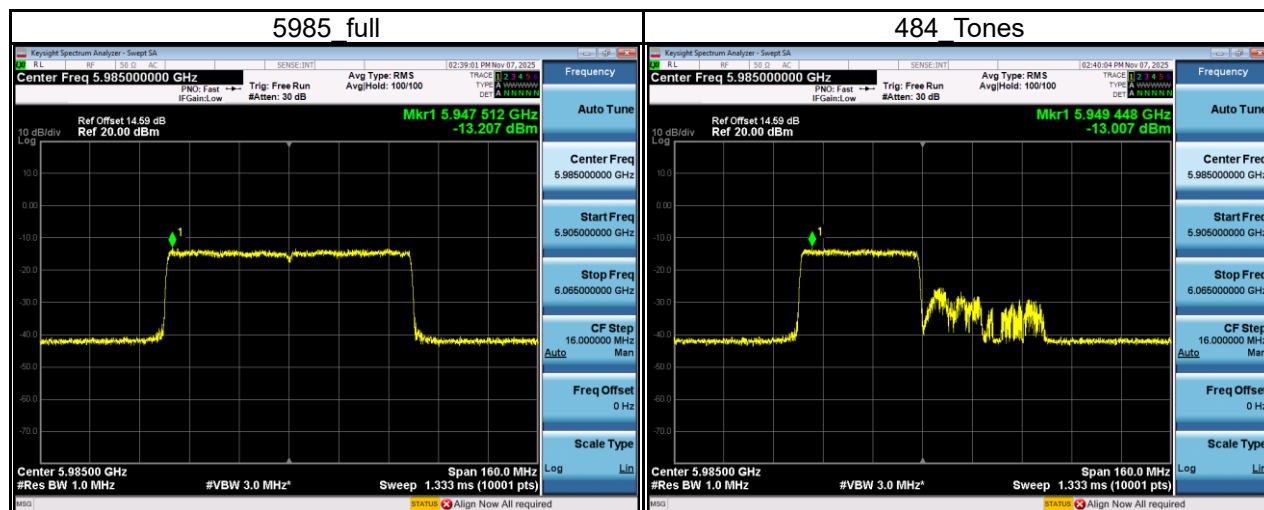


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6465_full	-12.85	0.04	-12.80	7.96	-4.84	-1.00	Pass
484_Tones	-13.15	0.04	-13.11	7.96	-5.15	-1.00	Pass

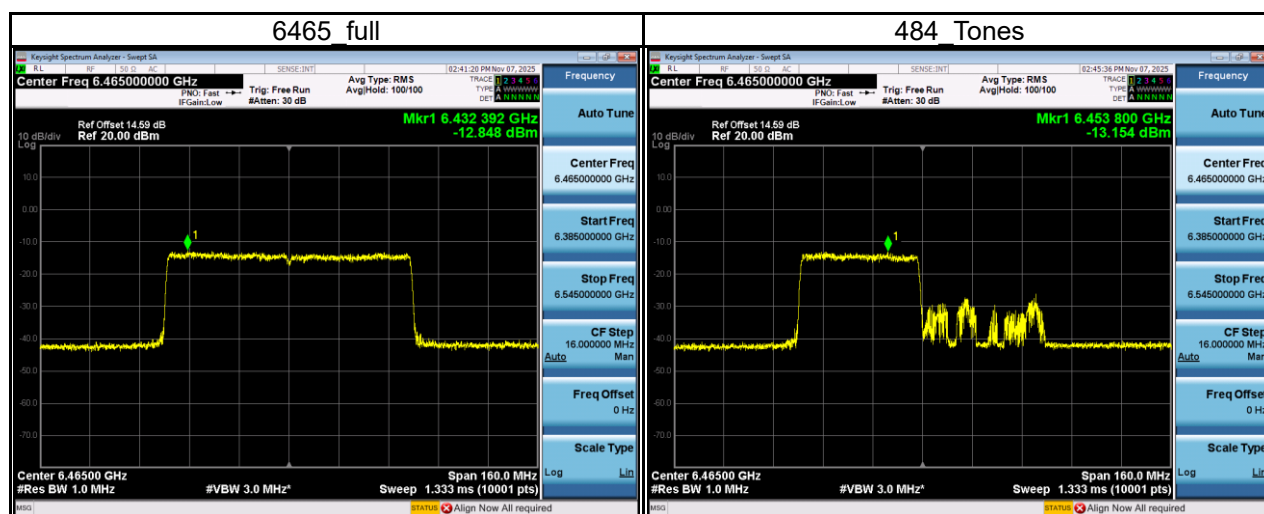

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6545_full	-13.49	0.04	-13.45	8.28	-5.17	-1.00	Pass
484_Tones	-13.39	0.04	-13.35	8.28	-5.07	-1.00	Pass

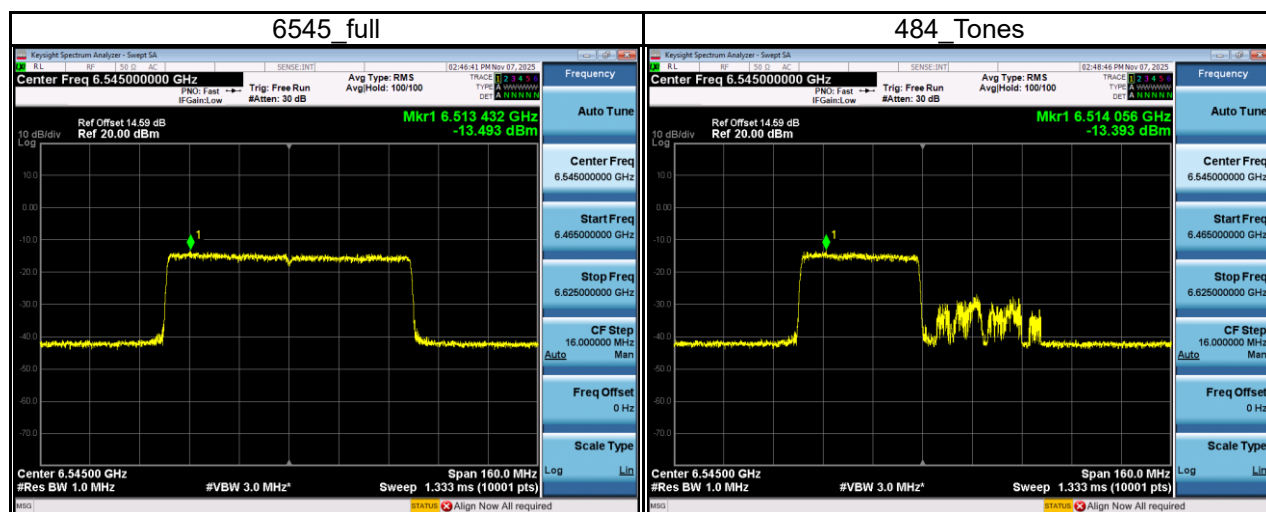

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6865_full	-9.30	0.04	-9.26	5.74	-3.52	-1.00	Pass
484_Tones	-9.50	0.04	-9.45	5.74	-3.71	-1.00	Pass

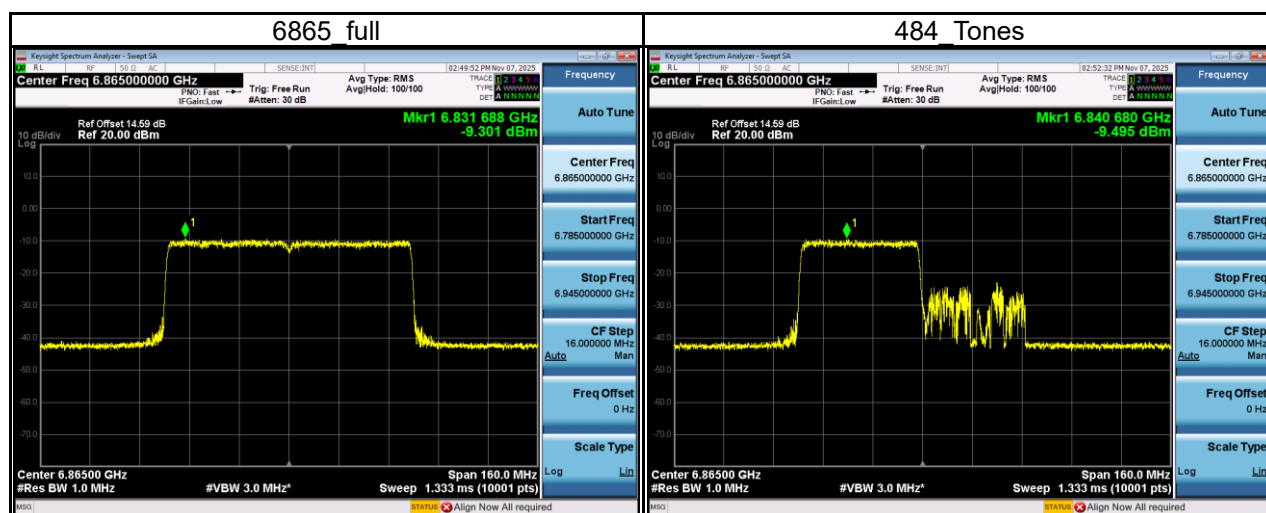


Test Mode	IEEE 802.11ax (HE80)_ Total
-----------	-----------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5985_full	-10.57	0.04	-10.52	8.27	-2.25	-1.00	Pass
484_Tones	-10.58	0.04	-10.53	8.27	-2.26	-1.00	Pass
6465_full	-9.91	0.04	-9.86	7.96	-1.90	-1.00	Pass
484_Tones	-10.01	0.04	-9.97	7.96	-2.01	-1.00	Pass
6545_full	-10.58	0.04	-10.54	8.28	-2.26	-1.00	Pass
484_Tones	-10.69	0.04	-10.65	8.28	-2.37	-1.00	Pass
6865_full	-7.10	0.04	-7.06	5.74	-1.32	-1.00	Pass
484_Tones	-7.37	0.04	-7.33	5.74	-1.59	-1.00	Pass

Test Mode	IEEE 802.11ax (HE160)_ Main Antenna
-----------	-------------------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6025_full	-13.36	0.02	-13.33	8.27	-5.06	-1.00	Pass
996_Tones	-13.26	0.02	-13.23	8.27	-4.96	-1.00	Pass

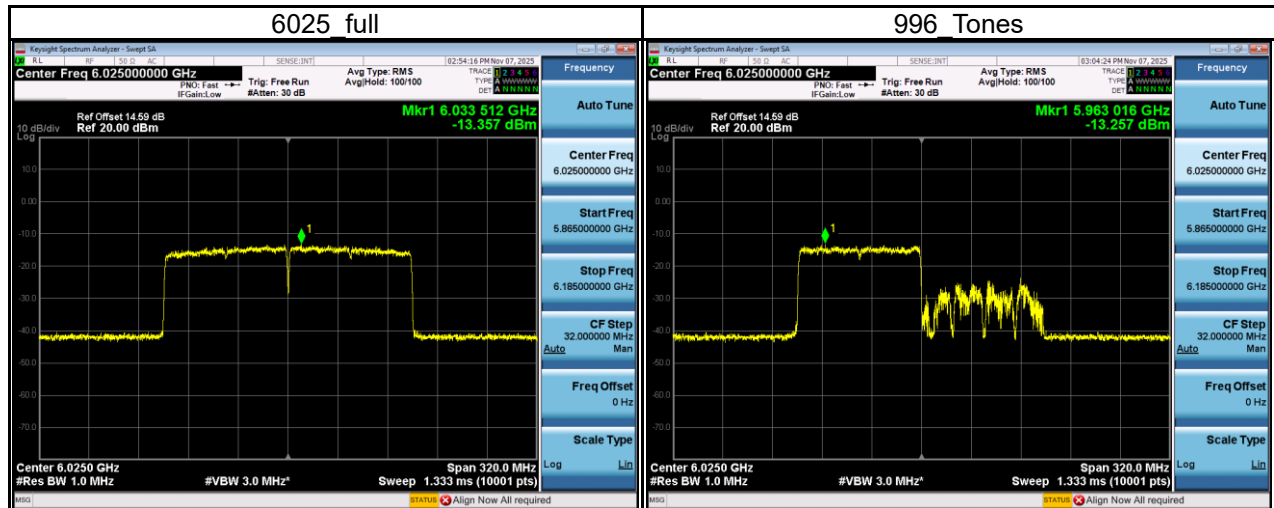

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6505_full	-13.45	0.02	-13.42	7.96	-5.46	-1.00	Pass
996_Tones	-13.39	0.02	-13.37	7.96	-5.41	-1.00	Pass

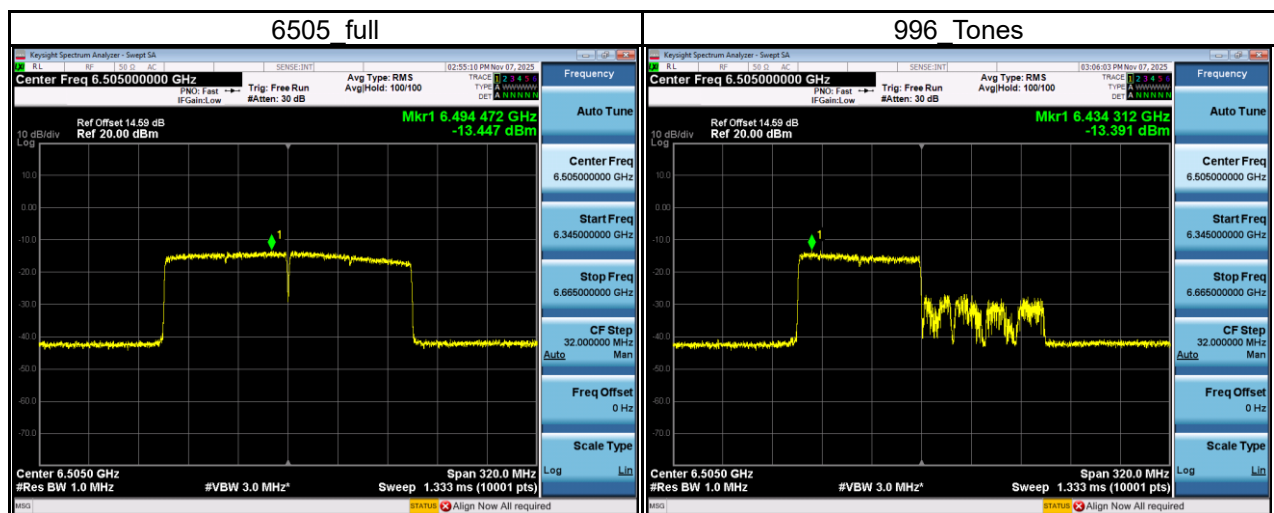

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6665_full	-13.54	0.02	-13.52	8.28	-5.24	-1.00	Pass
996_Tones	-13.67	0.02	-13.64	8.28	-5.36	-1.00	Pass

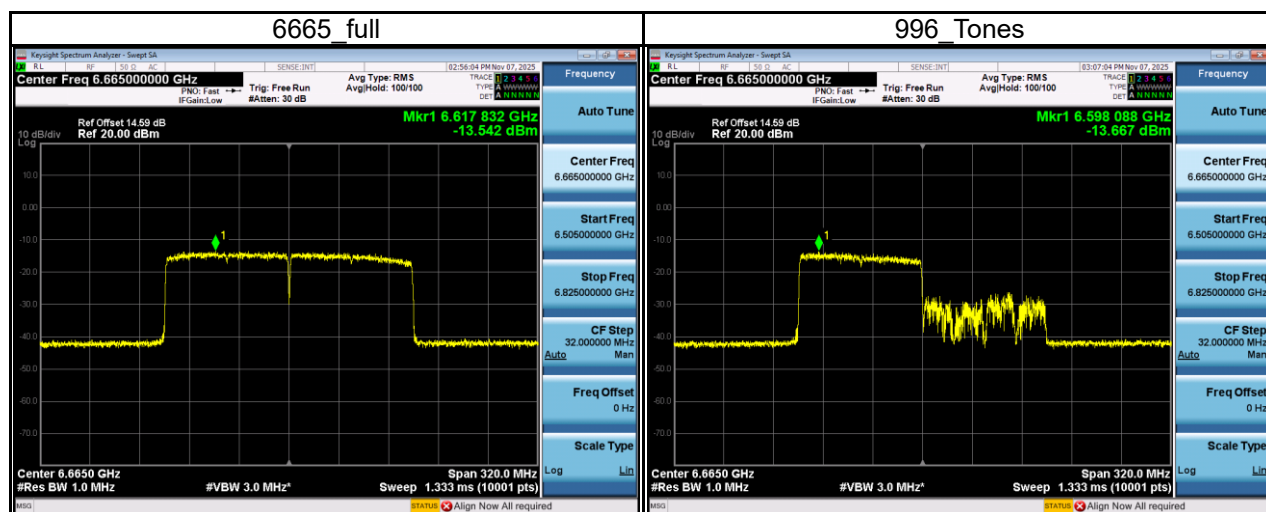

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6985_full	-12.55	0.02	-12.52	5.74	-6.78	-1.00	Pass
996_Tones	-12.45	0.02	-12.43	5.74	-6.69	-1.00	Pass

