


115VAC 60Hz
 R-9299-3 Det. Sys. OD850 15.107 (a) DE 2/6/02 PL LEAD ~~115VAC 60Hz~~ Hot
 REF 85.0 dBμV ATTEN 10 dB

f_p
 10 dB/
 OFFSET
 10.0
 dB
 DL
 48.0
 dBμV



Customer:	Detection Systems
Test Sample:	10.525GHz Field Disturbance Sensor
Model No.:	OD850
Test Method:	FCC ID:ESVOD850
Notes:	FCC 15.107(a) Conducted Emissions
	Lead Tested: Hot 115VAC 60Hz
	Detector Function: Peak
Date:	February 6, 2002
Tech:	Peter Lananna
Sheet:	1 of 2

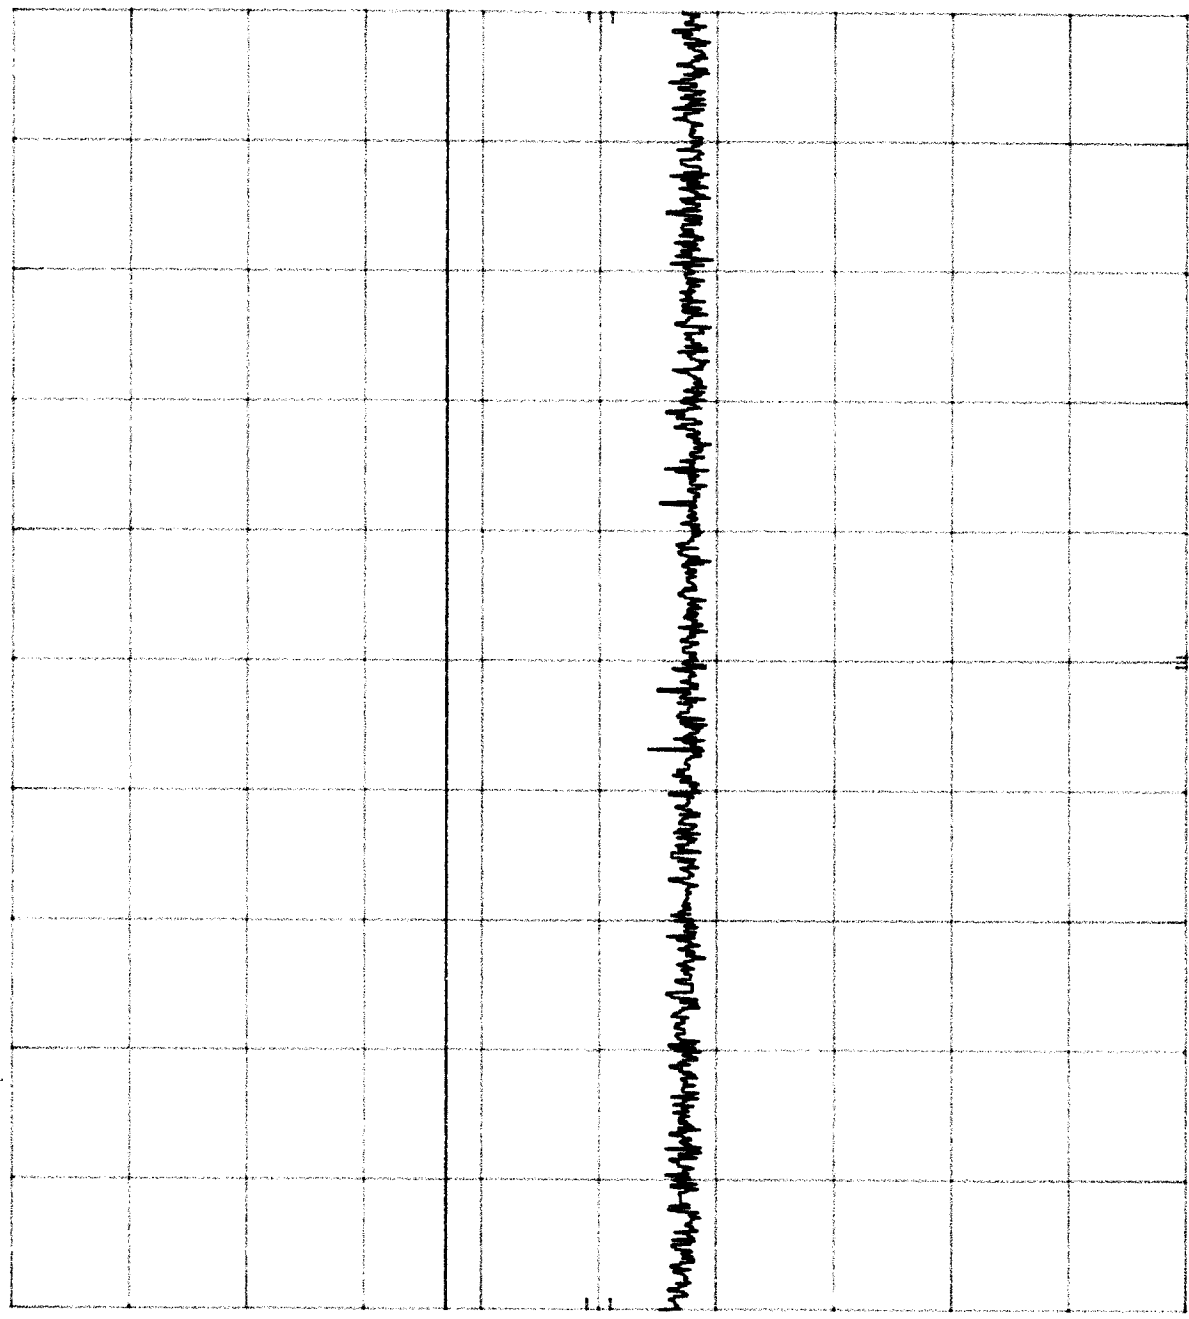

Retlif Testing Laboratories

Report No. R-9299-1

15.107 60Hz Neutral

R-9299-3 Det. Sys. 0D850 15.107 (a) CE 2/6/02 PL LEAD--
REF 85.0 dBμV ATTEN 10 dB

h_p

10 dB/

OFFSET


10.0

dB

OL

48.0

dBμV

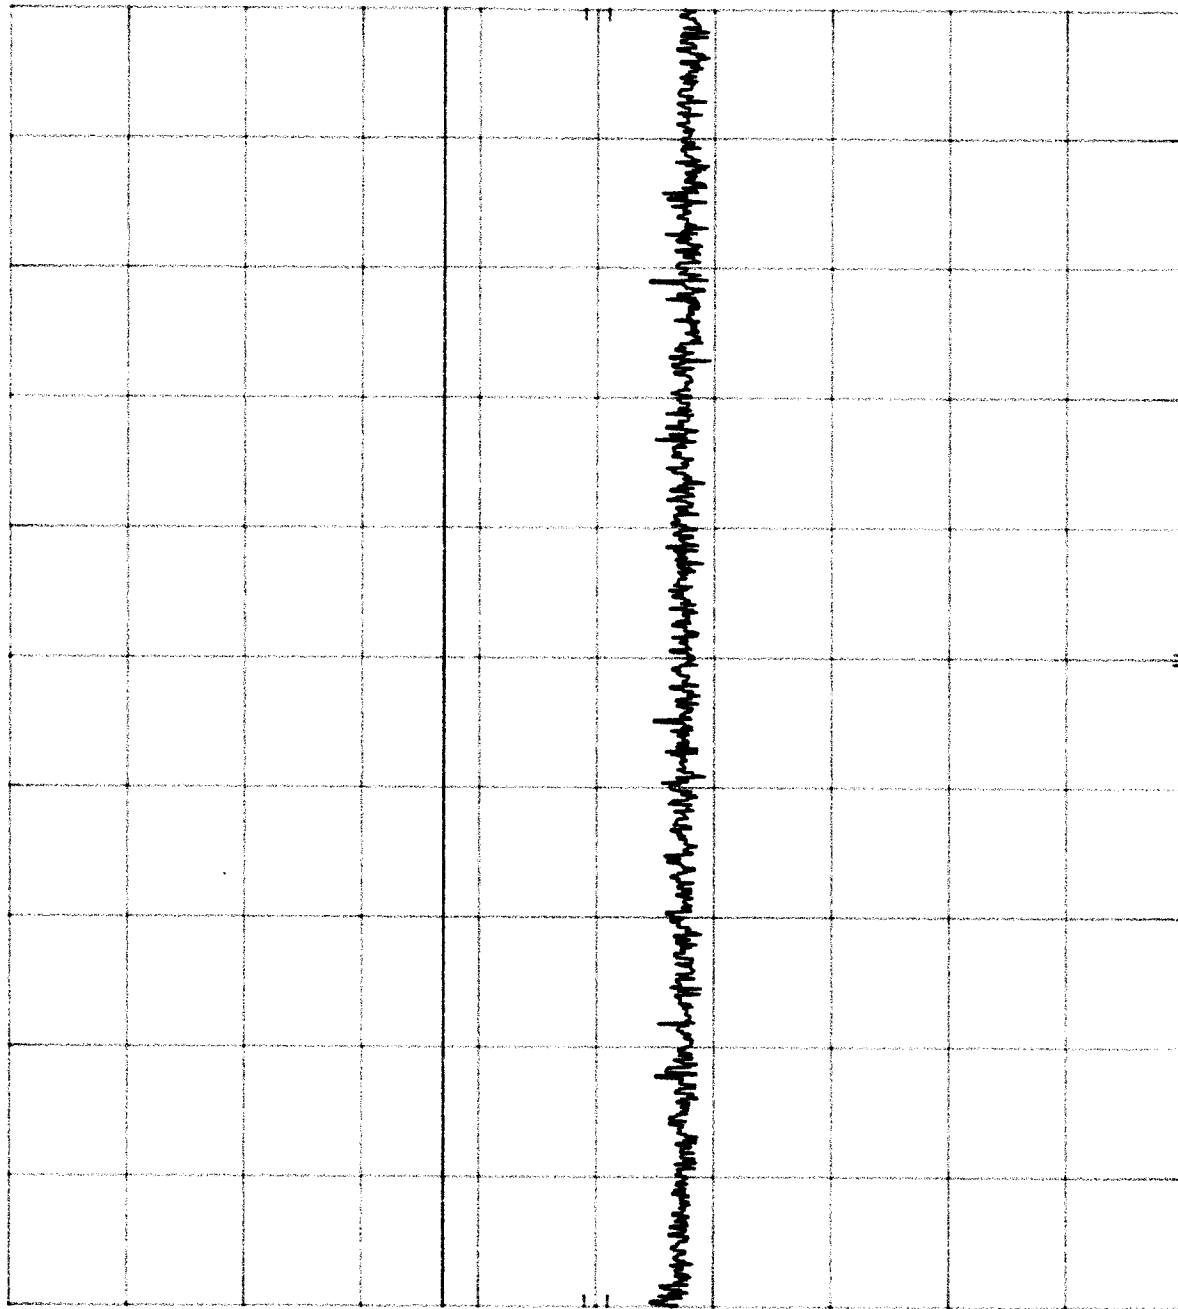

START 450 kHz RES BW 10 kHz VBW 30 kHz STOP 30.0 MHz
SWP 20.0 sec

Customer:	Detection Systems
Test Sample:	10.525GHz Field Disturbance Sensor
Model No.:	OD850
Test Method:	FCC 15.107(a) Conducted Emissions
Notes:	Lead Tested: Neutral 115VAC 60Hz
	Detector Function: Peak
Date:	February 6, 2002
Tech:	Peter Lananna
Sheet:	2 of 2



Retlif Testing Laboratories

Report No. R-9299-1