



EMC COMPLIANCE ENGINEERING AND TESTING



APPLICATION FOR FCC CLASS B CERTIFICATION WIRELESS REMOTE CONTROLLER

Alinco, Inc.
438 Amapola Ave.
Suite 130
Torrance, CA 90501

MODEL: TOPCON RC-30
FCC ID: EUGRC-30

January 26, 2000

This report concerns (check one):		Original Grant: X	Class II Change:
Equipment Type: Remote Controller			
Deferred grant requested per 47 CFR 0.457 (d) (1) (ii)?		Yes:	No: X
If yes, defer until:		_____	
		Date	
Company name agrees to notify the Commission by: _____ (date) of the intended date of announcement of the product so that the grant can be issued on that date.			
Transition Rules Request per 15.37? Yes:		No: X	
If no, assumed Part 15, subpart B for unintentional radiators - the new 47 CFR [10-1-90 Edition] provision..			

REPORT PREPARED BY:

EMI Technician: Jon Wilson
Administrative Writer: Melissa Fleming

Rhein Tech Laboratories, Inc.

Document Number: 990510

No part of this report may be reproduced without the full written approval of Rhein Tech Laboratories, Inc.

360 Herndon Parkway, Suite 1400
Herndon, VA 20170
703 689-0368 FAX 703 689-2056



Client: Alinco, Inc.
EUT: TOPCON RC-30
FCC ID: EUGRC-30
Work Order Number: 990510

TABLE OF CONTENTS

1.0	GENERAL INFORMATION	3
1.1	MODIFICATIONS	3
1.2	PRODUCT DESCRIPTION	ERROR! BOOKMARK NOT DEFINED.
1.3	RELATED SUBMITTAL(S)/GRANT(S)	5
1.4	TEST SYSTEM DETAILS	5
1.5	TEST METHODOLOGY	5
1.6	TEST FACILITY	5
2.0	PRODUCT LABELING	ERROR! BOOKMARK NOT DEFINED.
3.0	SYSTEM TEST CONFIGURATION	7
3.1	JUSTIFICATION	7
3.2	EUT EXERCISE SOFTWARE	7
3.3	CONFORMANCE STATEMENT	8
4.0	RADIATED MEASUREMENT PHOTOS	ERROR! BOOKMARK NOT DEFINED.
5.0	RADIATED EMISSION DATA	11
5.1	FIELD STRENGTH CALCULATION	14
6.0	PHOTOS OF TESTED EUT	ERROR! BOOKMARK NOT DEFINED.

APPENDIX LISTING

APPENDIX A:	SCHEMATICS/BLOCK DIAGRAM OF TOPCON RC-30	9
APPENDIX B:	EMISSIONS EQUIPMENT LIST	16
APPENDIX C:	RADIATED TEST METHODOLOGY	17
APPENDIX D:	USER'S MANUAL	18

FIGURE INDEX

FIGURE 1:	FCC ID AND DoC LABEL	ERROR! BOOKMARK NOT DEFINED.
FIGURE 2:	LOCATION OF LABELS ON EUT	ERROR! BOOKMARK NOT DEFINED.

TABLE INDEX

TABLE 5:	RADIATED EMISSIONS: (135 MHz)	11
TABLE 8:	EMISSIONS TEST EQUIPMENT	16



Client: Alinco, Inc.
EUT: TOPCON RC-30
FCC ID: EUGRC-30
Work Order Number: 990510

1.0 GENERAL INFORMATION

The following Application for FCC Type Certification of a Wireless Remote Controller is prepared on behalf of Alinco, Inc. in accordance with Part 2, and Part 15, Subparts A and B of the Federal Communications Commissions rules and regulations. The Equipment Under Test (EUT) was the TOPCON RC-30, FCC ID: EUGRC-30. The test results reported in this document relate only to the item that was tested.

All measurements contained in this Application were conducted in accordance with ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 1992. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Some accessories are used to increase sensitivity and prevent overloading of the measuring instrument. These are explained in the appendix of this report. Calibration checks are performed regularly on the instruments, and all accessories including the high pass filter, preamplifier and cables.

All radiated emissions measurement were performed manually at Rhein Tech, Incorporated. The radiated emissions measurements required by the rules were performed on the three meter, open field, test range maintained by Rhein Tech Laboratories, Inc., 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. Complete description and site attenuation measurement data have been placed on file with the Federal Communications Commission. The power line conducted emission measurements were performed in a shielded enclosure also located at the Herndon, Virginia facility. The FCC accepts Rhein Tech Laboratories, Inc. as a facility available to do measurement work for others on a contractual basis.

1.1 MODIFICATIONS

1. VR101 changed from 470 Ohms to 4.7k Ohms
2. R108 changed from 68 Ohms to 56 Ohms
3. R112 changed from 180k Ohms to 150k Ohms



Client: Alinco, Inc.
EUT: TOPCON RC-30
FCC ID: EUGRC-30
Work Order Number: 990510



Client: Alinco, Inc.
EUT: TOPCON RC-30
FCC ID: EUGRC-30
Work Order Number: 990510

1.3 RELATED SUBMITTAL(S)/GRANT(S)

N/A. This is an original submission for original submission for Certification.

1.4 TEST SYSTEM DETAILS

The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

EXTERNAL PERIPHERALS

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
REMOTE CONTROLLER (EUT)	TOPCON	RC-30	0012	EUGRC-30	N/A	011261

1.5 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 1992. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.6 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report dated June 24, 1996, submitted to and approved by the Federal Communication Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).



Client: Alinco, Inc.
EUT: TOPCON RC-30
FCC ID: EUGRC-30
Work Order Number: 990510



Client: Alinco, Inc.
EUT: TOPCON RC-30
FCC ID: EUGRC-30
Work Order Number: 990510

3.0 SYSTEM TEST CONFIGURATION

3.1 JUSTIFICATION

New batteries from the manufacturer were used for testing

3.2 EXERCISING THE EUT

The Topcon RC-30 was exercised through an internal routine which forces the device to continuously transmit its typical coded signal. In the RC-30's normal mode, it automatically shuts off within five seconds of activating any switch.



Client: Alinco, Inc.
EUT: TOPCON RC-30
FCC ID: EUGRC-30
Work Order Number: 990510

3.3 CONFORMANCE STATEMENT

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this attached test record. The modifications mentioned in this report were made during testing to the equipment in order to achieve compliance with these standards.


Furthermore, there was no deviation from, additions to or exclusions from the ANSI C63.4 test methodology.

Signature: _____

Date: January 26, 2000

Typed/Printed Name: Desmond A. Fraser

Position: President
(NVLAP Signatory)



Accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code 20061-0.

Note: This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.



Client: Alinco, Inc.
EUT: TOPCON RC-30
FCC ID: EUGRC-30
Work Order Number: 990510

APPENDIX A:

SCHEMATICS/BLOCK DIAGRAM OF TOPCON RC-30



Client: Alinco, Inc.
EUT: TOPCON RC-30
FCC ID: EUGRC-30
Work Order Number: 990510



Client: Alinco, Inc.
EUT: TOPCON RC-30
FCC ID: EUGRC-30
Work Order Number: 990510

5.0 RADIATED EMISSION DATA

TABLE 1: RADIATED EMISSIONS: (135 MHz)

(Temperature: 56°F Degree, Humidity: 56%)

Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4.916	Qp	V	180	1.0	30.0	-4.0	26.0	69.5	-43.5
206.420	Qp	H	180	1.0	33.6	-17.4	16.2	43.5	-27.3
407.743	Qp	V	180	1.5	51.7	-10.0	41.7	46.0	-4.3
429.370	Av	H	190	1.0	84.1	-9.3	74.8	80.7	-5.9
858.866	Av	V	40	1.0	28.9	-3.6	25.3	46.0	-20.7
1288.299	Av	H	270	1.0	32.9	2.1	35.0	54.0	-19.0
1717.732	Av	V	110	1.0	27.3	4.4	31.7	54.0	-22.3

**All readings are quasi-peak, unless stated otherwise. See Appendix B for Radiated Test Methodology.*

TEST PERSONNEL:



Signature: _____

Date: December 27, 1999

Typed/Printed Name: Jon Wilson




Client: Alinco, Inc.
EUT: TOPCON RC-30
FCC ID: EUGRC-30
Work Order Number: 990510

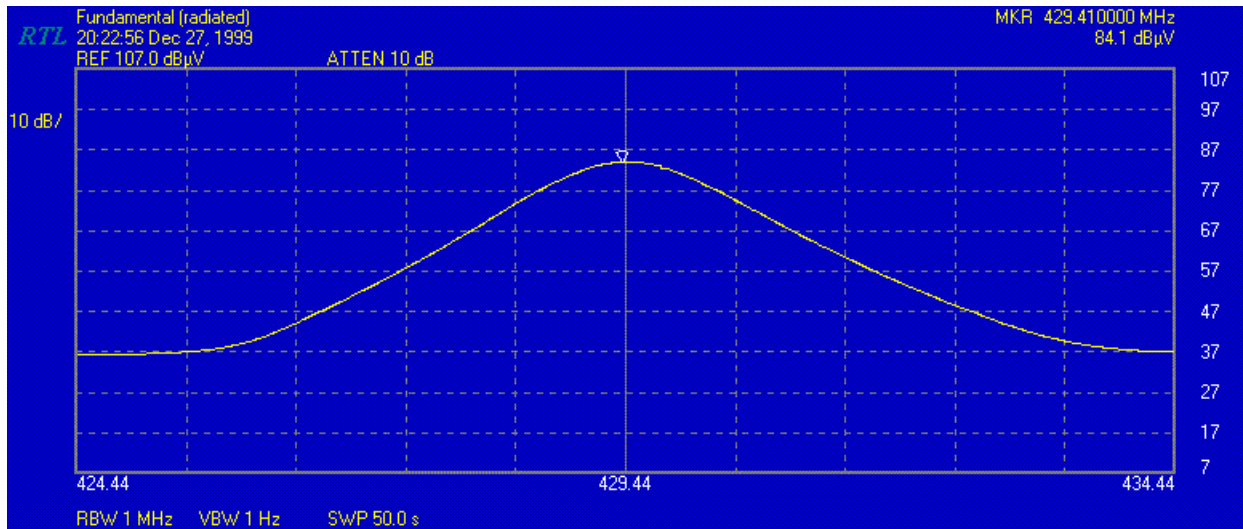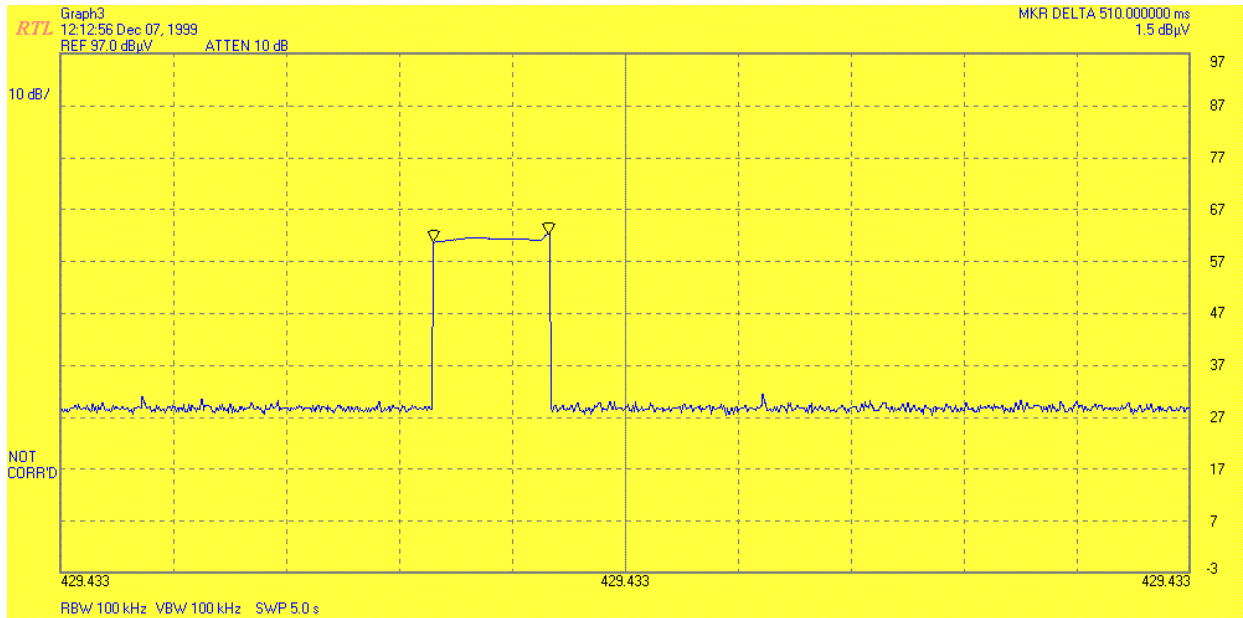



Client: Alinco, Inc.
EUT: TOPCON RC-30
FCC ID: EUGRC-30
Work Order Number: 990510

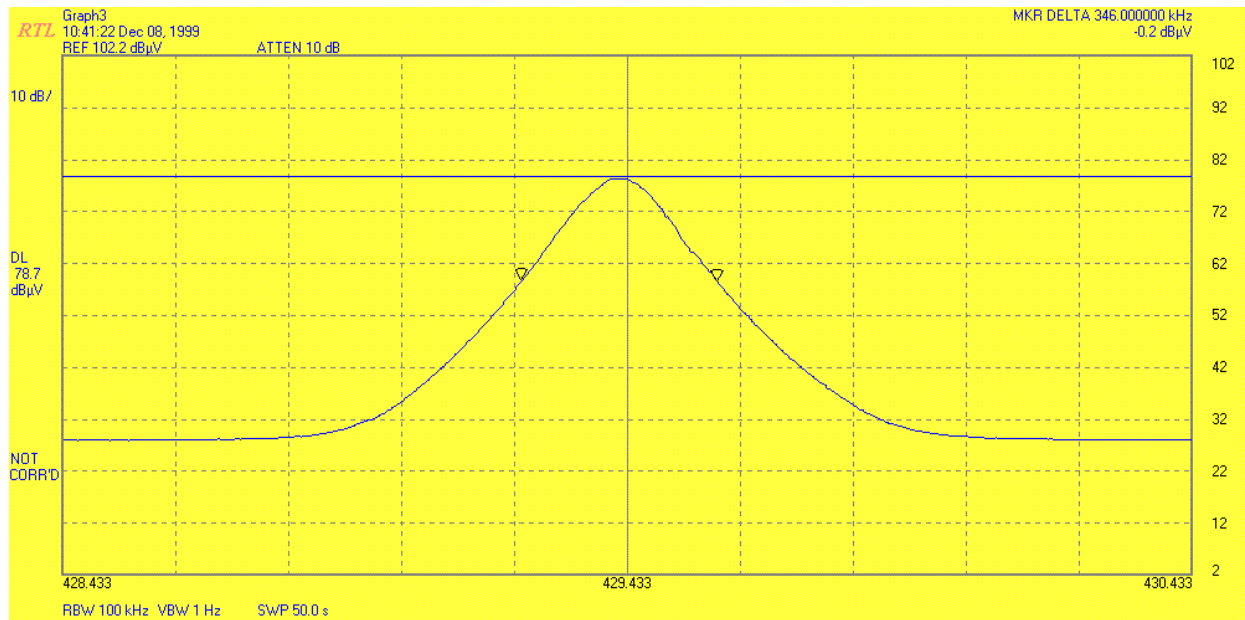



Client: Alinco, Inc.
EUT: TOPCON RC-30
FCC ID: EUGRC-30
Work Order Number: 990510

5.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FI(\text{dBuV/m}) = SAR(\text{dBuV}) + SCF(\text{dB/m})$$

FI = Field Intensity

SAR = Spectrum Analyzer Reading

SCF = Site Correction Factor

The Site Correction Factor (SCF) used in the above equation is determined empirically, and is expressed in the following equation:

$$SCF(\text{dB/m}) = -PG(\text{dB}) + AF(\text{dB/m}) + CL(\text{dB})$$

SCF = Site Correction Factor

PG = Pre-amplifier Gain

AF = Antenna Factor

CL = Cable Loss

The field intensity in microvolts per meter can then be determined according to the following equation:

$$FI(\text{uV/m}) = 10^{FI(\text{dBuV/m})/20}$$

For example, assume a signal at a frequency of 125 MHz has a received level measured as 49.3 dBuV. The total Site Correction Factor (antenna factor plus cable loss minus preamplifier gain) for 125 MHz is -11.5 dB/m. The actual radiated field strength is calculated as follows:

$$49.3 \text{ dBuV} - 11.5 \text{ dB} = 37.8 \text{ dBuV/m}$$

$$10^{37.8/20} = 10^{1.89} = 77.6 \text{ uV/m}$$



Client: Alinco, Inc.
EUT: TOPCON RC-30
FCC ID: EUGRC-30
Work Order Number: 990510



Client: Alinco, Inc.
EUT: TOPCON RC-30
FCC ID: EUGRC-30
Work Order Number: 990510

APPENDIX B: Emissions Equipment List

TABLE 2: EMISSIONS TEST EQUIPMENT

DESCRIPTION	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. LAB
AMPLIFIER	HEWLETT PACKARD	11975A	2304A00348	TEST EQUITY
AMPLIFIER (S/A 1)	RHEIN TECH	PR-1040	00001	RTL
AMPLIFIER (S/A 2)	RHEIN TECH	RTL2	900723	RTL
AMPLIFIER (S/A 3)	RHEIN TECH	8447F	2944A03783	RTL
AMPLIFIER (S/A 4)	RHEIN TECH	8447D	2727A05397	RTL
BICONICAL/LOG ANTENNA 1	ANTENNA RESEARCH	LPB-2520	1037	LIBERTY LABS
BICONICAL/LOG ANTENNA 2	ANTENNA RESEARCH	LPB-2520	1036	LIBERTY LABS
FIELD SITE SOURCE	EMCO	4610	9604-1313	RTL
FILTER (ROOM 1)	SOLAR	8130	947305	RTL
FILTER (ROOM 2)	SOLAR	8130	947306	RTL
HARMONIC MIXER 1	HEWLETT PACKARD	11970K	2332A00563	TELOGY
HARMONIC MIXER 2	HEWLETT PACKARD	11970A	2332A01199	TELOGY
HORN ANTENNA 1	EMCO	3160-10	9606-1033	EMCO
HORN ANTENNA 2	EMCO	3160-9	9605-1051	EMCO
HORN ANTENNA 3	EMCO	3160-7	9605-1054	EMCO
HORN ANTENNA 4	EMCO	3160-8	9605-1044	EMCO
HORN ANTENNA 5	EMCO	3160-03	9508-1024	EMCO
LISN (ROOM 1/L1)	SOLAR	7225-1	900727	ACUCAL
LISN (ROOM 1/L2)	SOLAR	7225-1	900726	ACUCAL
LISN (ROOM 2/L1)	SOLAR	7225-1	900078	ACUCAL
LISN (ROOM 2/L2)	SOLAR	7225-1	900077	ACUCAL
PRE-AMPLIFIER	HEWLETT PACKARD	8449B OPT	3008A00505	TELOGY
QUASI-PEAK ADAPTER (S/A 1)	HEWLETT PACKARD	85650A	3145A01599	ACUCAL
QUASI-PEAK ADAPTER (S/A 2)	HEWLETT PACKARD	85650A	2811A01276	ACUCAL
QUASI-PEAK ADAPTER (S/A 3)	HEWLETT PACKARD	85650A	2521A00473	ACUCAL
QUASI-PEAK ADAPTER (S/A 4)	HEWLETT PACKARD	85650A	2521A01032	ACUCAL
RF PRESELECTOR (S/A 1)	HEWLETT PACKARD	85685A	3146A01309	ACUCAL
SIGNAL GENERATOR (HP)	HEWLETT PACKARD	8660C	1947A02956	ACUCAL
SIGNAL GENERATOR (WAVETEK)	WAVETEK	3510B	4952044	ACUCAL
SPECTRUM ANALYZER 1	HEWLETT PACKARD	8566B	3138A07771	ACUCAL
SPECTRUM ANALYZER 2	HEWLETT PACKARD	8567A	2841A00614	ACUCAL
SPECTRUM ANALYZER 4	HEWLETT PACKARD	8567A	2727A00535	ACUCAL
TUNABLE DIPOLE	EMCO	3121	274	LIBERTY LABS
ANTENNA	ATM	WR08	08443-6	ATM
MIXER	OLESON	M08HW	F80814-1	OLESON
MIXER	OLESON	M05HW	G80814-1	OLESON
DIPLEXER	OLESON	M05HW	G80814-1	OLESON
MIXER	HEWLETT PACKARD	11970U	2332A01110	ACUCAL
MIXER	HEWLETT PACKARD	11970V	2521A00512	TELOGY
MIXER	HEWLETT PACKARD	11970W	2521A00710	TELOGY
ANTENNA	ATM	WR15	15-443-6	ATM
ANTENNA	ATM	WR10	10-443-6	ATM
ANTENNA	ATM	WR05	05-443-6	ATM
SWEEP GENERATOR	HEWLETT PACKARD	83752A	3610A00866	HEWLETT PACKARD



Client: Alinco, Inc.
EUT: TOPCON RC-30
FCC ID: EUGRC-30
Work Order Number: 990510

APPENDIX C: Radiated Test Methodology

RADIATED EMISSIONS MEASUREMENTS

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one meter and three meter distances, in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to insure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three-meter, open-field test site. The EUT was placed on a nonconductive turntable approximately 0.8 meters above the ground plane. The spectrum was examined from 30 MHz to 1000 MHz using a Hewlett Packard 8566B spectrum analyzer, a Hewlett Packard 85650A quasi-peak adapter, and EMCO log periodic and biconical antenna. In order to gain sensitivity, a New Circuits ZHL-4240W preamplifier was connected in series between the antenna and the input of the spectrum analyzer.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters in order to determine the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations. The spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. No video filter less than 10 times the resolution bandwidth was used. When any clock exceeds 108 MHz, the EUT was tested between 1 to 2 Gigahertz in peak mode with the resolution bandwidth set at 1 MHz as stated in ANSI C63.4. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Note: Rhein Tech Laboratories, Inc. has implemented procedures to minimize errors that occur from test instruments, calibration, procedures, and test setups. Test instrument and calibration errors are documented from the manufacturer or calibration lab. Other errors have been defined and calculated within the Rhein Tech quality manual, section 6.1. Rhein Tech implements the following procedures to minimize errors that may occur: yearly as well as daily calibration methods, technician training, and emphasis to employees on avoiding error.



Client: Alinco, Inc.
EUT: TOPCON RC-30
FCC ID: EUGRC-30
Work Order Number: 990510

APPENDIX D:

USER'S MANUAL
