


NU PARTS:
R222, C232

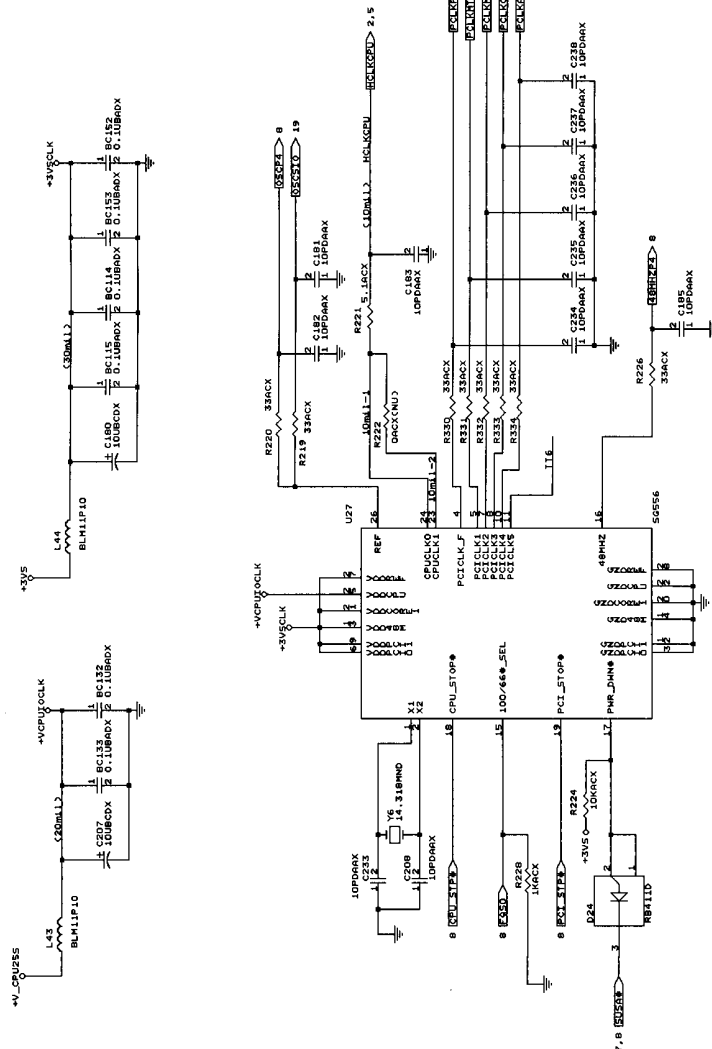


CLOCK LAYOUT GUIDELINES

- 1.

[illegible]

2. All clocks should have 1:2 width-to-spacing ratio

AGP BUS LAYOUT GUIDELINES









If the strobe is at 4.0 inches, the data line can be from 3.5 to 4.0 inches in length.

Math:Space	Trace	Line Length	Pull-up Stub Length
1:1	Control Signals	1.0 in (line length: 0.5 in)	0.5 in (Strobes: 0.1 in)

1:1 GAEO.:73
CC/BEO#

1:2 GAD_STBA

NU PARTS : R225, R398, R245, R250 C184, C187

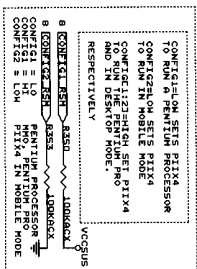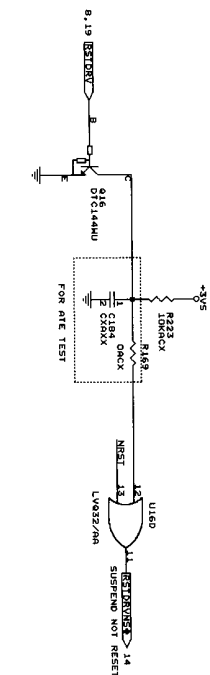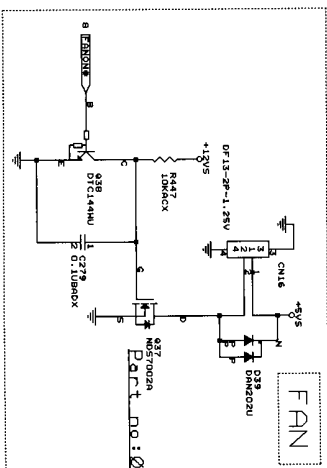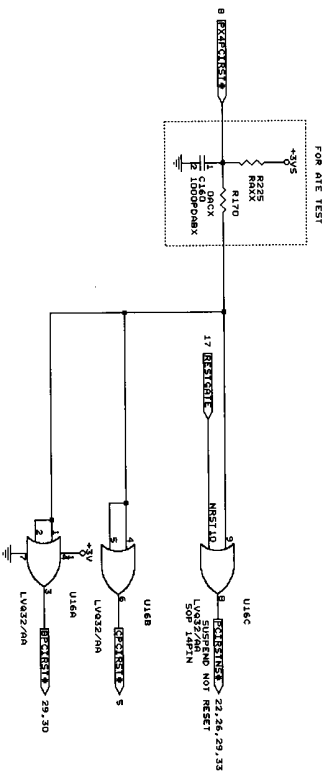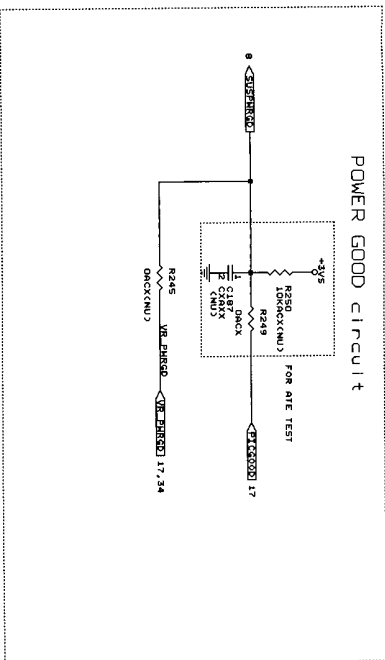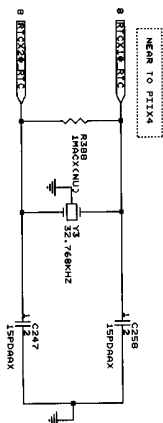

FILE	PI1X4
DESCRIPTION	PI1X4 CONTROL LOGIC
REV	0.3
DATE	SEP 11 2011
BY	1999/09/11
3	21
35	

