



Valued Quality. Delivered.

TEST REPORT

Report Number: 16060975HKG-001

Application
for
Original Grant of 47 CFR Part 15 Certification
New Family of RSS-247 Issue 1 Equipment Certification

Baby Monitor - Baby Unit

FCC ID: EW780-0289-00

IC: 1135B-80028900

Prepared and Checked by:

Approved by:

Signed on File

Leung Sung Tak, Andy
Assistant Engineer

 Digitally signed
by Kenneth Wong
Location: Intertek
Testing Services
Hong Kong Ltd.

Wong Kwok Yeung, Kenneth
Senior Lead Engineer
September 29, 2016

- Intertek's standard Terms and Conditions can be obtained at our website: <http://www.intertek.com/terms/>.
- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- © 2016 Intertek

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

INTERTEK TESTING SERVICES

GENERAL INFORMATION

Applicant Name:	VTech Telecommunications Ltd.
Applicant Address:	23/F., Tai Ping Industrial Centre, Block 1, 57 Ting Kok Road, Tai Po, Hong Kong.
FCC Specification Standard:	FCC Part 15, October 1, 2014 Edition
FCC ID:	EW780-0289-00
FCC Model(s):	VM345 BU, VM345-2 BU, VM3x5-ab BU, VM315, VM315-ab
IC Specification Standard:	RSS-247 Issue 1, May 2015 RSS-Gen Issue 4, November 2014
IC:	1135B-80028900
IC HVIN:	VM345 BU, VM345-2 BU, VM315
IC PMN:	VM345 BU, VM345-2 BU, VM315
Type of EUT:	Spread Spectrum Transmitter
Description of EUT:	2.4GHz Frequency Hopping Spread Spectrum Baby Monitor - Baby Unit
Serial Number:	N/A
Sample Receipt Date:	June 15, 2016
Date of Test:	July 18, 2016 to August 23, 2016
Report Date:	September 29, 2016
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

INTERTEK TESTING SERVICES

Table of Contents

1.0 Test Results Summary & Statement of Compliance	4
1.1 Summary of Test Results	4
1.2 Statement of Compliance	4
2.0 General Description	6
2.1 Product Description	6
2.2 Test Methodology	6
2.3 Test Facility	7
2.4 Related Submittal(s) Grants	7
3.0 System Test Configuration	9
3.1 Justification	9
3.2 EUT Exercising Software	10
3.3 Details of EUT and Description of Accessories	11
3.4 Measurement Uncertainty	11
4.0 Test Results	13
4.1 Maximum Conducted Output Power at Antenna Terminals	13
4.2 Maximum 20 dB RF Bandwidth	16
4.3 Minimum Number of Hopping Frequencies	19
4.4 Minimum Hopping Channel Carrier Frequency Separation	22
4.5 Average Channel Occupancy Time	24
4.6 Out of Band Conducted Emissions	27
4.7 Field Strength Calculation	32
4.8 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions	33
4.8.1 Radiated Emission Configuration Photograph	34
4.8.2 Radiated Emission Data	34
4.8.3 Radiated Emission Test Setup	35
4.8.4 Transmitter Duty Cycle Calculation	40
4.9 AC Power Line Conducted Emission	42
4.9.1 AC Power Line Conducted Emission Configuration Photograph	42
4.9.2 AC Power Line Conducted Emission Data	42
5.0 Equipment List	46

INTERTEK TESTING SERVICES

EXHIBIT 1 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

INTERTEK TESTING SERVICES

1.0 Test Results Summary & Statement of Compliance

1.1 Summary of Test Results

Test Items	FCC Part 15 Section	RSS-247/ RSS-Gen [#] Section	Results	Details see section
Antenna Requirement	15.203	8.3	Pass	2.1
Max. Conducted Output Power	15.247(b)(1)	5.1(2)	Pass	4.1
Max. 20dB RF Bandwidth	15.247(a)(1)(iii)	5.1(1)	Pass	4.2
Min. No. of Hopping Frequencies	15.247(a)(1)(iii)	5.1(3)	Pass	4.3
Min. Hopping Channel Carrier Frequency Separation	15.247(a)(1)	5.1	Pass	4.4
Average Time of Occupancy	15.247(a)(1)(iii)	5.1(3)	Pass	4.5
Out of Band Antenna Conducted Emission	15.247(d)	5.5	Pass	4.6
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d) & 15.109	5.4	Pass	4.8
AC Power Line Conducted Emission	15.207 & 15.107	8.8	Pass	4.9

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

1.2 Statement of Compliance

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2014 Edition
RSS-247 Issue 1, May 2015
RSS-Gen Issue 4, November 2014

INTERTEK TESTING SERVICES

EXHIBIT 2 GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

2.0 General Description

2.1 Product Description

The VM345 BU is a Baby Monitor – Baby Unit. It operates at frequency range of 2406MHz to 2475MHz. There are total 24 channels as shown in the following table.

Channel	1	2	3	4	5	6	7	8	9	10	11	12
(MHz)	2406	2409	2412	2415	2418	2421	2424	2427	2430	2433	2436	2439

Channel	13	14	15	16	17	18	19	20	21	22	23	24
(MHz)	2442	2445	2448	2451	2454	2457	2460	2463	2466	2469	2472	2475

There are 16 active channels out of the 24 channels during normal operation. The 16 active channels are selected in pseudo random manner in default.

The Baby Unit is powered by an adaptor 100-240VAC to 5.0VDC 1000mA.

The antenna(s) used in the EUT is integral, and the test sample is a prototype.

For FCC, the Model(s): VM345-2 BU, VM3x5-ab BU, VM315 and VM315-ab are the same as the Model: VM345 BU in electronics/electrical designs, including software & firmware, construction design/physical design/enclosure and PCB layout. The only differences between these models are color and model number for marketing purpose. Suffix "a, b, x" represents different type packaging, number of baby unit and color of enclosure.

For IC, the Model(s): VM345-2 BU, VM315 are the same as the Model: VM345 BU, in electronics/electrical designs, including software & firmware, construction design/physical design/enclosure, PCB layout. The only differences between these models are color and model number for marketing purpose.

The circuit description and frequency hopping algorithm are saved with filename: descri.pdf.

2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2014). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013). All other measurements were made in accordance with the procedures in 47 CFR Part 2.

INTERTEK TESTING SERVICES

2.3 Test Facility

The radiated emission test site, AC power line conducted measurement facility and antenna port conducted measurement facility used to collect the radiated data, AC Power Line conducted data, and conductive data are at Intertek Testing Services Hong Kong Ltd., which is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been fully placed on file with FCC and Industry Canada.

2.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

The Parent Unit for this Baby Unit (with FCC ID: EW780-9395-01) has been authorized by Certification procedure.

INTERTEK TESTING SERVICES

EXHIBIT 3 SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

3.0 System Test Configuration

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The Baby Unit was powered by a 100-240VAC to 5VDC 1000mA adaptor.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible). The parent unit was remotely located as far from the antenna and the base as possible to ensure full power transmission from the baby unit. Else, the base was wired to transmit full power with modulation.

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

For transmitter radiated measurement, the spectrum analyzer resolution bandwidth was 100 kHz for frequencies below 1000 MHz. The resolution bandwidth was 1 MHz for frequencies above 1000 MHz.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitry used to control additional functions other than the operation of the transmitter is subject to FCC Part Section 15.109 Limits.

INTERTEK TESTING SERVICES

3.1 Justification - Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All relevant operation modes have been tested, and the worst case data is included in this report.

3.2 EUT Exercising Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

INTERTEK TESTING SERVICES

3.3 Details of EUT and Description of Accessories

Details of EUT:

An AC adaptor (provided with the unit) was used to power the device. Their description are listed below.

- (1) An AC adaptor (100-240VAC to 5.0VDC 1000mA, Model: S006AKU0500100) (Supplied by Client)

Description of Accessories:

- (1) Parent Unit, Model: VM345 PU, FCC ID: EW780-9395-01 (Provided by Client)

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test at a level of confidence of 95% has been considered. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are $\pm 5.3\text{dB}$ and $\pm 0.99\text{dB}$ respectively. The value of the Measurement uncertainty for conducted emission test is $\pm 4.2\text{dB}$.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

INTERTEK TESTING SERVICES

EXHIBIT 4 TEST RESULTS

INTERTEK TESTING SERVICES

4.0 Test Results

4.1 Maximum Conducted Output Power at Antenna Terminals

- ☐ The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.
- ☒ The antenna port of the EUT was connected to the input of a spectrum analyzer. The analyzer was set for RBW>20dB bandwidth and power was read directly in dBm. External attenuation and cable loss were compensated for using the OFFSET function of the analyser.

Antenna Gain = 2dBi			
Frequency (MHz)		Output in dBm	Output in mW
Low Channel:	2406	16.24	42.073
Middle Channel:	2442	16.24	42.073
High Channel:	2475	16.27	42.364

Cable loss / external attenuation : 0.5 dB

Cable loss, external attenuation: ☒ included in OFFSET function
☐ added to SA raw reading

dBm max. output level = 16.27 dBm


Limits:

- ☒ 0.125W (21dBm) for antennas with gains of 6dBi or less
- ☐ 0.25W (24dBm) for antennas with gains of 6dBi or less
- ☐ 1W (30dBm) for antennas with gains of 6dBi or less
- ☐ ___W (___dBm) for antennas with gains more than 6dBi


The plots of conducted output power are saved as below.

INTERTEK TESTING SERVICES

Plots of conducted output power Lowest Channel

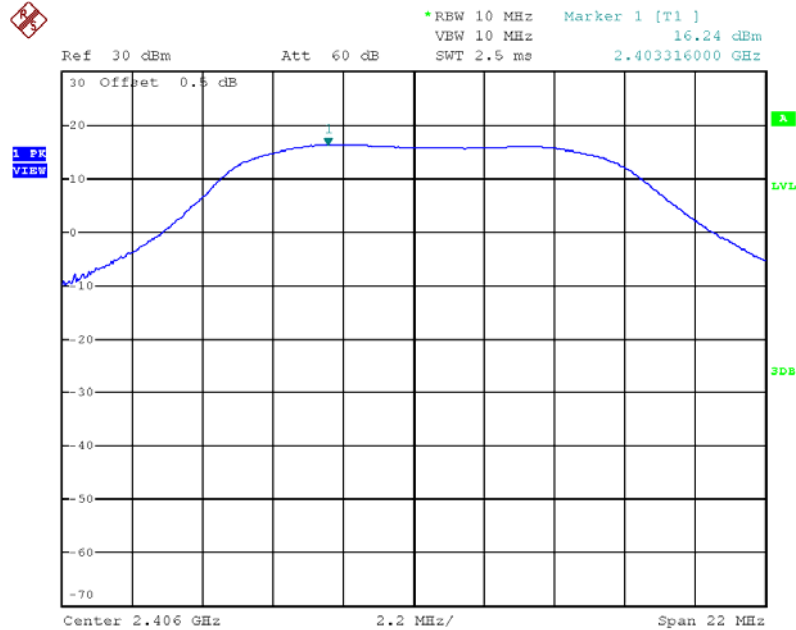


Middle Channel

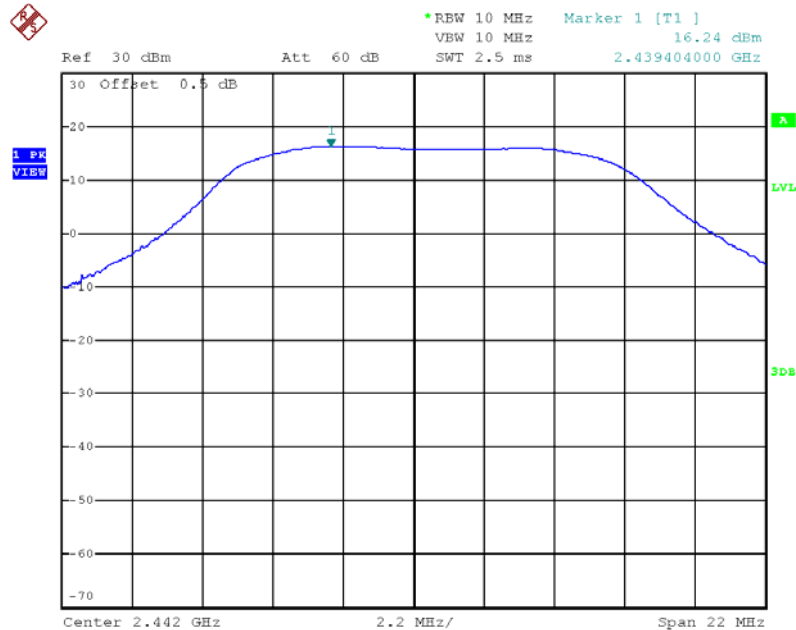

INTERTEK TESTING SERVICES

Plots of conducted output power Highest Channel

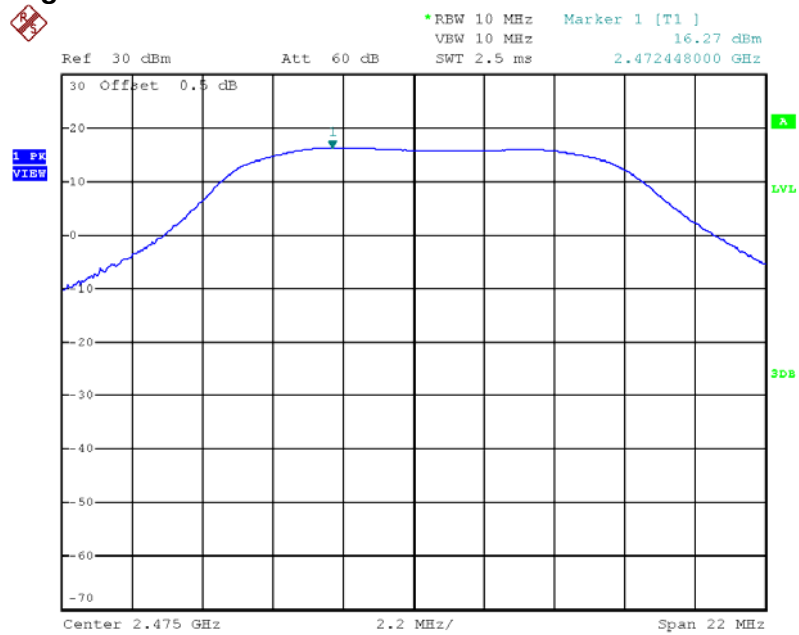

INTERTEK TESTING SERVICES

4.2 Maximum 20 dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 20 dB lower than PEAK level. The 20 dB bandwidth was determined from where the channel output spectrum intersected the display line.

Frequency (MHz)		20 dB Bandwidth (kHz)
Low Channel:	2406	4416
Middle Channel:	2442	4416
High Channel:	2475	4392

Limits

☐ $\leq 500\text{kHz}$ for 902-928MHz


☒ N/A for 2400-2483.5MHz

☐ $\leq 1\text{MHz}$ for 5725-5850MHz

The plots of 20dB RF bandwidth and occupied bandwidth are saved as below.

INTERTEK TESTING SERVICES

Plots of 20dB RF bandwidth Lowest Channel

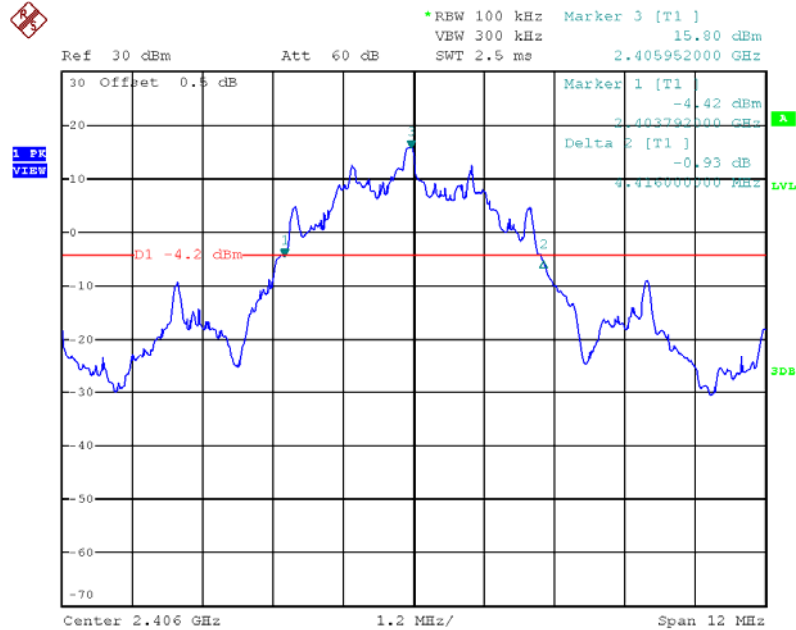


Middle Channel



INTERTEK TESTING SERVICES

Plots of 20dB RF bandwidth Highest Channel

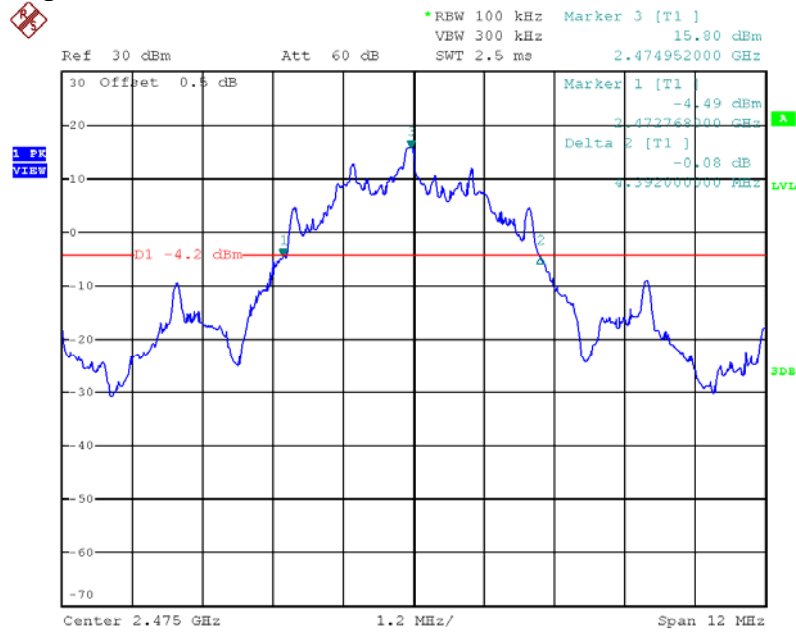

INTERTEK TESTING SERVICES

4.3 Minimum Number of Hopping Frequencies

With the analyzer set to MAX HOLD readings were taken for 2-3 minutes in each band. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

No. of hopping channels	16
-------------------------	----

Minimum Requirements:

- ☐ at least 50 hopping channels for 902MHz-928MHz (20 dB bandwidth of hopping channel < 250kHz)
- ☐ at least 25 hopping channels for 902MHz-928MHz (20 dB bandwidth of hopping channel $\geq$ 250kHz)
- ☒ at least 15 hopping channels for 2400MHz-2483.5MHz.
- ☐ at least 75 hopping channels for 5725MHz-5850MHz.

The plots of number of hopping frequencies are saved as below.


INTERTEK TESTING SERVICES

Plots of number of hopping frequencies

Plot A (6 channels)




Plot B (7 channels)

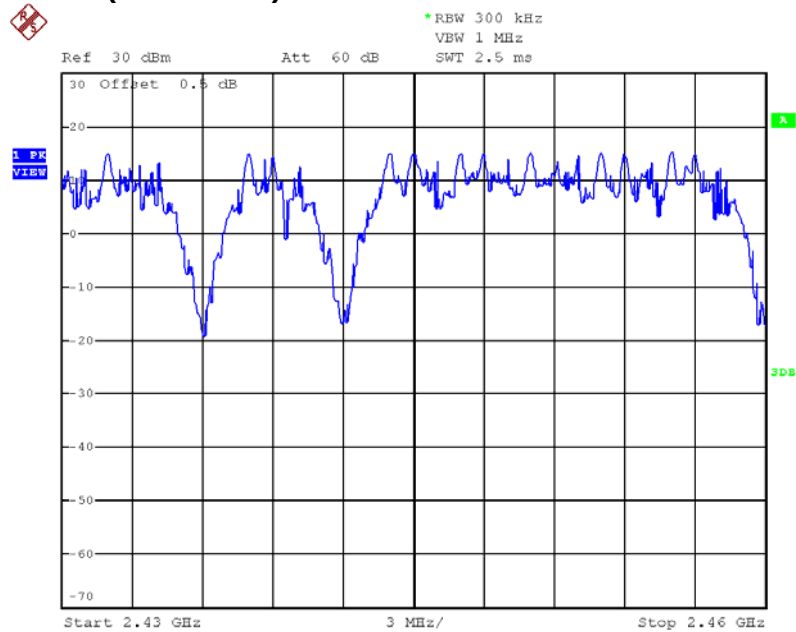

INTERTEK TESTING SERVICES

Plots of number of hopping frequencies

Plot C (3 channels)

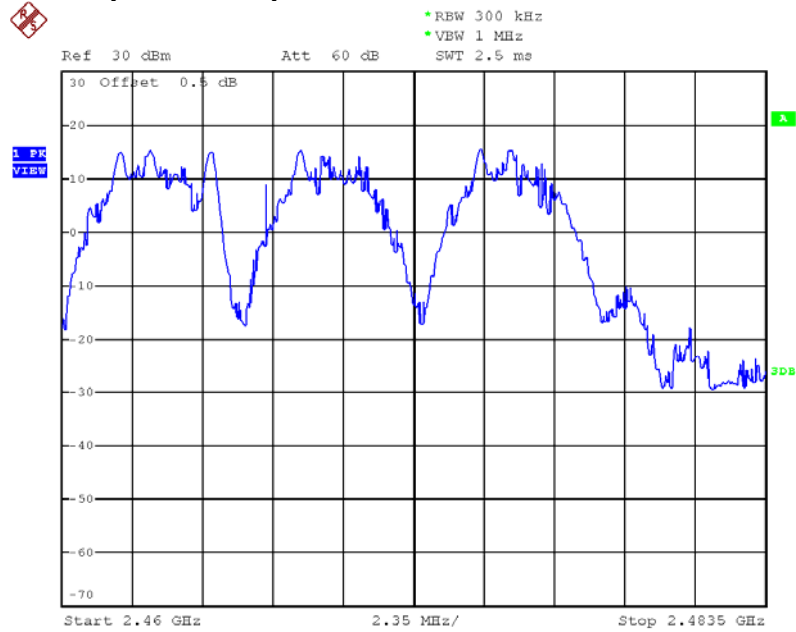

INTERTEK TESTING SERVICES

4.4 Minimum Hopping Channel Carrier Frequency Separation

Using the DELTA MARKER function of the analyzer, the frequency separation between two adjacent channels was measured and met the requirement.

Channel Separation (Channel 1 & Channel 2)	3024kHz
--	---------

Limits:

The channel separation must be larger than:

☐ 25 kHz

☐ 20 dB bandwidth of hopping channel: __Hz


☒ 2/3 of 20dB bandwidth of hopping channel: 2944 kHz

The plot(s) of hopping channel carrier frequency separation is saved as below.

INTERTEK TESTING SERVICES

Plots of hopping channel carrier frequency separation

Between channel 1 and channel 2

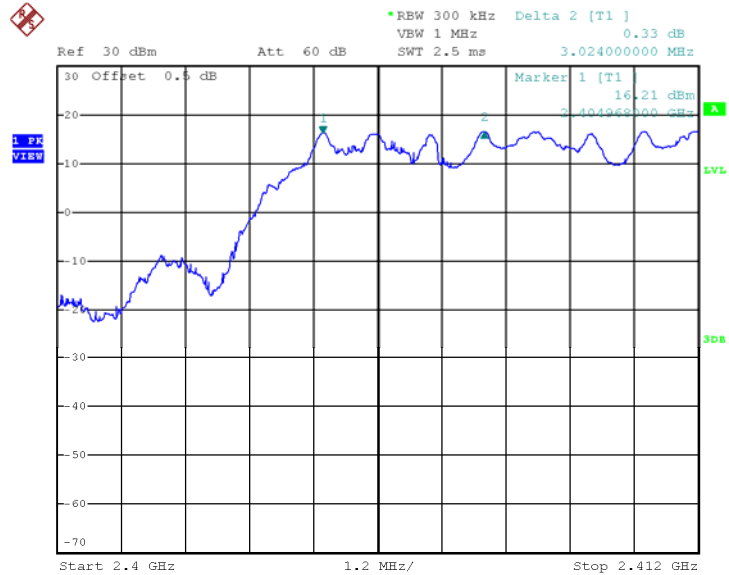

Date: 30.SEP.2016 06:53:23

INTERTEK TESTING SERVICES

4.5 Average Channel Occupancy Time

The spectrum analyzer center frequency was set to one of the known hopping channels. The SWEEP was set to 10ms, the SPAN was set to ZERO SPAN, and the TRIGGER was set to VIDEO. The time duration of the transmission so captured was measured with the MARKER DELTA function.

The SWEEP was then set to the time required by the regulation (20 seconds for 902-928 MHz devices, if the 20dB bandwidth is less than 250kHz, 10 seconds for 902-928 MHz if the 20dB bandwidth is or greater than 250kHz, "0.4 seconds x Number of hopping channels employed" seconds for 2400-2483.5 MHz, 30 seconds for 5725-5850 MHz). The analyzer was set to SINGLE SWEEP, the total ON time was added and compared against the limit (0.4 seconds).

Baby Unit (worst-case:)	
Average Occupancy Time = 4.56 ms x 74	337 ms

Limits:

Average 0.4 seconds maximum occupancy in:


- ☒ 6.4 seconds (0.4 sec. x 16) for 2400MHz-2483.5MHz
- ☐ 20 seconds for 902MHz-928MHz $\geq$ 50 hopping channels
- ☐ 10 seconds for 902MHz-928MHz $\geq$ 25 hopping channels
- ☐ 30 seconds for 5725-5850MHz

The plots of average channel occupancy time are saved as below.


INTERTEK TESTING SERVICES

Plots of average channel occupancy time

Plot A, TX time for on pulse

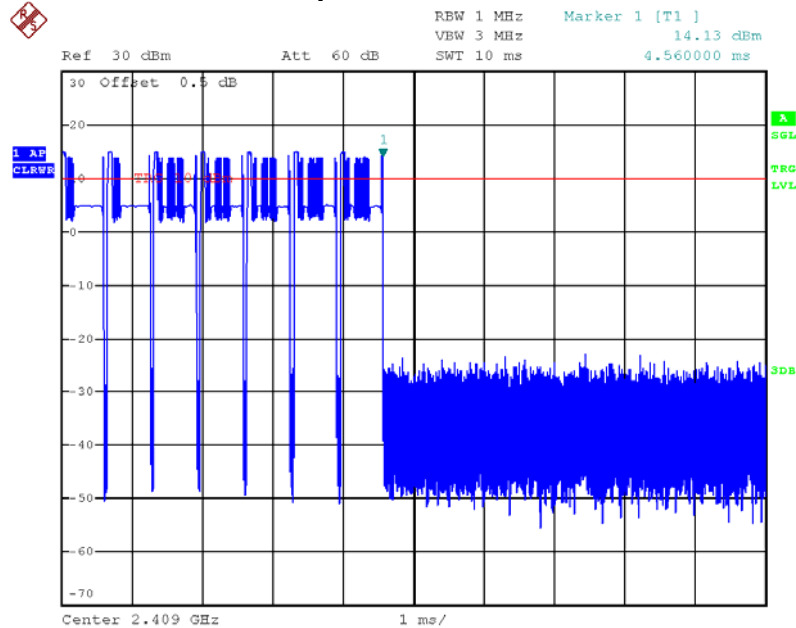


Plot B, No. of TX in 100ms

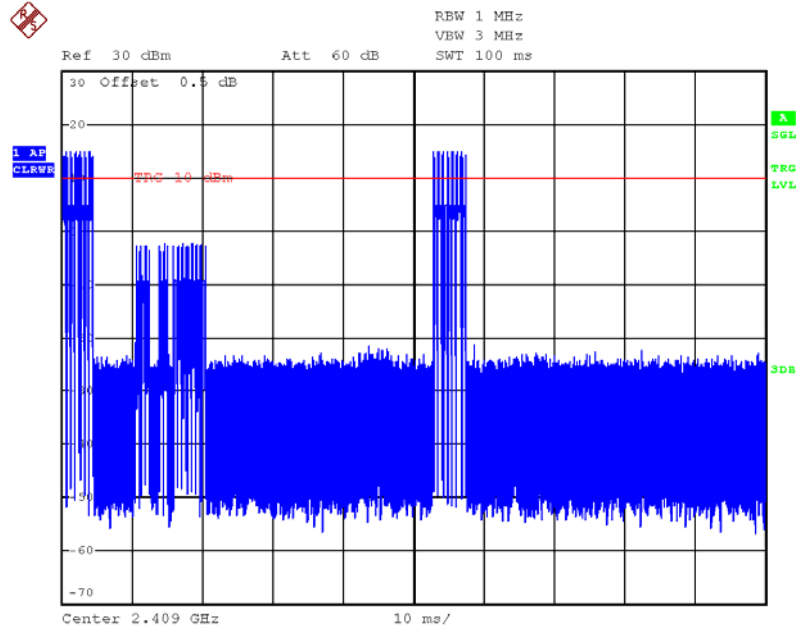

INTERTEK TESTING SERVICES

Plots of average channel occupancy time

Plot C, No. of TX in 6.4s

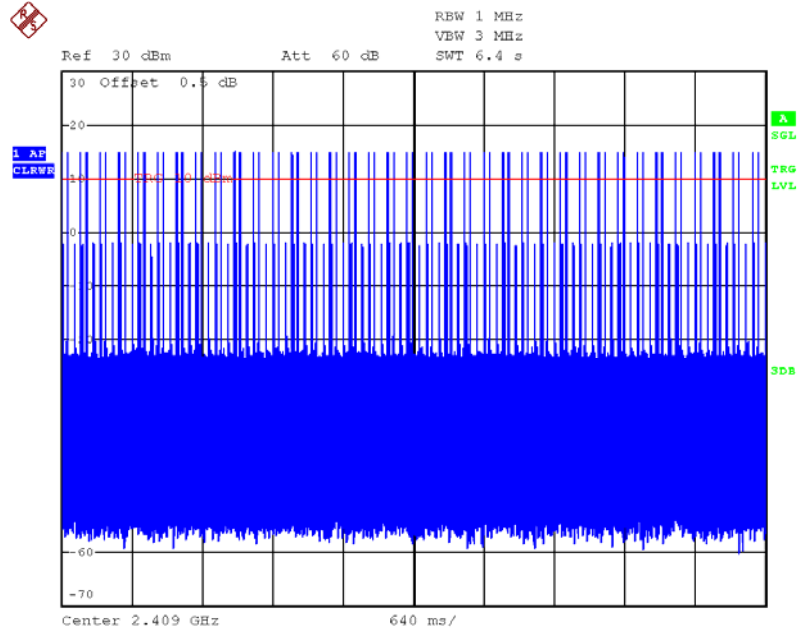

INTERTEK TESTING SERVICES

4.6 Out of Band Conducted Emissions

In any 100 kHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission.

The plot(s) of bandedge compliance is shown the worst-case which has been already considered between enable and disable the hopping function of the EUT.

Limits:


All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

The plots of out of band conducted emissions and bandedge are saved as below.


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

Lowest channel, Plot 1

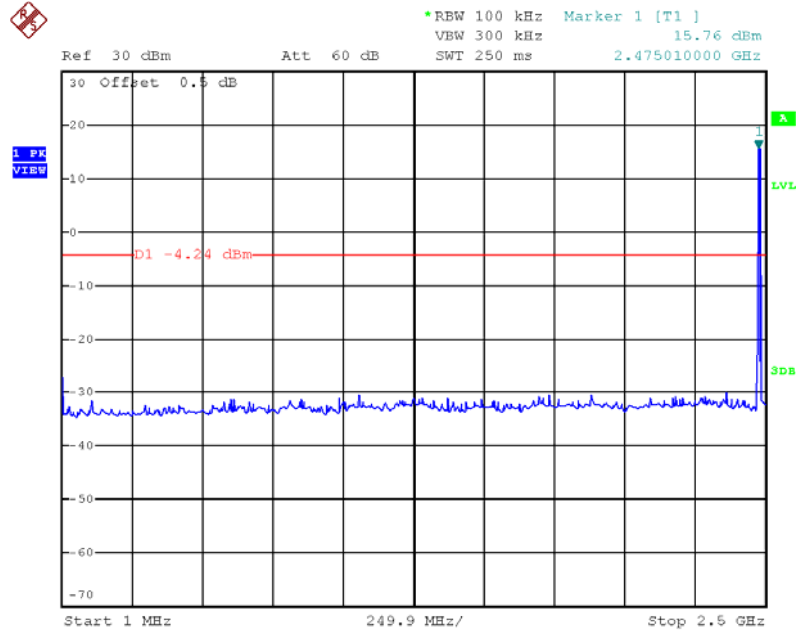


Lowest channel, Plot 2

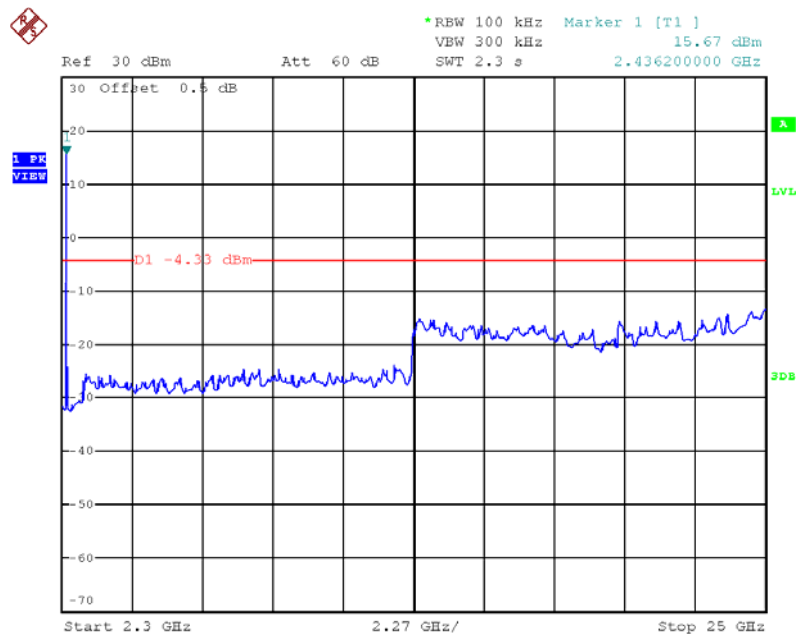


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions Middle channel, Plot 1

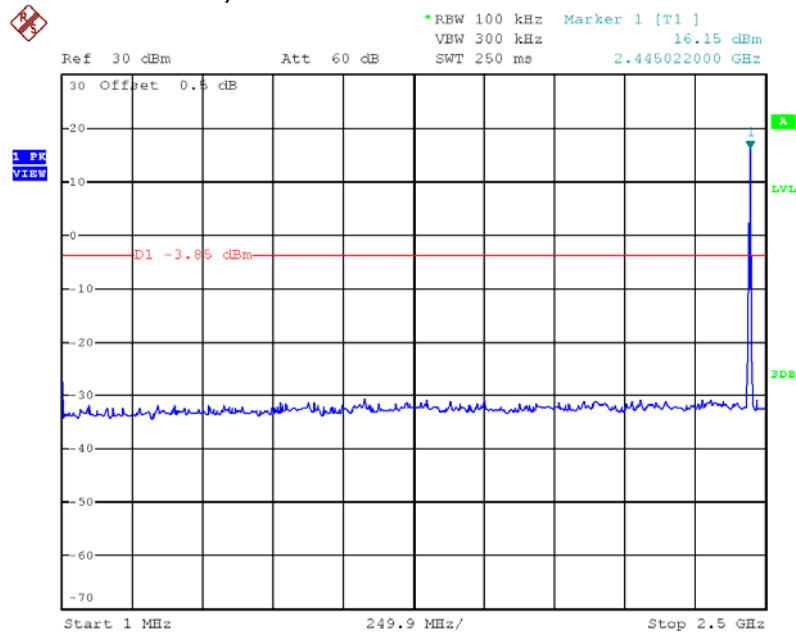


Middle channel, Plot 2

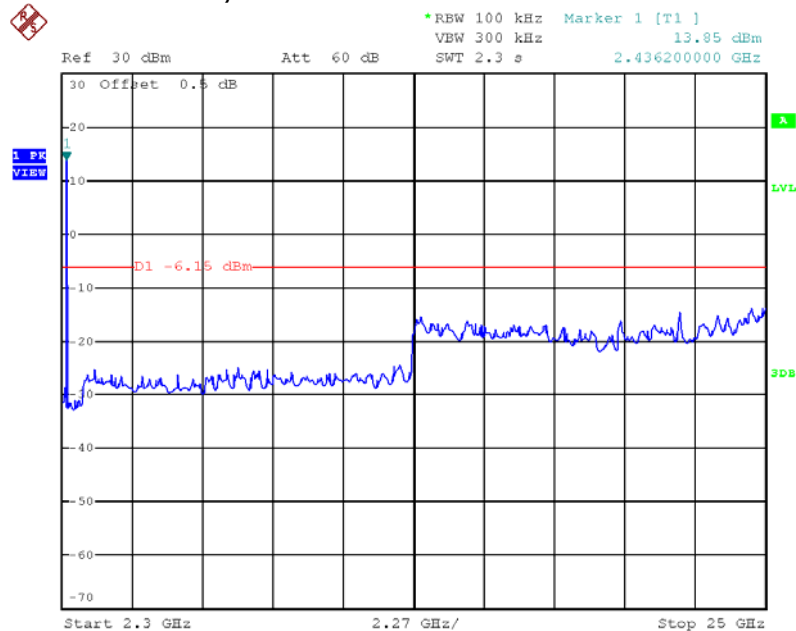


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions Highest channel, Plot 1

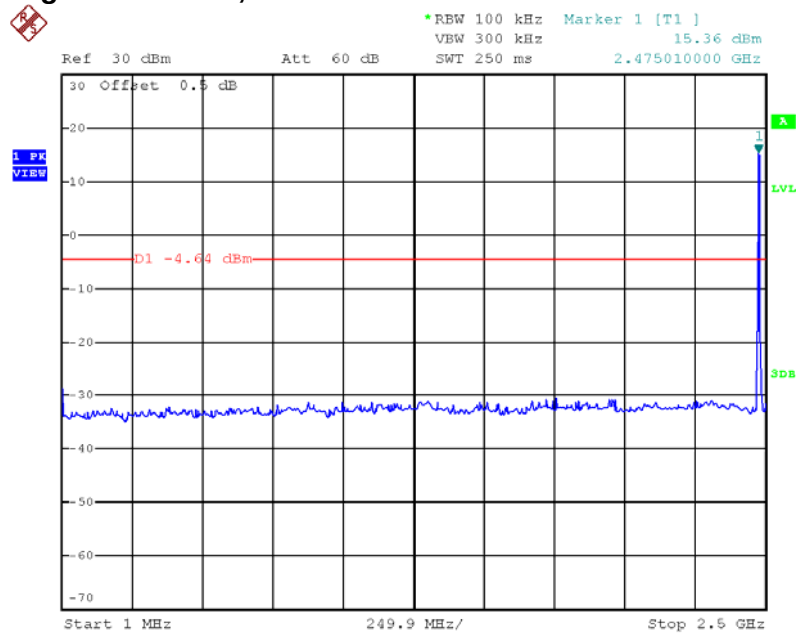


Highest channel, Plot 2

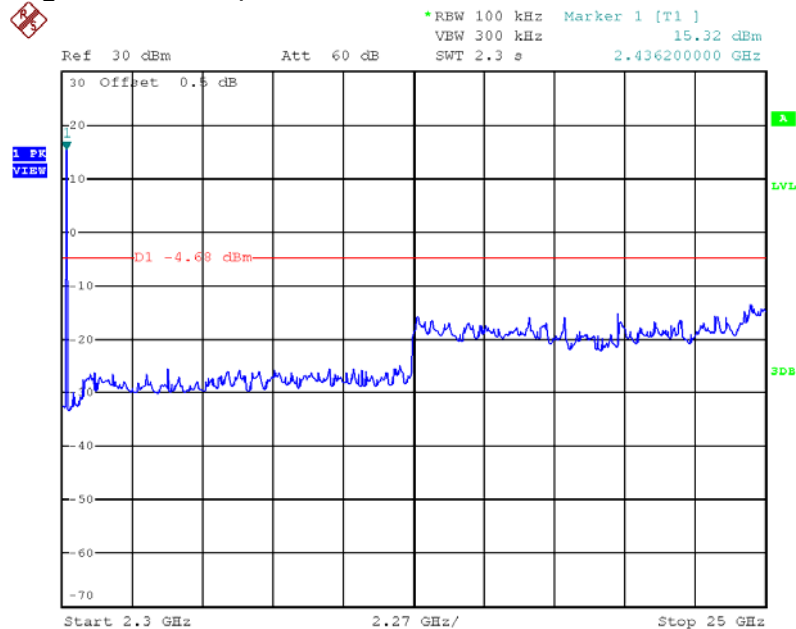


INTERTEK TESTING SERVICES

Plots of bandedge Lowest bandedge

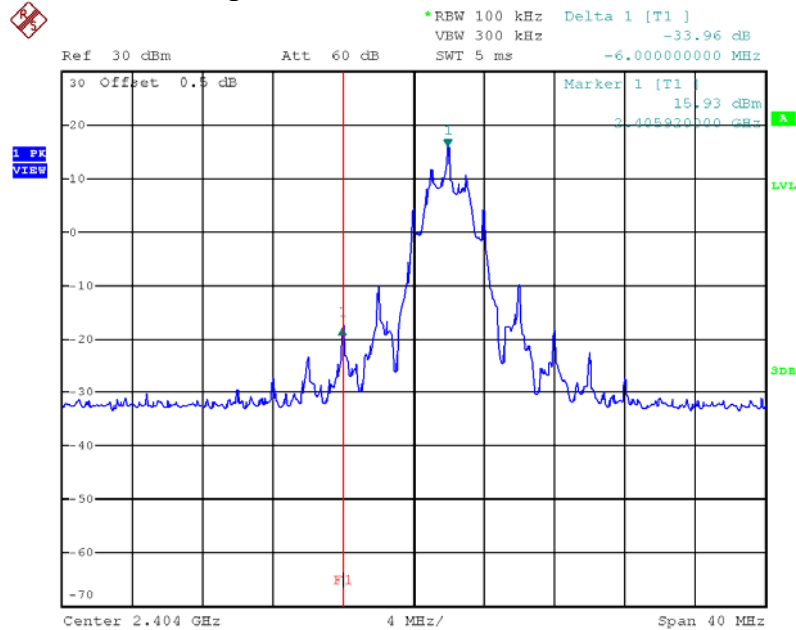

Highest bandedge

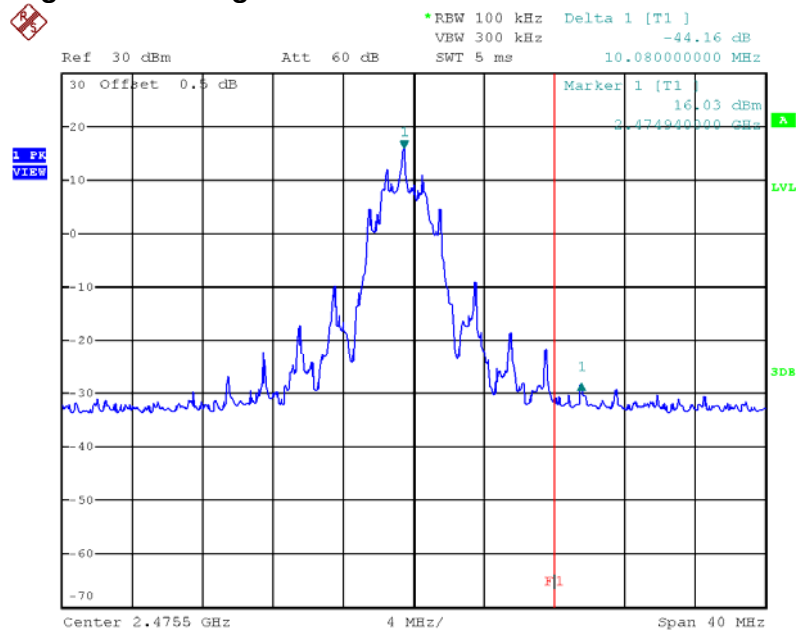

INTERTEK TESTING SERVICES

4.7 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where FS = Field Strength in dB μ V/m
 RA = Receiver Amplitude (including preamplifier) in dB μ V
 CF = Cable Attenuation Factor in dB
 AF = Antenna Factor in dB
 AG = Amplifier Gain in dB
 PD = Pulse Desensitization in dB
 AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB} \\ CF &= 1.6 \text{ dB} \\ AG &= 29 \text{ dB} \\ PD &= 0 \text{ dB} \\ AV &= -10 \text{ dB} \\ FS &= 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

INTERTEK TESTING SERVICES

4.8 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

INTERTEK TESTING SERVICES

4.8.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission
at

215.997 MHz

The worst case radiated emission configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

4.8.2 Radiated Emission Data

The data in tables 1-5 list the significant emission frequencies, the limit and the margin of compliance.


Judgement -

Passed by 0.8 dB margin


INTERTEK TESTING SERVICES

4.8.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

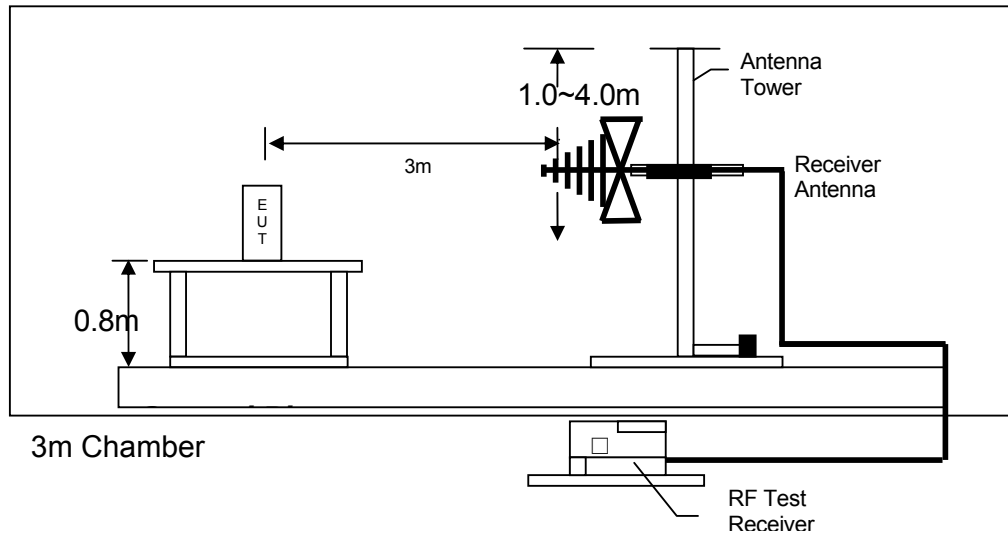

Test setup of radiated emissions up to 1GHz

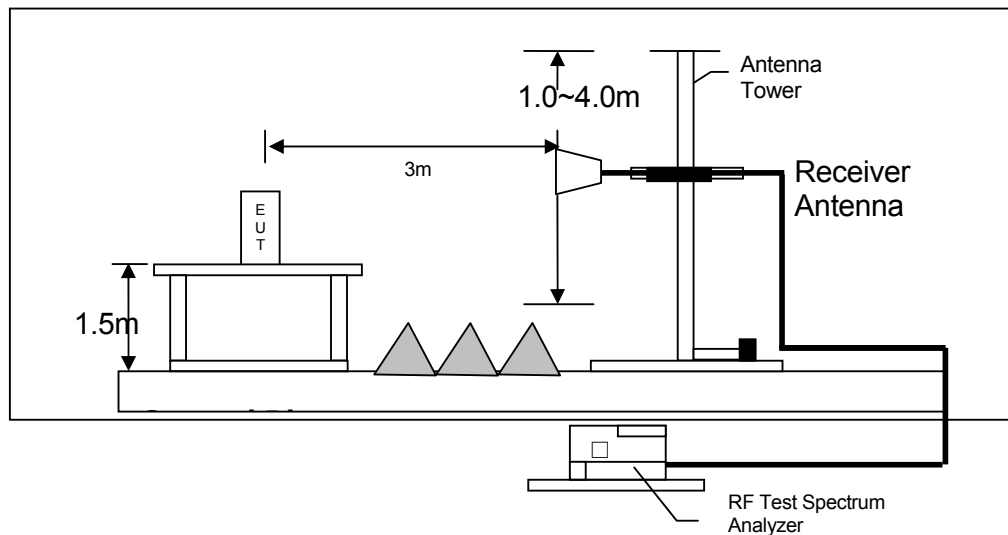

Test setup of radiated emissions above 1GHz

INTERTEK TESTING SERVICES

Mode: TX-Channel 01

Table 1

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Factor (dB)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2390.000	62.6	33	29.4	59.0	20.8	54.0	-15.8
V	4812.000	51.4	33	34.9	53.3	20.8	54.0	-21.5
V	12030.000	46.9	33	40.5	54.4	20.8	54.0	-20.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2390.000	62.6	33	29.4	59.0	74.0	-15.0
V	4812.000	51.4	33	34.9	53.3	74.0	-20.7
V	12030.000	46.9	33	40.5	54.4	74.0	-19.6

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 3.3.
 6. Correction Factor is constituted Cable Loss, Antenna Factor and Amplifier Gain.

INTERTEK TESTING SERVICES

Mode: TX-Channel 13

Table 2

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Factor (dB)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4884.000	51.3	33	34.9	53.2	20.8	54.0	-21.6
V	7326.000	47.8	33	37.9	52.7	20.8	54.0	-22.1
V	12210.000	47.2	33	40.5	54.7	20.8	54.0	-20.1

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4884.000	51.3	33	34.9	53.2	74.0	-20.8
V	7326.000	47.8	33	37.9	52.7	74.0	-21.3
V	12210.000	47.2	33	40.5	54.7	74.0	-19.3

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 3.3.
 6. Correction Factor is constituted Cable Loss, Antenna Factor and Amplifier Gain.

INTERTEK TESTING SERVICES

Mode: TX-Channel 24

Table 3

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Factor (dB)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>2483.500</i>	<i>76.1</i>	<i>33</i>	<i>29.4</i>	<i>72.5</i>	<i>20.8</i>	<i>54.0</i>	<i>-2.3</i>
<i>V</i>	<i>4950.000</i>	<i>51.9</i>	<i>33</i>	<i>34.9</i>	<i>53.8</i>	<i>20.8</i>	<i>54.0</i>	<i>-21.0</i>
<i>V</i>	<i>7425.000</i>	<i>47.6</i>	<i>33</i>	<i>37.9</i>	<i>52.5</i>	<i>20.8</i>	<i>54.0</i>	<i>-22.3</i>
<i>V</i>	<i>12375.000</i>	<i>46.7</i>	<i>33</i>	<i>40.5</i>	<i>54.2</i>	<i>20.8</i>	<i>54.0</i>	<i>-20.6</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>2483.500</i>	<i>76.1</i>	<i>33</i>	<i>29.4</i>	<i>72.5</i>	<i>74.0</i>	<i>-1.5</i>
<i>V</i>	<i>4950.000</i>	<i>51.9</i>	<i>33</i>	<i>34.9</i>	<i>53.8</i>	<i>74.0</i>	<i>-20.2</i>
<i>V</i>	<i>7425.000</i>	<i>47.6</i>	<i>33</i>	<i>37.9</i>	<i>52.5</i>	<i>74.0</i>	<i>-21.5</i>
<i>V</i>	<i>12375.000</i>	<i>46.7</i>	<i>33</i>	<i>40.5</i>	<i>54.2</i>	<i>74.0</i>	<i>-19.8</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 3.3.
 6. Correction Factor is constituted Cable Loss, Antenna Factor and Amplifier Gain.

INTERTEK TESTING SERVICES

Mode: Video On

Table 4

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	59.948	40.4	16	10.0	34.4	40.0	-5.6
V	95.960	39.4	16	12.0	35.4	43.5	-8.1
V	131.971	40.6	16	14.0	38.6	43.5	-4.9
V	167.982	34.8	16	18.0	36.8	43.5	-6.7
V	191.990	38.2	16	16.0	38.2	43.5	-5.3
V	215.997	41.7	16	17.0	42.7	43.5	-0.8
H	336.035	31.9	16	24.0	39.9	46.0	-6.1
V	479.958	30.0	16	26.0	40.0	46.0	-6.0
H	575.988	30.1	16	28.0	42.1	46.0	-3.9
H	624.003	27.8	16	29.0	40.8	46.0	-5.2
H	768.048	26.0	16	31.0	41.0	46.0	-5.0
V	816.063	26.4	16	31.0	41.4	46.0	-4.6

- NOTES:
1. Quasi-peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 3.3.
 5. Correction Factor is constituted Cable Loss and Antenna Factor

INTERTEK TESTING SERVICES

4.8.4 Transmitter Duty Cycle Calculation

$$\begin{aligned}\text{Duty Cycle (DC)} &= \text{Maximum On time in } 100\text{ms}/100\text{ms} \\ &= (4.56\text{ms} \times 2)/100\text{ms}\end{aligned}$$

$$\begin{aligned}\text{Average Factor (AF)} &= 20 \log (\text{DC}) \\ &= 20 * \log (0.0912) \\ &= -20.8\text{dB}\end{aligned}$$


The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SPAN function on the analyzer was set to ZERO. The transmitter ON time was determined from the resultant time-amplitude display.

Please refer to the attached plot(s) for more details.


INTERTEK TESTING SERVICES

Plots of transmitter On time

Plot A, Tx on time

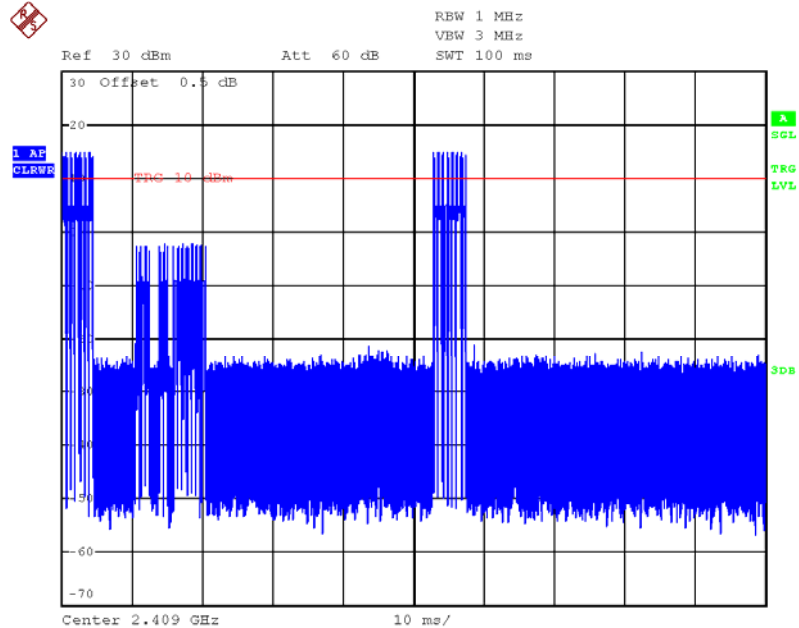

Plot B, Tx time in 100ms

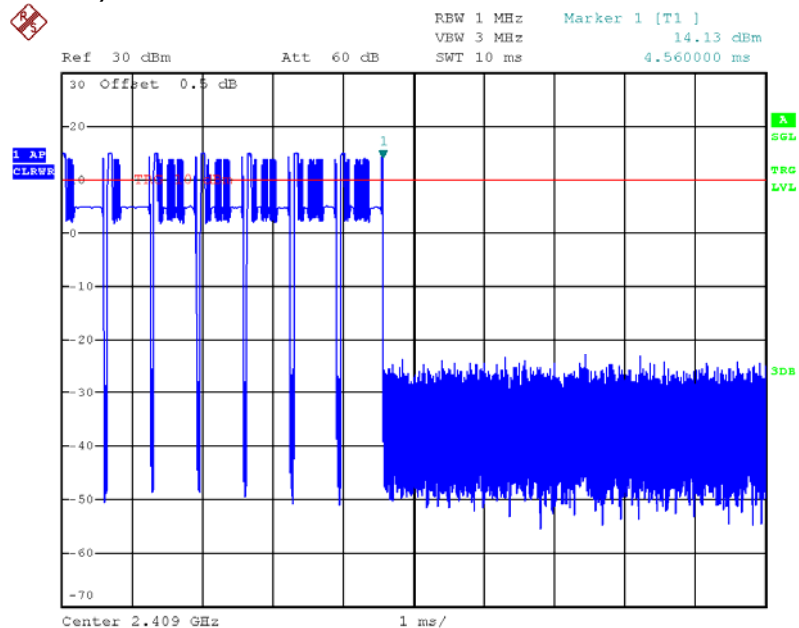

INTERTEK TESTING SERVICES

4.9 AC Power Line Conducted Emission

- ☐ Not applicable – EUT is only powered by battery for operation.
- ☒ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

4.9.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration
at

420 kHz

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf


4.9.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 10.38 dB margin compare with CISPR average limit

INTERTEK TESTING SERVICES

Worst Case: Video On

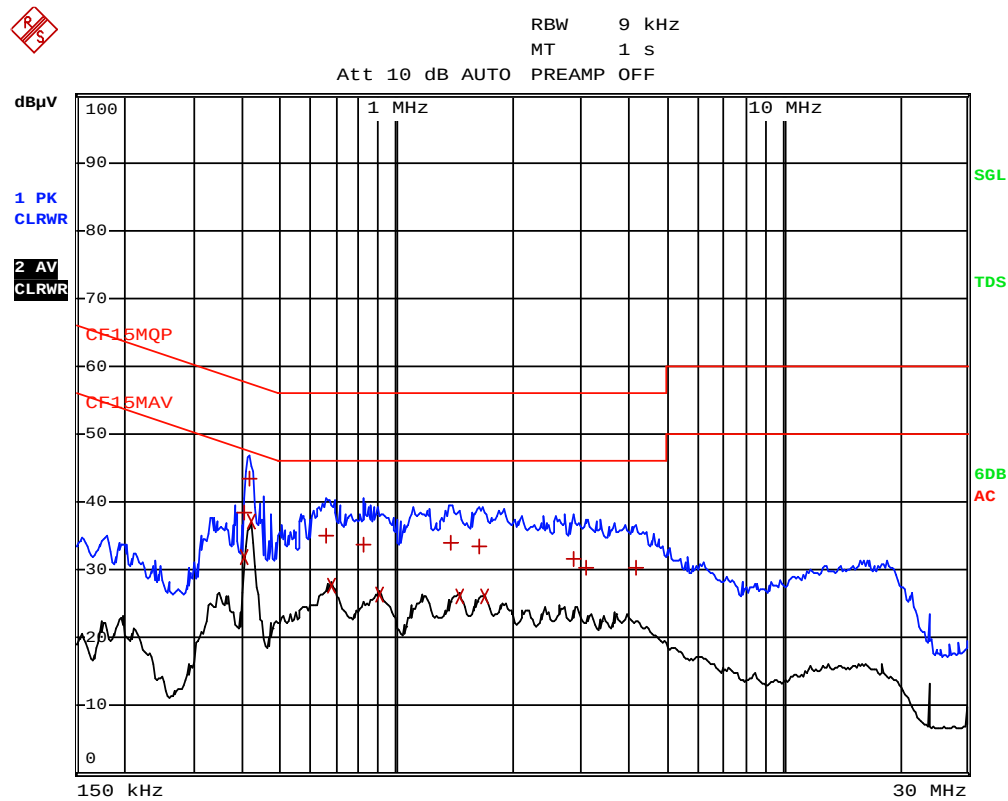

INTERTEK TESTING SERVICES

Worst Case: Video On

EDIT PEAK LIST (Final Measurement Results)

Trace1: CF15MQP

Trace2: CF15MAV

Trace3: ---

	TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1	Quasi Peak	402 kHz	38.53 L1	-19.27
2	CISPR Average	402 kHz	31.76 N	-16.04
1	Quasi Peak	415.5 kHz	43.54 L1	-13.99
2	CISPR Average	420 kHz	37.06 L1	-10.38
1	Quasi Peak	658.5 kHz	35.03 L1	-20.96
2	CISPR Average	681 kHz	27.67 L1	-18.32
1	Quasi Peak	825 kHz	33.71 L1	-22.28
2	CISPR Average	901.5 kHz	26.28 N	-19.71
1	Quasi Peak	1.383 MHz	33.89 N	-22.10
2	CISPR Average	1.4595 MHz	25.99 L1	-20.00
1	Quasi Peak	1.635 MHz	33.50 L1	-22.49
2	CISPR Average	1.7025 MHz	25.99 L1	-20.00
1	Quasi Peak	2.886 MHz	31.65 N	-24.34
1	Quasi Peak	3.1155 MHz	30.23 N	-25.76
1	Quasi Peak	4.1685 MHz	30.24 L1	-25.75

INTERTEK TESTING SERVICES

EXHIBIT 5 EQUIPMENT LIST

INTERTEK TESTING SERVICES

5.0 Equipment List

1) Radiated Emissions Test

Equipment	EMI Test Receiver (9kHz to 26.5GHz)	Spectrum Analyzer
Registration No.	EW-3156	EW-2249
Manufacturer	ROHDESCHWARZ	R&S
Model No.	ESR26	FSP30
Calibration Date	Nov. 03, 2015	Nov. 27, 2015
Calibration Due Date	Nov 03, 2016	Nov. 27, 2016

Equipment	Biconical Antenna	Log Periodic Antenna	Double Ridged Guide Antenna
Registration No.	EW-0571	EW-0447	EW-1133
Manufacturer	EMCO	EMCO	EMCO
Model No.	3104C	3146	3115
Calibration Date	Jun. 23, 2015	Mar. 16, 2015	Nov. 05, 2015
Calibration Due Date	Dec. 23, 2016	Sep. 16, 2016	May 05, 2017

2) Conducted Emissions Test

Equipment	EMI Test Receiver	LISN
Registration No.	EW-2500	EW-2501
Manufacturer	R&S	R&S
Model No.	ESCI	ENV-216
Calibration Date	Jan. 28, 2016	Jan. 28, 2016
Calibration Due Date	Jan. 28, 2017	Jan. 28, 2017

3) Conductive Measurement Test

Equipment	Spectrum Analyzer
Registration No.	EW-2249
Manufacturer	R&S
Model No.	FSP30
Calibration Date	Nov. 27, 2015
Calibration Due Date	Nov. 27, 2016

END OF TEST REPORT