

## TEST REPORT

**Report No.: 17050379HKG-002**

Application For Original Grant of 47 CFR Part 15 Certification

New family of RSS-210 Issue 9 Equipment Certification

DECT 6.0 Cordless Telephone with Bluetooth Function - Base unit

**FCC ID: EW780-0818-00**

**IC: 1135B-80081800**

**PREPARED AND CHECKED BY:**

**APPROVED BY:**

Signed On File  
Leung Chiu Kuen, Stanley  
Engineer

 Digitally signed  
by Jess Tang  
Location: Intertek  
Testing Services  
Hong Kong Ltd.

Jess Tang  
Lead Engineer  
Date: October 10, 2017

Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

© 2017 Intertek

**TEST REPORT****GENERAL INFORMATION**

|                                    |                                                                                        |
|------------------------------------|----------------------------------------------------------------------------------------|
| <b>Grantee:</b>                    | VTech Telecommunications Ltd.                                                          |
| <b>Grantee Address:</b>            | 23/F., Tai Ping Industrial Centre, Block 1,<br>57 Ting Kok Road, Tai Po,<br>Hong Kong. |
| <b>FCC Specification Standard:</b> | FCC Part 15, October 1, 2016 Edition                                                   |
| <b>FCC ID:</b>                     | EW780-0818-00                                                                          |
| <b>FCC Model(s):</b>               | XLC7BT, XLC7BT BS                                                                      |
| <b>IC Specification Standard:</b>  | RSS-210 Issue 9, August 2016<br>RSS-Gen Issue 4, November 2014                         |
| <b>IC:</b>                         | 1135B-80081800                                                                         |
| <b>HVIN</b>                        | XLC7BT                                                                                 |
| <b>PMN</b>                         | Home and Cellphone Calls                                                               |
| <b>Type of EUT:</b>                | Transceiver                                                                            |
| <b>Description of EUT:</b>         | DECT 6.0 Cordless Telephone with Bluetooth Function - Base unit                        |
| <b>Serial Number:</b>              | N/A                                                                                    |
| <b>Sample Receipt Date:</b>        | May 09, 2017                                                                           |
| <b>Date of Test:</b>               | May 12 - October 08, 2017                                                              |
| <b>Report Date:</b>                | October 10, 2017                                                                       |
| <b>Environmental Conditions:</b>   | Temperature: +10 to 40°C<br>Humidity: 10 to 90%                                        |

## TEST REPORT

### TABLE OF CONTENTS

|                                                                 |           |
|-----------------------------------------------------------------|-----------|
| <b>1.0 Test Results Summary &amp; Statement of Compliance</b>   | <b>4</b>  |
| 1.1 Summary of Test Results                                     | 4         |
| 1.2 Statement of Compliance                                     | 4         |
| <b>2.0 General Description</b>                                  | <b>5</b>  |
| 2.1 Product Description                                         | 5         |
| 2.2 Test Methodology                                            | 5         |
| 2.3 Test Facility                                               | 5         |
| <b>3.0 System Test Configuration</b>                            | <b>6</b>  |
| 3.1 Justification                                               | 6         |
| 3.2 EUT Exercising Software                                     | 7         |
| 3.3 Radiated Emission Test Setup                                | 8         |
| 3.4 Conducted Emission Test Setup                               | 9         |
| 3.5 Details of EUT and Description of Accessories               | 10        |
| 3.6 Measurement Uncertainty                                     | 10        |
| <b>4.0 Test Results</b>                                         | <b>11</b> |
| 4.1 Field Strength Calculation                                  | 11        |
| 4.2 Radiated Emissions                                          | 12        |
| 4.2.1 Radiated Emission Configuration Photograph                | 12        |
| 4.2.2 Radiated Emission Data                                    | 12        |
| 4.2.3 Transmitter Duty Cycle Calculation                        | 17        |
| 4.3 Radiated Emission on the Bandedge                           | 18        |
| 4.4 AC Power Line Conducted Emission                            | 21        |
| 4.4.1 AC Power Line Conducted Emission Configuration Photograph | 21        |
| 4.4.2 AC Power Line Conducted Emission Data                     | 21        |
| <b>5.0 Equipment List</b>                                       | <b>24</b> |

## TEST REPORT

### EXHIBIT 1 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

#### 1.0 Test Results Summary & Statement of Compliance

##### 1.1 Summary of Test Results

| TEST ITEMS                            | FCC PART 15 SECTION      | RSS-210/<br>RSS-GEN#/<br>RSS-310^<br>SECTION | RESULTS | DETAILS<br>SEE<br>SECTION |
|---------------------------------------|--------------------------|----------------------------------------------|---------|---------------------------|
| Antenna Requirement                   | 15.203                   | 8.3 <sup>#</sup>                             | Pass    | 2.1                       |
| Security Code Information             | 15.214(d)                | 2.4                                          | Pass    | 2.1                       |
| Radiated Emission                     | 15.249(a), 209, &<br>109 | A2.9(a)                                      | Pass    | 4.2                       |
| Radiated Emission on the Bandedge     | 15.249(d)                | A2.9(b)                                      | Pass    | 4.3                       |
| Radiated Emission in Restricted Bands | 15.205                   | 2.2                                          | Pass    | 4.2                       |
| AC Power Line Conducted Emission      | 15.207 & 15.107          | 8.8 <sup>#</sup>                             | Pass    | 4.4                       |

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

##### 1.2 Statement of Compliance

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2016 Edition  
RSS-210 Issue 9, August 2016  
RSS-Gen Issue 4, November 2014

## TEST REPORT

### EXHIBIT 2 GENERAL DESCRIPTION

#### 2.0 General Description

##### 2.1 Product Description

The XLC7BT is a DECT 6.0 Cordless Telephone With Bluetooth Function - Base Unit. It operates at frequency range of 2402MHz to 2480MHz. The Base Unit is powered by an AC adaptor 100-120VAC 60Hz 200mA and/or 3 x Ni-MH type, "AAA" size rechargeable battery pack (1.2V, 600mAh). With Bluetooth device registered and enabled, the Base Unit allows user uses the cordless handset to make or receive cellular phone calls via the cellular network. Two Bluetooth devices can be connected at the same time.

The Bluetooth antenna used in base unit is integral, and the test sample is a prototype.

For FCC, base unit of the Model(s): XLC7BT BS is the same as the Model: XLC7BT in electrical designs including software & firmware, PCB layout and construction design/physical design/enclosure. The only differences between these models are model number and packing to be sold for marketing purpose.

The circuit description is saved with filename: descri.pdf.

Connection between the device and the telephone network is accomplished through the use of USOC RJ11C in the 2-wire loop calling central office line.

##### 2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in Radiated Emission Test Sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

##### 2.3 Test Facility

The radiated emission test sites and conducted measurement facility used to collect the radiated data and conducted data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC and IC No. 2042V.

## TEST REPORT

### EXHIBIT 3 SYSTEM TEST CONFIGURATION

#### 3.0 System Test Configuration

##### 3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit continuously mode to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The Base Unit was powered by a 100-120VAC 60Hz 200mA to 6.0VDC 600mA adaptor and/or fully charged batteries.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. If the base unit attached to peripherals, they were connected and operational to simulate typical use. The handset was remotely located as far from the antenna and the base as possible to ensure full power transmission from the base. Else, the base was wired to transmit full power.

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

For transmitter radiated measurement, the spectrum analyzer resolution bandwidth was 100 kHz for frequencies below 1000 MHz. The resolution bandwidth was 1 MHz for frequencies above 1000 MHz.

Radiated emission measurement for transmitter was performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitry used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109 Limits.

The DECT module was put into transmission mode when taking radiated emission data for determining worst-case spurious emission.

## TEST REPORT

### 3.1 Justification - Cont'd

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.2.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period ( $T_{eff}$ ) was 625 $\mu$ s. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All relevant operation modes have been tested, and the worst case data was included in this report.

### 3.2 EUT Exercising Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

## TEST REPORT

### 3.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

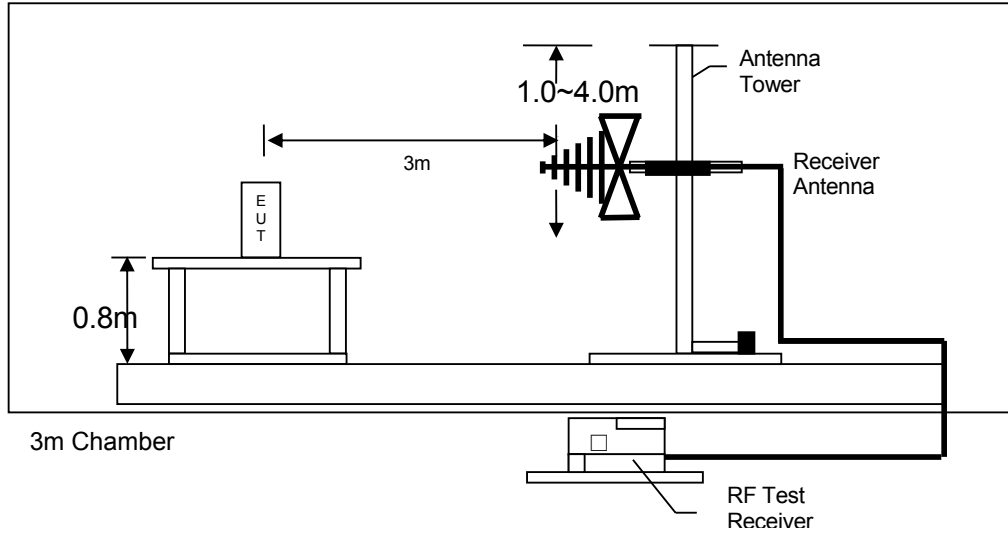


Figure 3.3.1 Test setup of radiated emissions up to 1GHz

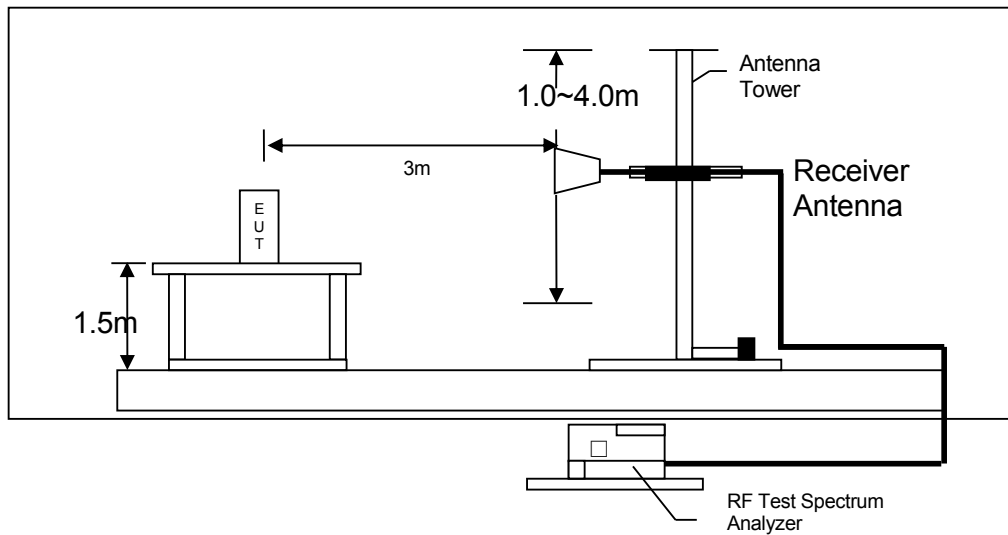


Figure 3.3.2 Test setup of radiated emissions above 1GHz

## TEST REPORT

### 3.4 Conducted Emission Test Setup

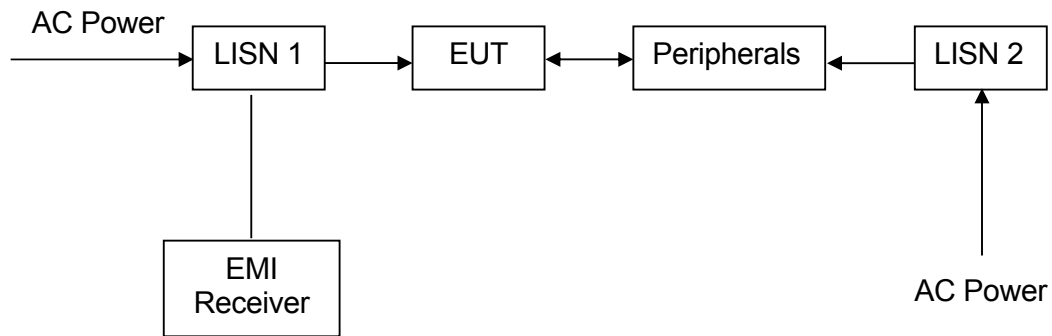


Figure 3.4.1

## TEST REPORT

### 3.5 Details of EUT and Description of Accessories

#### Details of EUT:

An AC adaptor (provided with the unit) was used to power the device. Their description are listed below.

- (1) An AC adaptor (100-120VAC 60Hz 200mA to 6.0VDC 600mA, Model: S006AKU0600060) (Supplied by Client)
- (2) Base unit: A 3 x Ni-MH type "AAA" size rechargeable battery (1.2V 600mAh, Brand: GP) (Supplied by Client)
- (3) Base unit: A 3 x Ni-MH type "AAA" size rechargeable battery (1.2V 600mAh, Brand: Corun) (Supplied by Client)

#### Description of Accessories:

- (1) Telecommunication cable with RJ11C connectors (1m, unshielded) (Supplied by Intertek)
- (2) Handset (Model: XLC7 HS, FCC ID: EW780-0358-00) (Supplied by Client)
- (3) iPhone 5c, Model: A1529, FCC ID: BCG-E2694A (Supplied by Intertek)
- (4) Telephone Line Simulator, Model: TLS-5D-01, S/N: 151101 (Supplied by Intertek)

### 3.6 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered. The values of the Measurement uncertainty for radiated emission test, AC line conducted emission test and RF conducted test, frequency stability and timing jitter are  $\pm 5.3\text{dB}$ ,  $\pm 4.2\text{dB}$ ,  $\pm 1\text{dB}$ ,  $\pm 23\text{Hz}$ ,  $0.1\mu\text{s}$  respectively.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

## TEST REPORT

### EXHIBIT 4 TEST RESULTS

#### 4.0 Test Results

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

##### 4.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where

- FS = Field Strength in dB $\mu$ V/m
- RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

##### Example

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$AV = -10 \text{ dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

## TEST REPORT

### 4.2 Radiated Emissions

#### 4.2.1 Radiated Emission Configuration Photograph

Worst Case Radiated Emission  
at

729.127 MHz

The worst case radiated emission configuration photographs are saved with filename: config photos.pdf

#### 4.2.2 Radiated Emission Data

The data in tables 1-4 list the significant emission frequencies, the limit and the margin of compliance. Test setup is shown in section 3.3 Figure 3.3.1 and 3.3.2.

Judgement -

Passed by 10.8 dB margin

## TEST REPORT

### RADIATED EMISSION DATA

Mode: TX-Channel 00

Table 1

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Average Factor (dB) | Calculated at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|--------------|
| H            | 2402.000         | 103.7          | 33                | 29.4                | 100.1                     | 24                  | 76.1                      | 94.0                         | -17.9        |
| <b>H</b>     | <b>4804.000</b>  | <b>59.4</b>    | <b>33</b>         | <b>34.9</b>         | <b>61.3</b>               | <b>24</b>           | <b>37.3</b>               | <b>54.0</b>                  | <b>-16.7</b> |
| V            | 7206.000         | 49.5           | 33                | 37.9                | 54.4                      | 24                  | 30.4                      | 54.0                         | -23.6        |
| H            | 9608.000         | 43.3           | 33                | 40.4                | 50.7                      | 24                  | 26.7                      | 54.0                         | -27.3        |
| <b>H</b>     | <b>12010.000</b> | <b>40.3</b>    | <b>33</b>         | <b>40.5</b>         | <b>47.8</b>               | <b>24</b>           | <b>23.8</b>               | <b>54.0</b>                  | <b>-30.2</b> |
| H            | 14412.000        | 40.4           | 33                | 40.0                | 47.4                      | 24                  | 23.4                      | 54.0                         | -30.6        |

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| H            | 2402.000         | 103.7          | 33                | 29.4                | 100.1                     | 114.0                     | -13.9        |
| <b>H</b>     | <b>4804.000</b>  | <b>59.4</b>    | <b>33</b>         | <b>34.9</b>         | <b>61.3</b>               | <b>74.0</b>               | <b>-12.7</b> |
| V            | 7206.000         | 49.5           | 33                | 37.9                | 54.4                      | 74.0                      | -19.6        |
| H            | 9608.000         | 43.3           | 33                | 40.4                | 50.7                      | 74.0                      | -23.3        |
| <b>H</b>     | <b>12010.000</b> | <b>40.3</b>    | <b>33</b>         | <b>40.5</b>         | <b>47.8</b>               | <b>74.0</b>               | <b>-26.2</b> |
| H            | 14412.000        | 40.4           | 33                | 40.0                | 47.4                      | 74.0                      | -26.6        |

- NOTES:
1. Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

## TEST REPORT

Mode: TX-Channel 39

Table 2

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Average Factor (dB) | Calculated at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|--------------|
| H            | 2440.000         | 104.1          | 33                | 29.4                | 100.5                     | 24                  | 76.5                      | 94.0                         | -17.5        |
| <b>H</b>     | <b>4880.000</b>  | <b>59.3</b>    | <b>33</b>         | <b>34.9</b>         | <b>61.2</b>               | <b>24</b>           | <b>37.2</b>               | <b>54.0</b>                  | <b>-16.8</b> |
| <b>V</b>     | <b>7320.000</b>  | <b>49.7</b>    | <b>33</b>         | <b>37.9</b>         | <b>54.6</b>               | <b>24</b>           | <b>30.6</b>               | <b>54.0</b>                  | <b>-23.4</b> |
| H            | 9760.000         | 42.9           | 33                | 40.4                | 50.3                      | 24                  | 26.3                      | 54.0                         | -27.7        |
| <b>H</b>     | <b>12200.000</b> | <b>40.3</b>    | <b>33</b>         | <b>40.5</b>         | <b>47.8</b>               | <b>24</b>           | <b>23.8</b>               | <b>54.0</b>                  | <b>-30.2</b> |
| H            | 14640.000        | 41.7           | 33                | 38.4                | 47.1                      | 24                  | 23.1                      | 54.0                         | -30.9        |

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| H            | 2440.000         | 104.1          | 33                | 29.4                | 100.5                     | 114.0                     | -13.5        |
| <b>H</b>     | <b>4880.000</b>  | <b>59.3</b>    | <b>33</b>         | <b>34.9</b>         | <b>61.2</b>               | <b>74.0</b>               | <b>-12.8</b> |
| <b>V</b>     | <b>7320.000</b>  | <b>49.7</b>    | <b>33</b>         | <b>37.9</b>         | <b>54.6</b>               | <b>74.0</b>               | <b>-19.4</b> |
| H            | 9760.000         | 42.9           | 33                | 40.4                | 50.3                      | 74.0                      | -23.7        |
| <b>H</b>     | <b>12200.000</b> | <b>40.3</b>    | <b>33</b>         | <b>40.5</b>         | <b>47.8</b>               | <b>74.0</b>               | <b>-26.2</b> |
| H            | 14640.000        | 41.7           | 33                | 38.4                | 47.1                      | 74.0                      | -26.9        |

- NOTES:
1. Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

## TEST REPORT

Mode: TX-Channel 78

Table 3

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Average Factor (dB) | Calculated at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|--------------|
| H            | 2480.000         | 104.2          | 33                | 29.4                | 100.6                     | 24                  | 76.6                      | 94.0                         | -17.4        |
| <b>H</b>     | <b>4960.000</b>  | <b>59.9</b>    | <b>33</b>         | <b>34.9</b>         | <b>61.8</b>               | <b>24</b>           | <b>37.8</b>               | <b>54.0</b>                  | <b>-16.2</b> |
| <b>V</b>     | <b>7440.000</b>  | <b>49.4</b>    | <b>33</b>         | <b>37.9</b>         | <b>54.3</b>               | <b>24</b>           | <b>30.3</b>               | <b>54.0</b>                  | <b>-23.7</b> |
| H            | 9920.000         | 43.2           | 33                | 40.4                | 50.6                      | 24                  | 26.6                      | 54.0                         | -27.4        |
| <b>H</b>     | <b>12400.000</b> | <b>39.7</b>    | <b>33</b>         | <b>40.5</b>         | <b>47.2</b>               | <b>24</b>           | <b>23.2</b>               | <b>54.0</b>                  | <b>-30.8</b> |
| H            | 14880.000        | 41.7           | 33                | 38.4                | 47.1                      | 24                  | 23.1                      | 54.0                         | -30.9        |

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| H            | 2480.000         | 104.2          | 33                | 29.4                | 100.6                     | 114.0                     | -13.4        |
| <b>H</b>     | <b>4960.000</b>  | <b>59.9</b>    | <b>33</b>         | <b>34.9</b>         | <b>61.8</b>               | <b>74.0</b>               | <b>-12.2</b> |
| <b>V</b>     | <b>7440.000</b>  | <b>49.4</b>    | <b>33</b>         | <b>37.9</b>         | <b>54.3</b>               | <b>74.0</b>               | <b>-19.7</b> |
| H            | 9920.000         | 43.2           | 33                | 40.4                | 50.6                      | 74.0                      | -23.4        |
| <b>H</b>     | <b>12400.000</b> | <b>39.7</b>    | <b>33</b>         | <b>40.5</b>         | <b>47.2</b>               | <b>74.0</b>               | <b>-26.8</b> |
| H            | 14880.000        | 41.7           | 33                | 38.4                | 47.1                      | 74.0                      | -26.9        |

- NOTES:
1. Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

## TEST REPORT

Mode: Talk with selected Bluetooth

Table 4

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-amp (dB) | Antenna Factor (dB) | Net at 3m (dBμV/m) | Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|-----------------|----------------|--------------|---------------------|--------------------|----------------------|--------------|
| V            | 48.308          | 28.0           | 16           | 11.0                | 23.0               | 40.0                 | -17.0        |
| V            | 54.613          | 28.9           | 16           | 11.0                | 23.9               | 40.0                 | -16.1        |
| V            | 143.368         | 30.8           | 16           | 14.0                | 28.8               | 43.5                 | -14.7        |
| V            | 159.373         | 27.7           | 16           | 16.0                | 27.7               | 43.5                 | -15.8        |
| V            | 211.511         | 26.3           | 16           | 17.0                | 27.3               | 43.5                 | -16.2        |
| H            | 304.510         | 23.2           | 16           | 22.0                | 29.2               | 46.0                 | -16.8        |
| <b>H</b>     | <b>322.576</b>  | <b>23.0</b>    | <b>16</b>    | <b>23.0</b>         | <b>30.0</b>        | <b>46.0</b>          | <b>-16.0</b> |
| V            | 729.127         | 21.2           | 16           | 30.0                | 35.2               | 46.0                 | -10.8        |

- NOTES:
1. Peak Detector Data unless otherwise stated.
  2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative sign in the column shows value below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.
  6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

### 4.2.3 Transmitter Duty Cycle Calculation

Based on the Bluetooth Specification Version 2.0 / 2.1 + EDR, the transmitter ON time for each timeslot of Bluetooth is 625µs. DH5 has the maximum duty cycle, which consists of 5 continuous Tx slots and 1 Rx slot. Therefore one hopset take  $(5+1) \times 625\mu s = 3.75ms$ . For one period for a pseudo-random hopping through at least 20 RF channels in adaptive mode (worst case), it take:  $20 \times 3.75ms = 75ms$ .

The dwell time for DH5 is  $5 \times 625\mu s = 3.125ms$

For the worst case calculation, there are two transmissions might occur in 100ms.

Therefore,

$$\begin{aligned}\text{Duty Cycle (DC)} &= \text{Maximum On time in 100ms}/100ms \\ &= 3.125ms \times 2 / 100ms \\ &= 0.0625\end{aligned}$$

$$\begin{aligned}\text{Average Factor (AF) of Bluetooth in dB} &= 20 \log_{10} (0.0625) \\ &= -24.0dB\end{aligned}$$

## TEST REPORT

### 4.3 Radiated Emission on the Bandedge


From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz and 2483.5MHz). In case of emissions up to two standard bandwidths away from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.4 (2014) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50 dB below the level of the fundamental or to the general radiated emission limits in FCC Part 15 Section 15.209 / Table 4 of RSS-Gen, whichever is the lesser attenuation, which meet the requirement of FCC Part 15 Section 15.249(d) / RSS-210 A2.9(b).


The plots of radiated emission on the bandedge are saved as below.

TEST REPORT

**BASE UNIT WITH BLUETOOTH PORTION, LOWEST CHANNEL**

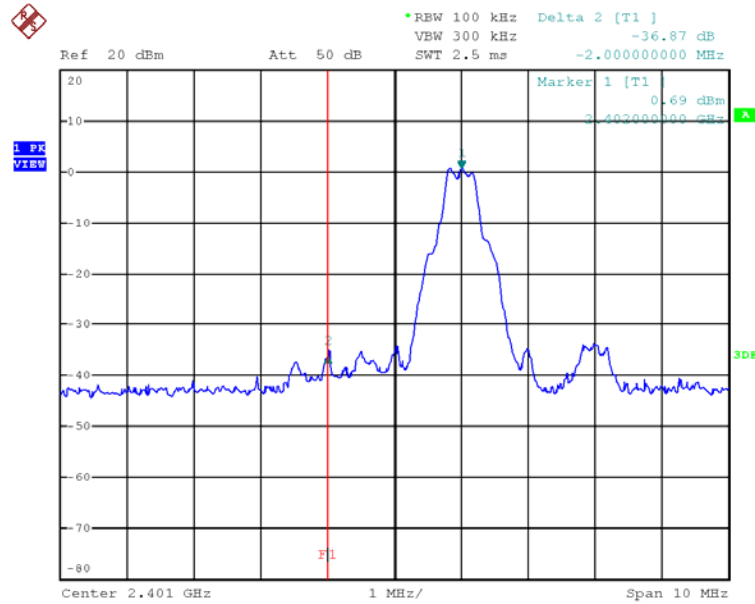

**BASE UNIT WITH BLUETOOTH PORTION, HIGHEST CHANNEL**

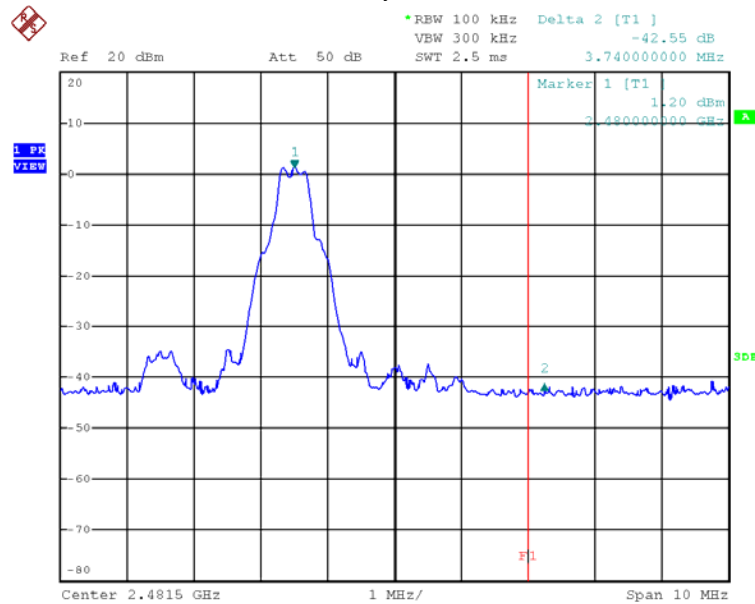

## TEST REPORT

Bandedge compliance is determined by applying marker-delta method, i.e.

Resultant Field Strength = Fundamental Emissions - Delta from the plot

Resultant field strength for the lowest and/or highest channel(s), with corresponding average values are calculated as follows:

| AC adaptor | Channel | Fundamental Emission (dBμV/m) | Delta from the Plot (dB) | Resultant Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|------------|---------|-------------------------------|--------------------------|-----------------------------------|------------------------|-------------|
| Ten Pao    | Lowest  | 76.1                          | 36.87                    | 39.23                             | 54                     | -14.77      |
|            | Highest | 76.6                          | 42.55                    | 34.05                             | 54                     | -19.95      |

| Ac adaptor | Channel | Fundamental Emission (dBμV/m) | Delta from the Plot (dB) | Resultant Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|------------|---------|-------------------------------|--------------------------|-----------------------------------|---------------------|-------------|
| Ten Pao    | Lowest  | 100.1                         | 36.87                    | 63.23                             | 74                  | -10.77      |
|            | Highest | 100.6                         | 42.55                    | 58.05                             | 74                  | -15.95      |

The resultant field strength meets the general radiated emission limit in FCC Part 15 Section 15.209 / Table 5 of RSS-Gen, which does not exceed 74dBμV/m for peak limit and also 54dBμV/m for average limit.

## TEST REPORT

### 4.4 AC Power Line Conducted Emission

- [ ] Not applicable – EUT is only powered by battery for operation.
- [x] EUT connects to AC power line. Emission Data is listed in following pages.
- [ ] Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

Test setup is shown in section 3.4 Figure 3.4.1.

#### 4.4.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration  
at

316.5 MHz

The worst case line conducted configuration photographs are saved with filename: config photos.pdf.

#### 4.4.2 AC Power Line Conducted Emission Data


The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 14.41 dB margin compared with CISPR average limit

## TEST REPORT

### CONDUCTED EMISSION DATA

Worst Case: Talk mode with Bluetooth

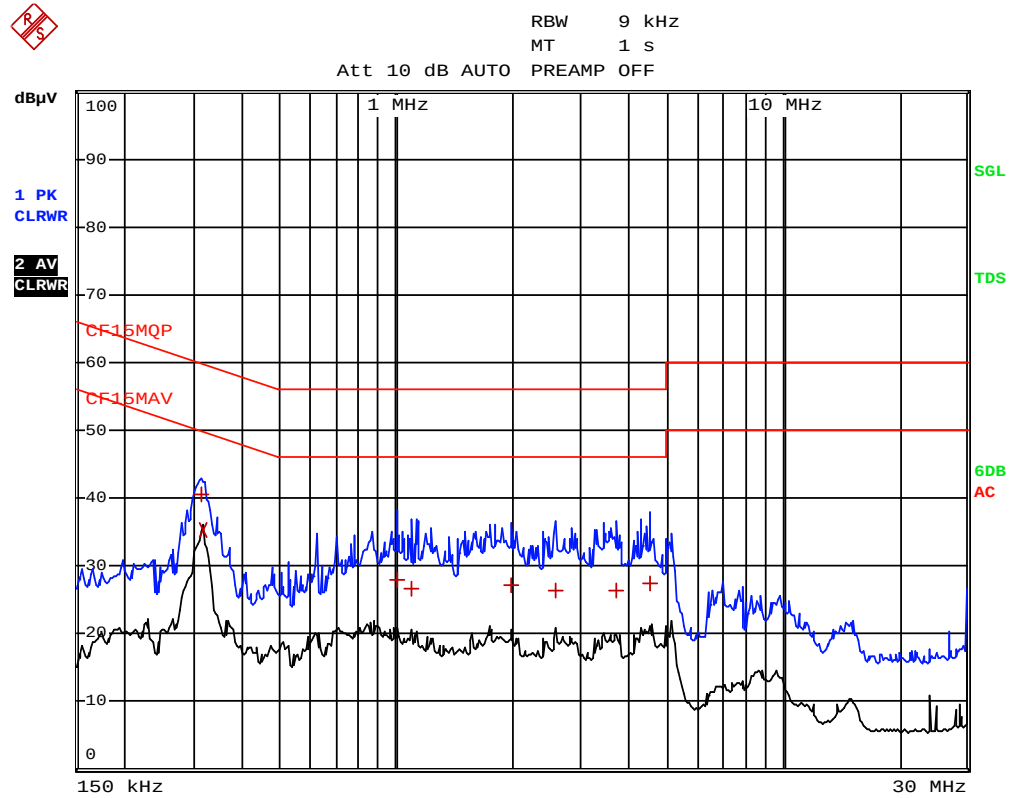

## TEST REPORT

Worst Case: Talk mode with Bluetooth

| EDIT PEAK LIST (Final Measurement Results) |            |            |    |                |
|--------------------------------------------|------------|------------|----|----------------|
| Trace1:                                    |            | CF15MQP    |    |                |
| Trace2:                                    |            | CF15MAV    |    |                |
| Trace3:                                    |            | ---        |    |                |
| TRACE                                      | FREQUENCY  | LEVEL dBμV |    | DELTA LIMIT dB |
| 1 Quasi Peak                               | 312 kHz    | 40.65      | N  | -19.25         |
| 2 CISPR Average                            | 316.5 kHz  | 35.38      | L1 | -14.41         |
| 1 Quasi Peak                               | 1.0095 MHz | 27.84      | L1 | -28.15         |
| 1 Quasi Peak                               | 1.095 MHz  | 26.67      | N  | -29.32         |
| 1 Quasi Peak                               | 1.9995 MHz | 27.20      | L1 | -28.79         |
| 1 Quasi Peak                               | 2.598 MHz  | 26.47      | N  | -29.52         |
| 1 Quasi Peak                               | 3.696 MHz  | 26.48      | L1 | -29.51         |
| 1 Quasi Peak                               | 4.5645 MHz | 27.33      | L1 | -28.66         |

## TEST REPORT

### EXHIBIT 5 EQUIPMENT LIST

#### 5.0 Equipment List

##### 1) Radiated Emissions Test

| Equipment            | Biconical Antenna | EMI Test Receiver<br>(9kHz to 26.5GHz) | Double Ridged Guide<br>Antenna |
|----------------------|-------------------|----------------------------------------|--------------------------------|
| Registration No.     | EW-0571           | EW-3156                                | EW-0194                        |
| Manufacturer         | EMCO              | ROHDESCHWARZ                           | EMCO                           |
| Model No.            | 3104C             | ESR26                                  | 3115                           |
| Calibration Date     | May. 18, 2016     | Dec. 06, 2016                          | Aug. 10, 2016                  |
| Calibration Due Date | Nov. 18, 2017     | Dec. 06, 2017                          | Feb. 10, 2018                  |

| Equipment            | Log Periodic Antenna | Pyramidal Horn Antenna | Pyramidal Horn Antenna |
|----------------------|----------------------|------------------------|------------------------|
| Registration No.     | EW-0447              | EW-0905                | EW-0905                |
| Manufacturer         | EMCO                 | EMCO                   | EMCO                   |
| Model No.            | 3146                 | 3160-09                | 3160-09                |
| Calibration Date     | May. 18, 2016        | Feb. 12, 2016          | Aug. 18, 2017          |
| Calibration Due Date | Nov. 18, 2017        | Aug. 12, 2017          | Feb. 18, 2019          |

| Equipment            | Notch Filter (cutoff<br>frequency 2.4GHz to<br>2.5GHz) | RF Cable 9kHz to<br>1000MHz | RF Cable (up to 40GHz) |
|----------------------|--------------------------------------------------------|-----------------------------|------------------------|
| Registration No.     | EW-3155                                                | EW-3170                     | EW-3155                |
| Manufacturer         | MICROTRONICS                                           | N/A                         | N/A                    |
| Model No.            | BRM50701-02                                            | 9kHz to 1000MHz             | 1-40 GHz               |
| Calibration Date     | May. 26, 2017                                          | Mar. 20, 2017               | Dec. 05, 2016          |
| Calibration Due Date | May. 26, 2018                                          | Mar. 20, 2018               | Dec. 05, 2017          |

| Equipment            | Solid State Low Noise<br>Preamplifier Assembly (1<br>- 18)GHz | Spectrum Analyzer | RF Pre-amplifier 3 pcs<br>(9kHz to 40GHz) |
|----------------------|---------------------------------------------------------------|-------------------|-------------------------------------------|
| Registration No.     | EW-3229                                                       | EW-2249           | EW-3006                                   |
| Manufacturer         | BONN ELEKTRO                                                  | R&S               | SCHWARZBECK                               |
| Model No.            | BLMA 0118-5G                                                  | FSP30             | BBV 9744                                  |
| Calibration Date     | Oct. 24, 2016                                                 | Dec. 23, 2016     | Mar. 23, 2017                             |
| Calibration Due Date | Oct. 24, 2017                                                 | Nov, 27. 2017     | Mar. 23, 2018                             |

##### 2) Conducted Emissions Test

| Equipment            | EMI Test Receiver | RF Cable 9kHz to<br>1000MHz | LISN          |
|----------------------|-------------------|-----------------------------|---------------|
| Registration No.     | EW-3156           | EW-3170                     | EW-2874       |
| Manufacturer         | ROHDESCHWARZ      | N/A                         | R&S           |
| Model No.            | ESR26             | 9kHz to 1000MHz             | ENV-216       |
| Calibration Date     | Dec. 06, 2016     | Mar. 20, 2017               | Mar. 16, 2017 |
| Calibration Due Date | Dec. 06, 2017     | Mar. 20, 2018               | Mar. 16, 2018 |

**TEST REPORT**

3) Conductive Measurement Test

| Equipment            | Temperature & Humidity Chamber | Spectrum Analyzer | Digital Multimeter |
|----------------------|--------------------------------|-------------------|--------------------|
| Registration No.     | EW-2134                        | EW-2466           | EW-1021            |
| Manufacturer         | GIANT FORCE                    | R&S               | FLUKE              |
| Model No.            | GTH-750-40-CP-SD               | FSP30             | 87-IV              |
| Calibration Date     | Sep. 26, 2016                  | Oct. 03, 2016     | Oct. 31, 2016      |
| Calibration Due Date | Sep. 4, 2017                   | Aug. 20, 2017     | Nov. 29, 2017      |

**END OF TEST REPORT**