

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 - TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



TEST REPORT

Report Number: 14081065HKG-001

Application
for
Original Grant of 47 CFR Part 15 Certification
Single New of RSS-210 Issue 8 Equipment Certification

IP Camera

FCC ID: EW780-9480-00

IC: 1135B-80948000

Prepared and Checked by:

A handwritten signature in black ink, appearing to read 'Yeung Yung Fai'.

Yeung Yung Fai, James
Engineer

Approved by:

A handwritten signature in black ink, appearing to read 'Chan Chi Hung'.

Chan Chi Hung, Terry
Supervisor
October 08, 2014

- Intertek's standard Terms and Conditions can be obtained at our website: <http://www.intertek.com/terms/>.
- This report shall not be reproduced, except in full.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-ellsemko.com

GENERAL INFORMATION

Applicant Name:	VTech Telecommunications Ltd.
Applicant Address:	23/F., Tai Ping Industrial Center, Block 1, 57 Ting Kok Road, Tai Po, N.T., Hong Kong.
FCC Specification Standard:	FCC Part 15, October 1, 2012 Edition
FCC ID:	EW780-9480-00
FCC Model(s):	VC921
IC Specification Standard:	RSS-210 Issue 8, December 2010 RSS-Gen Issue 3, December 2010
IC:	1135B-80948000
IC Model(s):	VC921
Type of EUT:	Digital Transmission System
Description of EUT:	IP Camera
Serial Number:	N/A
Sample Receipt Date:	August 27, 2014
Date of Test:	September 01, 2014 to September 19, 2014
Report Date:	October 08, 2014
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

Table of Contents

1.0 Summary of Test Results	4
1.1 Statement of Compliance	4
2.0 General Description	6
2.1 Product Description	6
2.2 Test Methodology.....	7
2.3 Test Facility	7
3.0 System Test Configuration.....	9
3.1 Justification	9
3.2 EUT Exercising Software	10
3.3 Details of EUT and Description of Accessories	11
3.4 Measurement Uncertainty	11
4.0 Test Results	13
4.1 Occupied bandwidth.....	13
4.2 Maximum Conducted Output Power at Antenna Terminals	22
4.3 Minimum 6dB RF Bandwidth.....	32
4.4 Maximum Power Spectral Density.....	42
4.5 Out of Band Conducted Emissions.....	51
4.6 Field Strength Calculation	72
4.7 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions	73
4.7.1 Radiated Emission Configuration Photograph	73
4.7.2 Radiated Emission Data	73
4.7.3 Transmitter Duty Cycle Calculation	87
4.8 AC Power Line Conducted Emission.....	87
4.8.1 AC Power Line Conducted Emission Configuration Photograph	87
4.8.2 AC Power Line Conducted Emission Data	87
5.0 Equipment List	91

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



EXHIBIT 1

SUMMARY OF TEST RESULTS & STATEMENT OF COMPLIANCE

Test Report Number: 14081065HKG-001
FCC ID: EW780-9480-00
IC: 1135B-80948000

Page 3 of 91

Intertek Testing Services Hong Kong Ltd.
2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

1.0 Summary of Test Results

Test Items	FCC Part 15 Section	RSS-210/ RSS-Gen# Section	Results	Details see section
Antenna Requirement	15.203	7.1.2#	Pass	2.1
Max. Conducted Output Power (average)	15.247(b)(3)&(4)	A8.4(4)	Pass	4.1
Min. 6dB RF Bandwidth	15.247(a)(2)	A8.2(a)	Pass	4.2
Max. Power Density (average)	15.247(e)	A8.2(b)	Pass	4.3
Out of Band Antenna Conducted Emission	15.247(d)	A8.5	Pass	4.4
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d), 15.209 & 15.109	A8.5	Pass	4.6
AC Power Line Conducted Emission	15.207 & 15.107	7.2.4#	Pass	4.7

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

1.1 Statement of Compliance

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2012 Edition
RSS-210 Issue 8, December 2010
RSS-Gen Issue 3, December 2010

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



EXHIBIT 2 GENERAL DESCRIPTION

Test Report Number: 14081065HKG-001
FCC ID: EW780-9480-00
IC: 1135B-80948000

Page 5 of 91

Intertek Testing Services Hong Kong Ltd.
2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

2.0 General Description

2.1 Product Description

The VC921 is a IP Camera.

For 802.11b mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via direct-sequence spread spectrum (DSSS) modulation. Maximum bit rate can be up to 11Mbps. For 802.11g mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps. For 802.11n (with 20MHz bandwidth) mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps. For 802.11n (with 40MHz bandwidth) mode, it operates at frequency range of 2422.000MHz to 2452.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps.

The EUT is power by 100-240Vac 300mA to 5Vdc 1000mA.

The antenna(s) used in the EUT is Integral.

The circuit description is saved with filename: descri.pdf.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009). Preliminary radiated scans and all radiated measurements were performed in Open Area Test Sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2009) and KDB Publication No. 558074 D01 v03r02 (05-June-2014). All other measurements were made in accordance with the procedures in RSS-Gen Issue 3 (2010).

2.3 Test Facility

The open area test site, AC Power Line conducted measurement facility, and antenna port conducted measurement facility used to collect the radiated data, AC Power Line conducted data, and conductive data are at Intertek Testing Services Hong Kong Ltd., which is located at World-Wide Industrial Centre 43-47 Shan Mei Street, Fo Tan ShaTin, New Territories, Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC and the Industry Canada.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



EXHIBIT 3 SYSTEM TEST CONFIGURATION

Test Report Number: 14081065HKG-001
FCC ID: EW780-9480-00
IC: 1135B-80948000

Page 8 of 91

Intertek Testing Services Hong Kong Ltd.
2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

3.0 System Test Configuration

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT is power by 100-240Vac 300mA to 5Vdc 1000mA.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the EUT attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109 Limits.

3.1 Justification – Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.2.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.6.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

The EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT power cord connected to one LISN (Line impedance stabilization network), which provided 50ohm coupling impedance for measuring instrument. Meanwhile, the peripheral or support equipment power cords connected to a separate LISN. The ac powers for all LISNs were obtained from the same power source. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled. Power cords of non-EUT equipment (peripherals) were not bundled. AC power cords of peripheral equipments draped over the rear edge of the table, and routed them down onto the floor of the ac power line conducted emission test site to the second LISN.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

Different data rates have been tested. Worst case is reported only.

All relevant operation modes have been tested, and the worst case data is included in this report.

All data rates were tested under normal mode of WiFi. Only the worst-case data is shown in the report for DSSS and OFDM

3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



3.3 Details of EUT and Description of Accessories

Details of EUT:

A battery (provided with the unit) was used to power the device. Their description are listed below.

Description of Accessories:

- (1) An AC adaptor (100VAC to 5V 1000mA, Model: S006MU0500100, Brand: Ten Pao) (Supplied by Client)

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



EXHIBIT 4 TEST RESULTS

Test Report Number: 14081065HKG-001
FCC ID: EW780-9480-00
IC: 1135B-80948000

Page 12 of 91

Intertek Testing Services Hong Kong Ltd.
2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

4.0 Test Results

4.1 Occupied bandwidth

When maximum conducted (average) output power is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth (see ANSI C63.10-2009 section 6.9.1)

IEEE 802.11b (DSSS, 1 Mbps) Antenna Gain = 0 dBi	
Frequency (MHz)	OBW (MHz)
Low Channel: 2412	17.74
Middle Channel: 2437	17.40
High Channel: 2462	17.44

IEEE 802.11g (OFDM, 6 Mbps) Antenna Gain = 0 dBi	
Frequency (MHz)	OBW (MHz)
Low Channel: 2412	19.92
Middle Channel: 2437	19.84
High Channel: 2462	19.92

IEEE 802.11n (20MHz) (OFDM, MCS0) Antenna Gain = 0 dBi	
Frequency (MHz)	OBW (MHz)
Low Channel: 2412	19.92
Middle Channel: 2437	19.92
High Channel: 2462	19.92

IEEE 802.11n (40MHz) (OFDM, MCS0) Antenna Gain = 0 dBi	
Frequency (MHz)	OBW (MHz)
Low Channel: 2422	39.29
Middle Channel: 2437	39.46
High Channel: 2452	39.02

The plots of OBW are saved as below.


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




Plots of Occupied Bandwidth

802.11b, Lowest channel

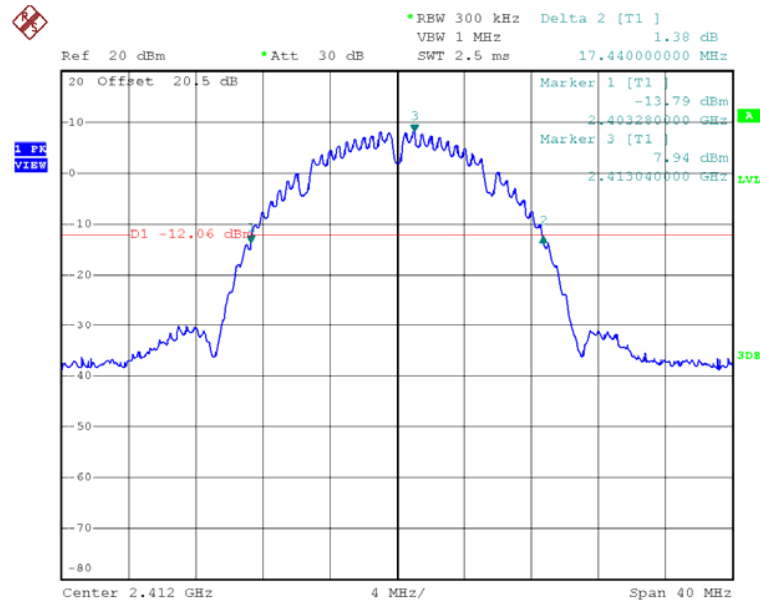


802.11b, Middle channel

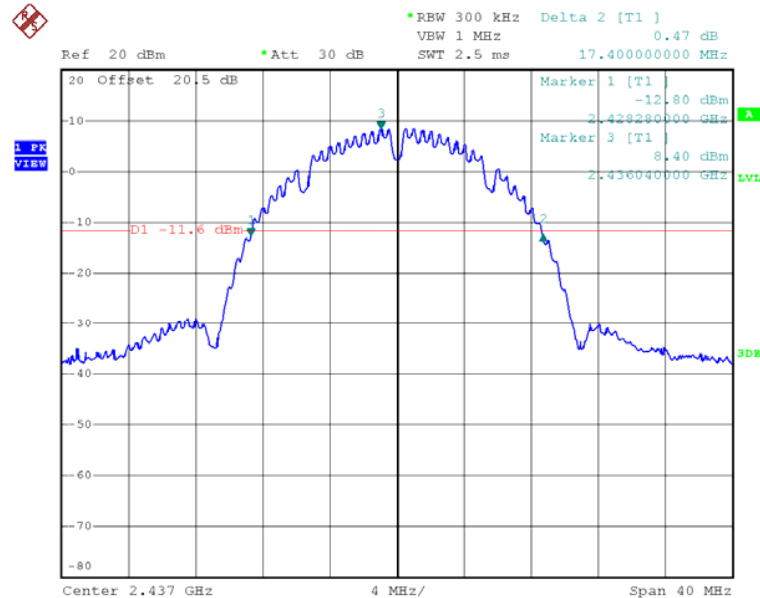

Plots of Occupied Bandwidth

802.11b, Highest channel

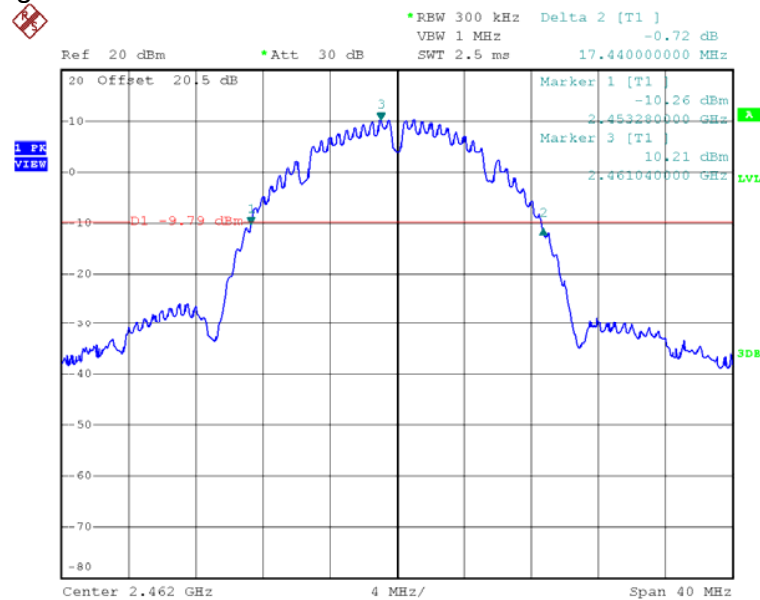


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




Plots of Occupied Bandwidth

802.11g, Lowest channel

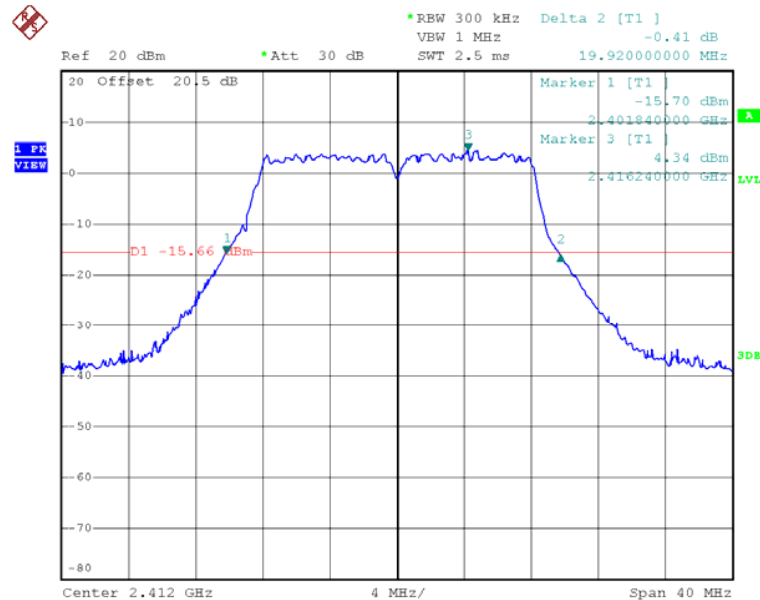


802.11g, Middle channel

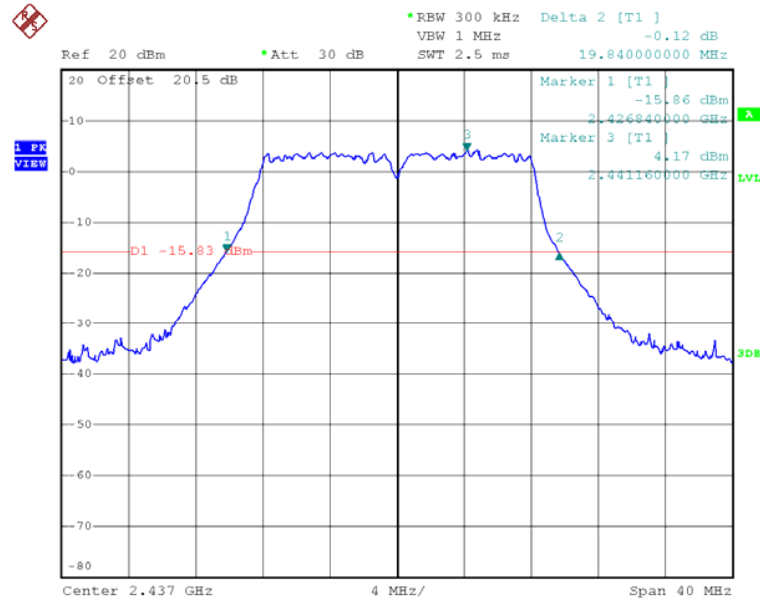


Plots of Occupied Bandwidth

802.11g, Highest channel

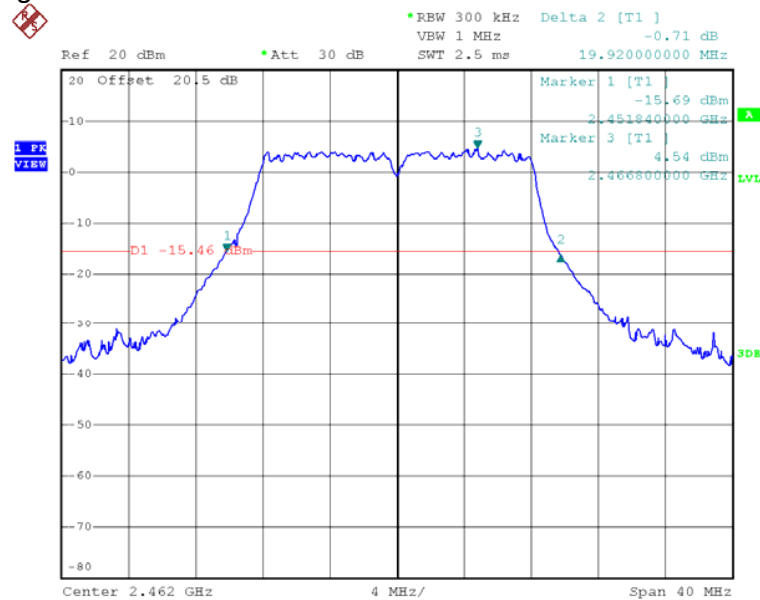


Plots of Occupied Bandwidth

802.11n(20M), Lowest channel

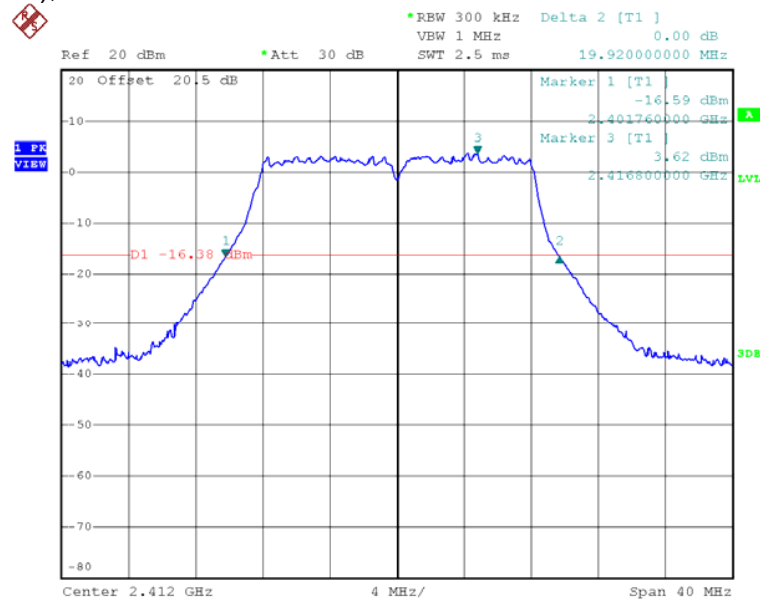

802.11n(20M), Middle channel

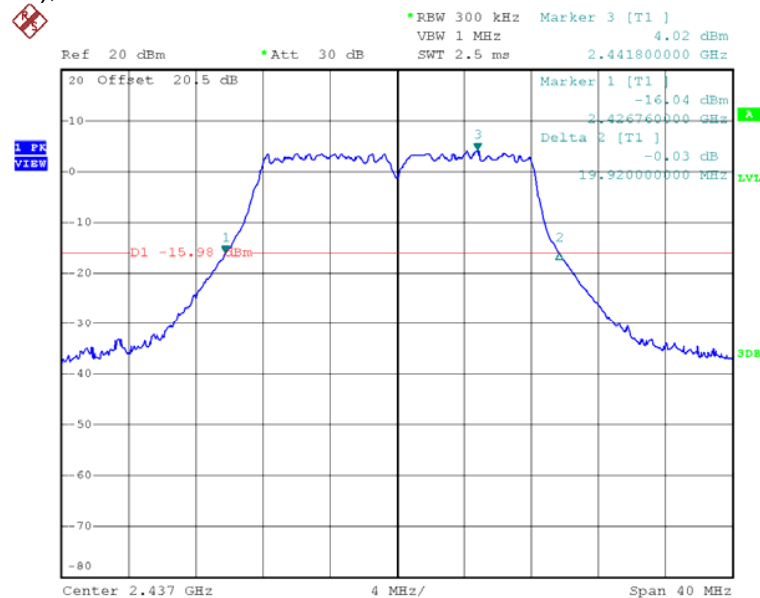


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




Plots of Occupied Bandwidth

802.11n(20M), Highest channel

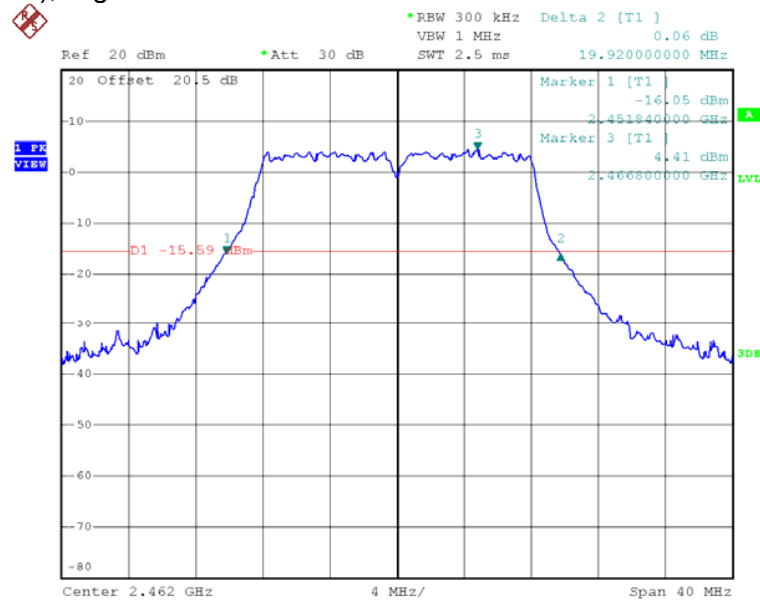


Plots of Occupied Bandwidth

802.11n(40M), Lowest channel

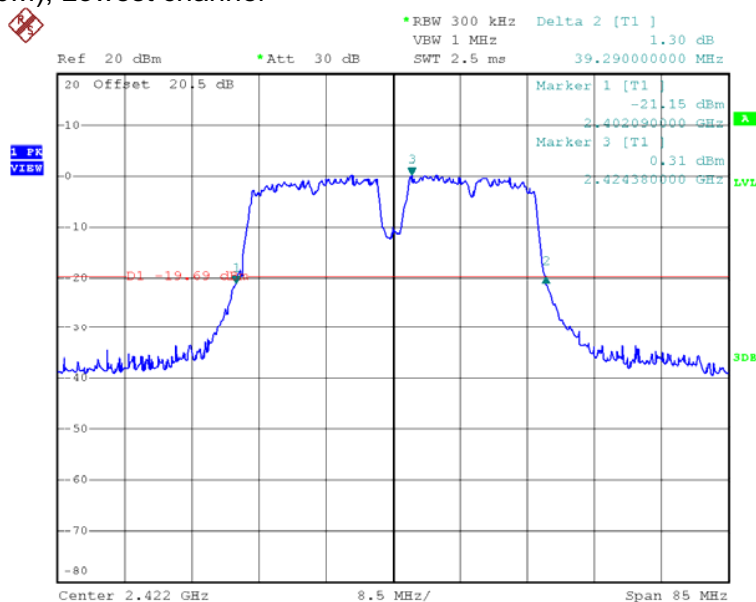

802.11n(40M), Middle channel

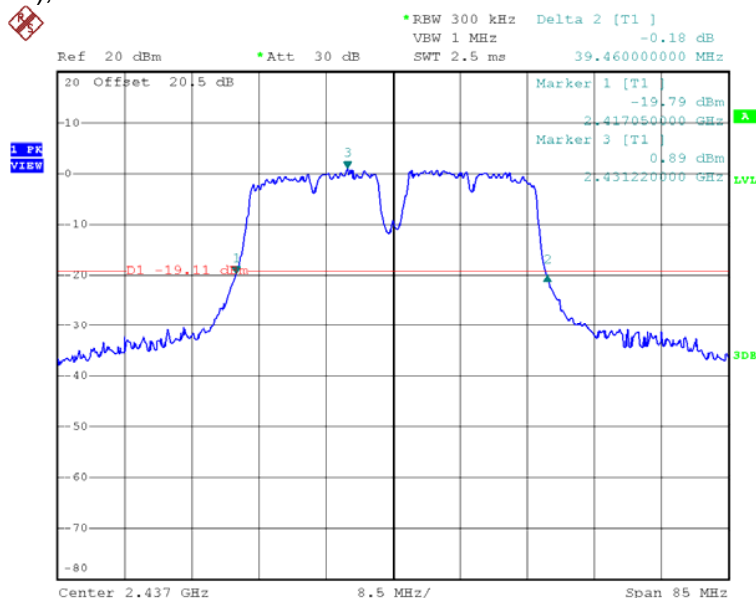


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Plots of Occupied Bandwidth

802.11n(40M), Highest channel

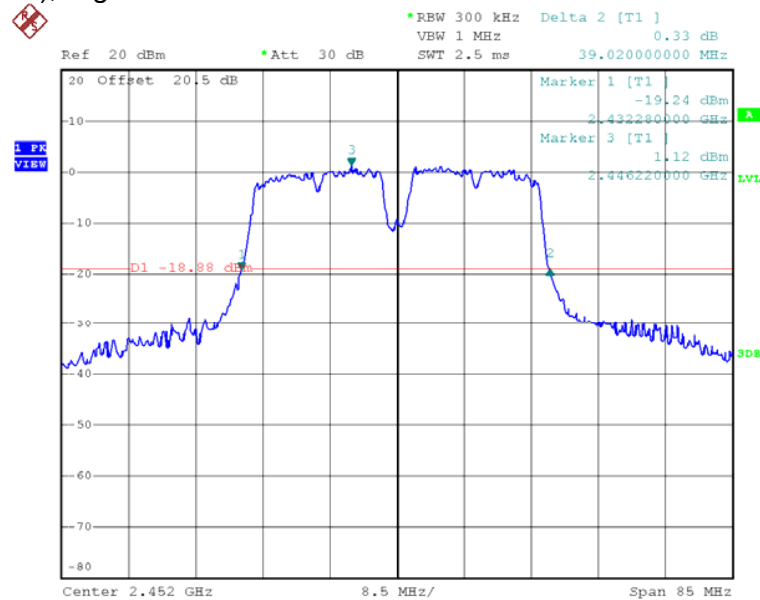

Test Report Number: 14081065HKG-001

FCC ID: EW780-9480-00

IC: 1135B-80948000

Page 21 of 91

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

4.2 Maximum Conducted (average) Output Power at Antenna Terminals

The antenna port of the EUT was connected to the input of a spectrum analyzer.

- ☒ External attenuation and cable loss were compensated for using the OFFSET function of the analyser. The measurement procedure 9.2.2 was used.
- ☐ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

IEEE 802.11b (DSSS, 1 Mbps) Antenna Gain = 0 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	15.85	38.5
Middle Channel: 2437	16.25	42.2
High Channel: 2462	17.86	61.1

IEEE 802.11g (OFDM, 6 Mbps) Antenna Gain = 0 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	12.11	16.3
Middle Channel: 2437	12.37	17.3
High Channel: 2462	12.73	18.4

IEEE 802.11n (20MHz) (OFDM, MCS0) Antenna Gain = 0 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	11.68	14.7
Middle Channel: 2437	12.19	16.6
High Channel: 2462	12.65	18.4

4.2 Maximum Conducted Output Power at Antenna Terminals – Cont'd

IEEE 802.11n (40MHz) (OFDM, MCS0) Antenna Gain = 0 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2422	11.14	13.0
Middle Channel: 2437	11.65	14.6
High Channel: 2452	11.91	15.5

Cable loss : 0.5 dB External Attenuation : 20 dB

Cable loss, external attenuation: ☒ included in OFFSET function
☐ added to SA raw reading

IEEE 802.11b (DSSS, 1 Mbps)
max. conducted (average) output level = 17.86 dBm

IEEE 802.11g (OFDM, 6 Mbps)
max. conducted (average) output level = 12.73 dBm

IEEE 802.11n (20MHz) (OFDM, MCS0)
max. conducted (average) output level = 12.65 dBm

IEEE 802.11n (40MHz) (OFDM, MCS0)
max. conducted (average) output level = 11.91 dBm

Limits:

☒ 1W (30dBm) for antennas with gains of 6dBi or less

☐ ____W (____dBm) for antennas with gains more than 6dBi

The plots of conducted output power are saved as below.


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




Plots of maximum output power

802.11b, Lowest channel

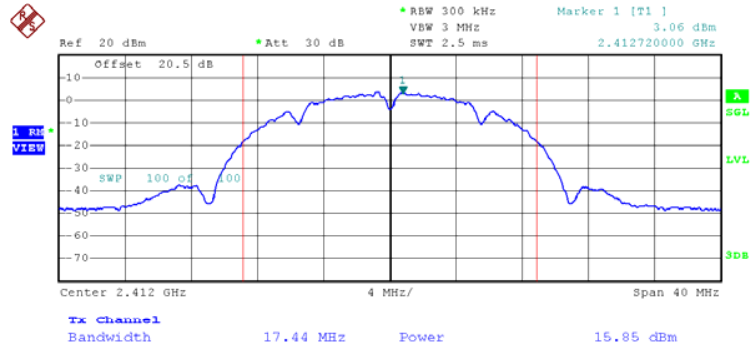

802.11b, Middle channel

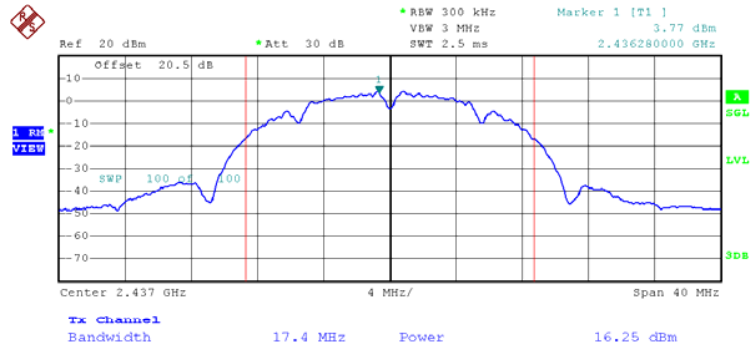


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Plots of maximum output power

802.11b, Highest channel

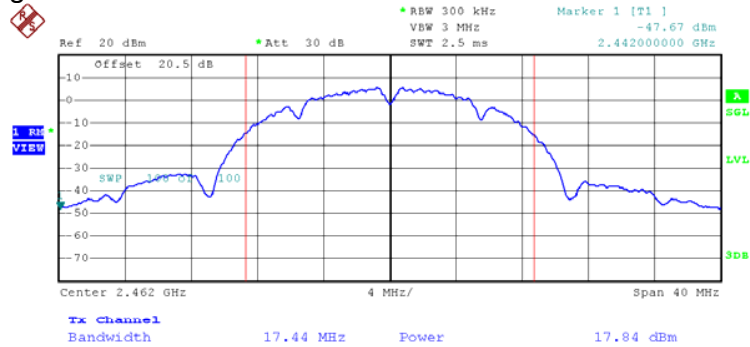


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




Plots of maximum output power

802.11g, Lowest channel

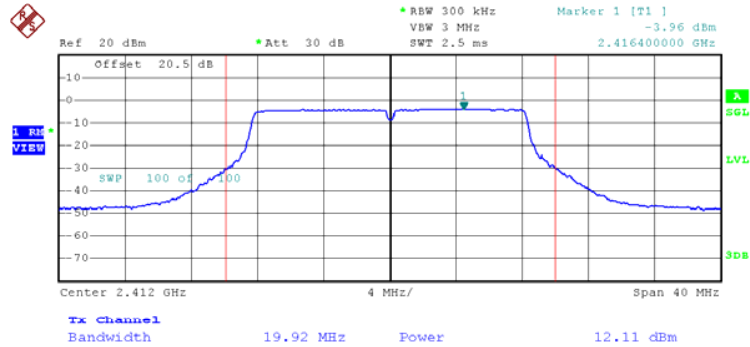

802.11g, Middle channel

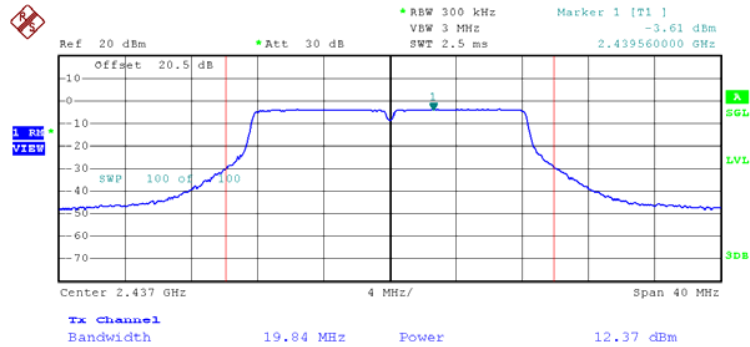


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Plots of maximum output power

802.11g, Highest channel

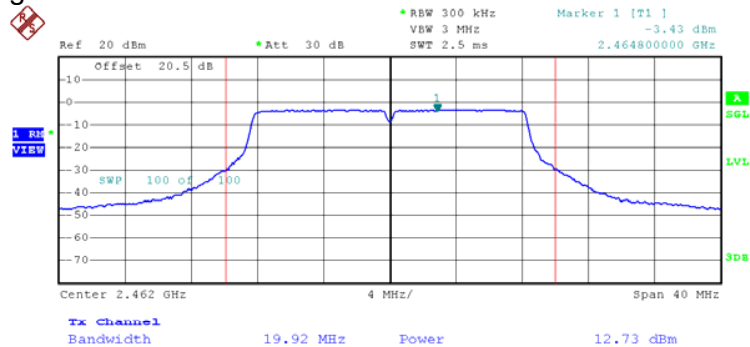


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




Plots of maximum output power

802.11n(20M), Lowest channel

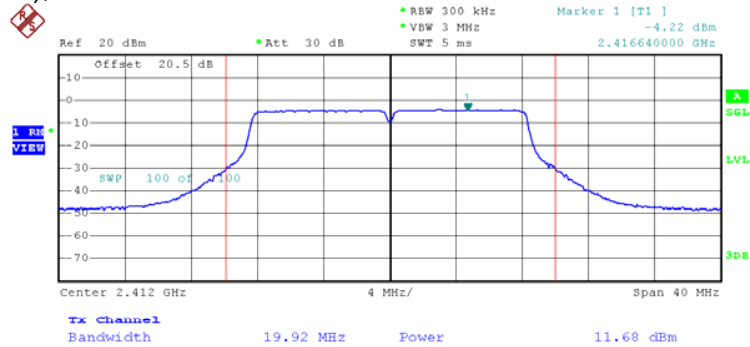

802.11n(20M), Middle channel

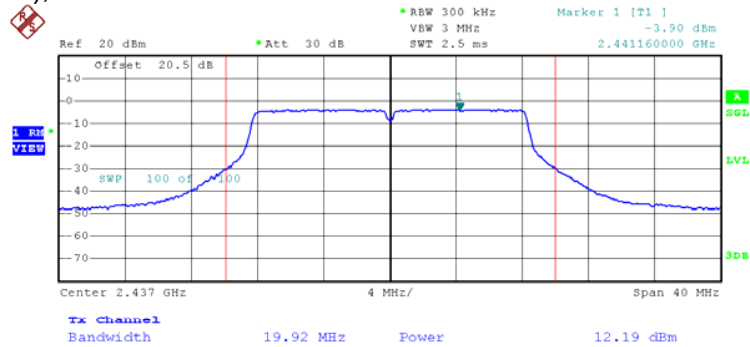


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




Plots of maximum output power

802.11n(20M), Highest channel

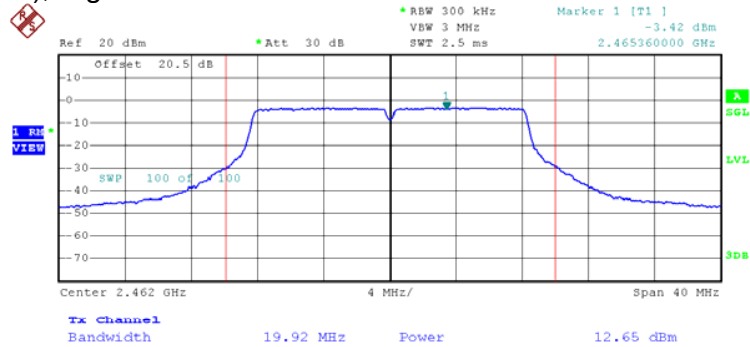


Plots of maximum output power

802.11n(40M), Lowest channel

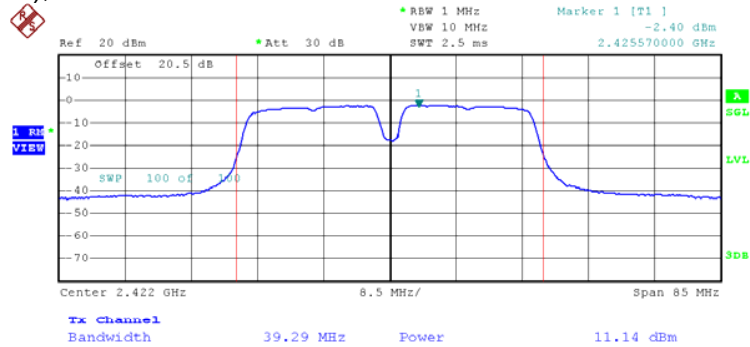

802.11n(40M), Middle channel

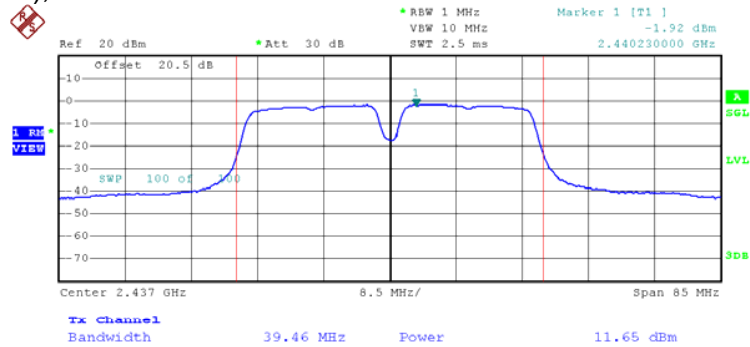


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Plots of maximum output power

802.11n(40M), Highest channel

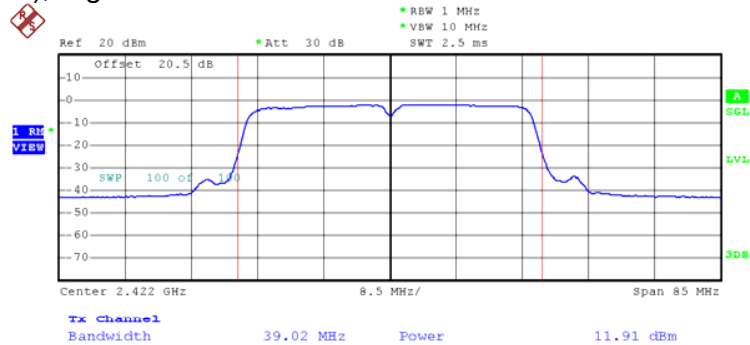

4.3 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

For Industry Canada, the 99% occupied bandwidth was measured, and the procedure under the section 4.6.1 of RSS-GEN was used.

IEEE 802.11b (DSSS, 1 Mbps)	
Frequency (MHz)	6dB Bandwidth (kHz)
Low Channel: 2412	10240
Middle Channel: 2437	10200
High Channel: 2462	10240

IEEE 802.11g (OFDM, 6 Mbps)	
Frequency (MHz)	6dB Bandwidth (kHz)
Low Channel: 2412	16800
Middle Channel: 2437	16800
High Channel: 2462	16800

IEEE 802.11n (20MHz) (OFDM, MCS0)	
Frequency (MHz)	6dB Bandwidth (kHz)
Low Channel: 2412	16800
Middle Channel: 2437	16800
High Channel: 2462	16800

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



4.2 Minimum 6dB RF Bandwidth – Cont'd

IEEE 802.11n (40MHz) (OFDM, MCS0)	
Frequency (MHz)	6dB Bandwidth (kHz)
Low Channel: 2422	36710
Middle Channel: 2437	36920
High Channel: 2452	36890


Limits

6 dB bandwidth shall be at least 500kHz


The plots of 6dB RF bandwidth and occupied bandwidth are saved as below.

Plots of 6dB RF bandwidth

802.11b, Lowest Channel

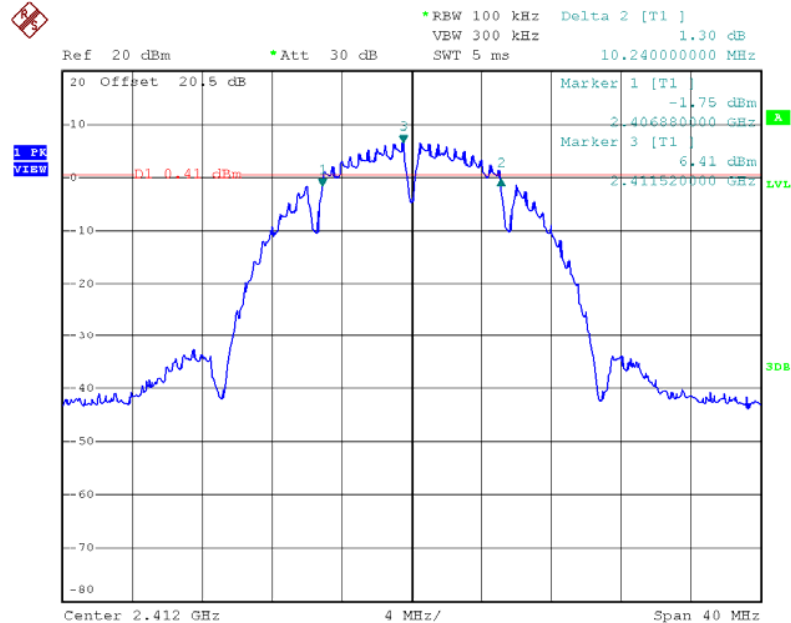

802.11b, Middle Channel

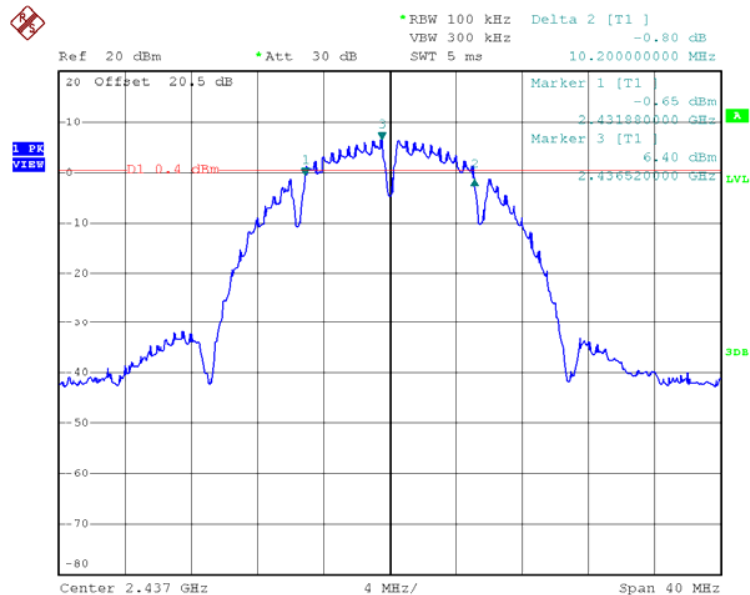


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Plots of 6dB RF bandwidth

802.11b, Highest Channel

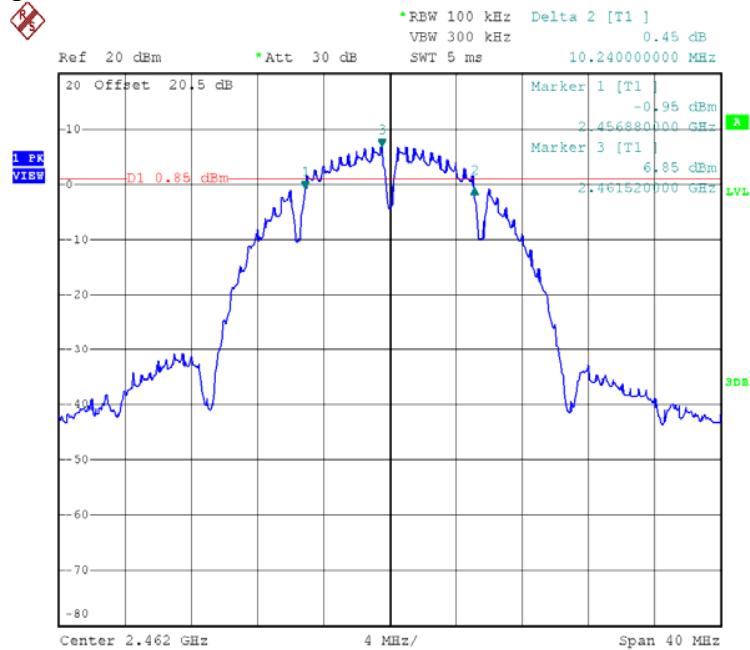


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




Plots of 6dB RF bandwidth

802.11g, Lowest Channel

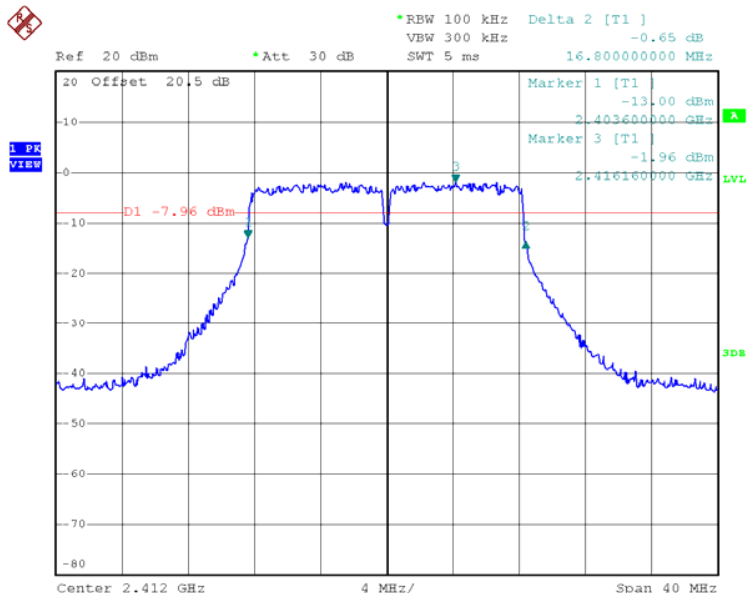

802.11g, Middle Channel

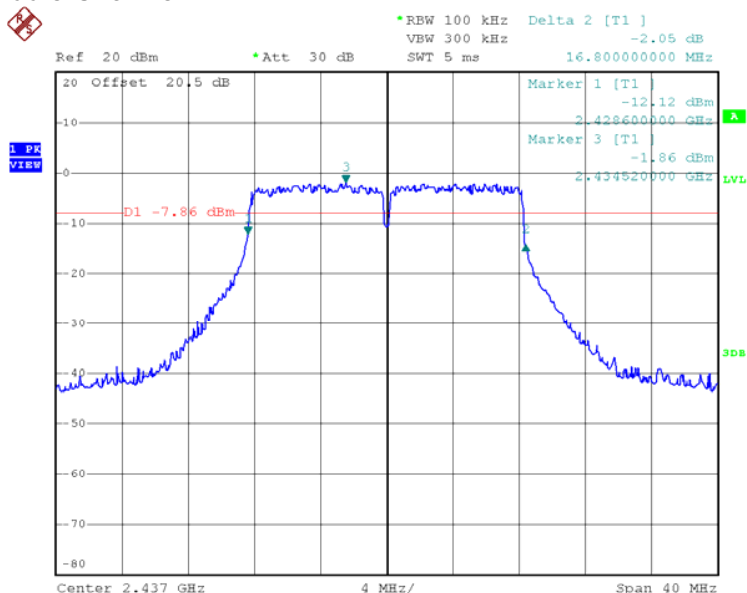


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




Plots of 6dB RF bandwidth

802.11g, Highest Channel

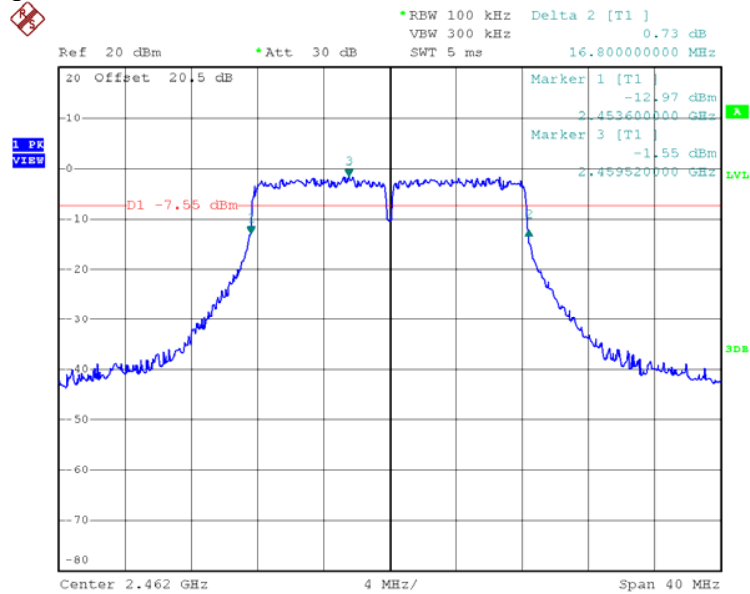


Plots of 6dB RF bandwidth

802.11n(20M), Lowest Channel

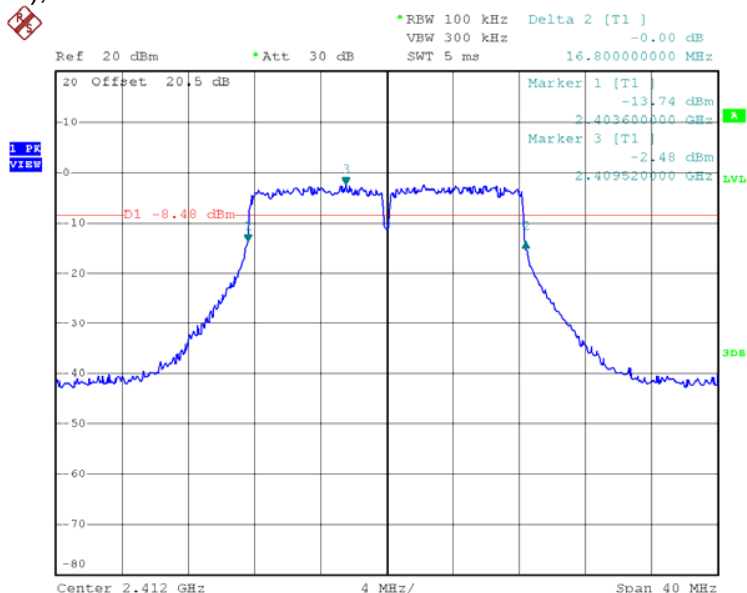


802.11n(20M), Middle Channel

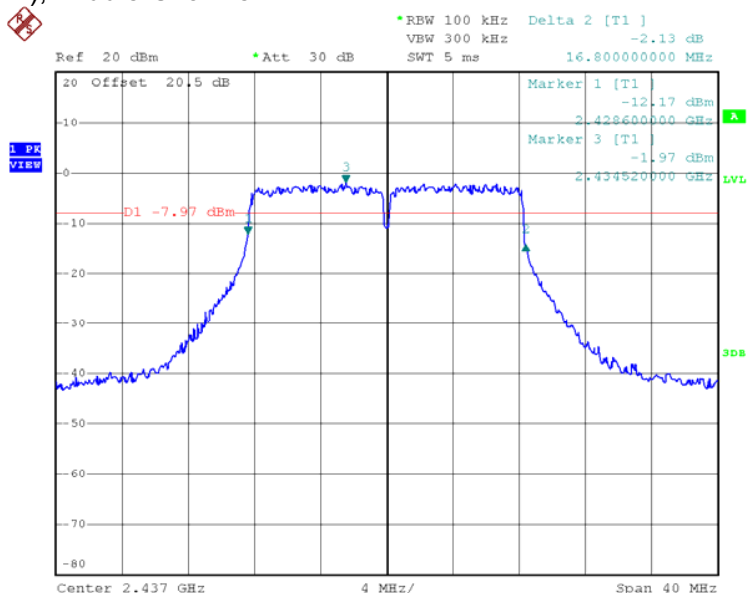

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



802.11n(20M), Highest Channel

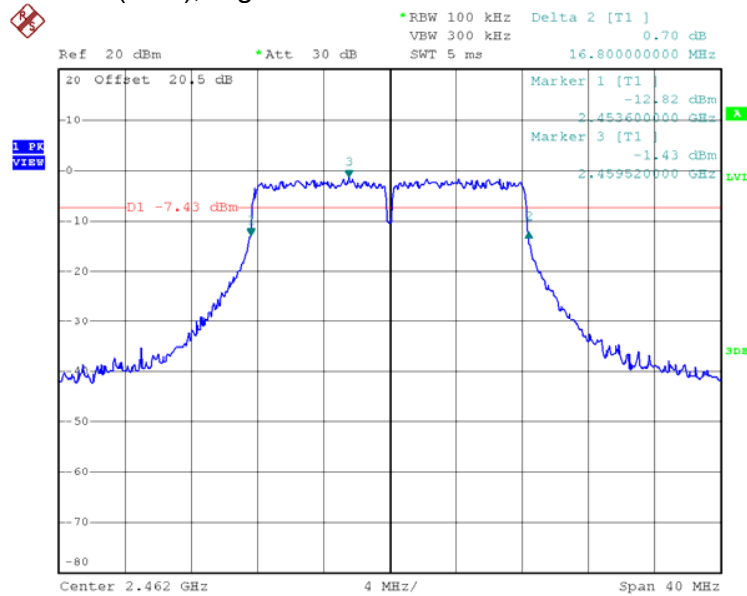


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




Plots of 6dB RF bandwidth

802.11n(40M), Lowest Channel

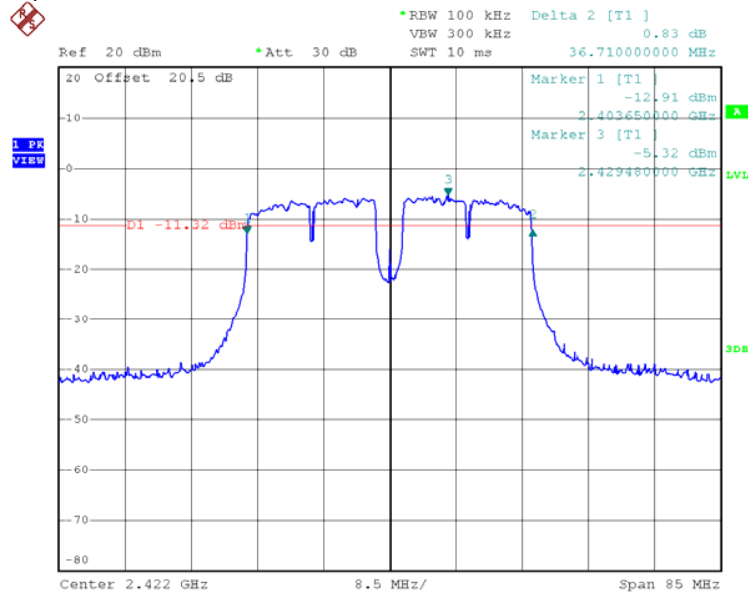

802.11n(40M), Middle Channel

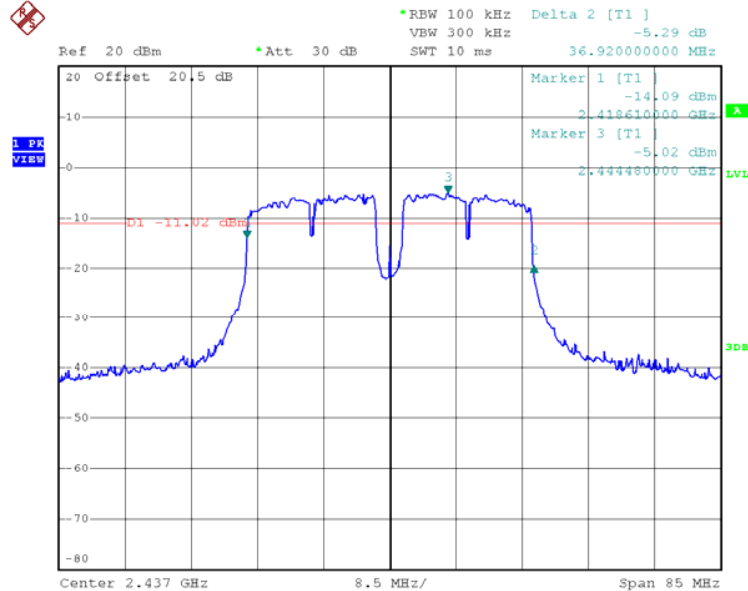


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Plots of 6dB RF bandwidth

802.11n(40M), Highest Channel

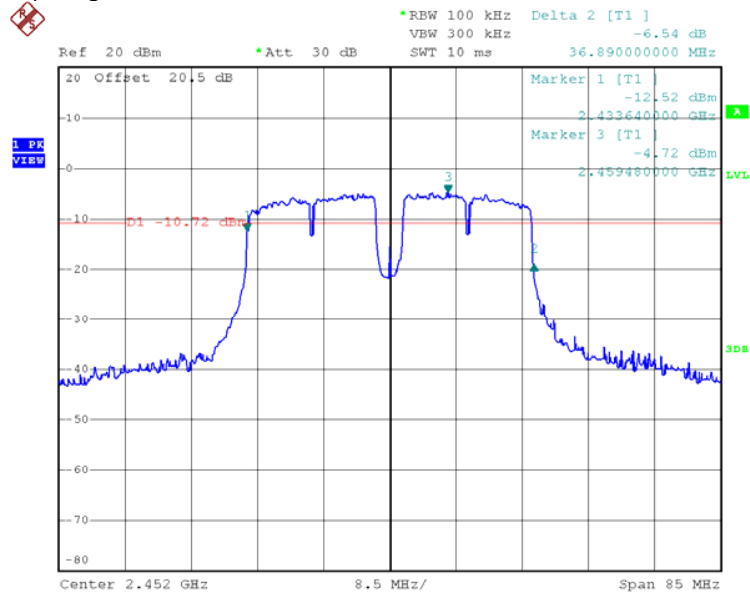

4.4 Maximum Power Spectral Density

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.3 AVGPS-1 was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

IEEE 802.11b (DSSS, 1 Mbps)	
Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	-1.89
Middle Channel: 2437	-1.51
High Channel: 2462	-0.35

IEEE 802.11g (OFDM, 6 Mbps)	
Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	-8.61
Middle Channel: 2437	-8.50
High Channel: 2462	-8.03

IEEE 802.11n (20MHz) (OFDM, MCS0)	
Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	-8.91
Middle Channel: 2437	-8.58
High Channel: 2462	-8.14

IEEE 802.11n (40MHz) (OFDM, MCS0)	
Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2422	-12.23
Middle Channel: 2437	-11.94
High Channel: 2452	-11.34


Cable Loss: 0.5 dB

Limit:
8dBm


The plots of n power spectral density are as below.

Plots of power spectral density

802.11b, Lowest channel

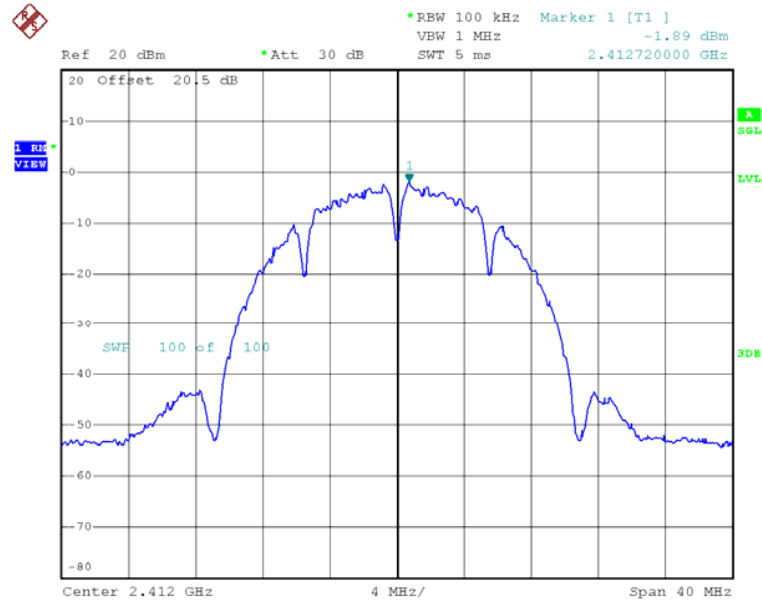

802.11b, Middle channel

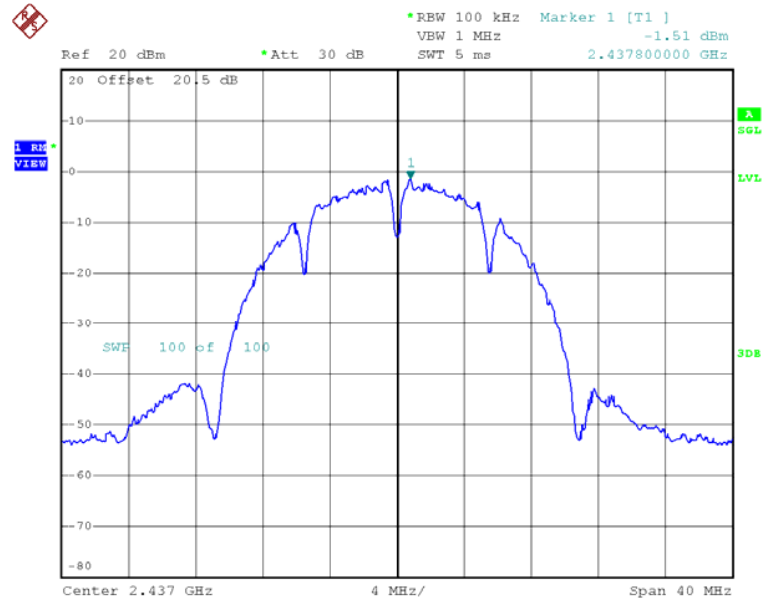


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Plots of power spectral density

802.11b, Highest channel

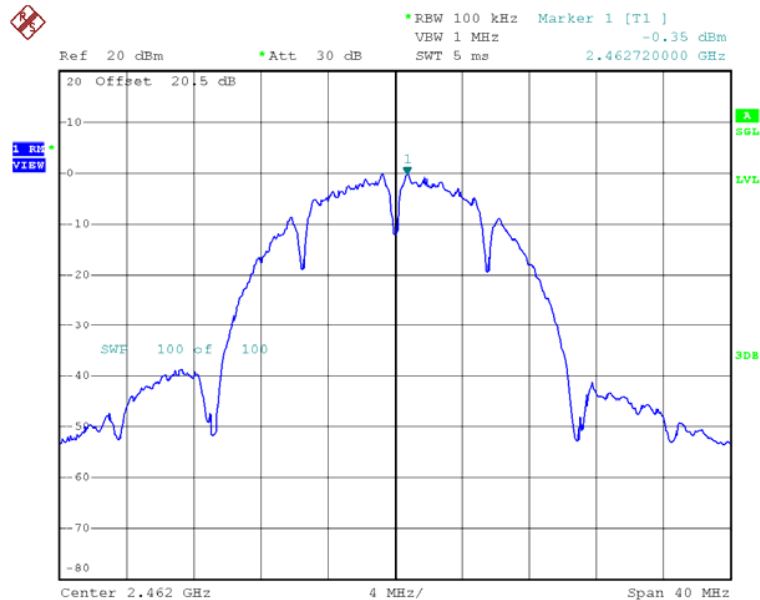

Test Report Number: 14081065HKG-001

Page 44 of 91

FCC ID: EW780-9480-00

IC: 1135B-80948000


Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com


Plots of power spectral density

802.11g, Lowest

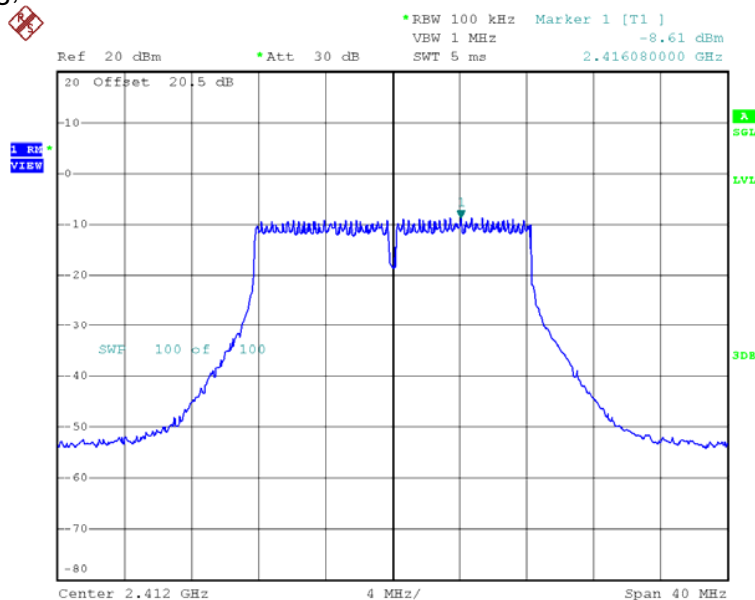

channel

802.11g, Middle channel

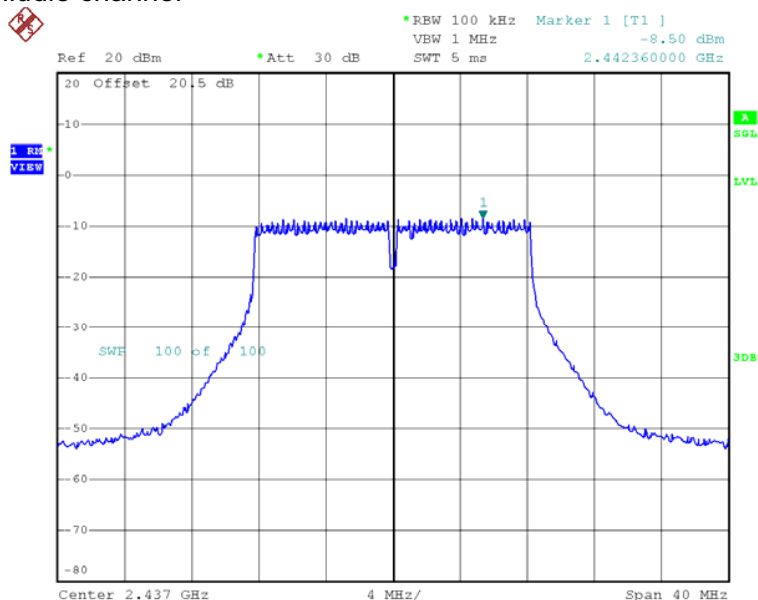


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Plots of power spectral density

802.11g, Highest channel

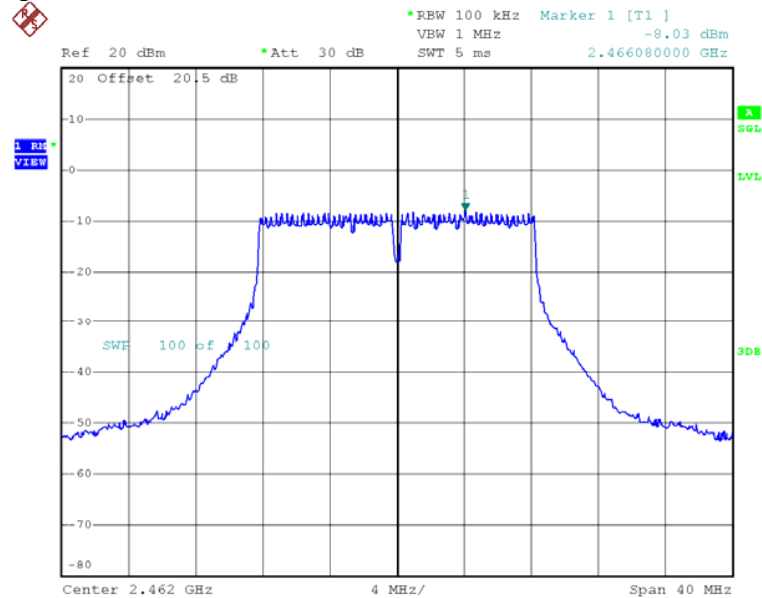

Test Report Number: 14081065HKG-001

Page 46 of 91

FCC ID: EW780-9480-00

IC: 1135B-80948000


Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.


Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

Plots of power spectral density

802.11n(20M), Lowest channel

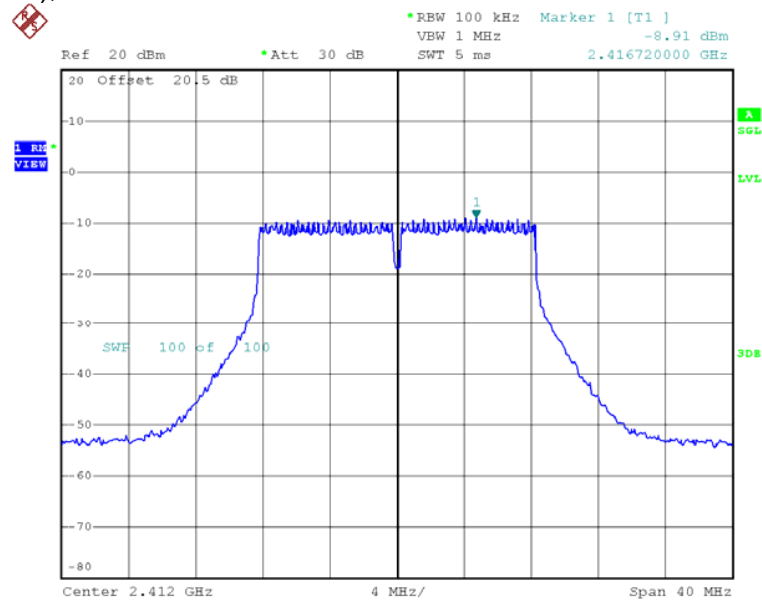

802.11n(20M), Middle channel

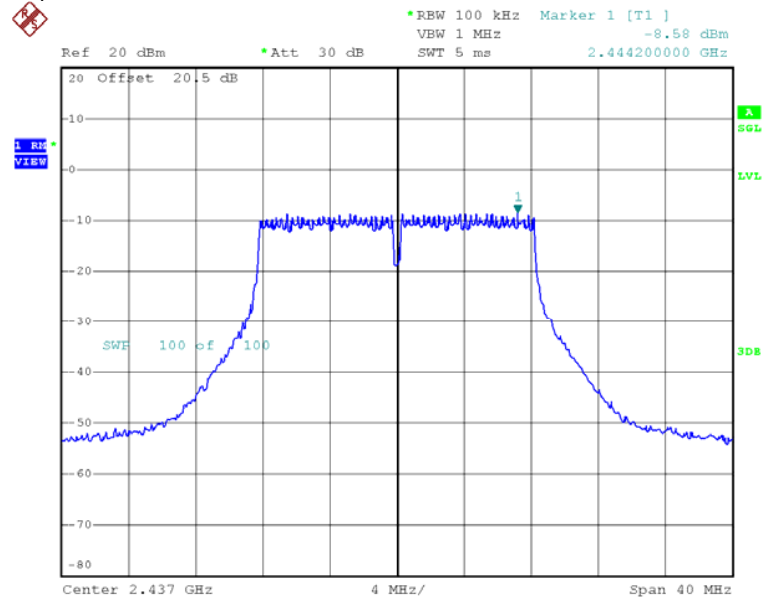


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




Plots of power spectral density

802.11n(20M), Highest channel

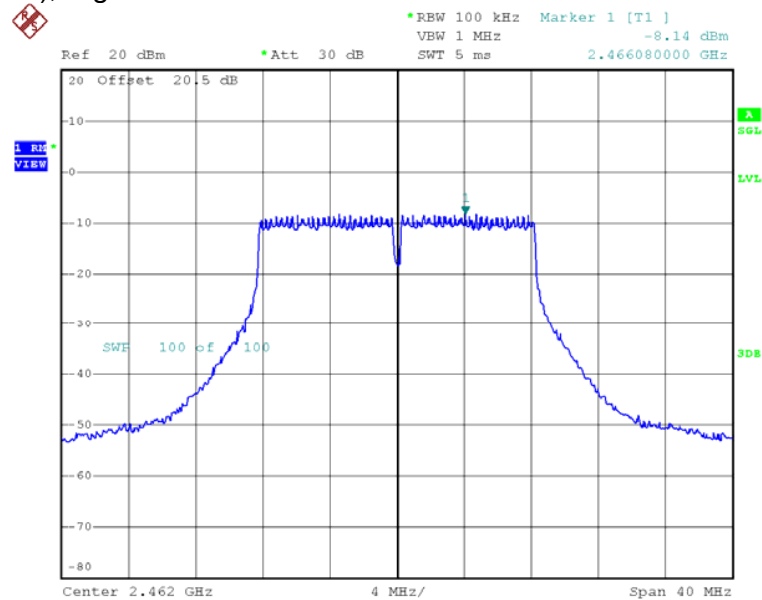


Plots of power spectral density

802.11n(40M), Lowest channel

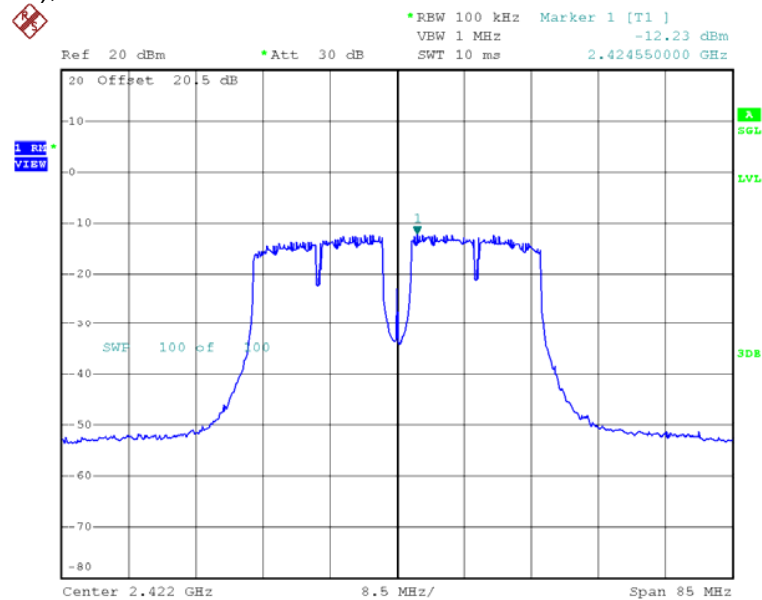

802.11n(40M), Middle channel

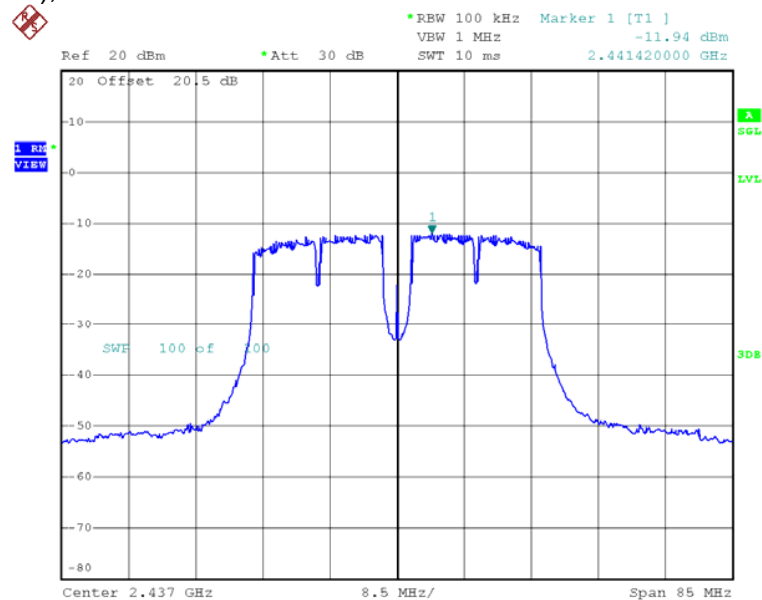


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Plots of power spectral density

802.11n(40M), Highest channel

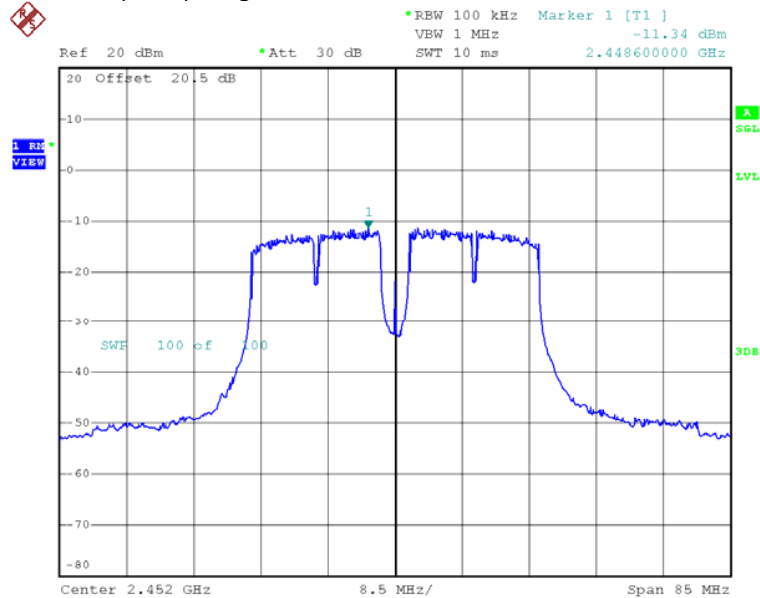

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



4.5 Out of Band Conducted Emissions

The maximum conducted (average) output power was used to demonstrate compliance as described in 9.2. Then the display line (in red) shown in the following plots denotes the limit at 30dB below maximum measured in-band peak PSD level in 100 KHz bandwidth.

The measurement procedures under sections 11 of KDB558074 D01 v03r02 (05-June-2014) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.


Limits:

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 30 dB below the maximum measured in-band peak PSD level.


The plots of reference level measurement and out of band conducted emissions are as below.

Plots of reference level measurement

802.11b, Lowest channel

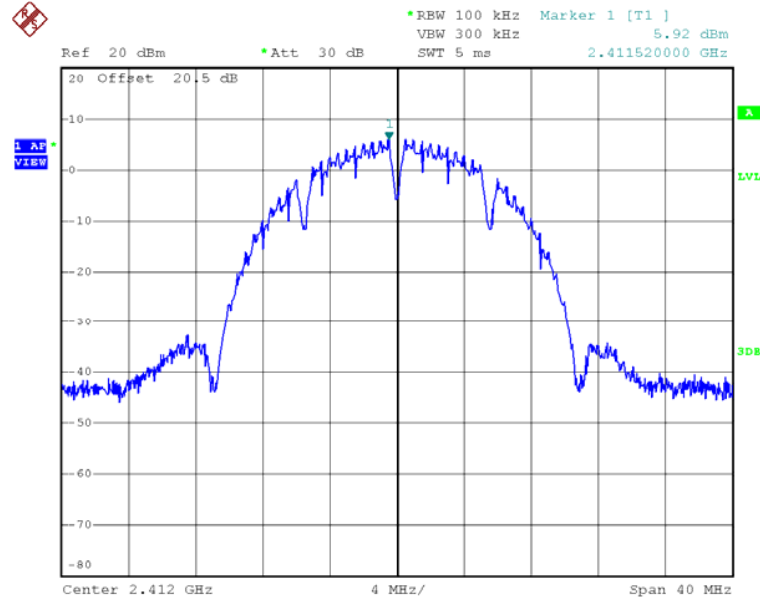

802.11b, Middle channel

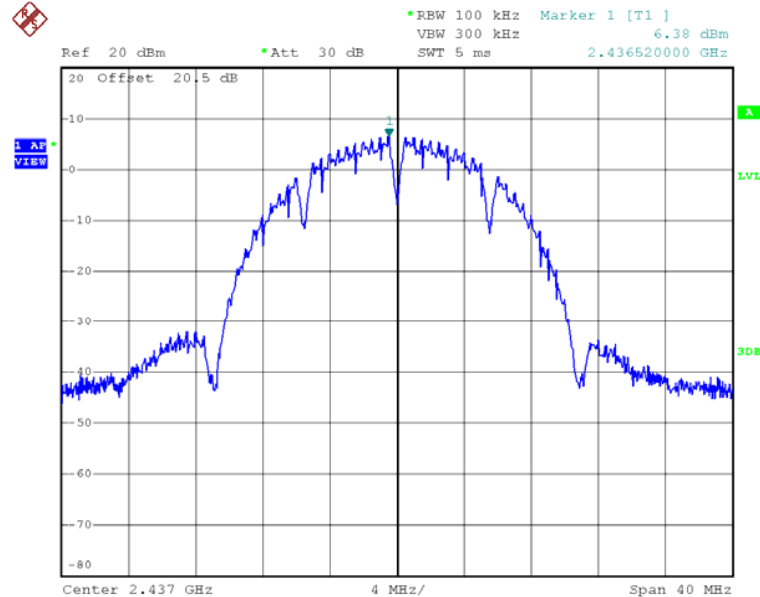


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




Plots of reference level measurement

802.11b, Highest channel

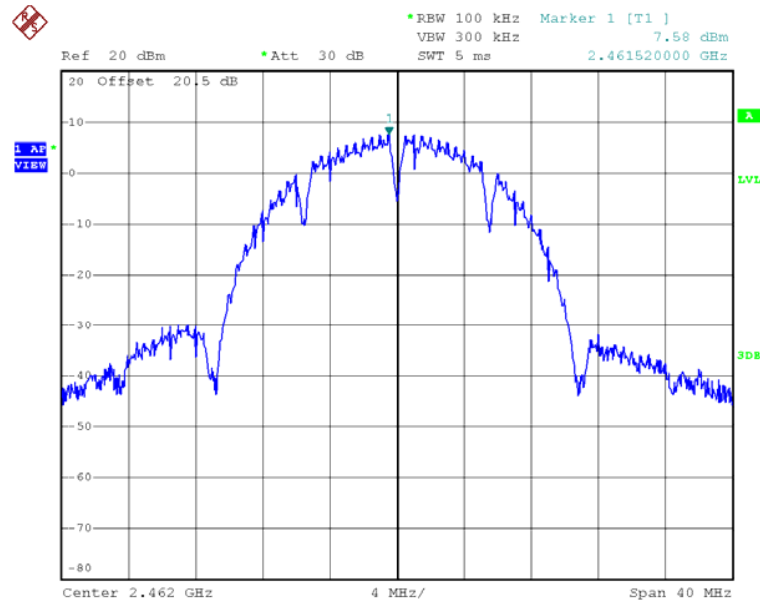


Plots of reference level measurement

802.11g, Lowest channel

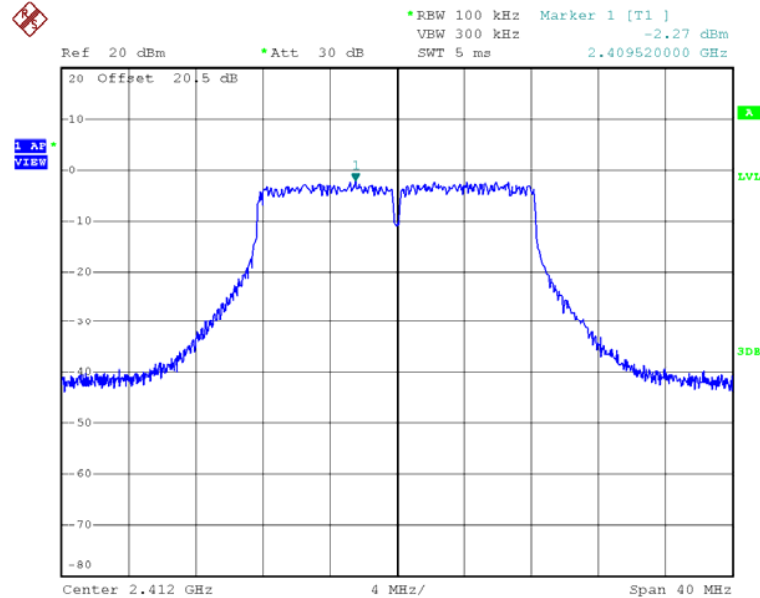

802.11g, Middle channel

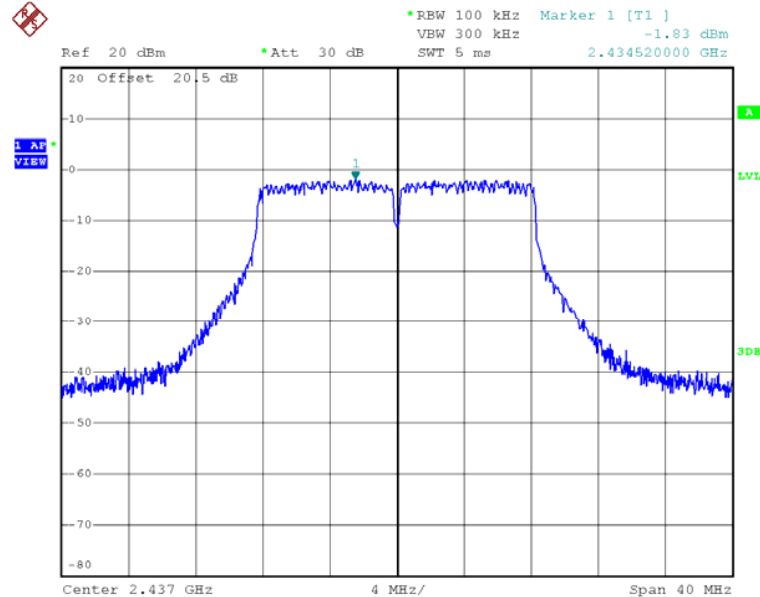


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Plots of reference level measurement

802.11g, Highest channel

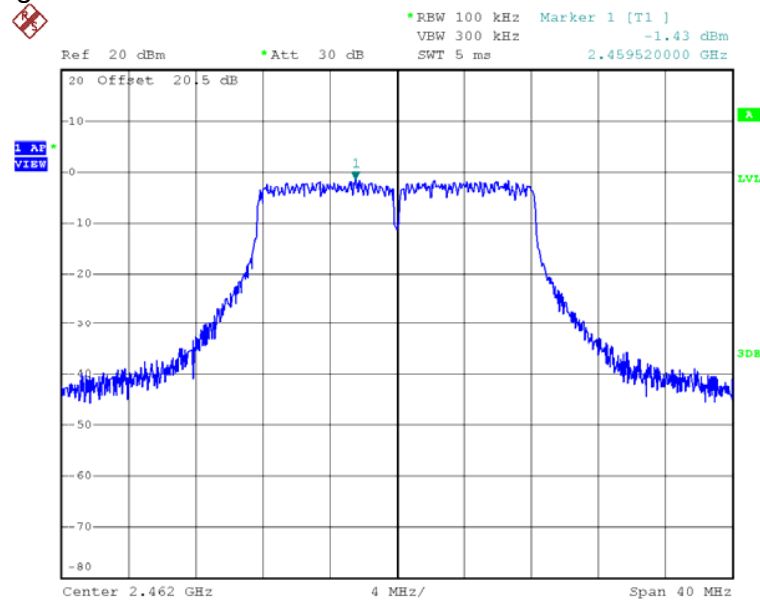


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




Plots of reference level measurement

802.11n(20M), Lowest channel

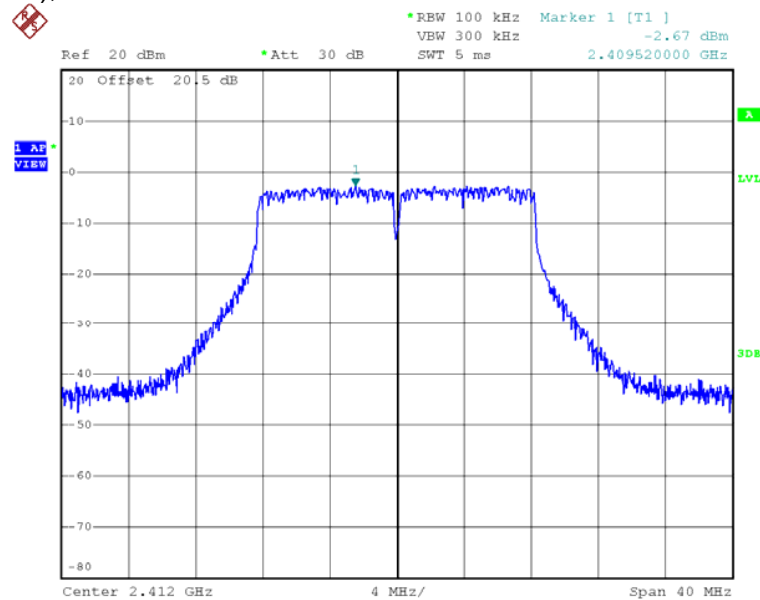

802.11n(20M), Middle channel

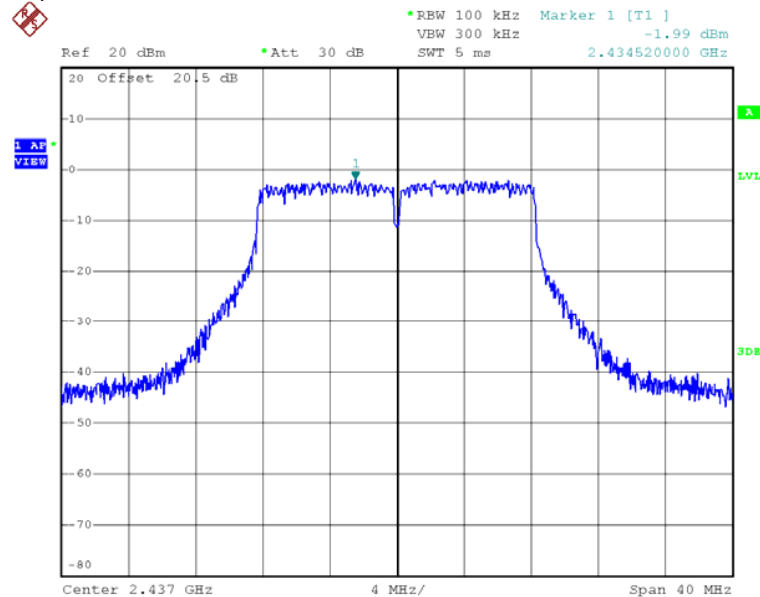


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




Plots of reference level measurement

802.11n(20M), Highest channel

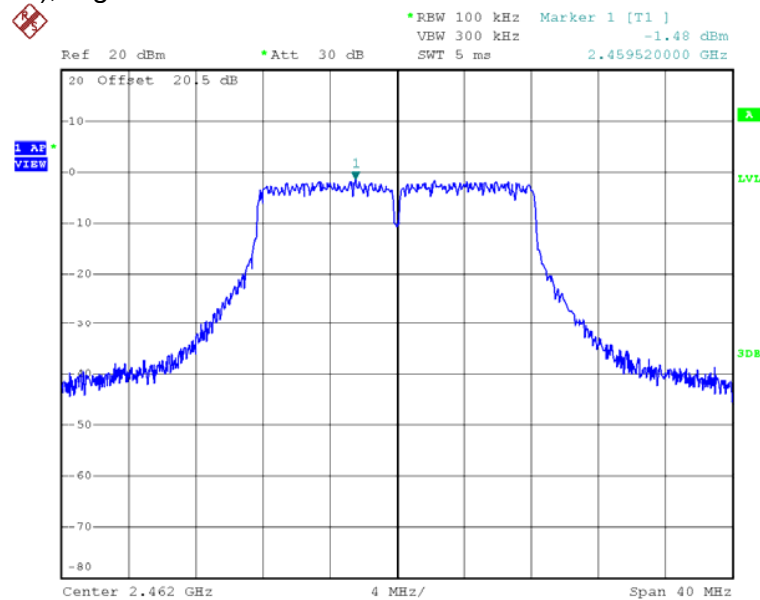


Plots of reference level measurement

802.11n(40M), Lowest channel

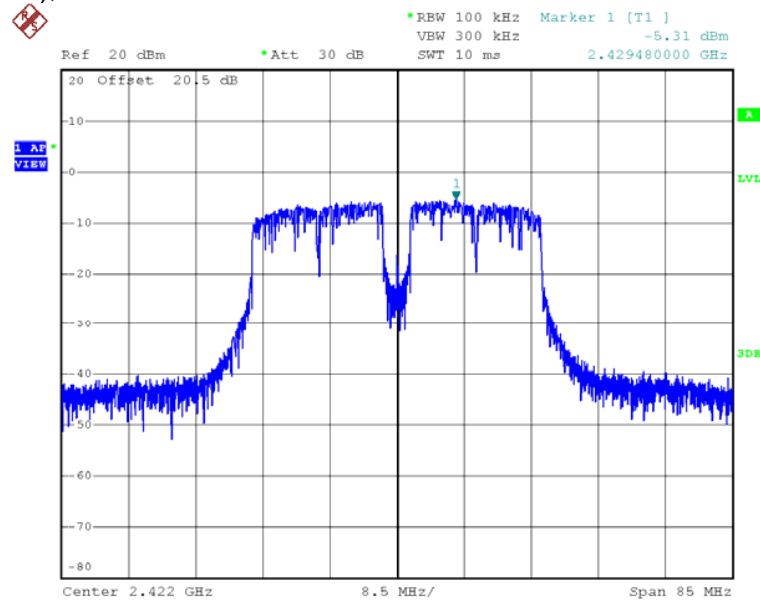

802.11n(40M), Middle channel

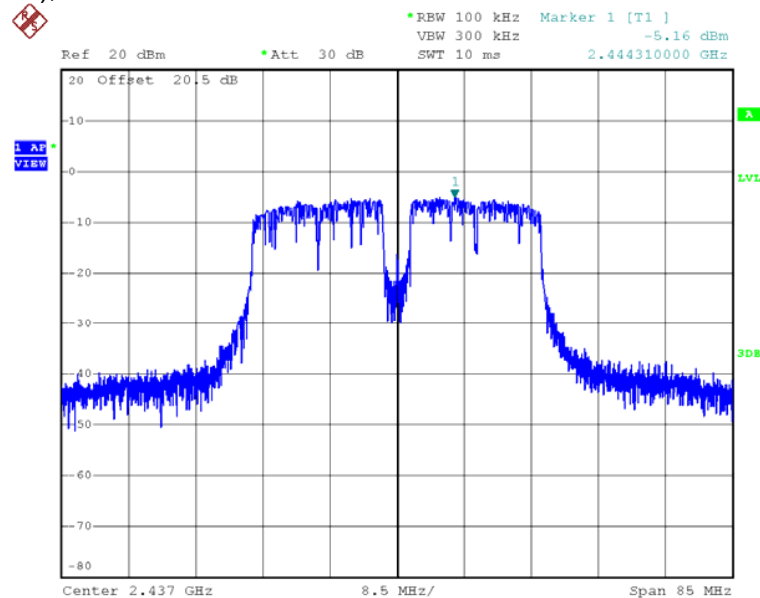


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




Plots of reference level measurement

802.11n(40M), Highest channel

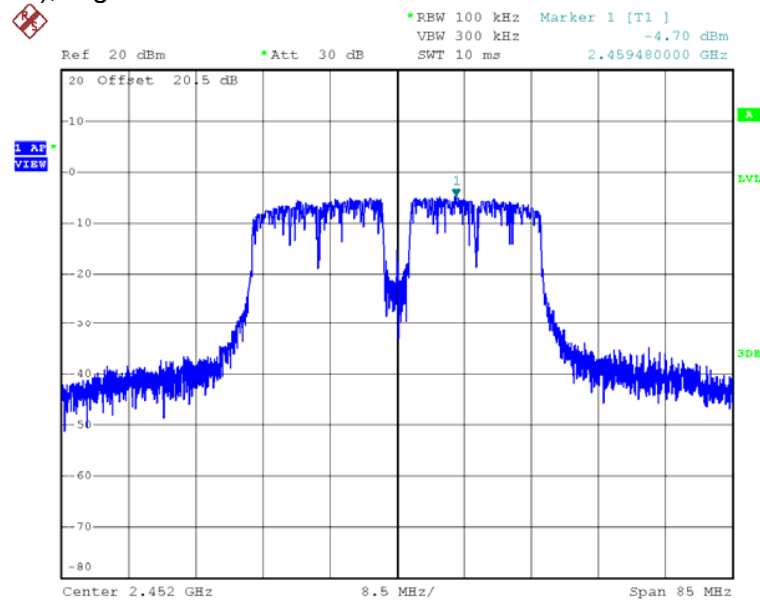


Plots of out of band conducted emissions

802.11b, Lowest Channel, Plot A

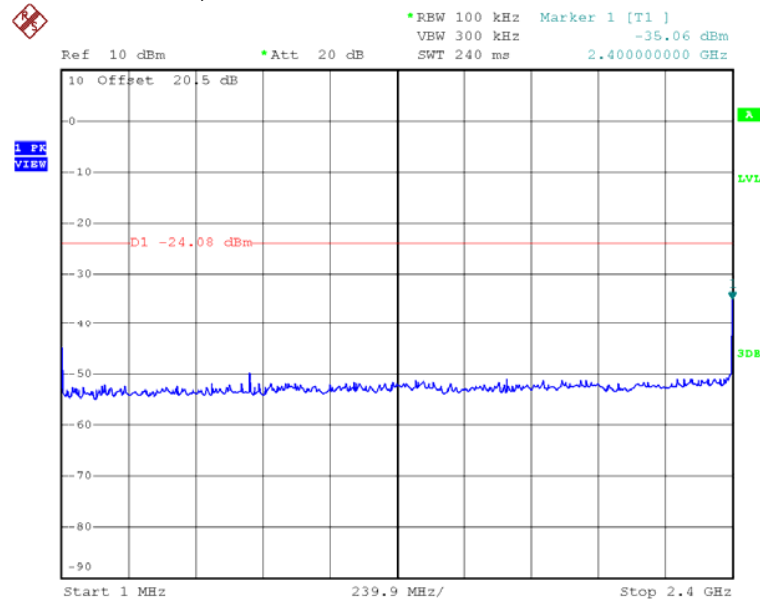


802.11b, Lowest Channel, Plot B

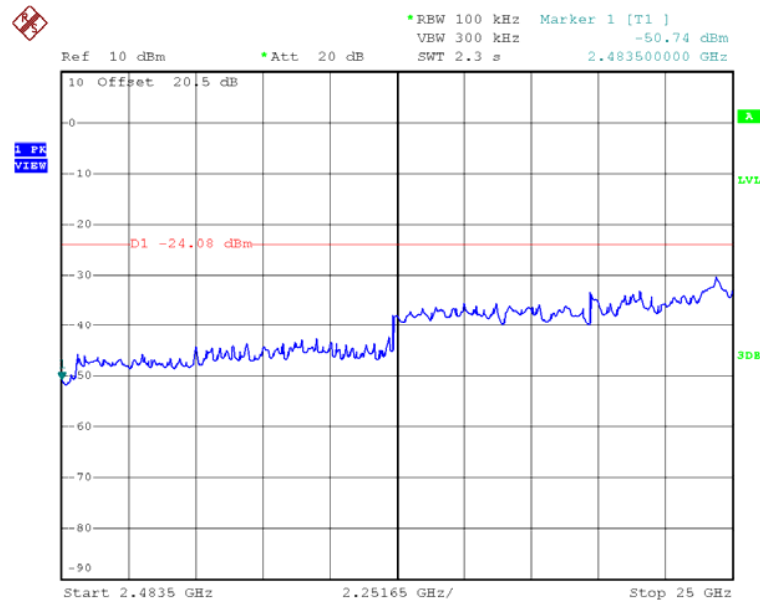


Plots of out of band conducted emissions

802.11b, Middle Channel, Plot A

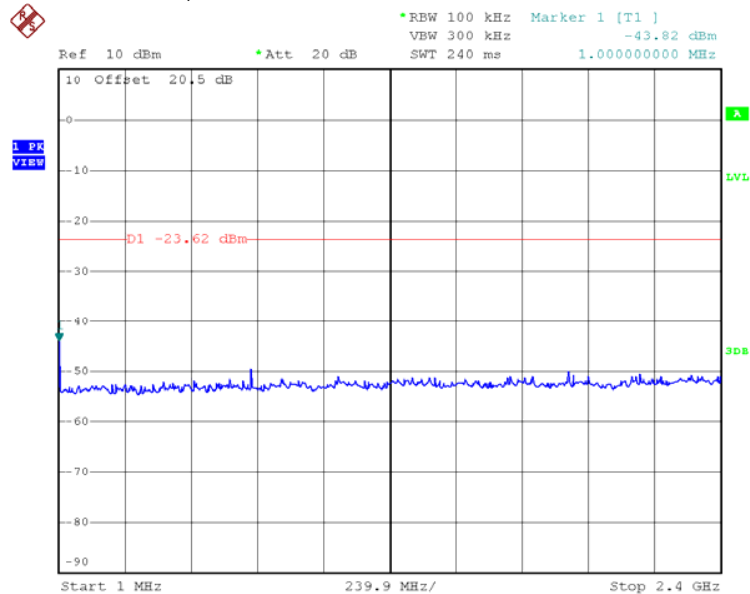


802.11b, Middle Channel, Plot B

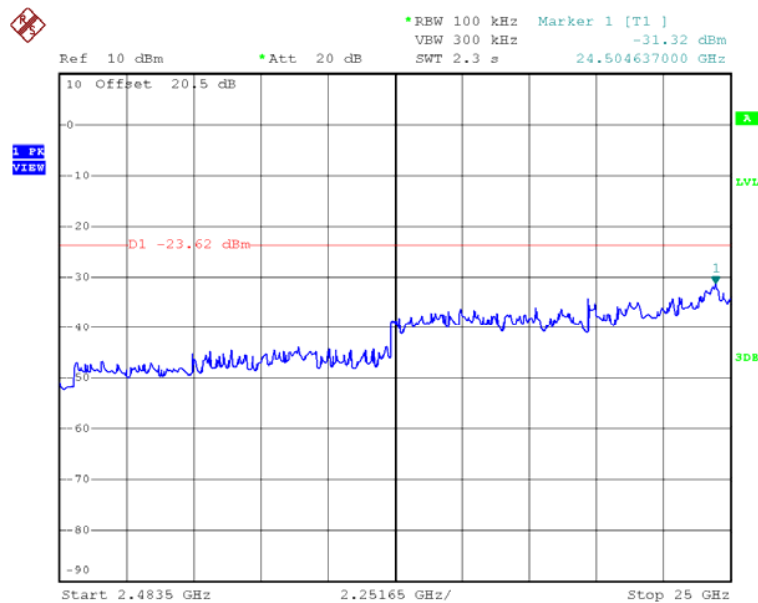


Plots of out of band conducted emissions

802.11b, Highest Channel, Plot A

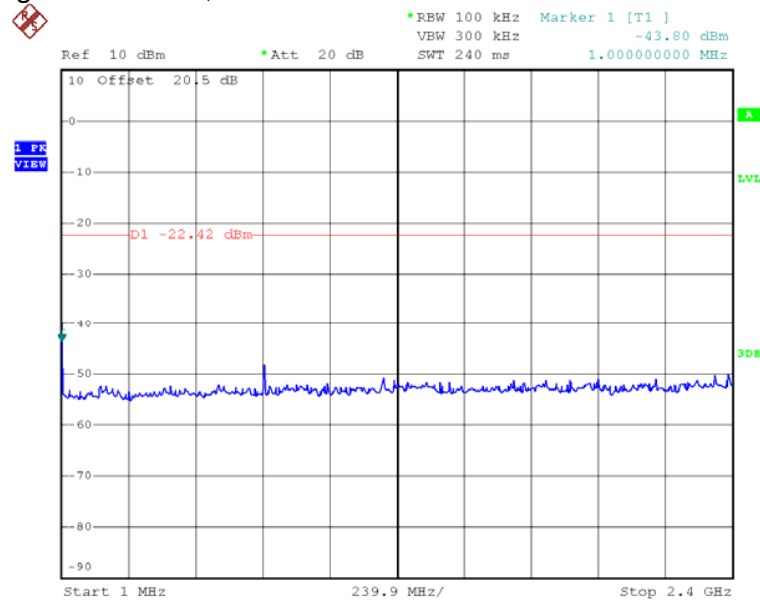


802.11b, Highest Channel, Plot B

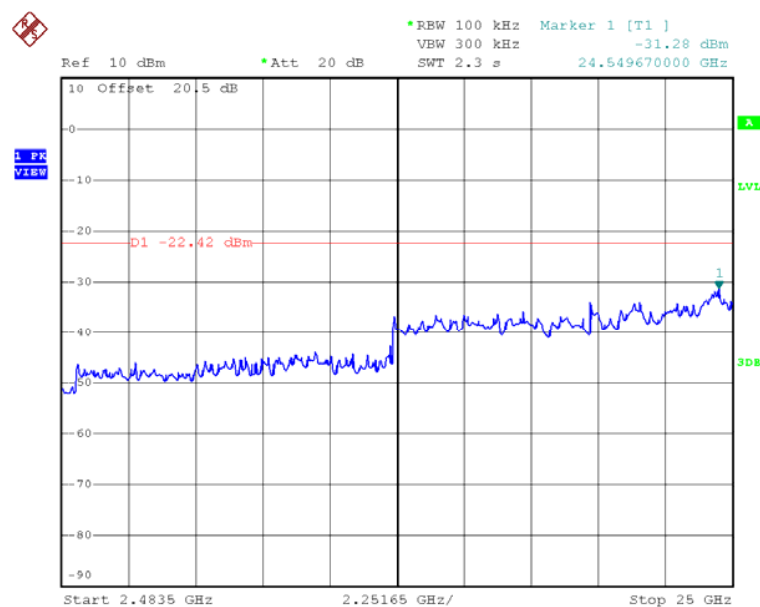


Plots of out of band conducted emissions

802.11g, Lowest Channel, Plot A

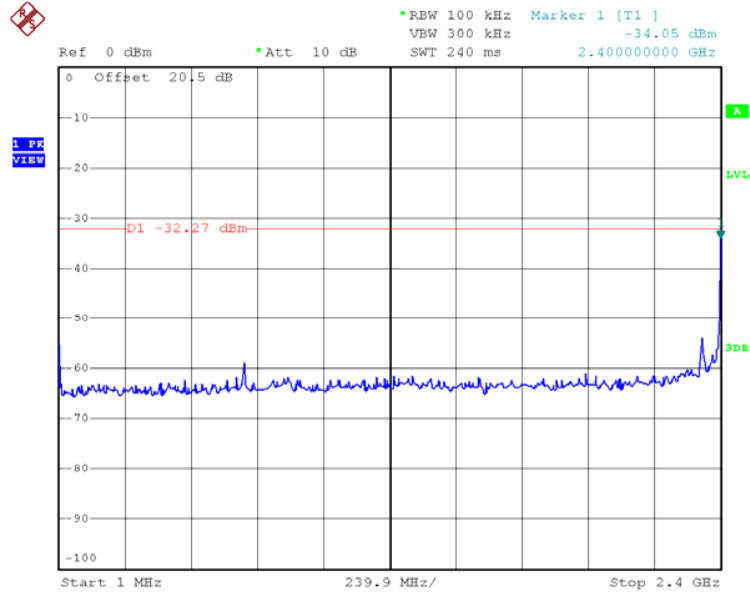


802.11g, Lowest Channel, Plot B

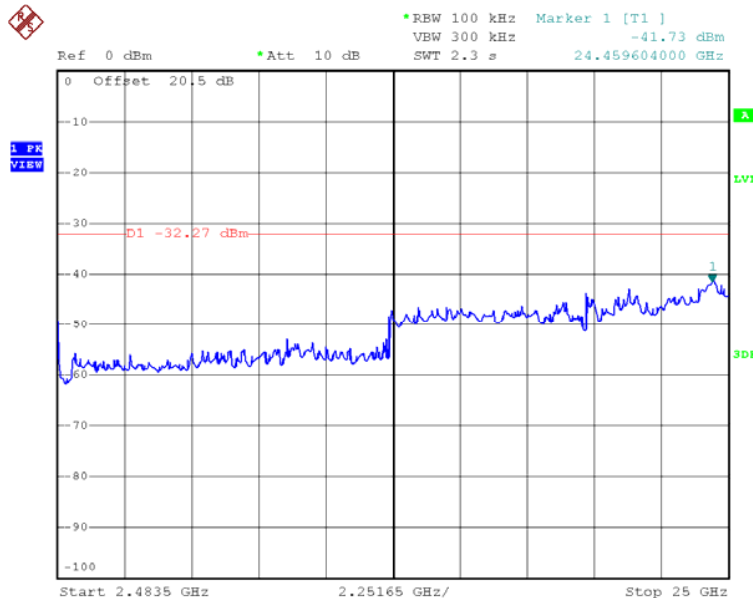


Plots of out of band conducted emissions

802.11g, Middle Channel, Plot A

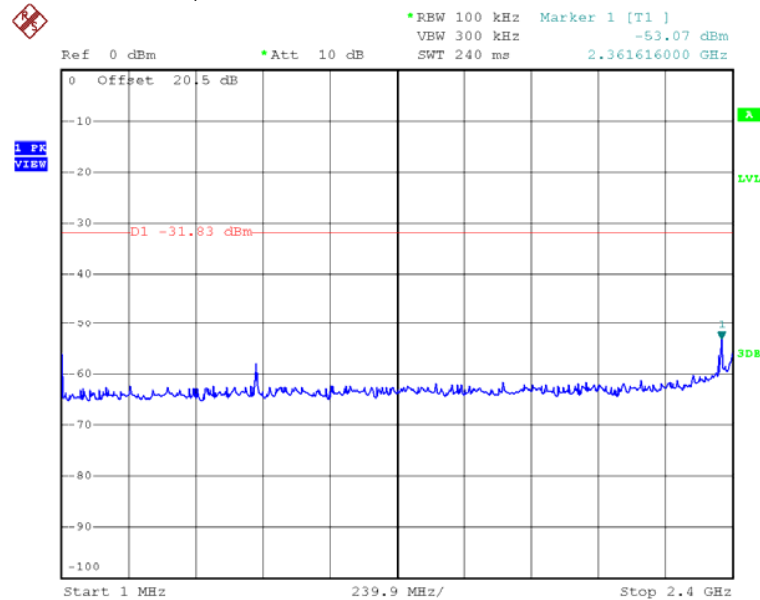


802.11g, Middle Channel, Plot B

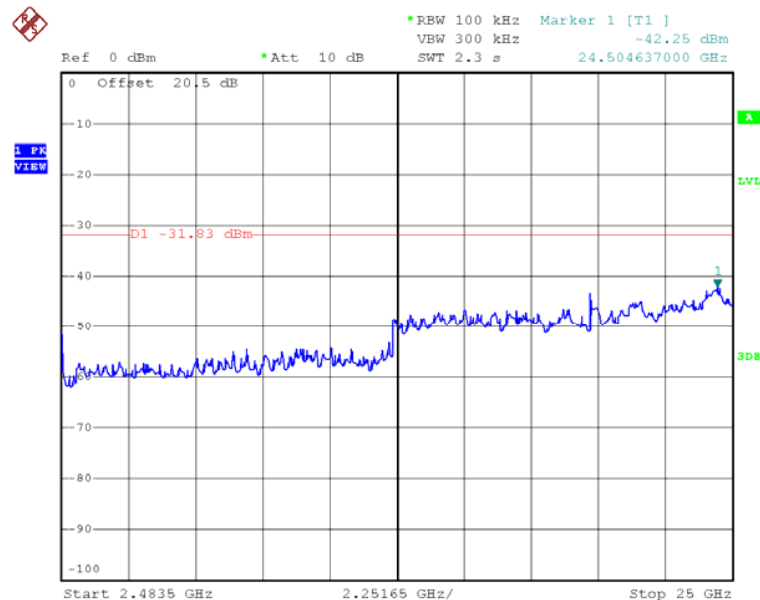


Plots of out of band conducted emissions

802.11g, Highest Channel, Plot A

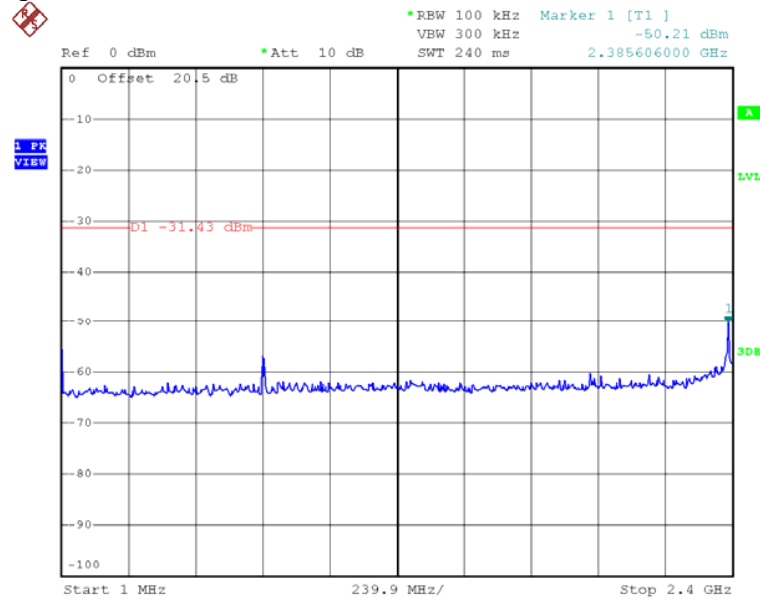


802.11g, Highest Channel, Plot B

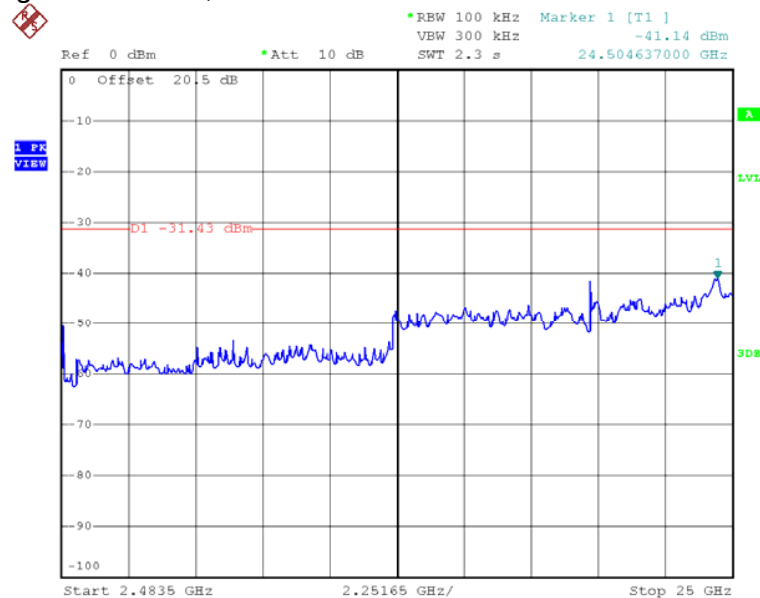


Plots of out of band conducted emissions

802.11n (20m), Lowest Channel, Plot A

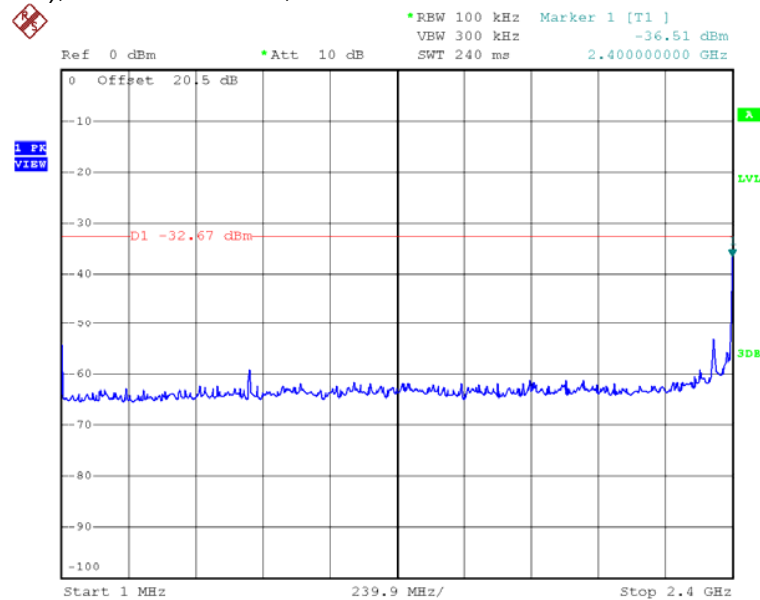


802.11n (20m), Lowest Channel, Plot B

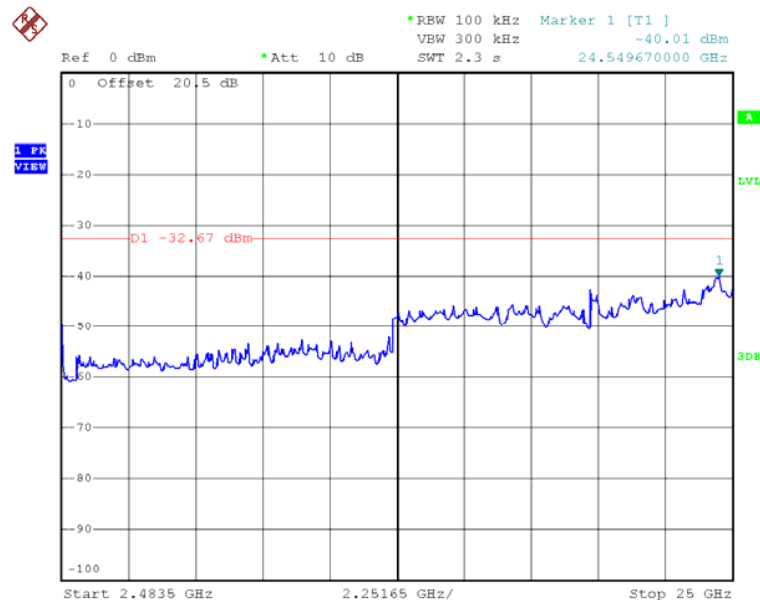


Plots of out of band conducted emissions

802.11n (20m), Middle Channel, Plot A

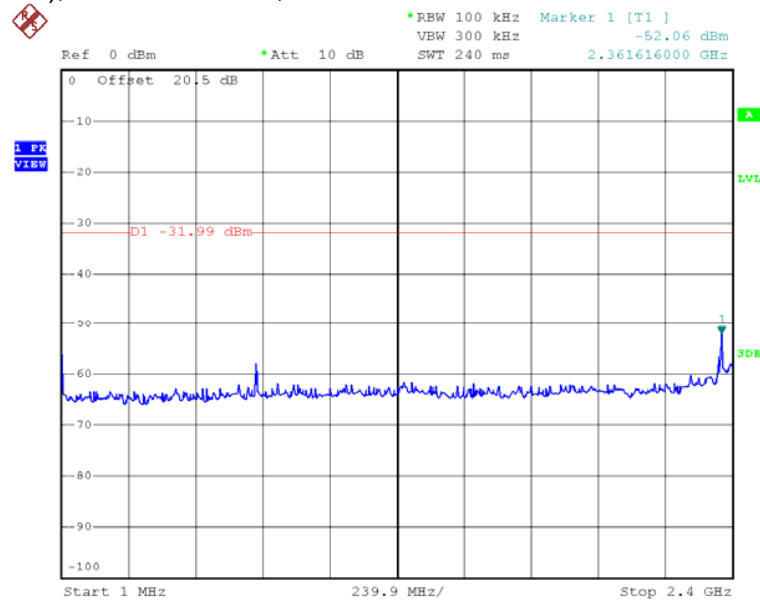


802.11n (20m), Middle Channel, Plot B

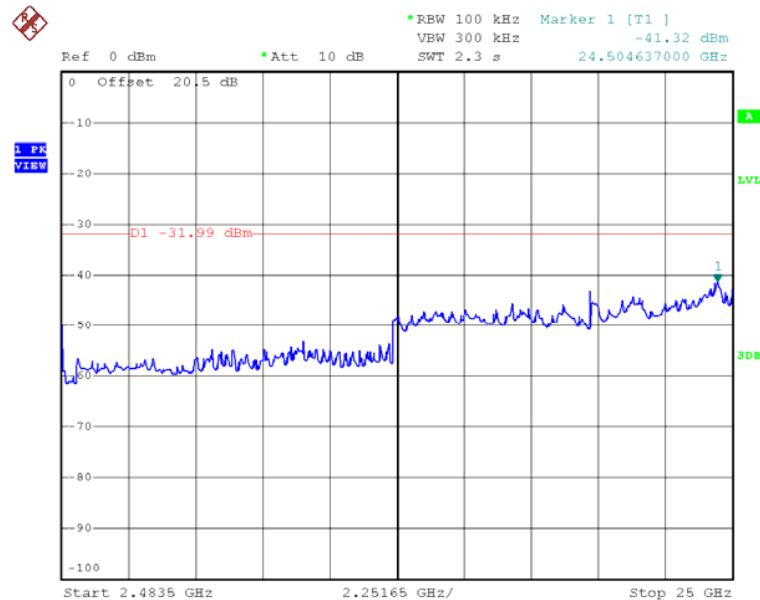


Plots of out of band conducted emissions

802.11n (20m), Highest Channel, Plot A

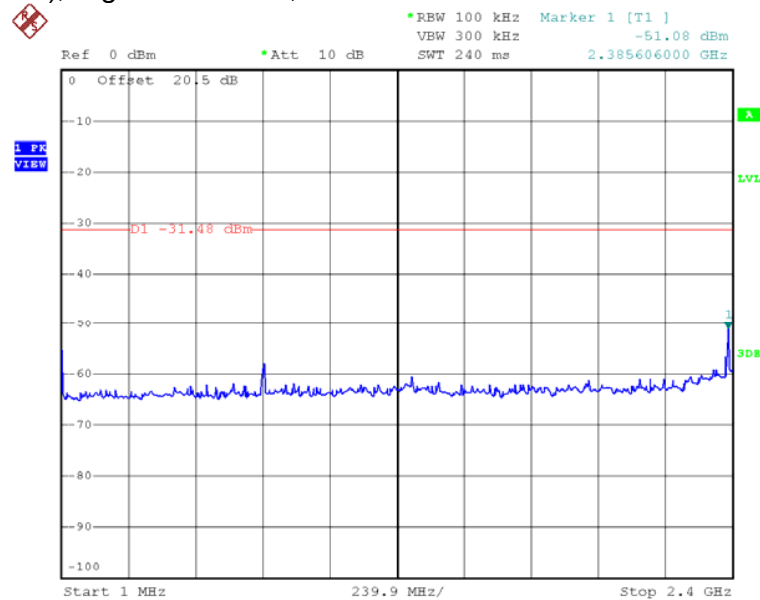


802.11n (20m), Highest Channel, Plot B

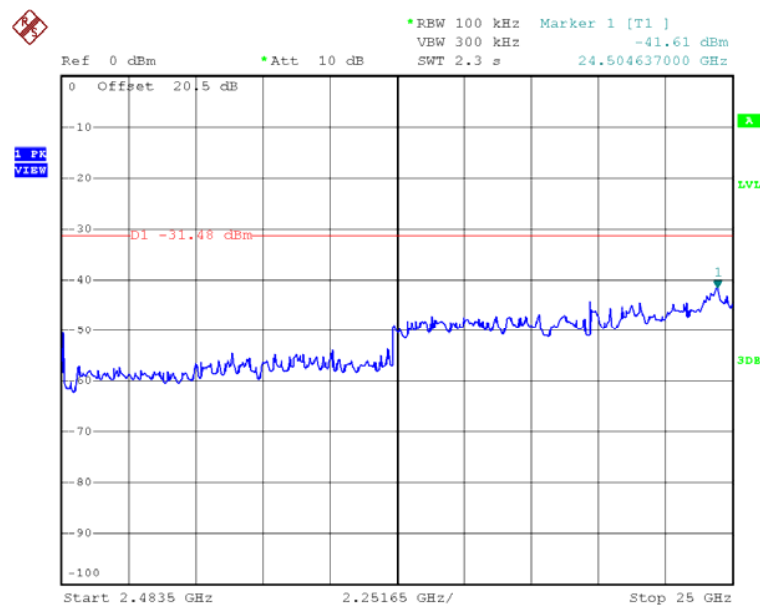


Plots of out of band conducted emissions

802.11n (40m), Lowest Channel, Plot A

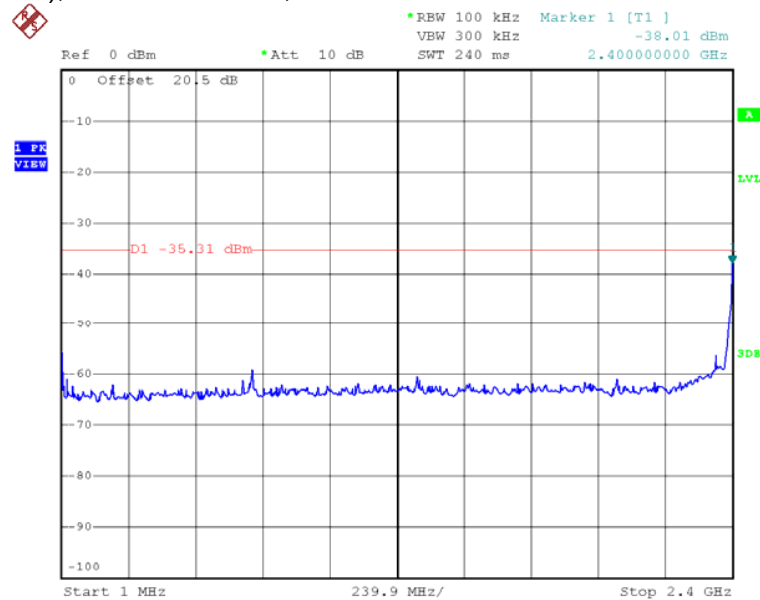


802.11n (40m), Lowest Channel, Plot B

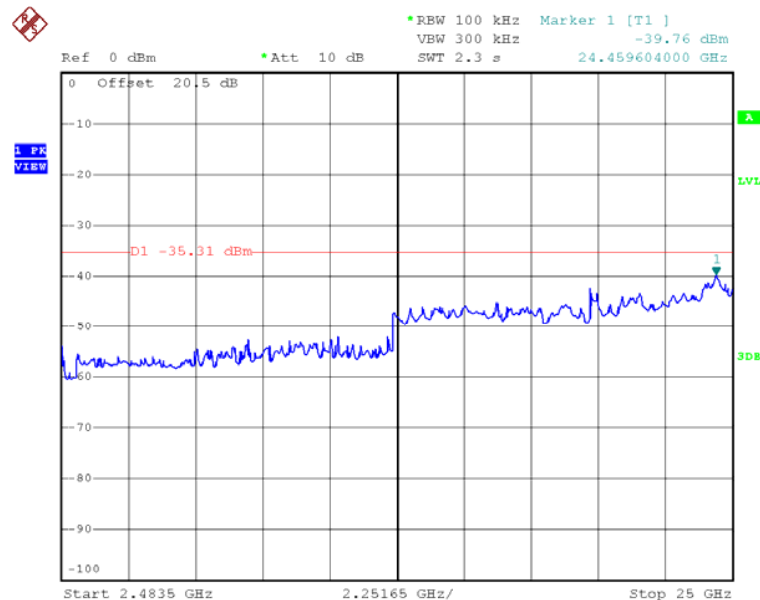


Plots of out of band conducted emissions

802.11n (40m), Middle Channel, Plot A

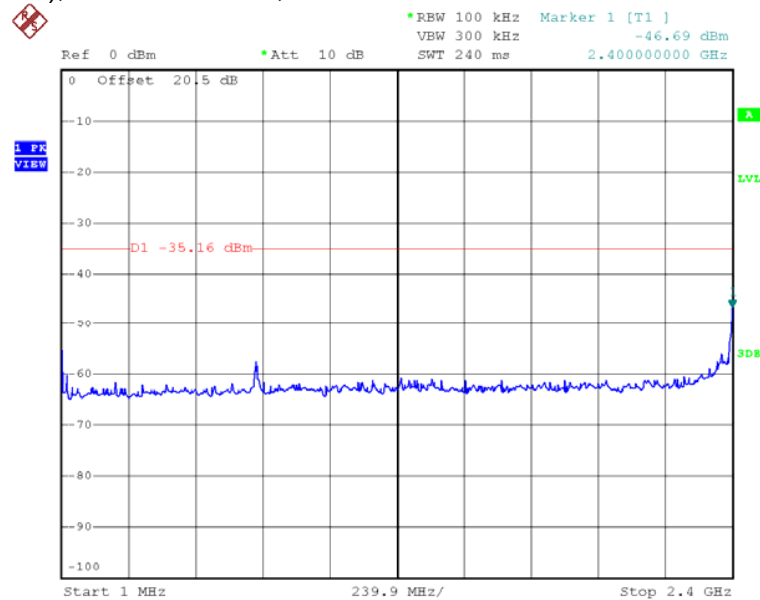


802.11n (40m), Middle Channel, Plot B

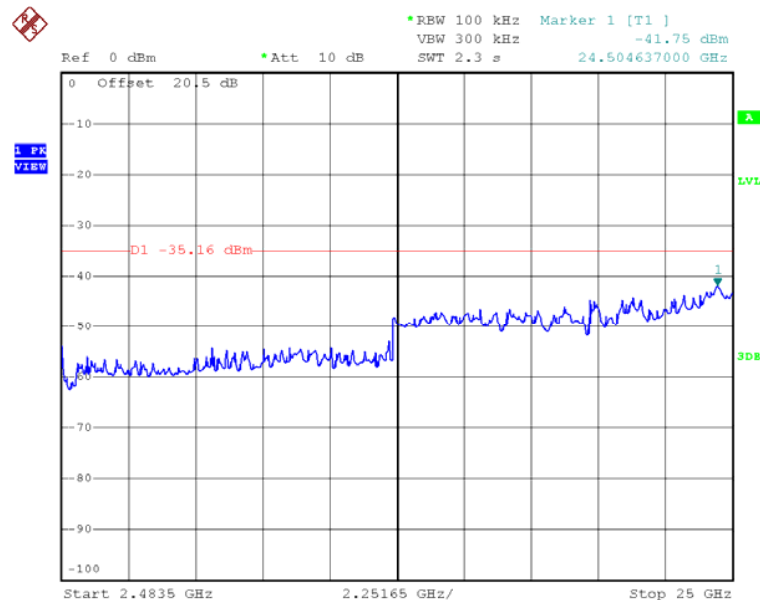


Plots of out of band conducted emissions

802.11n (40m), Highest Channel, Plot A

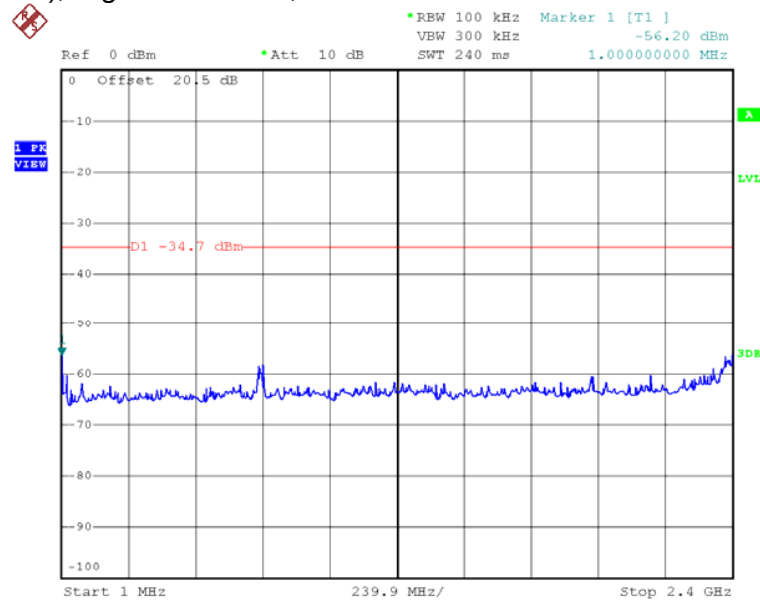

802.11n (40m), Highest Channel, Plot B

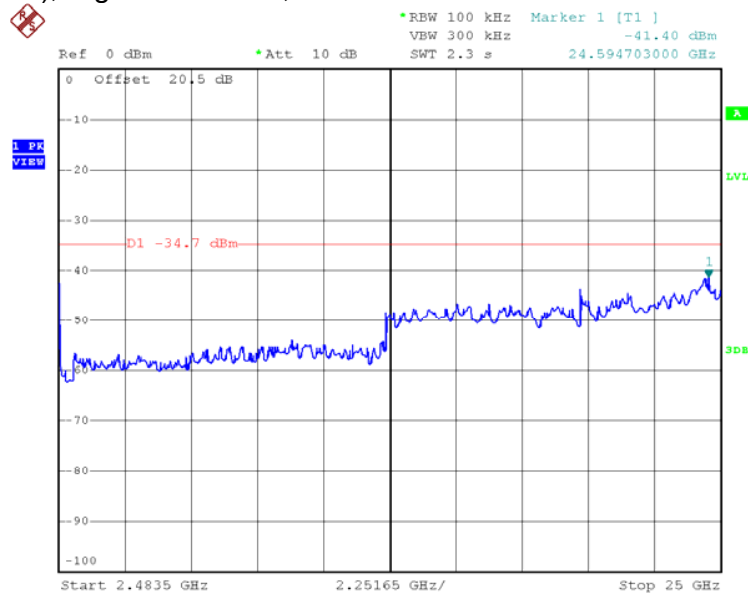

4.6 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in dB μ V/m
 RA = Receiver Amplitude (including preamplifier) in dB μ V
 CF = Cable Attenuation Factor in dB
 AF = Antenna Factor in dB
 AG = Amplifier Gain in dB
 PD = Pulse Desensitization in dB
 AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dB μ V/m. This value in dB μ V/m is converted to its corresponding level in μ V/m.

RA = 62.0 dB μ V
AF = 7.4 dB
CF = 1.6 dB
AG = 29.0 dB
PD = 0.0 dB
AV = -10 dB

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

4.7 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

4.7.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission
at

2390.000 MHz

The worst case radiated emission configuration photographs are saved with filename:
config photos.pdf

4.7.2 Radiated Emission Data

The data in tables 1-13 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 6.1 dB margin compare with average limit

Mode: TX-Channel 01

Table 1
IEEE 802.11b (DSSS, 1 Mbps)

Radiated Emission Data

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - average (dBuV/m)	Average Limit at 3m (dBuV/m)	Margin (dB)
V	2390.000	51.5	33	29.4	47.9	54.0	-6.1
V	4824.000	41.5	33	34.9	43.4	54.0	-10.6
V	12060.000	33.0	33	40.5	40.5	54.0	-13.5
V	14472.000	34.3	33	40.0	41.3	54.0	-12.7

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
V	2390.000	62.7	33	29.4	59.1	74.0	-14.9
V	4824.000	56.9	33	34.9	58.8	74.0	-15.2
V	12060.000	45.2	33	40.5	52.7	74.0	-21.3
V	14472.000	46.8	33	40.0	53.8	74.0	-20.2

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

Mode: TX-Channel 06

Table 2
IEEE 802.11b (DSSS, 1 Mbps)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	43.8	33	34.9	45.7	54.0	-8.3
V	7311.000	39.0	33	37.9	43.9	54.0	-10.1
V	12185.000	33.1	33	40.5	40.6	54.0	-13.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	56.6	33	34.9	58.5	74.0	-15.5
V	7311.000	50.8	33	37.9	55.7	74.0	-18.3
V	12185.000	45.3	33	40.5	52.8	74.0	-21.2

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

Mode: TX-Channel 11

Table 3
IEEE 802.11b (DSSS, 1 Mbps)

Radiated Emission Data

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - average (dBuV/m)	Average Limit at 3m (dBuV/m)	Margin (dB)
H	2483.500	50.9	33	29.4	47.3	54.0	-6.7
V	4924.000	43.9	33	34.9	45.8	54.0	-8.2
V	7386.000	38.7	33	37.9	43.6	54.0	-10.4
V	12310.000	35.3	33	40.5	42.8	54.0	-11.2

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
H	2483.500	62.4	33	29.4	58.8	74.0	-15.2
V	4924.000	57.6	33	34.9	59.5	74.0	-14.5
V	7386.000	50.8	33	37.9	55.7	74.0	-18.3
V	12310.000	45.2	33	40.5	52.7	74.0	-21.3

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

Mode: TX-Channel 01

Table 4
IEEE 802.11g (OFDM, 6 Mbps)

Radiated Emission Data

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - average (dBuV/m)	Average Limit at 3m (dBuV/m)	Margin (dB)
V	2390.000	51.4	33	29.4	47.8	54.0	-6.2
V	4824.000	40.5	33	34.9	42.4	54.0	-11.6
V	12060.000	33.2	33	40.5	40.7	54.0	-13.3
V	14472.000	35.7	33	40.0	42.7	54.0	-11.3

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
V	2390.000	62.7	33	29.4	59.1	74.0	-14.9
V	4824.000	53.6	33	34.9	55.5	74.0	-18.5
V	12060.000	44.9	33	40.5	52.4	74.0	-21.6
V	14472.000	46.6	33	40.0	53.6	74.0	-20.4

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

Mode: TX-Channel 06

Table 5
IEEE 802.11g (OFDM, 6 Mbps)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	40.9	33	34.9	42.8	54.0	-11.2
V	7311.000	37.9	33	37.9	42.8	54.0	-11.2
V	12185.000	34.0	33	40.5	41.5	54.0	-12.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	53.7	33	34.9	55.6	74.0	-18.4
V	7311.000	50.8	33	37.9	55.7	74.0	-18.3
V	12185.000	45.4	33	40.5	52.9	74.0	-21.1

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

Mode: TX-Channel 11

Table 6
IEEE 802.11g (OFDM, 6 Mbps)

Radiated Emission Data

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - average (dBuV/m)	Average Limit at 3m (dBuV/m)	Margin (dB)
H	2483.500	50.9	33	29.4	47.3	54.0	-6.7
V	4924.000	40.7	33	34.9	42.6	54.0	-11.4
V	7386.000	37.6	33	37.9	42.5	54.0	-11.5
V	12310.000	34.3	33	40.5	41.8	54.0	-12.2

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
H	2483.500	63.1	33	29.4	59.5	74.0	-14.5
V	4924.000	54.6	33	34.9	56.5	74.0	-17.5
V	7386.000	50.8	33	37.9	55.7	74.0	-18.3
V	12310.000	45.3	33	40.5	52.8	74.0	-21.2

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

Mode: TX-Channel 01

Table 7
IEEE 802.11n (20MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - average (dBuV/m)	Average Limit at 3m (dBuV/m)	Margin (dB)
<i>H</i>	<i>2390.000</i>	<i>51.0</i>	<i>33</i>	<i>29.4</i>	<i>47.4</i>	<i>54.0</i>	<i>-6.6</i>
<i>V</i>	<i>4824.000</i>	<i>41.3</i>	<i>33</i>	<i>34.9</i>	<i>43.2</i>	<i>54.0</i>	<i>-10.8</i>
<i>V</i>	<i>12060.000</i>	<i>33.0</i>	<i>33</i>	<i>40.5</i>	<i>40.5</i>	<i>54.0</i>	<i>-13.5</i>
<i>V</i>	<i>14472.000</i>	<i>34.4</i>	<i>33</i>	<i>40.0</i>	<i>41.4</i>	<i>54.0</i>	<i>-12.6</i>

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
<i>H</i>	<i>2390.000</i>	<i>63.1</i>	<i>33</i>	<i>29.4</i>	<i>59.5</i>	<i>74.0</i>	<i>-14.5</i>
<i>V</i>	<i>4824.000</i>	<i>53.7</i>	<i>33</i>	<i>34.9</i>	<i>55.6</i>	<i>74.0</i>	<i>-18.4</i>
<i>V</i>	<i>12060.000</i>	<i>45.3</i>	<i>33</i>	<i>40.5</i>	<i>52.8</i>	<i>74.0</i>	<i>-21.2</i>
<i>V</i>	<i>14472.000</i>	<i>46.6</i>	<i>33</i>	<i>40.0</i>	<i>53.6</i>	<i>74.0</i>	<i>-20.4</i>

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

Mode: TX-Channel 06

Table 8
IEEE 802.11n (20MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	41.7	33	34.9	43.6	54.0	-10.4
V	7311.000	38.8	33	37.9	43.7	54.0	-10.3
V	12185.000	33.0	33	40.5	40.5	54.0	-13.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	53.5	33	34.9	55.4	74.0	-18.6
V	7311.000	50.7	33	37.9	55.6	74.0	-18.4
V	12185.000	45.2	33	40.5	52.7	74.0	-21.3

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

Mode: TX-Channel 11

Table 9
IEEE 802.11n (20MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - average (dBuV/m)	Average Limit at 3m (dBuV/m)	Margin (dB)
<i>H</i>	<i>2483.500</i>	<i>51.1</i>	<i>33</i>	<i>29.4</i>	<i>47.5</i>	<i>54.0</i>	<i>-6.5</i>
<i>H</i>	<i>4924.000</i>	<i>42.0</i>	<i>33</i>	<i>34.9</i>	<i>43.9</i>	<i>54.0</i>	<i>-10.1</i>
<i>H</i>	<i>7386.000</i>	<i>37.8</i>	<i>33</i>	<i>37.9</i>	<i>42.7</i>	<i>54.0</i>	<i>-11.3</i>
<i>H</i>	<i>12310.000</i>	<i>33.4</i>	<i>33</i>	<i>40.5</i>	<i>40.9</i>	<i>54.0</i>	<i>-13.1</i>

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
<i>H</i>	<i>2483.500</i>	<i>62.0</i>	<i>33</i>	<i>29.4</i>	<i>58.4</i>	<i>74.0</i>	<i>-15.6</i>
<i>H</i>	<i>4924.000</i>	<i>54.6</i>	<i>33</i>	<i>34.9</i>	<i>56.5</i>	<i>74.0</i>	<i>-17.5</i>
<i>H</i>	<i>7386.000</i>	<i>50.7</i>	<i>33</i>	<i>37.9</i>	<i>55.6</i>	<i>74.0</i>	<i>-18.4</i>
<i>H</i>	<i>12310.000</i>	<i>45.2</i>	<i>33</i>	<i>40.5</i>	<i>52.7</i>	<i>74.0</i>	<i>-21.3</i>

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

Mode: TX-Channel 03

Table 10
IEEE 802.11n (40MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - average (dBuV/m)	Average Limit at 3m (dBuV/m)	Margin (dB)
<i>H</i>	<i>2390.000</i>	<i>49.4</i>	<i>33</i>	<i>29.4</i>	<i>45.8</i>	<i>54.0</i>	<i>-8.2</i>
<i>V</i>	<i>4844.000</i>	<i>39.5</i>	<i>33</i>	<i>34.9</i>	<i>41.4</i>	<i>54.0</i>	<i>-12.6</i>
<i>V</i>	<i>12110.000</i>	<i>33.1</i>	<i>33</i>	<i>40.5</i>	<i>40.6</i>	<i>54.0</i>	<i>-13.4</i>
<i>V</i>	<i>14532.000</i>	<i>36.1</i>	<i>33</i>	<i>38.4</i>	<i>41.5</i>	<i>54.0</i>	<i>-12.5</i>

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
<i>H</i>	<i>2390.000</i>	<i>61.2</i>	<i>33</i>	<i>29.4</i>	<i>57.6</i>	<i>74.0</i>	<i>-16.4</i>
<i>V</i>	<i>4844.000</i>	<i>52.6</i>	<i>33</i>	<i>34.9</i>	<i>54.5</i>	<i>74.0</i>	<i>-19.5</i>
<i>V</i>	<i>12110.000</i>	<i>44.9</i>	<i>33</i>	<i>40.5</i>	<i>52.4</i>	<i>74.0</i>	<i>-21.6</i>
<i>V</i>	<i>14532.000</i>	<i>46.9</i>	<i>33</i>	<i>38.4</i>	<i>52.3</i>	<i>74.0</i>	<i>-21.7</i>

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

Mode: TX-Channel 06

Table 11
IEEE 802.11n (40MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	39.7	33	34.9	41.6	54.0	-12.4
V	7311.000	35.6	33	37.9	40.5	54.0	-13.5
V	12185.000	32.9	33	40.5	40.4	54.0	-13.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	52.6	33	34.9	54.5	74.0	-19.5
V	7311.000	49.5	33	37.9	54.4	74.0	-19.6
V	12185.000	45.2	33	40.5	52.7	74.0	-21.3

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

Mode: TX-Channel 09

Table 12
IEEE 802.11n (40MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - average (dBuV/m)	Average Limit at 3m (dBuV/m)	Margin (dB)
<i>H</i>	<i>2483.500</i>	<i>48.9</i>	<i>33</i>	<i>29.4</i>	<i>45.3</i>	<i>54.0</i>	<i>-8.7</i>
<i>H</i>	<i>4904.000</i>	<i>39.7</i>	<i>33</i>	<i>34.9</i>	<i>41.6</i>	<i>54.0</i>	<i>-12.4</i>
<i>H</i>	<i>7356.000</i>	<i>35.9</i>	<i>33</i>	<i>37.9</i>	<i>40.8</i>	<i>54.0</i>	<i>-13.2</i>
<i>H</i>	<i>12260.000</i>	<i>33.2</i>	<i>33</i>	<i>40.5</i>	<i>40.7</i>	<i>54.0</i>	<i>-13.3</i>

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
<i>H</i>	<i>2483.500</i>	<i>59.2</i>	<i>33</i>	<i>29.4</i>	<i>55.6</i>	<i>74.0</i>	<i>-18.4</i>
<i>H</i>	<i>4904.000</i>	<i>52.6</i>	<i>33</i>	<i>34.9</i>	<i>54.5</i>	<i>74.0</i>	<i>-19.5</i>
<i>H</i>	<i>7356.000</i>	<i>49.5</i>	<i>33</i>	<i>37.9</i>	<i>54.4</i>	<i>74.0</i>	<i>-19.6</i>
<i>H</i>	<i>12260.000</i>	<i>45.2</i>	<i>33</i>	<i>40.5</i>	<i>52.7</i>	<i>74.0</i>	<i>-21.3</i>

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

Mode: TX other

Table 13

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	36.345	37.7	16	10.0	31.7	40.0	-8.3
V	48.467	38.5	16	11.0	33.5	40.0	-6.5
V	72.256	43.7	16	7.0	34.7	40.0	-5.3
V	144.761	35.8	16	14.0	33.8	43.5	-9.7
H	192.478	31.5	16	16.0	31.5	43.5	-12.0
<i>H</i>	<i>240.478</i>	<i>27.6</i>	<i>16</i>	<i>19.0</i>	<i>30.6</i>	<i>46.0</i>	<i>-15.4</i>

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

4.7.3 Transmitter Duty Cycle Calculation

Not applicable – No average factor is required.

4.8 AC Power Line Conducted Emission

- ☐ Not applicable – EUT is only powered by battery for operation.
- ☒ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

4.8.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration
at

0.348 MHz

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

4.8.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance


Passed by 15.75 dB margin compare with average limit

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Worst Case: On

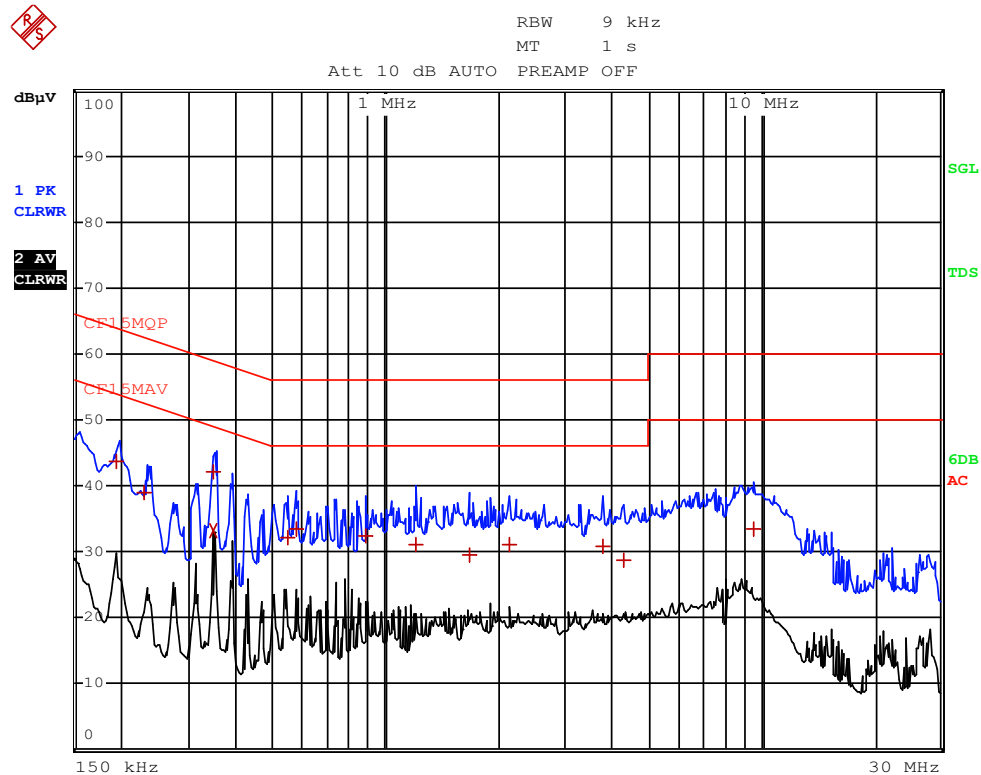

Date: 29.SEP.2014 10:31:46

Test Report Number: 14081065HKG-001

FCC ID: EW780-9480-00

IC: 1135B-80948000

Page 88 of 91

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Worst Case: On

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV		DELTA LIMIT dB
1 Quasi Peak	195 kHz	43.60	N	-20.21
1 Quasi Peak	231 kHz	39.10	L1	-23.31
2 CISPR Average	348 kHz	33.25	N	-15.75
1 Quasi Peak	352.5 kHz	42.02	L1	-16.88
1 Quasi Peak	546 kHz	32.14	L1	-23.85
1 Quasi Peak	577.5 kHz	33.47	N	-22.52
1 Quasi Peak	888 kHz	32.29	N	-23.70
1 Quasi Peak	1.2075 MHz	31.08	L1	-24.91
1 Quasi Peak	1.6755 MHz	29.53	L1	-26.46
1 Quasi Peak	2.13 MHz	31.10	L1	-24.89
1 Quasi Peak	3.786 MHz	30.82	N	-25.17
1 Quasi Peak	4.29 MHz	28.77	N	-27.22
1 Quasi Peak	9.582 MHz	33.58	N	-26.41

Date: 29.SEP.2014 10:31:41

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



EXHIBIT 5 EQUIPMENT LIST

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



5.0 Equipment List

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer	Biconical Antenna
Registration No.	EW-2666	EW-2188	EW-0571
Manufacturer	R&S	AGILENTTECH	EMCO
Model No.	ESCI7	E4407B	3104C
Calibration Date	Jun. 20, 2013	Apr. 16, 2014	Nov. 01, 2013
Calibration Due Date	Dec. 20, 2014	Apr. 16, 2015	May 01, 2015

Equipment	Log Periodic Antenna	Double Ridged Guide Antenna (1GHz - 18GHz)
Registration No.	EW-0446	EW-1133
Manufacturer	EMCO	EMCO
Model No.	3146	3115
Calibration Date	Apr. 30, 2013	Apr. 30, 2014
Calibration Due Date	Oct. 30, 2014	Oct. 30, 2015

2) Conducted Emissions Test

Equipment	EMI Test Receiver	Artificial Mains Network
Registration No.	EW-2251	EW-2501
Manufacturer	R&S	R&S
Model No.	ESCI	ENV-216
Calibration Date	Nov. 20, 2013	Dec. 25, 2013
Calibration Due Date	Nov. 20, 2014	Nov. 30, 2014

3) Conductive Measurement Test

Equipment	Spectrum Analyzer
Registration No.	EW-2249
Manufacturer	R&S
Model No.	FSP30
Calibration Date	Oct. 28, 2013
Calibration Due Date	Oct. 28, 2014

END OF TEST REPORT