



Tested By Hong, Report No.:0005370

Scan Settings (1 Range)


Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF	60dB

Final Measurement: x QP

Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No. Start Stop Name

21 9k 30M EW0698

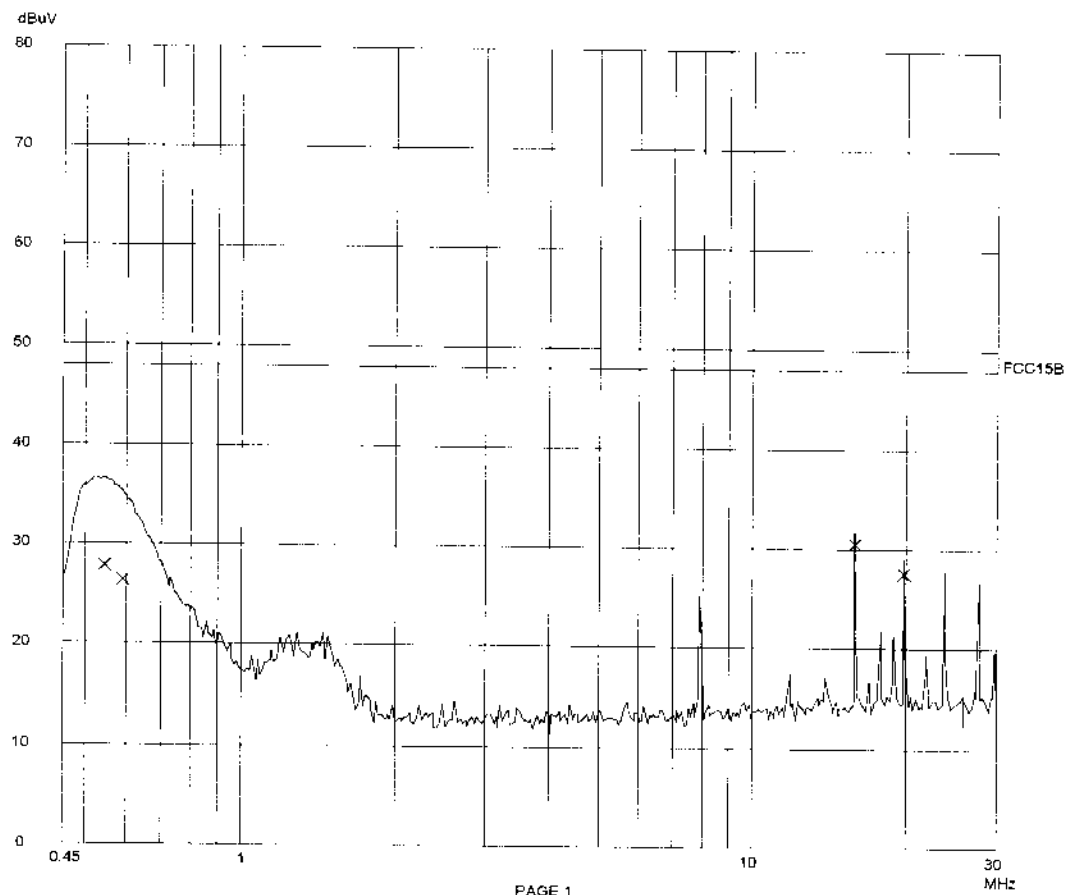



Intertek Testing Services
ETL SEMKO

Report No.: 0005370 *transmit mode*

Tested By: Hong, Report No.: 0005370

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV
0.54500	27.7	48.0
0.59000	26.3	48.0
15.87000	30.4	48.0
19.83500	27.5	48.0

* limit exceeded

Ctrl No.: N/A