

	Report No: R1199	FCC ID: EZ05PQ5290	
	Test No: T0042	Test Report	Page: 1 of 19



dB Technology

----- (Cambridge Ltd.) -----

EMC
Testing

EMC
Consultancy

EMC
Training

23, Headington Drive,
Cambridge.
CB1 4HE
Tel : 01954 251974 (test site)
or : 01223 241140 (accounts)
Fax : 01954 251907
web : www.dbtechnology.mcmail.com
email: dbtech@mcmail.com

REPORT ON ELECTROMAGNETIC COMPATIBILITY TESTS

Performed at:

TWENTY PENCE TEST SITE

Twenty Pence Road,
Cottenham,
Cambridge
U.K.
CB4 4PS

on

BEWATOR COTAG Ltd.

5298 Pin and Proximity Reader

dated

16 October 1999



Report No: R1199
Test No: T0042

FCC ID: EZ05PQ5290

Test Report

Page: 2 of 19

Equipment Under Test (EUT)

5298 Pin & Proximity Reader

Test Commissioned by:

BEWATOR COTAG
A Division of Bewator Group Ltd.,
Mercers Row
Cambridge
CB5 8EX

Representative:

Martin Young

Test Started:

8 October 1999

Test Completed:

8 October 1999

Test Engineer:

Dave Smith

Date of Report:

16 October 1999

Report:

Written by: Dave Smith

Checked by: D. BARLOW

Signature: D. A. Smith

Signature: D. Barlow

Date: 26/10/99

Date: 26/10/99

Test Standards Applied


CFR 47 : 1998 Code of Federal Regulations: Part 15 Subpart C - Radio Frequency Devices - PASS
Intentional Radiators

Test Results Summary

CFR 47 : 1998

PASS

Test	Port	Method	Limit	PASS/FAIL	Notes
Conducted Emissions	ac power	ANSI C63.4:1992	FCC pt 15 sub C	PASS	
Radiated Emissions		ANSI C63.4:1992	FCC pt 15 sub C	PASS	



Report No:	R1199
Test No:	T0042


FCC ID: EZ05PQ5290

Test Report

Page: 3 of 19

Contents

1 EUT Details	4
1.1 General	4
1.2 Modifications to EUT and Peripherals	4
1.3 EUT Operating Modes	5
<i>Figure 1 General Arrangement of EUT and Peripherals</i>	6
<i>Photograph 1 Conducted Emissions - Back</i>	7
<i>Photograph 2 Conducted Emissions - Front</i>	7
<i>Photograph 3 Radiated Emissions - Back</i>	8
<i>Photograph 4 Radiated Emissions - Front</i>	8
2 Test Equipment	9
3 Test Methods	10
3.1 Conducted Emissions - ac power	10
3.2 Radiated Emissions	10
4 Test Results	10
4.1 Conducted Emission Results	11
4.2 Radiated Emissions Results	12
<i>PLOT 1 Conducted Emission Scan - Live</i>	13
<i>PLOT 2 Conducted Emission Scan - Neutral</i>	14
<i>PLOT 3 Radiated Emission Scan: 25MHz - 275MHz</i>	15
<i>PLOT 4 Radiated Emission Scan: 250MHz - 1GHz</i>	16
<i>PLOT 5 Radiated Emission Scan: 100kHz - 490kHz</i>	17
<i>PLOT 6 Radiated Emission Scan: 450kHz - 1.45MHz</i>	18
<i>PLOT 7 Radiated Emission Scan: 1MHz - 30MHz</i>	19



Report No: R1199

FCC ID: EZO5PQ5290

Test No: T0042

Test Report

Page: 4 of 19

1 EUT Details

1.1 General

The EUT consisted of a Model 5298 Pin and Proximity Reader. The device is a variant of the Model 5290.

The EUT is an intentional radiator at a frequency of 132kHz and therefore the rules of CFR47 part 15 subsection C were applied.

The EUT contained no clocks or circuitry operating at or above 108MHz.

Details of the EUT and associated peripherals used during the tests are listed below. Figure 1 shows the interconnections between the EUT and peripherals.

Item	Manufacturer	Model	Description	Serial No:	FCC ID
1	Bewator Cotag	5298	EUT		EZO5PQP900
2	Bewator Cotag	P900	Control Unit		
3	Belser	A9526	110V - 24V ac adaptor	BE11645000AA 0001	

1.2 Modifications to EUT and Peripherals

Details of any modifications that were required to achieve compliance are listed below. The modification numbers are referred to in the results sections as appropriate.

Mod No:	Details
0	As received on 8 October 1999.



Report No: R1199

FCC ID: EZ05PQ5290

Test No: T0042

Test Report

Page: 5 of 19

1.3 EUT Operating Modes

The EUT was tested in the following operating mode or modes. Generally, operating modes are chosen that will exercise the functions of the EUT as fully as possible and in a manner likely to produce maximum emission levels or susceptibility. Individual test result sheets reference the operating mode of the EUT.

Operating Mode	Details
1	Normal operating mode with intentional transmitter always active.






Figure 1 General Arrangement of EUT and Peripherals

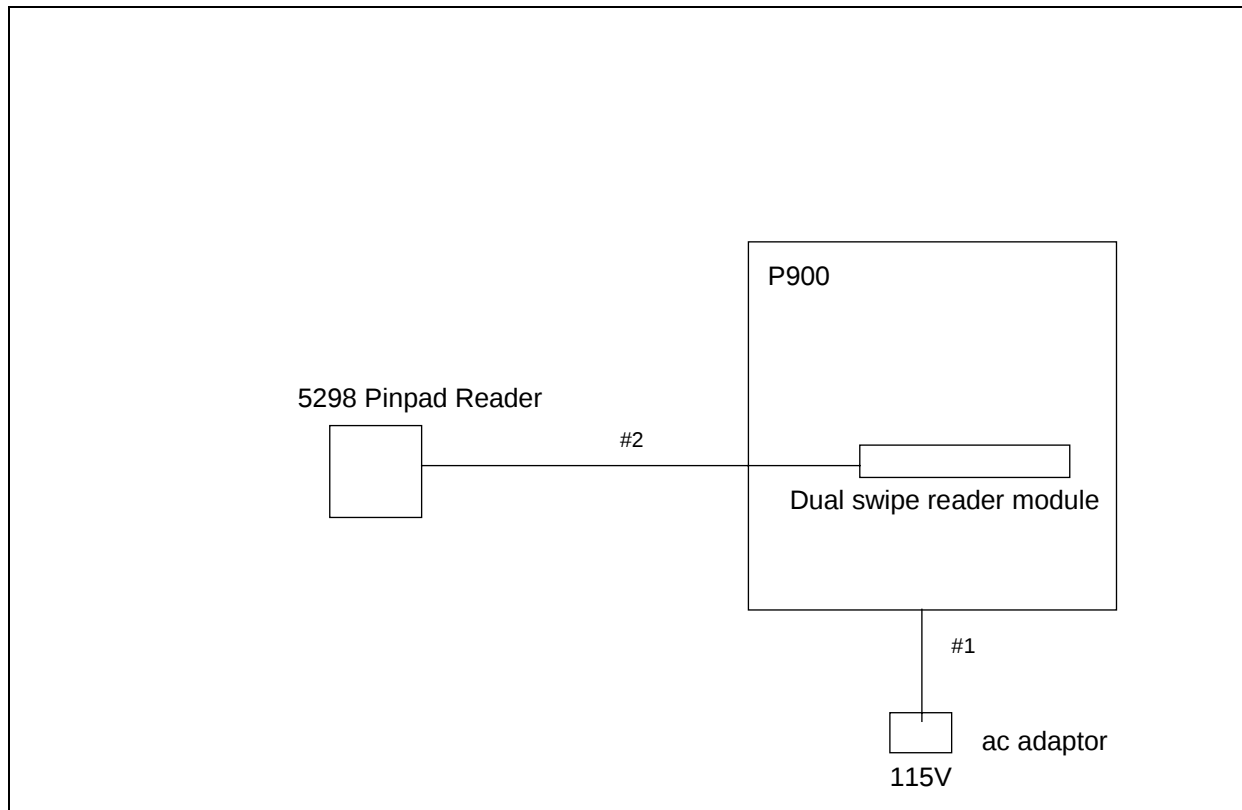

- #1 1.5m spiral wrap screen
- #2 2m braid screen data cable



Report No: R1199
Test No: T0042

FCC ID: EZ05PQ5290


Test Report


Page: 7 of 19

Photograph 1 Conducted Emissions - Back



Photograph 2 Conducted Emissions - Front

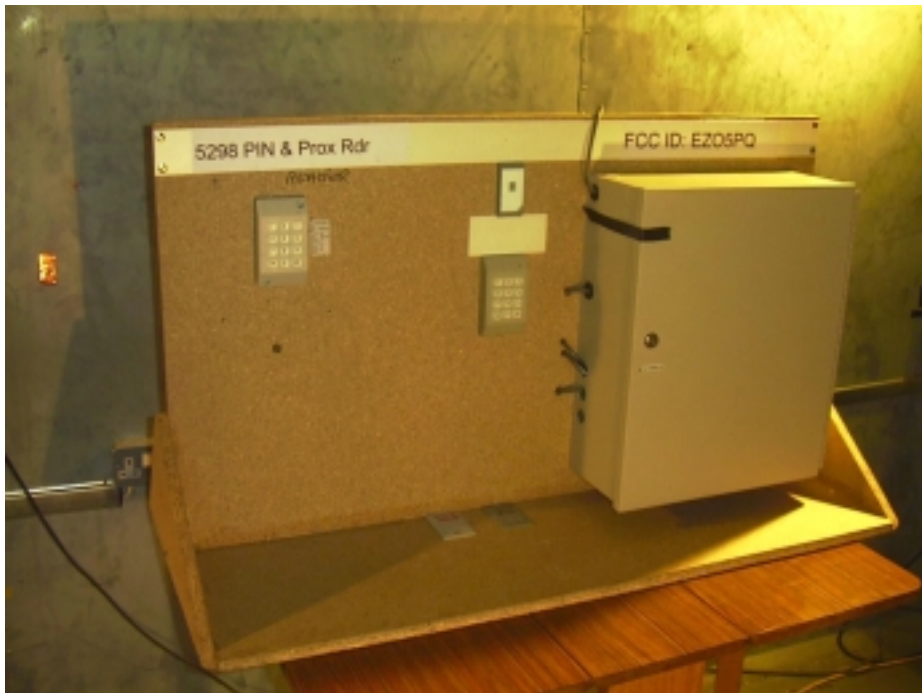



Report No:	R1199
Test No:	T0042

FCC ID: EZ05PQ5290

Test Report


Page: 8 of 19

Photograph 3 Radiated Emissions - Back



Photograph 4 Radiated Emissions - Front





Report No: R1199

FCC ID: EZ05PQ5290

Test No: T0042


Test Report

Page: 9 of 19

2 Test Equipment

The test equipment used during the tests was one or more of the items listed below. Individual test result sheets indicate which items were used.

Ref No:	Manufacturer	Model	Description	Serial	Cal Date
R1	Chase	LHR7000	RF Receiver 10kHz - 30MHz	1056	30 June 99
R4	Rohde and Schwarz	ESVHS10	RF Receiver 20MHz - 1GHz	843744/00	23 June 99
R5 R5B	Hewlett Packard Hewlett Packard	HP 8595E HP87405A	Spectrum Analyser Pre-amp	3412A00701 3207A00322	1 Oct 98
L1	EMCO	1912.5	LISN	1358	18 Mar 99
L2	Rohde and Schwarz	ESH3-Z5	LISN	843862/009	18 Mar 99
A2	EMCO	3146	Log Periodic Antenna 200MHz - 1GHz	2011	15 Jul 99
A4	Chase	CBL6112	Bilog Antenna 30MHz - 2GHz	2027	15 Jul 99
A5	Chase	CBL111A	Bilog Antenna 30MHz - 1GHz	1760	15 Jul 99
A7	EMCO	6502	Active Loop 9kHz - 30MHz	2139	1 Oct 99



Report No:	R1199
Test No:	T0042

FCC ID: EZ05PQ5290

Test Report

Page: 10 of 19

3 Test Methods

3.1 Conducted Emissions - ac power

This section describes the general method of performing this test. The specific method used and any deviations from this general method are listed in the appropriate results section.

Bench top EUTs and peripheral equipment are normally placed on a 0.8m high non-conducting bench, positioned 0.4m from one of the metallic walls of a screened room. Floor standing EUTs are normally placed 0.1m above the metallic floor of the screened room. Mains leads are bundled so as not to exceed 1m.

The EUT is powered using a 50ohm/50uH Line Impedance Stabilisation Network (LISN). Peripherals are powered using a second a 50ohm/50uH LISN. These LISNs are bonded to the screened room floor.

With the correct supply voltage applied to the EUT scans are performed on both the live and neutral line outputs of the LISN using quasi-peak detection over the specified frequency range. The results of these scans are shown in the plots section at the end of the report.

Significant emissions identified by the scans are measured and the results tabulated. The table of results is shown in the conducted emissions results section.

3.2 Radiated Emissions


This section describes the general method of performing this test. The specific method used and any deviations from this general method are listed in the appropriate results section.

Initial scans are performed in a semi-anechoic screened room at a distance of 3m. Scans are performed over the frequency range 30MHz to 1GHz with the antenna both horizontally and vertically polarised. During these scans the EUT and peripherals are rotated through 360°. Bench top EUTs are placed on a non-conducting bench at a height of 0.8m above the ground plane. Floor standing EUTs are placed 0.1m above the ground plane. The results of the scans are shown in the plots included at the end of the report.

Significant emissions identified by the scans are measured on an open area test site at the appropriate test distance using a CISPR16 quasi-peak receiver. Maximised readings are obtained by rotating the EUT through 360° and adjusting the height of the antenna from 1m to 4m. Measurements are made with the antenna both horizontally and vertically polarised and the results tabulated.

4 Test Results

The following sections contain tabulated test results. Plots of various scans are included at the back of this section.



Report No: R1199
Test No: T0042

FCC ID: EZ05PQ5290

Test Report

Page: 11 of 19

4.1 Conducted Emission Results

Test Equipment: Factor Set 1: EMLISN RG214 10 m cable

Conducted Emissions

Company:	BEWATOR COTAG Ltd.	Product:	5298
Date:	8 October 1999	Test Eng:	Dave Smith
Ports:	ac power		
Test:	ANSI C63.4:1992 using limits of FCC pt 15 sub C		
Ports:			
Test:			

Test	Op Mode	Mod State	Line (L/N)	Fact Set	Freq. MHz	Det qp/av	Rec. Level dBuV	Corr'n Factor dB	Total Level dBuV	Limit FCCB dBuV/m	Margin FCCB dBuV/m	Limit	Margin	Notes	
C1	1	0	L	1	5.542	qp	43.1	0.2	43.3	48.0	4.7				
C1	1	0	L	1	7.391	qp	37.3	0.2	37.5	48.0	10.5				
C1	1	0	L	1	9.240	qp	38.9	0.2	39.1	48.0	8.9				
C1	1	0	L	1	14.783	qp	37.4	0.2	37.6	48.0	10.4				
C1	1	0	L	1	16.630	qp	29.6	0.3	29.9	48.0	18.1				
C1	1	0	L	1	29.494	qp	36.5	0.3	36.8	48.0	11.2				
C2	1	0	N	1	5.544	qp	50.3	0.2	50.5	48.0	-2.5			#1	
C2	1	0	N	1	5.544	av	39.2	0.2	39.4	48.0	8.6				
C2	1	0	N	1	5.544	qp	37.3	0.2	37.5	48.0	10.5			#2	
C2	1	0	N	1	7.391	qp	36.5	0.2	36.7	48.0	11.3				
C2	1	0	N	1	9.241	qp	40.1	0.2	40.3	48.0	7.7				
C2	1	0	N	1	14.783	qp	32.3	0.2	32.5	48.0	15.5				
C2	1	0	N	1	25.871	qp	25.3	0.3	25.6	48.0	22.4				
C2	1	0	N	1	29.494	qp	35.6	0.3	35.9	48.0	12.1				
Results										Minimum Margin PASS/FAIL		4.7 dB PASS			
Notes		Comments and Observations													
#1		Results of scans shown in Plot 1 and Plot 2													
#1		Exceeded limit of 48dBuV but average reading was more than 6dB below quasi-peak reading therefore 13dB reduction of quasi-peak reading permitted by 15.207.													
#2		Reading when 13dB reduction applied.													



Report No: R1199
Test No: T0042

FCC ID: EZ05PQ5290

Test Report

Page: 12 of 19

4.2 Radiated Emissions Results

Test Equipment: Factor Set 1: HFBilog RG214 25 m cable
Factor Set 2: Loop RG214 25 m cable

Radiated Emissions

Company:	BEWATOR COTAG Ltd.	Product:	5298
Date:	8 October 1999	Test Eng:	Dave Smith
Test:	ANSI C63.4:1992 using limits of FCC pt 15 sub C		
Test:			

Test	Op Mode	Mod State	Dist m	Fact Set	Freq. MHz	Ant Pol	Rec. Level dBuV	Corr'n Factor dB/m	Total Level dBuV/m	Limit FCC(C) dBuV/m	Margin FCC(C) dBuV/m	Limit	Margin	Notes
R1	1	0	10	2	0.132	C	41.1	10.6	51.7	85.2	33.5			#1
R2	1	0	3	2	0.132	C	69.1	10.6	79.7	105.2	25.5			#1
R3	1	0	3	1	31.400	H	0.6	18.8	19.4	40.0	20.6			
R3	1	0	3	1	44.248	H	11.8	11.8	23.6	40.0	16.4			
R3	1	0	3	1	62.845	V	14.1	7.7	21.8	40.0	18.2			
R3	1	0	3	1	74.872	V	19.3	8.0	27.3	40.0	12.7			
R3	1	0	3	1	81.111	H	25.2	8.8	34.0	40.0	6.0			
R3	1	0	3	1	86.637	H	27.2	9.9	37.1	40.0	2.9			
R3	1	0	3	1	88.500	V	23.0	10.3	33.3	43.5	10.2			
R3	1	0	3	1	110.869	H	12.4	13.9	26.3	43.5	17.2			
R3	1	0	3	1	112.733	V	15.6	14.0	29.6	43.5	13.9			
R3	1	0	3	1	120.103	H	13.3	14.2	27.5	43.5	16.0			
Results					Minimum Margin PASS/FAIL					2.9 dB PASS				
Notes		Comments and Observations												
#1		Results of screened room scans shown in Plot 3 to Plot 7 Limit extrapolated using 40dB per decade as per section 15.31(f)(2) V= vertical, H= horizontal, C= co-axial												



Cable BM3 5.21

Notes

Analysis 991006 CL Catag 5295


Test: BM350ZZ(S) & VfgZ43/1991 Motor Feed (QF Det)

RF level

dBuV

991006 CL Co

Quasi-peak

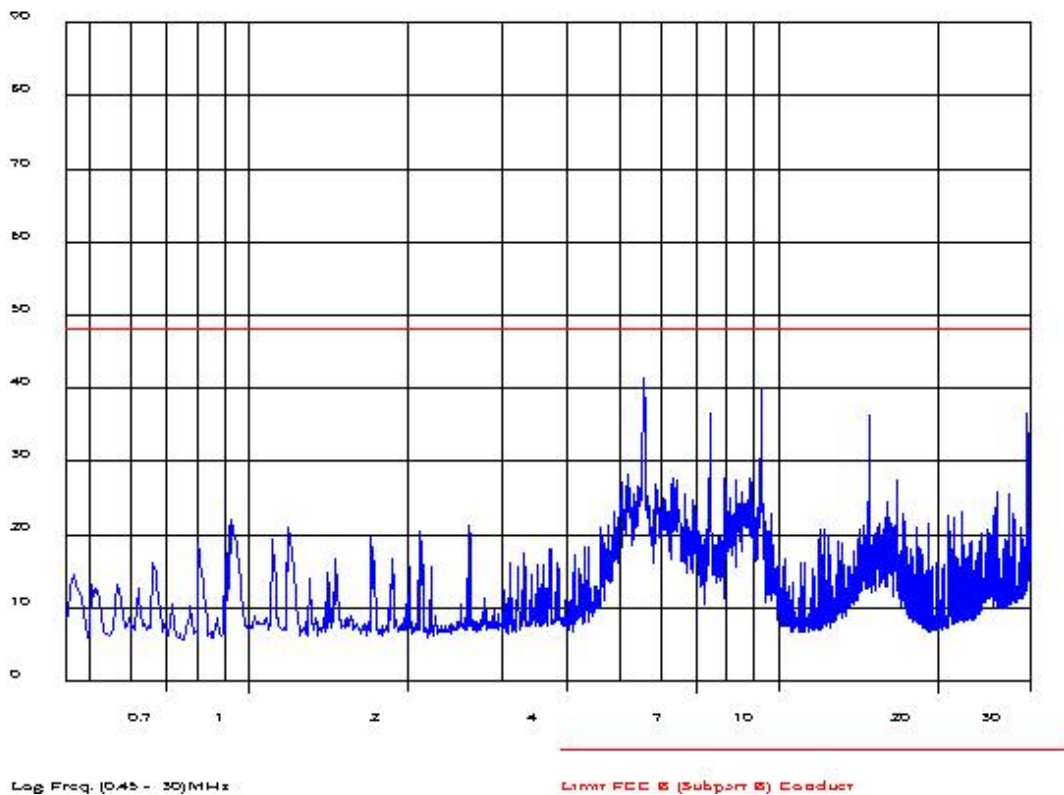

Frequency List (MHz)

5.542	29.494		
7.391	29.564		
9.240			
14.783			
16.630			

PLOT 1 Conducted Emission Scan - Live

Test	Line	Mod	Op. Mode	Test Engineer	Date
C1	L	0	1	DS	8 Oct 99



Report No: R1199
Test No: T0042

FCC ID: EZ05PQ5290

Test Report

Page: 14 of 19

Basic RMS 5.21

Notes

Analysis 991006 E2M Catag 5295


Test: RM550ZZ(S) & Vfg243/1991 Motor Load (QF Det)

RF level

dBuV

991006 E2M C

Quasi-peak

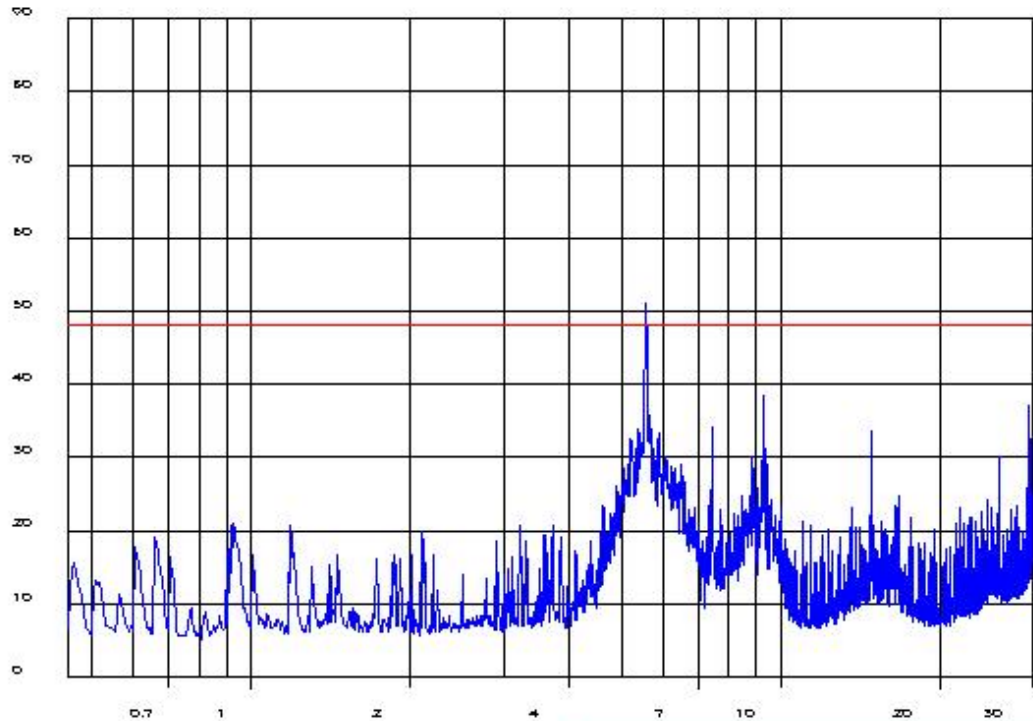

Log Freq. (0.45 - 30)MHz

Limit FCC B (Subpart B) Conduct

Frequency List (MHz)

5.544	9.240		
5.894	29.566		
7.391			
9.241			
14.783			

Plot 2

Conducted Emission Scan - Neutral

Test	Line	Mod	Op. Mode	Test Engineer	Date
C2	N	0	1	DS	8 Oct 99




Report No: R1199
Test No: T0042

FCC ID: EZ05PQ5290

Test Report

Page: 15 of 19

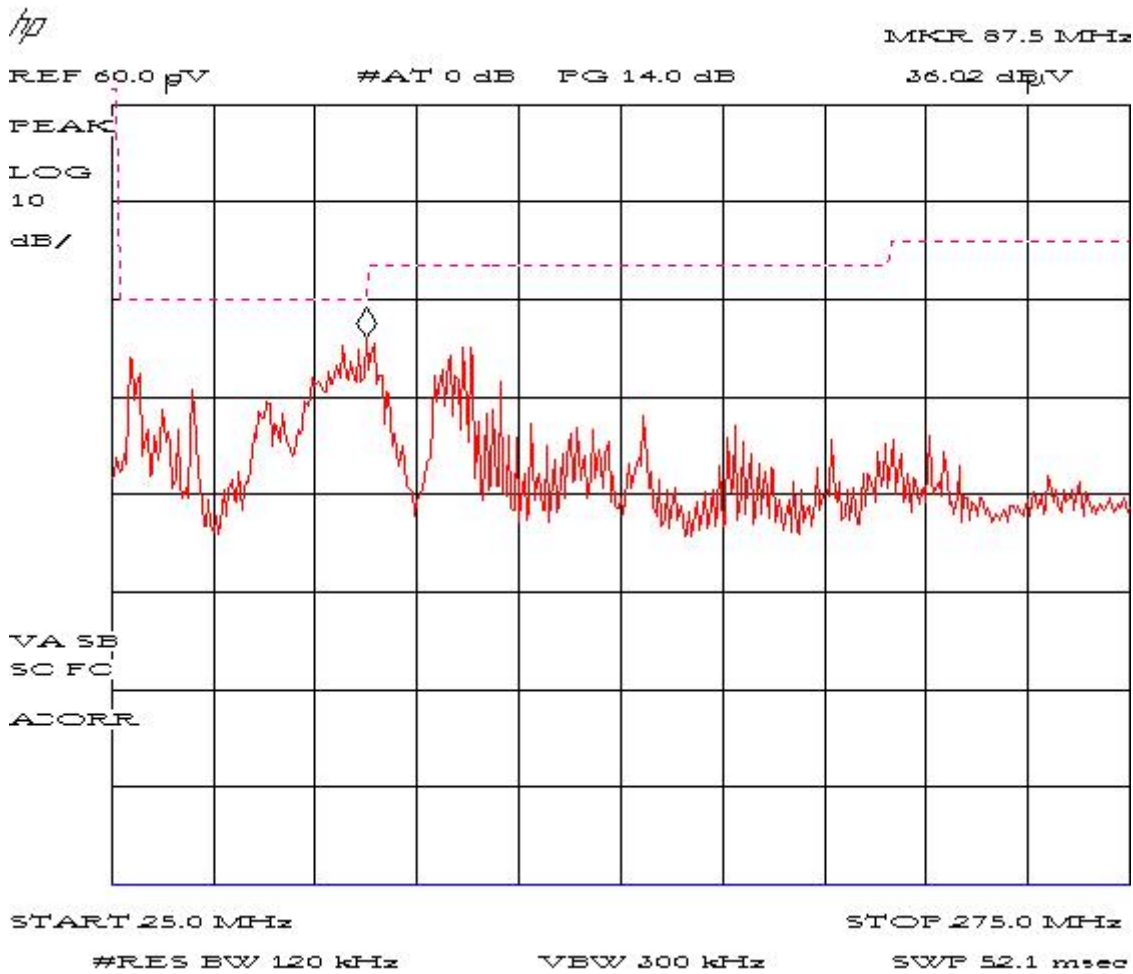


Frequency List (MHz)

31.400	86.637	216.210	
44.248	88.500	218.058	
62.845	110.869		
74.872	112.733		
81.111	120.103		

Plot 3 Radiated Emission Scan: 25MHz - 275MHz

Test	Pol	Dist. (m)	Height (m)	Mod	Op. Mode	Test Engineer	Date
R3	V+H	3	1	0	1	DS	8 Oct 99




Report No: R1199
Test No: T0042

FCC ID: EZ05PQ5290


Test Report

Page: 16 of 19

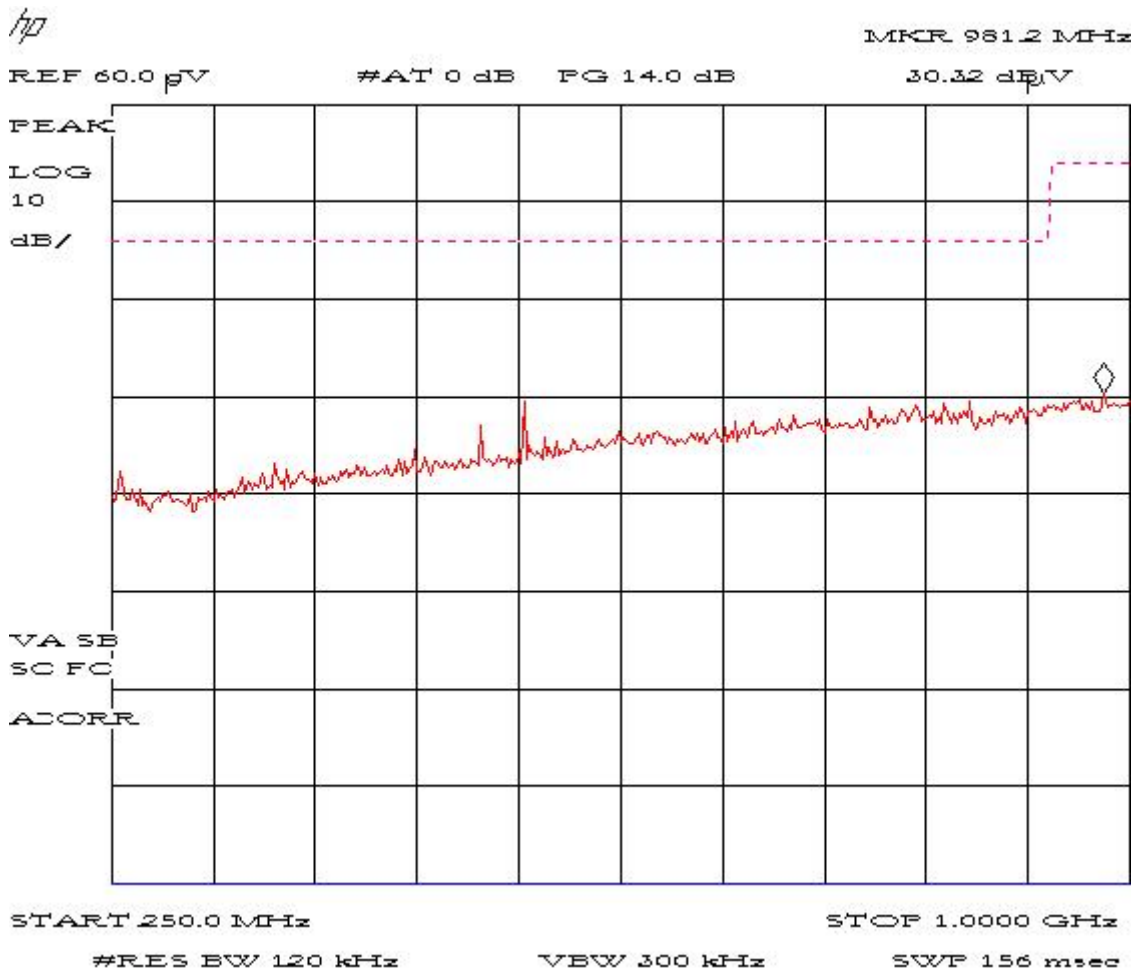

Plot 4 Radiated Emission Scan: 250MHz - 1GHz

Test	Pol	Dist. (m)	Height (m)	Mod	Op. Mode	Test Engineer	Date
R3	V+H	3	1	0	1	DS	8 Oct 99




Report No: R1199
Test No: T0042

FCC ID: EZ05PQ5290

Test Report

Page: 17 of 19

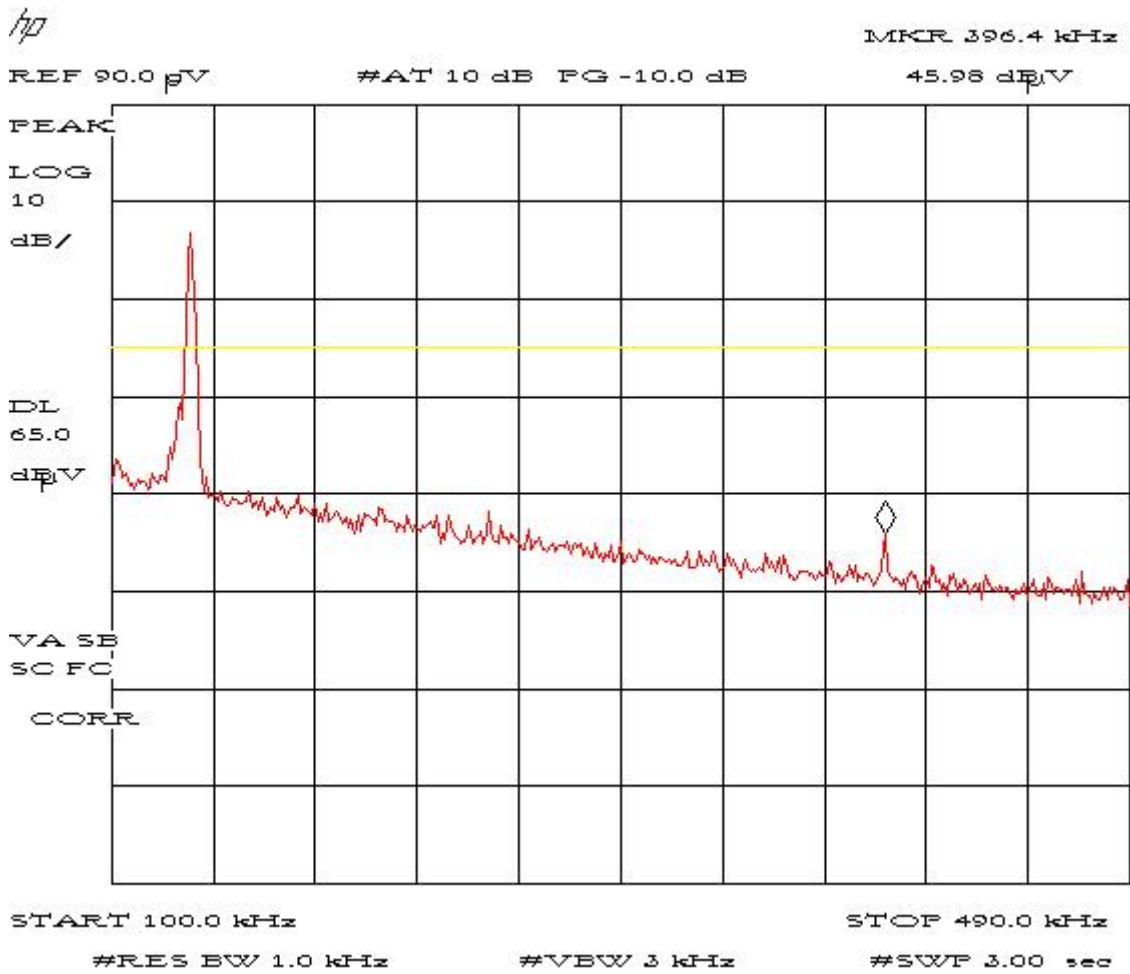

Only significant frequency = fundemental at 132kHz


Plot 5 Radiated Emission Scan: 100kHz - 490kHz

Test	Pol	Dist. (m)	Height (m)	Mod	Op. Mode	Test Engineer	Date
R1	C+O	3	1	0	1	DS	8 Oct 99

c=co-axial

o=orthagonal

limit varies with frequency - line shown on graph = lowest limit level




Report No: R1199

FCC ID: EZ05PQ5290

Test No: T0042

Test Report

Page: 18 of 19

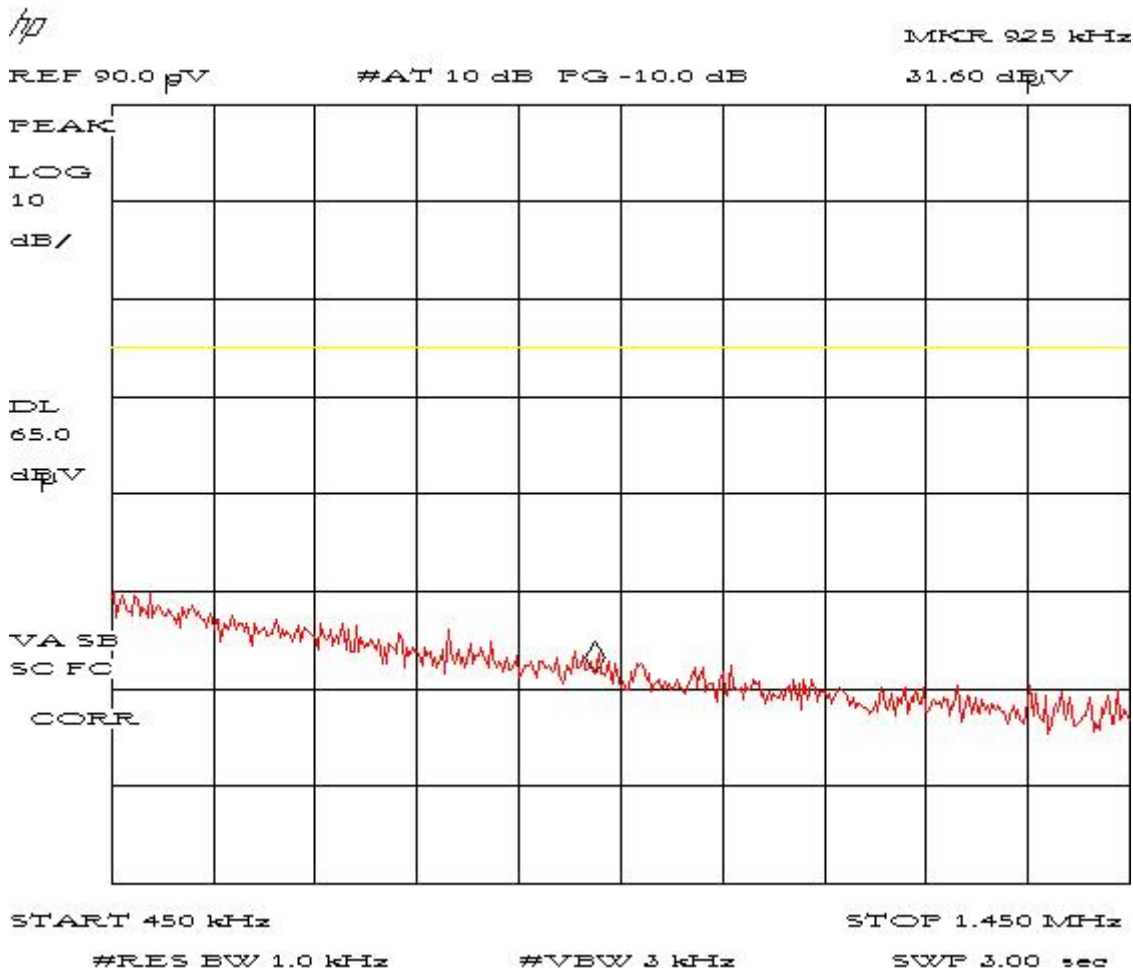
**PLOT 6 Radiated Emission Scan: 450kHz - 1.45MHz**

Test	Pol	Dist. (m)	Height (m)	Mod	Op. Mode	Test Engineer	Date
R1	C+O	3	1	0	1	DS	8 Oct 99

c=co-axial

o=orthagonal

limit varies with frequency - line shown on graph = lowest limit level




Report No: R1199
Test No: T0042

FCC ID: EZO5PQ5290

Test Report

Page: 19 of 19

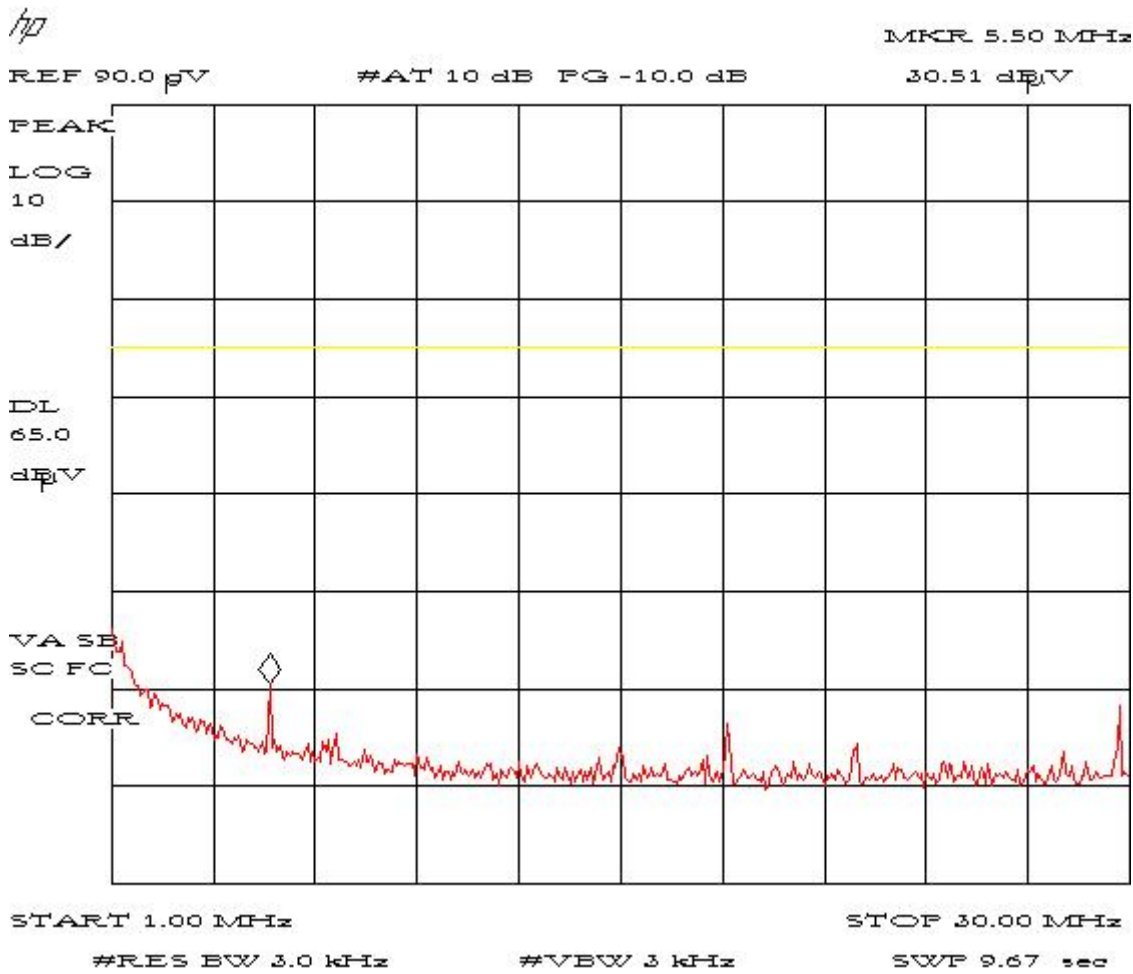

Plot 7 Radiated Emission Scan: 1MHz - 30MHz

Test	Pol	Dist. (m)	Height (m)	Mod	Op. Mode	Test Engineer	Date
R1	C+O	3	1	0	1	DS	8 Oct 99

c=co-axial
o=orthagonal
limit varies with frequency - line shown on graph = lowest limit level