



MOTOROLA
intelligence everywhere™

SBG1000 Wireless Cable Modem Gateway User Guide



SURFboard®
Cable Modem

Next page ►

WARNING: TO PREVENT FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE. THE UNIT MUST NOT BE EXPOSED TO DRIPPING OR SPLASHING. DO NOT PLACE OBJECTS FILLED WITH LIQUIDS, SUCH AS VASES, ON THE UNIT.

CAUTION: TO PREVENT ELECTRICAL SHOCK, THIS EQUIPMENT REQUIRES A GROUNDING CONDUCTOR IN THE LINE CORD. THE LINE CORD PROVIDED WITH THE EQUIPMENT IS ACCEPTABLE FOR USE WITH NEMA STYLE 5-15R AC RECEPTACLE SUPPLYING NOMINAL 120 VOLTS. DO NOT CONNECT THE PLUG INTO AN EXTENSION CORD, RECEPTACLE, OR OTHER OUTLET UNLESS THE PLUG CAN BE FULLY INSERTED WITH NO PART OF THE BLADES EXPOSED.

CAUTION: TO ENSURE REGULATORY AND SAFETY COMPLIANCE, USE ONLY THE PROVIDED POWER AND INTERFACE CABLES.

CAUTION: DO NOT OPEN THE UNIT. DO NOT PERFORM ANY SERVICING OTHER THAN THAT CONTAINED IN THE INSTALLATION AND TROUBLESHOOTING INSTRUCTIONS. REFER ALL SERVICING TO QUALIFIED SERVICE PERSONNEL.

CAUTION: CHANGES AND MODIFICATIONS NOT EXPRESSLY APPROVED BY MOTOROLA FOR COMPLIANCE COULD VOID USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

CAUTION: Exposure to Radio Frequency Radiation. To comply with the FCC RF exposure compliance requirements, the separation distance between the antenna and any person's body (including hands, wrists, feet and ankles) must be at least 20 cm (8 inches).

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device must be installed and used in strict accordance with the manufacturer's instructions as described in the user documentation that comes with the product.

Postpone cable modem installation until there is no risk of thunderstorm or lightning activity in the area.

Do not overload outlets or extension cords, as this can result in a risk of fire or electric shock. Overloaded AC outlets, extension cords, frayed power cords, damaged or cracked wire insulation, and broken plugs are dangerous. They may result in a shock or fire hazard.

Route power supply cords so that they are not likely to be walked on or pinched by items placed upon or against them. Pay particular attention to cords where they are attached to plugs and convenience receptacles, and examine the point where they exit from the product.

Place this equipment in a location that is close enough to an electrical outlet to accommodate the length of the power cord.

Place this equipment on a stable surface.

Be sure that the outside cable system is grounded, so as to provide some protection against voltage surges and built-up static charges. Article 820-20 of the NEC (Section 54, Part I of the Canadian Electrical Code) provides guidelines for proper grounding and, in particular, specifies the CATV cable ground shall be connected in the grounding system of the building, as close to the point of cable entry as practical.

When using this device, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury to persons, including the following:

- Read all of the instructions {listed here and/or in the user manual} before you operate this equipment. Give particular attention to all safety precautions. Retain the instructions for future reference.
- Comply with all warning and caution statements in the instructions. Observe all warning and caution symbols that are affixed to this equipment.
- Comply with all instructions that accompany this equipment.
- *Avoid using this product during an electrical storm.* There may be a risk of electric shock from lightning. For added protection for this product during a lightning storm, or when it is left unattended and unused for long periods of time, unplug it from the wall outlet, and disconnect the cable system. This will prevent damage to the product due to lightning and power surges.
- Avoid damaging the cable modem with static by touching the coaxial cable when it is attached to the earth grounded coaxial cable TV wall outlet.
- Always first touch the coaxial cable connector on the cable modem when disconnecting or re-connecting USB or Ethernet cable from the cable modem or the user's PC.
- Operate this product only from the type of power source indicated on the product's marking label. If you are not sure of the type of power supplied to your home, consult your dealer or local power company.
- Upon completion of any service or repairs to this products, ask the service technician to perform safety checks to determine that the product is in safe operating condition.

It is recommended that the customer install an AC surge protector in the AC outlet to which this device is connected. This is to avoid damaging the equipment by local lightning strikes and other electrical surges.

Different types of cord sets may be used for connections to the main supply circuit. Use only a main line cord that complies with all applicable product safety requirements of the country of use.

Installation of this product must be in accordance with national wiring codes.

Place unit to allow for easy access when disconnecting the power cord/adaptor of the device from the AC wall outlet.

Wipe the unit with a clean, dry cloth. Never use cleaning fluid or similar chemicals. Do not spray cleaners directly on the unit or use forced air to remove dust.

This product was qualified under test conditions that included the use of the supplied cables between system components. To be in compliance with regulations, the user must use these cables and install them properly. Connect the unit to a grounding type AC wall outlet (100-240 V AC) using the standard power cord/adaptor as supplied with the unit.

Do not cover the device, or block the airflow to the device with any other objects. Keep the device away from excessive heat and humidity and keep the device free from vibration and dust.

Installation must at all times conform to local regulations.



This product is provided with a separate *Regulatory, Safety, Software License, and Warranty Information* card. If one is not provided with this product, please ask your service provider or point-of-purchase representative, as the case may be.

- THIS PRODUCT IS IN COMPLIANCE WITH ONE OR MORE OF THE STANDARDS LISTED ON THE *REGULATORY, SAFETY, SOFTWARE LICENSE, AND WARRANTY INFORMATION* CARD. NOT ALL STANDARDS APPLY TO ALL MODELS.
- NO WARRANTIES OF ANY KIND ARE PROVIDED BY MOTOROLA WITH RESPECT TO THIS PRODUCT, EXCEPT AS STATED ON THE *REGULATORY, SAFETY, SOFTWARE LICENSE, AND WARRANTY INFORMATION* CARD. MOTOROLA'S WARRANTIES DO NOT APPLY TO PRODUCT THAT HAS BEEN REFURBISHED OR REISSUED BY YOUR SERVICE PROVIDER.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Copyright © 2002 by Motorola, Inc.

All rights reserved. No part of this publication may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation or adaptation) without written permission from Motorola, Inc.

Motorola reserves the right to revise this publication and to make changes in content from time to time without obligation on the part of Motorola to provide notification of such revision or change. Motorola provides this guide without warranty of any kind, either implied or expressed, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Motorola may make improvements or changes in the product(s) described in this manual at any time.

MOTOROLA and the Stylized M Logo are registered in the US Patent & Trademark Office. Microsoft and Windows are registered trademarks and Windows Me and Windows XP are trademarks of Microsoft Corporation. Microsoft Windows screen shots are used by permission of Microsoft Corporation. Macintosh and AppleTalk are registered trademarks of Apple Computer, Inc. Iomega is a registered trademark of Iomega Corporation. Linux is a registered trademark of Linus Torvalds. Acrobat Reader is a registered trademark of Adobe Systems, Inc. Netscape and Navigator are registered trademarks of Netscape Communications Corporation. UNIX is a registered trademark of the Open Group in the United States and other countries. All other product or service names are the property of their respective owners. © Motorola, Inc. 2002.

Contents

Overview	1	Firewall Pages in the SBG1000 Setup Program	37
Powerful Features in a Single Unit	2	Firewall > POLICY — basic Page	38
Easy Setup	2	Firewall > POLICY — advanced Page	39
Sample LAN	3	Firewall > ALERT — basic Page	40
Optional Accessories	4	Firewall > ALERT — email Page	41
Front Panel	6	Firewall > LOGS Page	42
Rear Panel	8		
Label on the Bottom of the Unit	9	Configuring the Gateway	43
Wiring the SBG1000 LAN	9	Gateway > STATUS Page	44
Wired Ethernet LAN	10	Gateway > WAN Page	45
USB Connection	12	Gateway > LAN — nat config Page	47
HPNA LAN	13	Gateway > LAN — dhcp server config Page	48
IEEE 802.11b Wireless LAN	14	Gateway > LAN — dhcp reservations Page	49
Security	15	Gateway > ALG — basic Page	50
Firewall	15	Gateway > ALG — advanced Page	50
DMZ	16	Gateway > LOG Page	51
Wireless Security	16		
Virtual Private Networks	16	Configuring TCP/IP	53
Print Server	17	Configuring TCP/IP in Windows 95, Windows 98, or	
Related Documentation	17	Windows Me	54
		Configuring TCP/IP in Windows 2000	56
		Configuring TCP/IP in Windows XP	60
		Verifying the IP Address in Windows 95, Windows 98,	
		or Windows Me	64
		Verifying the IP Address in Windows 2000 or Windows XP	65
Installation	19		
Before You Begin	19	Setting Up the Wireless LAN	67
Precautions	20	Configuring a Unique Wireless Network Name	68
Signing Up for Service	21	Configuring Basic Wireless LAN Security	69
Computer System Requirements	21	Configuring Wireless Clients	70
Connecting the SBG1000 to the Cable System	22	Wireless Pages in the SBG1000 Setup Program	70
Cabling the Ethernet or HPNA LAN	23	Wireless > STATUS Page	71
Obtaining an IP address in Windows 98, Windows 98		Wireless > NETWORK Page	72
SE, or Windows Me	23	Wireless > SECURITY — basic Page	73
Obtaining an IP address in Windows 2000 or		Wireless > SECURITY — advanced Page	74
Windows XP	23	Wireless > STATISTICS page	75
Obtaining an IP address on Macintosh or UNIX Systems	23		
Connecting a PC to the USB Port	24	Configuring the Print Server	77
Setting Up the Wireless LAN	24	Configuring the SBG1000 Print Server	77
Connecting the Printer	24	Printer > CONFIGURATION — Microsoft smb Page	78
Wall Mounting the Wireless Gateway	25	Printer > CONFIGURATION — Apple Page	79
Wall Mounting Template	27	Printer > CONFIGURATION — lpr Page	80
Installing the Optional External Diversity Antenna	28	Adding a Printer in Windows 98 or Windows Me	80
		Adding a Printer in Windows 2000	86
Configuring the SBG1000	31		
Starting the SBG1000 Setup Program	32		
Changing the Default Password	34		
Getting Help	35		
Setting the Firewall Policy	36		



Setting Up a USB Driver 95

Setting Up a USB Driver in Windows 98	96
Setting Up a USB Driver in Windows 2000	100
Setting Up a USB Driver in Windows Me	103
Setting Up a USB Driver in Windows XP	104
Removing the USB Driver from Windows 98 or Windows Me	105
Removing the USB Driver from Windows 2000	108
Removing the USB Driver from Windows XP	111

Troubleshooting 117

Front-Panel Lights and Error Conditions	117
---	-----

Contact Us 119

Frequently-Asked Questions 121

Specifications 123

General Specifications	123
Cable Modem Specifications	124

Glossary 125

Software License 143

Overview

Thank you for purchasing the Motorola® SBG1000 Wireless Cable Modem Gateway. The SBG1000 combines a SURFboard™ cable modem, [IEEE 802.11b](#) wireless [access point](#), [router](#) with five-port 10/100Base-T [switch](#), print server, and an advanced [firewall](#) into one compact product. It is the perfect networking solution for the home, home office, or small business/enterprise. You can create a custom network to share a single [broadband](#) connection, files, printers, and other peripherals like scanners, with or without wires.

The SBG1000:

- Eliminates the need for five separate products, enabling you to maximize the potential of your existing resources
- Offers enhanced network security for wired and wireless users
- Enables operators to add future value-added services



The features and physical appearance of your SBG1000 may differ slightly from the picture.

This product is subject to change. Not all features described in this *User Guide* are available on all SBG1000 models. For the most recent documentation, visit the [Product Documentation](#) page on www.motorola.com/broadband.

Powerful Features in a Single Unit

The Motorola SBG1000 Wireless Cable Modem Gateway combines high-speed Internet access, networking, and computer security for a home or small-office local area network ([LAN](#)). It provides:

- An integrated high-speed SURFboard cable modem for continuous [broadband](#) access to the Internet and other online services, with much faster data transfer than traditional dial-up or ISDN modems.
- A [router](#) with a five-port 10/100Base-T [Ethernet switch](#), supporting:
 - Half- or full-[duplex](#) connections
 - Five dual-purpose switch/uplink ports
 - [Auto-MDIX](#)
- An [IEEE 802.11b Wi-Fi](#) certified wireless [access point](#) to enable laptop users to remain connected while moving around the home or small office or to connect desktop computers without installing network wiring. Depending on distance, wireless connection speeds can match that of Ethernet at 11 Mbps.
- An [HPNA](#) connection to connect computers to the LAN over existing telephone wiring — this provides the advantage of using your existing phone lines for network wiring with up to 10 Mbps throughput.
- A [USB](#) connection for a single PC.
- A single broadband connection for up to 253 computers to surf the web; all computers on the Ethernet, wireless, HPNA LAN, and USB communicate as if they were connected to the same physical network.
- A built-in [DHCP](#) server to easily configure a combined wired and/or wireless [Class C private LAN](#).
- An advanced [firewall](#), supporting:
 - [stateful-inspection](#)
 - Intrusion detection
 - DMZ
 - Denial-of-service attack prevention
 - Network Address Translation (NAT)
- Virtual private network ([VPN](#)) [pass-through](#) operation supporting [IPSec](#), [PPTP](#), or [L2TP](#) to securely connect remote computers over the Internet.
- A print server to enable Windows[®], Macintosh[®], UNIX[®], and Linux[®] computers to share one or more printers.

Easy Setup

It is much easier to configure a [LAN](#) using the Motorola SBG1000 Wireless Cable Modem Gateway than it is using typical networking equipment:


- The Installation Assistant application on the *Motorola SBG1000 Wireless Cable Modem Gateway* CD-ROM enables easy connection to the cable network.
- For basic operation, most default settings require no modification.
- The Setup Program provides a graphical user interface ([GUI](#)) for easy configuration of necessary wireless, Ethernet, router, DHCP, and security settings. For a list of important issues, see “[Configuring the SBG1000](#)” on page 31.

Sample LAN

The sample LAN shown in the figure contains the following devices, all protected by the SBG1000 firewall:

- A printer connected to the print server through the parallel connection
- A PDA connected through the wireless IEEE 802.11b connection
- One desktop Macintosh on a wireless connection
- One desktop PC on a wireless connection using a Motorola USB Adapter
- A laptop PC on a wireless connection connected using a Motorola PC Card
- One computer connected directly to Ethernet port one
- Three computers connected to Ethernet port two using a hub or switch
- Two computers connected over telephone wiring through HPNA
- One PC connected to the USB port

Sample SBG1000 hybrid network

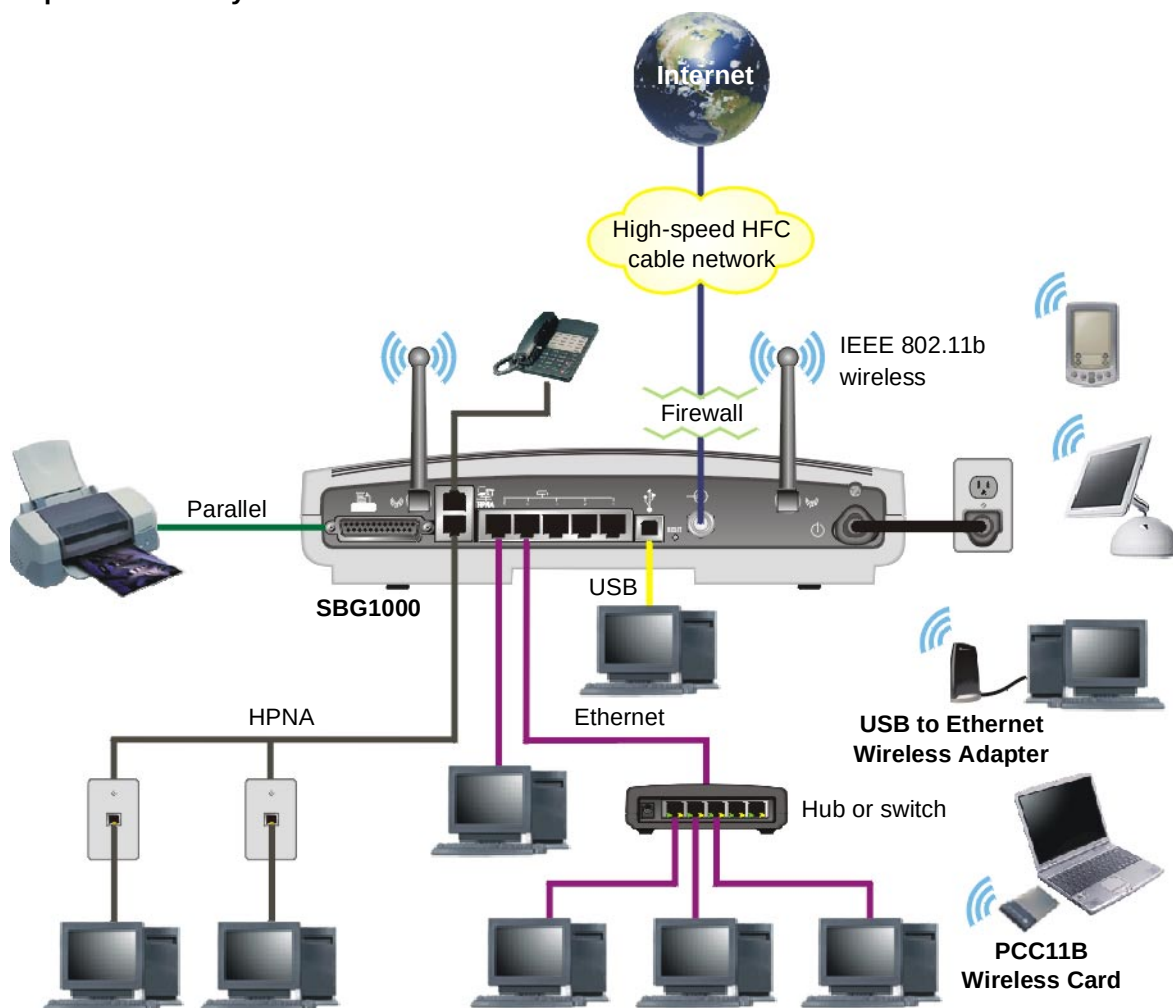



Optional Accessories

Accessories available for the Motorola SBG1000 Wireless Cable Modem Gateway include wireless adapters and an external high-gain diversity antenna.

You can use the Motorola PCC11b wireless card or the USB11b wireless adapter, which comply with the IEEE 802.11b wireless standard, to connect a PC to the wireless LAN:

USB11b Wireless Adapter

Connects a desktop, laptop, printer, or other peripheral device to the wireless LAN. It has a built-in antenna and a two meter (six feet) long cable that connects to the PC USB port. Its light indicates:

- Off — Not connected to a USB port or not receiving power from the PC
- Yellow — Not installed or initializing
- Green — Installed and operational
- Flashing Green — Receiving data from another wireless LAN device
- Flashing Yellow — Transmitting data to another wireless LAN device

PCC11Bb Wireless Card

A credit-card sized adapter that connects a laptop to the wireless LAN. You can roam in, or around, the home or small office and remain connected. It fits in a [PCMCIA](#) Type II standard slot on the laptop supporting 3.3 Volt PC card. The PCC11b has also has a built-in antenna.

Motorola USB11b Wireless Adapter (left) and PCC11b Wireless Card



For installation instructions, see the documentation provided with each product.

The Motorola External Diversity Antenna connects to the Motorola SBG1000 Wireless Cable Modem Gateway, providing higher gain to increase wireless LAN performance and coverage, even in obstructed locations. The External Diversity Antenna specifications are:

Frequency 2400 to 2500 MHz

Gain 5 dBi peak gain, nominal

Pattern Type Directional, vertically polarized

Connection Reverse-polarity TNC male, RG-142 cable

For information about connecting the external antenna, see ["Installing the Optional External Diversity Antenna"](#) on page 28.


Motorola External Diversity Antenna





Front Panel

The front panel provides indicator lights. *The model number on your SBG may be different than in some illustrations and screen images.*

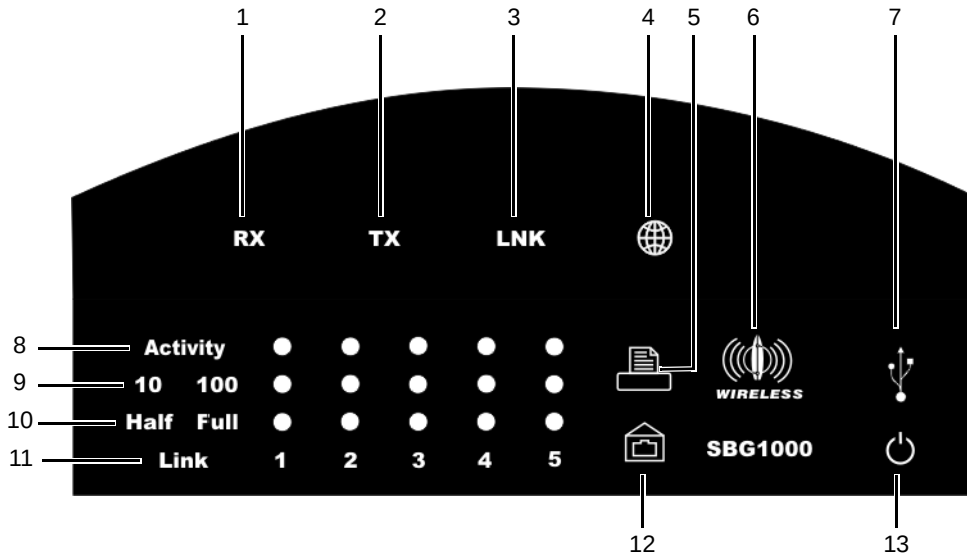

Front-panel top section lights

Key	Light	Flashing	On
1	RX (Receive)	Scanning for a receive (downstream) channel connection	The downstream channel is connected
2	TX (Transmit)	Scanning for a send (upstream) channel connection	The upstream channel is connected
3	LNK (Link)	Scanning for a network connection	The startup process is complete and the SBG1000 is online
4		Transmitting or receiving data	There is no solid on state

Front-panel bottom section lights

Key Light


Flashing

On

5		Data transfer to printer	Printer is connected
6		Wireless activity	Wireless feature is functioning normally
7		USB activity	There is a proper USB connection
8	Activity	Ethernet activity on the port	
9	10 100	none	Indicates the LAN connection speed: • Amber for a 10Base-T connection • Green for a 100Base-T connection
10	Half Full	none	Indicates the LAN port duplex mode • Amber for half duplex • Green for full duplex
11	Link 1 to 5	No flashing mode	There is a proper Ethernet connection to the port
12		Data transfer over phone line using HPNA	There is no solid on state
13	 Power	No flashing mode	The SBG1000 power supply is working properly

Rear Panel

The rear panel provides cabling connectors, status lights, and the power receptacle:

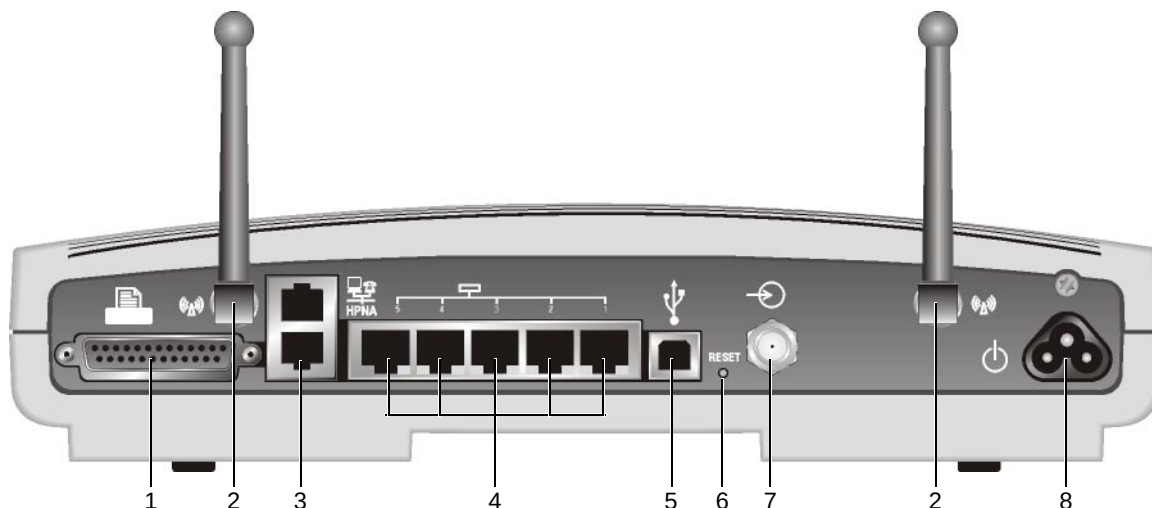


Key	Item	Description
1		The printer port provides a connection for one printer.
2		The Motorola SBG1000 Wireless Cable Modem Gateway includes two antennas. The optional Motorola External Diversity Antenna provides higher gain to increase wireless LAN performance and coverage. For information about the External Diversity Antenna, see "Optional Accessories" on page 4.
3		Use the HPNA ports to connect an HPNA LAN: - Connect the bottom HPNA port to the telephone jack using the supplied telephone wire terminated with RJ-11 connectors. - You can connect a telephone to the top HPNA port.
4		Use Ethernet ports 1 to 5 to connect an Ethernet LAN cable with RJ-45 connectors. You can connect Ethernet-equipped computers, hubs , bridges , or switches .
5		Use the USB port for Connecting a PC to the USB Port (see page 24).
6		If you experience a problem, you can push this recessed button to restart the SBG1000 (see "Troubleshooting" on page 117). To reset all values to their defaults, hold down the button for more than five seconds. Resetting may take 5 to 30 minutes because the SBG1000 must find and lock on the appropriate communications channels.
7		The cable port provides a connection to the coaxial cable outlet.
8		The power connector provides power to the SBG1000.



Label on the Bottom of the Unit

To receive data service, you need to provide the [MAC address](#) marked **HFC MAC ID** to your cable service provider:

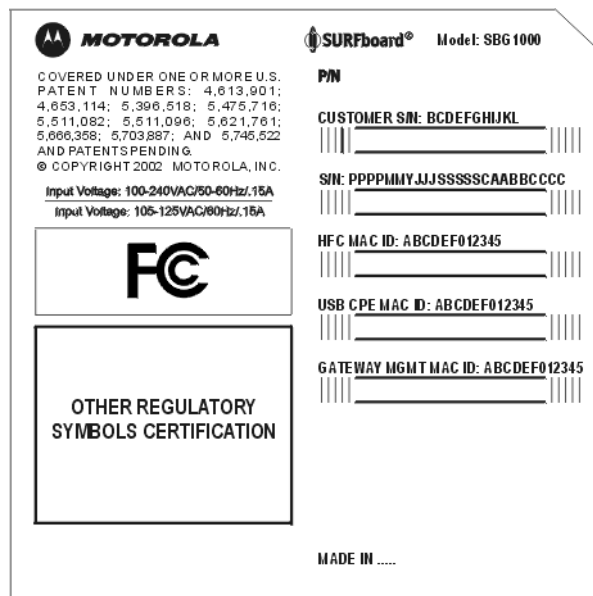

Wiring the SBG1000 LAN

The Motorola SBG1000 Wireless Cable Modem Gateway enables connection of a [Class C network](#) with up to 253 [client](#) computers and other IEEE 802.11b compliant devices on a combination of:

- 10/100Base-T [Ethernet](#)
- [IEEE 802.11b](#) wireless networking
- [HPNA V2.0](#)
- [USB V1.1](#)

Each computer needs appropriate network [adapter](#) hardware and [driver](#) software. The clients on the Ethernet, wireless, HPNA, or USB interfaces can share:

- Internet access with a single cable service provider account (subject to network operator terms and conditions)
- Files, printers, storage devices, multi-user software applications, games, and video conferencing

Wireless and wired network connections use Windows networking to share files and peripheral devices such as printers, CD-ROM drives, floppy disk drives, and Iomega® Zip Drives.




Wired Ethernet LAN

Each computer on the Ethernet LAN requires an Ethernet network interface card (NIC) and [driver](#) software installed.

Because the Motorola SBG1000 Wireless Cable Modem Gateway Ethernet ports support [auto-MDIX](#), you can use either [straight-through](#) or cross-over cable to connect a hub, switch, or computer. Use [category 5](#) cabling for all Ethernet connections.

The physical wiring arrangement has no connection to the logical network allocation of IP addresses.


Sample SBG1000 Ethernet network connections

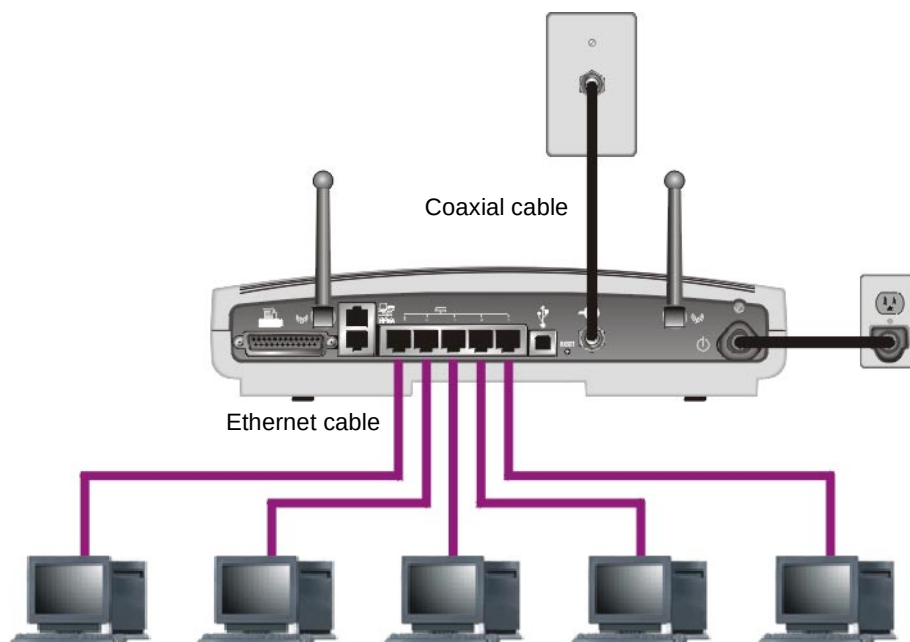



A wired Ethernet LAN with more than five computers requires one or more [hubs](#) or [switches](#). You can connect a hub or switch to any Ethernet port on the Motorola SBG1000 Wireless Cable Modem Gateway.

The following illustration is an example of an Ethernet LAN you can set up using the Motorola SBG1000 Wireless Cable Modem Gateway. You should cable the Ethernet LAN in an appropriate manner for the site. A complete discussion of Ethernet cabling is beyond the scope of this document.

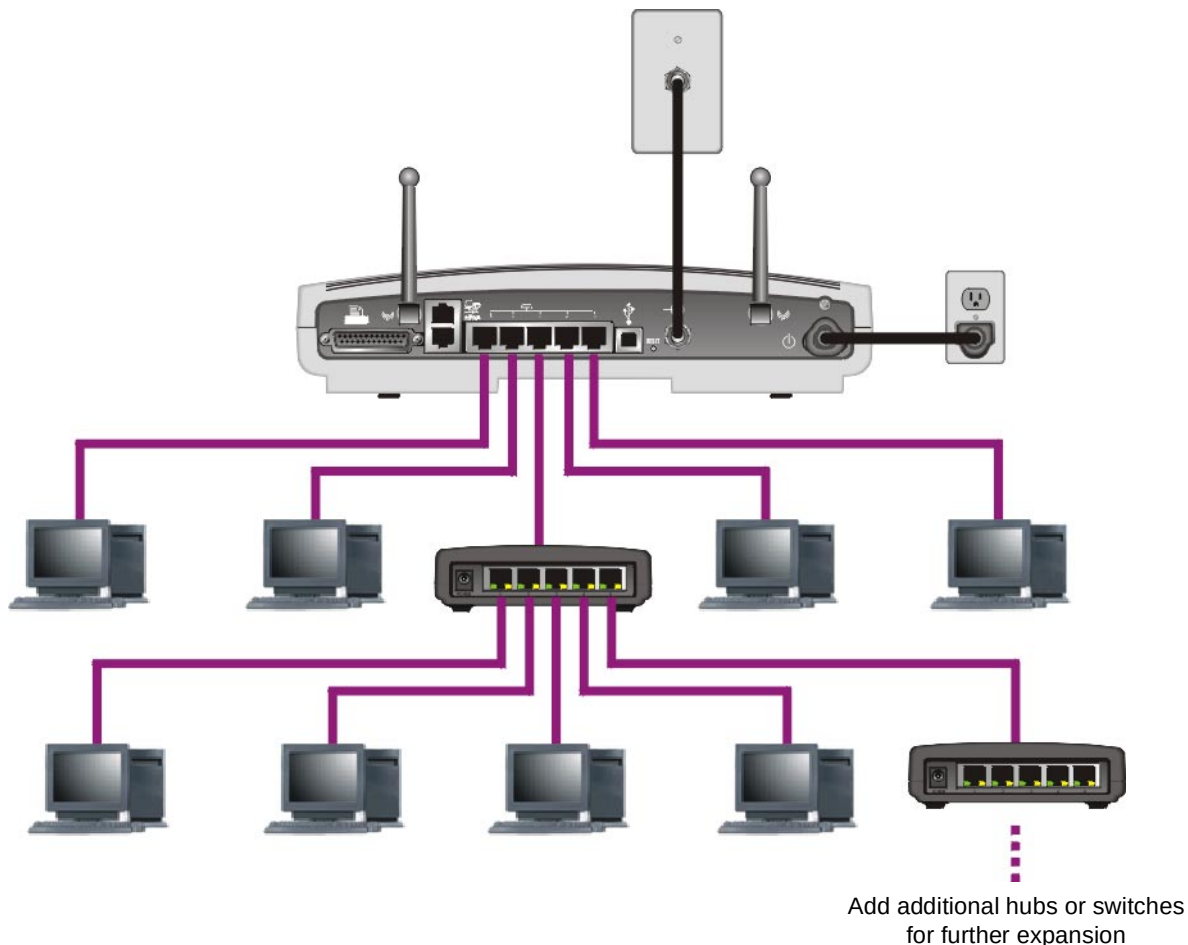


You can connect a hub or switch to any Ethernet port on the Motorola SBG1000 Wireless Cable Modem Gateway.



USB Connection

You can connect a single PC running Windows® 98, Windows XP™, Windows Me®, or Windows® 2000 to the Motorola SBG1000 Wireless Cable Modem Gateway USB port. For cabling instructions, see ["Connecting a PC to the USB Port"](#) on page 24.

Sample USB connection.

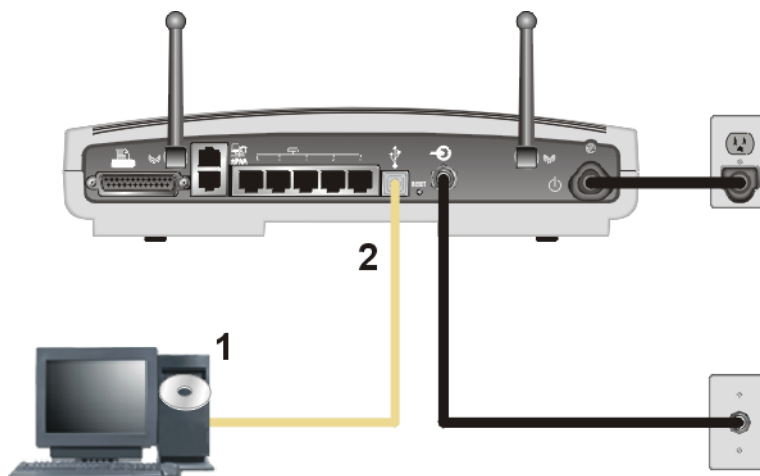

Caution!




Before plugging in the USB cable, be sure the Motorola SBG1000 Wireless Cable Modem Gateway CD-ROM is inserted in the PC CD-ROM drive.

HPNA LAN

To eliminate the need to install network wiring, the Motorola SBG1000 Wireless Cable Modem Gateway provides a Home Phoneline Network Alliance ([HPNA](#) or HomePNA) connection. HPNA networks use existing telephone lines to connect the computers without interfering with telephone voice service, [DSL](#), [ISDN](#), modems, or fax machines. HPNA networks can extend up to 300 meters (1000 feet).

Sample HPNA network connections

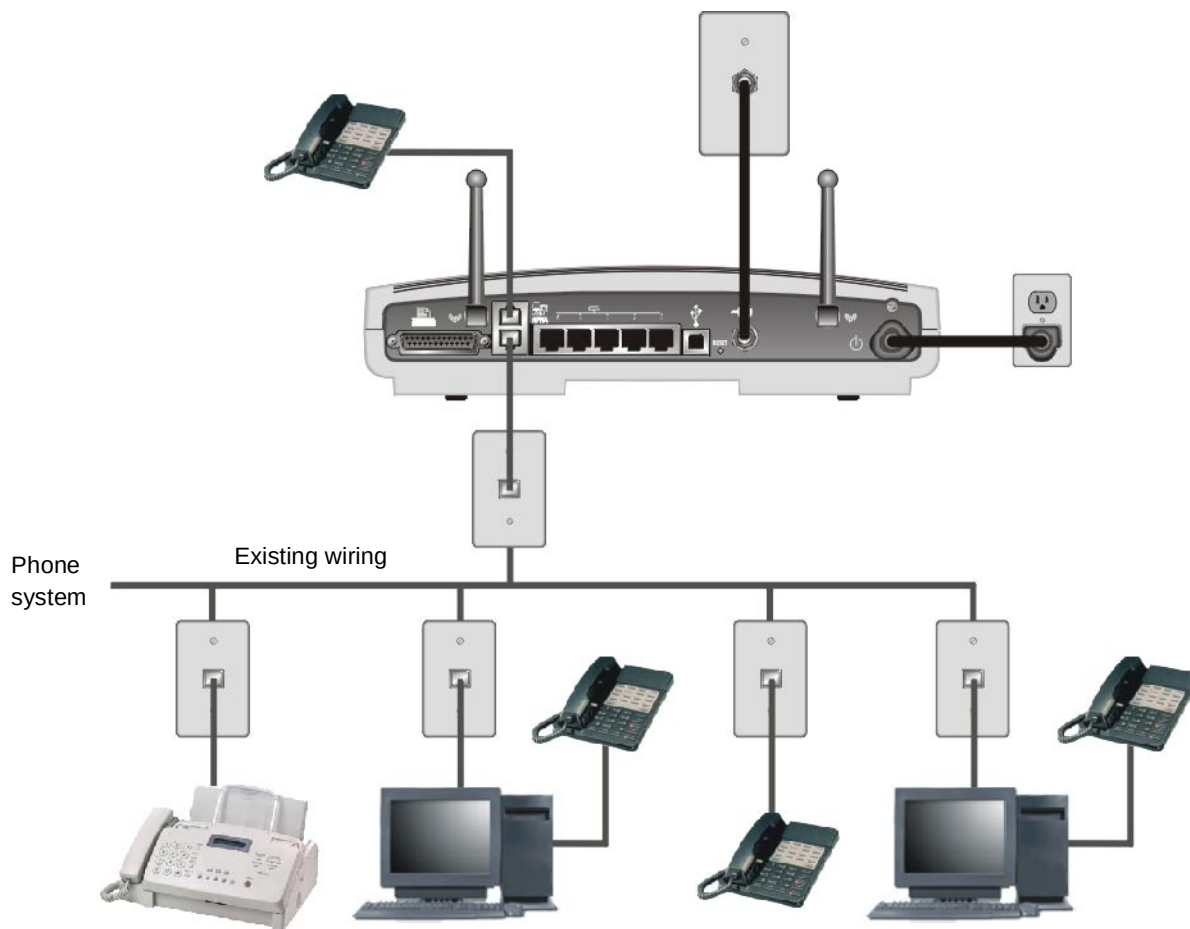

Each computer requires an HPNA adapter to connect to the HPNA network. HPNA adapters (sold elsewhere) are available for PCI or USB. After installing the HPNA adapter, you must install HPNA driver software on the computer following the instructions provided with the HPNA adapter.

HPNA 2.0 supports 10 Mbps data transfer similar to Ethernet 10Base-T.

If there is more than one telephone line, you must make all HPNA connections to the same line. You can connect a telephone to the top HPNA port on the SBG1000 (see "[Front Panel](#)" on page 6).

IEEE 802.11b Wireless LAN

Wireless communication occurs over radio waves rather than a wire. Like a cordless telephone, a wireless LAN uses radio signals instead of wires to exchange data. A wireless network eliminates the need for expensive and intrusive wiring to connect computers throughout the home or office. Mobile users can remain connected to the network even when carrying their laptop to different locations in the home or office.

Each computer on a wireless LAN requires an adapter described in “Optional Accessories” on page 4:

- For wireless laptops connections, use a Motorola PCC11b Wireless Card in the PCMCIA slot.
- For wireless desktop connections, use a Motorola USB11b Wireless Adapter to connect your PC USB port.

Sample wireless network connections



To set up the SBG1000, on a computer wired to the SBG1000 over Ethernet or USB, perform the procedures in [“Setting Up the Wireless LAN”](#) on page 67.

To set up each wireless **client** (station):

- 1 Insert the *PCC11b and USB11b Wireless Adapter* CD-ROM in the CD-ROM drive on the client.
- 2 Install the device software from the CD.
- 3 Connect the Motorola PCC11b wireless card or USB11b wireless adapter following the instructions supplied with the card or adapter



Security


The Motorola SBG1000 Wireless Cable Modem Gateway provides:

- A [firewall](#) to protect the SBG1000 LAN from undesired attacks over the Internet
- Security measures to prevent eavesdropping of wireless data

Network Address Translation ([NAT](#)) provides some security because the IP addresses of SBG1000 LAN computers are not visible on the Internet.

The logical network diagram does not necessarily correspond to the network cabling. A full discussion of network security is beyond the scope of this document.

SBG1000 security measures shown in a logical network diagram

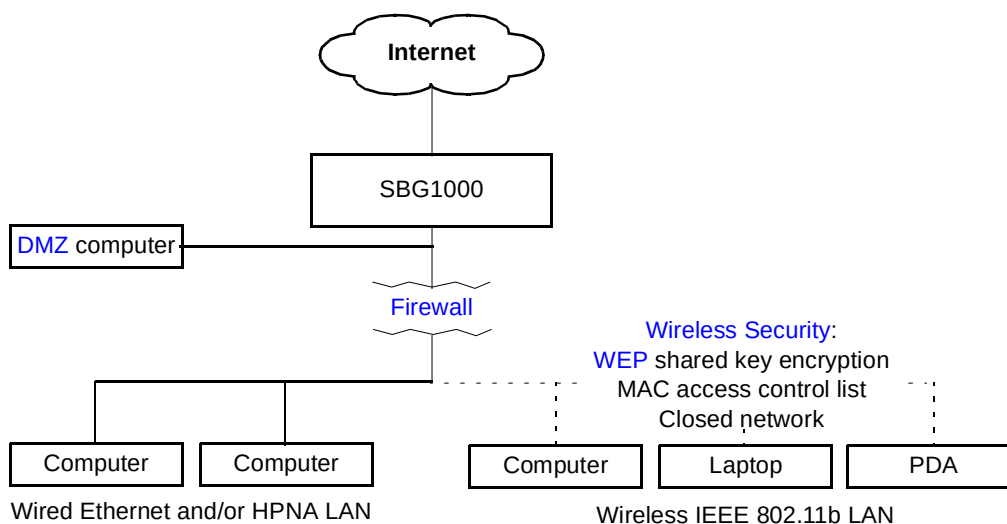

Firewall

The SBG1000 firewall protects the SBG1000 LAN from undesired attacks and other intrusions from the Internet. It provides an advanced integrated [stateful-inspection](#) firewall supporting intrusion detection, session tracking, and denial-of-service attack prevention. The firewall:

- Maintains state data for every [TCP/IP](#) session on the [OSI](#) network and transport layers
- Monitors all incoming and outgoing [packets](#), applies the firewall policy to each one, and screens for improper packets and intrusion attempts
- Provides comprehensive logging for all:
 - User authentications
 - Rejected internal and external connection requests
 - Session creation and termination
 - Outside attacks (intrusion detection)

You can configure the firewall filters to set rules for port usage and to block specific IP domains and networks. For information about choosing a default firewall policy, see [“Setting the Firewall Policy”](#) on page 36.

DMZ

A de-militarized zone ([DMZ](#)) is one or more computers logically located outside the firewall between an SBG1000 LAN and the Internet. A DMZ prevents direct access by outside users to private data. You can use a DMZ to set up a web [server](#) without exposing confidential data on your network. A DMZ is also useful for gamers that have a problem running a computer game's protocol through a firewall. DMZ provides the gamer a way to expose a single host directly to the Internet and thus overcome any firewall issues.

Wireless Security

To prevent unauthorized eavesdropping of data transmitted over the wireless LAN, you must enable wireless security. *The default Open authentication setting provides no security for transmitted data.*

You can [encrypt](#) data transmitted over the IEEE 802.11b wireless interface by configuring a [WEP](#) key on the Motorola SBG1000 Wireless Cable Modem Gateway and wireless LAN [clients](#) (stations).

You can also define a MAC access control list to restrict wireless LAN access to specified clients based on the client [MAC address](#).

If you enable closed network operation, the network name (ESSID) is not transmitted in the IEEE 802.11b beacon frame. This provides additional network protection because only IEEE 802.11b stations that are configured with your network name can associate with the SBG1000. Closed network operation is not part of the IEEE 802.11b standard

For information about configuring a WEP key, see "[Configuring Basic Wireless LAN Security](#)" on page 69.

Virtual Private Networks

The SBG1000 allows multiple [tunnel](#) VPN [pass-through](#) operation to securely connect remote computers over the Internet through the SBG1000. The SBG1000:


- Is compatible with Point to Point Tunneling Protocol ([PPTP](#)) and Layer 2 Tunneling Protocol ([L2TP](#))
- Is fully interoperable with any [IPSec](#) client or gateway and [ANX](#) certified IPSec stacks

Print Server

You can connect a printer to the Motorola SBG1000 Wireless Cable Modem Gateway back panel using a standard DB-25 connector. The print server:

- Enables Windows, UNIX, Linux, or Macintosh computers on the wired or wireless SBG1000 LAN to share a printer
- Supports the [SMB](#), [LPR](#), AppleTalk[®] printing [protocols](#)

Printer connection

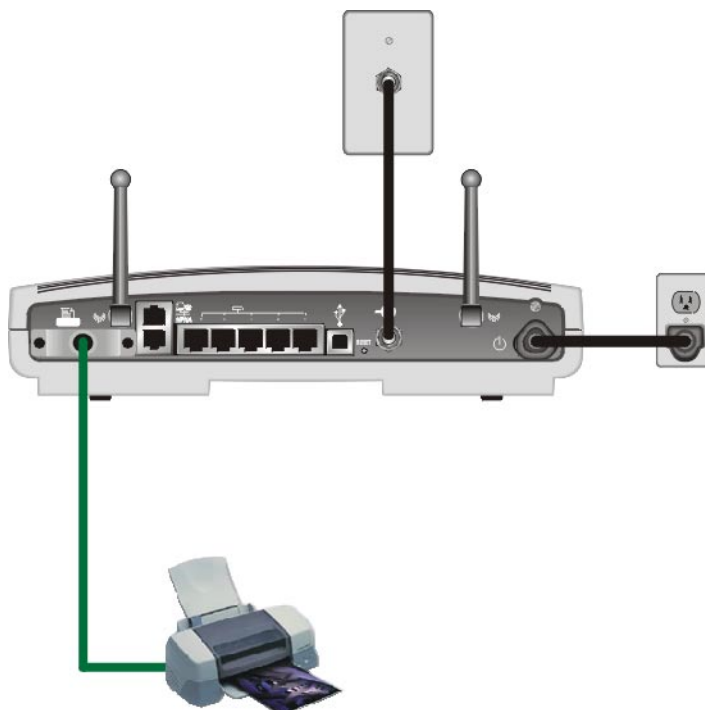

For information about configuring the print server, see [“Configuring the Print Server”](#) on page 77.

Related Documentation

The following documents also provide information you can use with the Motorola SBG1000 Wireless Cable Modem Gateway:

- *Motorola SBG1000 Wireless Cable Modem Gateway Quick Start Guide*
- *Motorola PCC11b Wireless Card Quick Start Guide and on-line help on the PCC11b and USB11b Wireless Adapter CD-ROM*
- *Motorola USB11b Wireless Adapter Quick Start Guide and on-line help on the PCC11b and USB11b Wireless Adapter CD-ROM*
- *Motorola Diversity Antenna Installation Instructions*

For the most recent documentation, visit the [Product Documentation](#) page on www.motorola.com/broadband.

❖ Installation

To install the Motorola SBG1000 Wireless Cable Modem Gateway hardware:

- Determine the type of connections you will make to the SBG1000 — Ethernet, HPNA, wireless, USB, and/or printer
- Check that you have the proper cables, adapters, and adapter software to connect to your SBG1000:
 - For Ethernet, you'll need Ethernet cables and network interface cards (NICs) with accompanying installation software.
 - For HPNA, you'll need telephone jumper cables, HPNA interface cards, and the installation software.
 - For wireless connections, you'll need wireless adapters and the installation software for the adapters.
 - For USB, you'll need a USB cable and the *Motorola SBG1000 Wireless Cable Modem Gateway* CD-ROM which contains the software for USB installation.
 - For the printer, you'll need a printer cable.

Before You Begin

Before you begin the installation, check that you received the following items with the Motorola SBG1000 Wireless Cable Modem Gateway:

Item		Description
Power cord		Connects the SBG1000 to the AC electrical outlet
10/100Base-T Ethernet cable		Connects to the Ethernet port
USB cable		Connects to the USB port
Phone wire jumper with RJ-11 connectors		Connects to a telephone line used for the HPNA network
Motorola SBG1000 Wireless Cable Modem Gateway CD-ROM		Contains this <i>User Guide</i> and USB drivers

You will need 75-ohm [coaxial cable](#) with F-type connectors to connect the SBG1000 to the nearest cable outlet. If a TV is connected to the cable outlet, you may need a 5-900 MHz RF [splitter](#) and two additional coaxial cables to use both the TV and the SBG1000.

You may need:

To Set Up

A wired Ethernet LAN with more than five computers

An HPNA LAN

An IEEE 802.11b wireless LAN

You Will Need

One or more Ethernet [hubs](#) or [switches](#)

An HPNA [adapter](#) and [driver](#) software for each computer connected using HPNA

An IEEE 802.11b adapter and driver software for each computer having a wireless connection (see "[Optional Accessories](#)" on page 4)

If you are installing the optional Motorola External Diversity Antenna, you may need a pair of needle nose pliers. Coaxial cable, RF splitters, hubs, and switches are available at consumer electronic stores.


Precautions

Postpone SBG1000 installation until there is no risk of thunderstorm or lightning activity in the area.

To avoid damaging the SBG1000 with static electricity:

- Always first connect the coaxial cable to the grounded cable TV wall outlet.
- Before you connect or disconnect the USB or Ethernet cable from the SBG1000 or PC, always touch the coaxial cable connector on the SBG1000 to release any static charges.

To avoid damaging the SBG1000 or computers with static electricity:

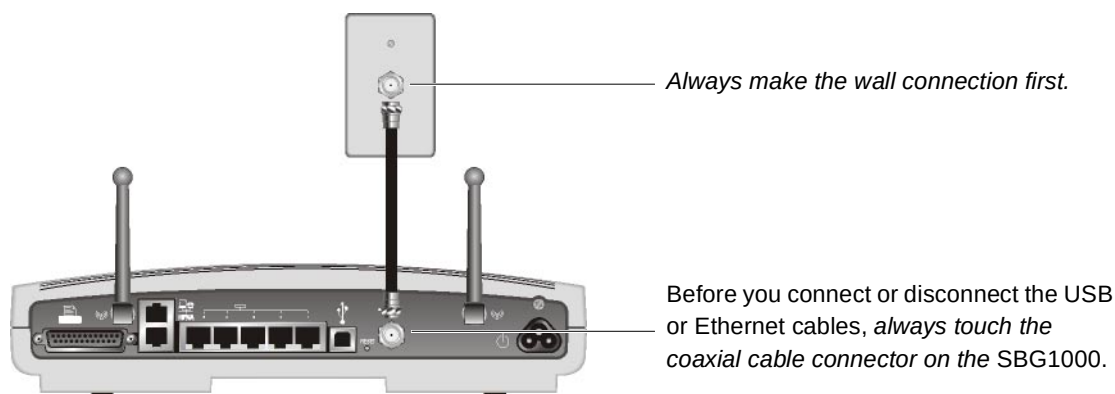

To avoid potential shock, always unplug the power cord from the wall outlet or other power source before disconnecting it from the SBG1000 rear panel.

To prevent overheating the SBG1000, do not block the ventilation holes on the bottom of the unit.

Do not open the unit. Refer all service to your cable service provider.

Wipe the unit with a clean, dry cloth. Never use cleaning fluid or similar chemicals. Do not spray cleaners directly on the unit or use forced air to remove dust.

Signing Up for Service

You must sign up with a cable service provider to access the Internet and other online services.

To activate your service, call your local cable service provider.

You need to provide the [MAC address](#) printed on the bar code label marked HFC MAC ID on the Motorola SBG1000 Wireless Cable Modem Gateway rear panel. You can record it here:

00 : _____ : _____ : _____ : _____ : _____

You should ask your cable service provider the following questions:

- Do you have any special system requirements?
- When can I begin to use my SBG1000?
- Are there any files I need to download after I am connected?
- Do I need a user name or password to access the Internet or use e-mail?

Computer System Requirements

You can connect Microsoft Windows, Macintosh, UNIX, or Linux computers equipped as follows to the SBG1000 LAN:

- One of the following:

Ethernet 10Base-T or 10/100Base-T Ethernet adapter with proper NIC driver software installed

IEEE 802.11b Any IEEE 802.11b device
For information about the Motorola PCC11b Wireless Card ([PCMCIA](#) type II 3.3 V slot) or USB11b Wireless Adapter, see "[Optional Accessories](#)" on page 4.

HPNA HPNA phone line adapter installed with proper HPNA driver software installed

- PC with Pentium class or better processor
- Windows 98, Windows 98 SE, Windows Me, Windows 2000, Windows XP, Windows NT, Macintosh, or Linux operating system with operating system CD-ROM available
- Minimum 16 MB RAM recommended
- 10 MB available hard disk space

You can use any web browser such as Microsoft® Internet Explorer or Netscape Navigator® with the Motorola SBG1000 Wireless Cable Modem Gateway.


You can use the USB connection with any PC running Windows 98, Windows 2000, Windows Me, or Windows XP that has a USB interface. The USB connection requires special USB driver software that is supplied on the Motorola SBG1000 Wireless Cable Modem Gateway CD-ROM. You can upgrade the USB drivers from the Internet. For information, check our website <http://www.motorola.com/broadband>.

Connecting the SBG1000 to the Cable System

Allow 5 to 30 minutes the first time you turn on the SBG1000 to find and lock on the appropriate communications channels.

- 1 Be sure the computer is on and the SBG1000 is unplugged.
- 2 Connect one end of the coaxial cable to the cable outlet or splitter.
- 3 Connect the other end of the coaxial cable to the cable connector on the SBG1000.
Hand-tighten the connectors to avoid damaging them.
- 4 If you are using the optional Motorola External Diversity Antenna, install it now. Follow the instructions in ["Installing the Optional External Diversity Antenna"](#) on page 28.
- 5 Insert the *Motorola SBG1000 Wireless Cable Modem Gateway* CD-ROM into the CD-ROM drive.
- 6 Plug the power cord into the power connector on the SBG1000.
- 7 Plug the power cord into the electrical outlet. *This turns the Motorola SBG1000 Wireless Cable Modem Gateway on. You do not need to unplug it when not in use.*
- 8 Check that the lights on the [Front Panel](#) cycle through this sequence:
 - Power icon turns on when AC power is connected to the SBG1000 and indicates that the power supply is working properly.
 - RX (receive) light flashes while scanning for the receive channel and changes to solid green when the receive channel is locked.
 - TX (transmit) light flashes while scanning for the send channel and changes to solid green when the send channel is locked.
 - LNK (link) light flashes during SBG1000 registration and configuration and changes to solid green when the cable modem wireless gateway is registered.
 - Globe icon flashes when the SBG1000 is transmitting or receiving data.

Connecting the SBG1000 to the cable system

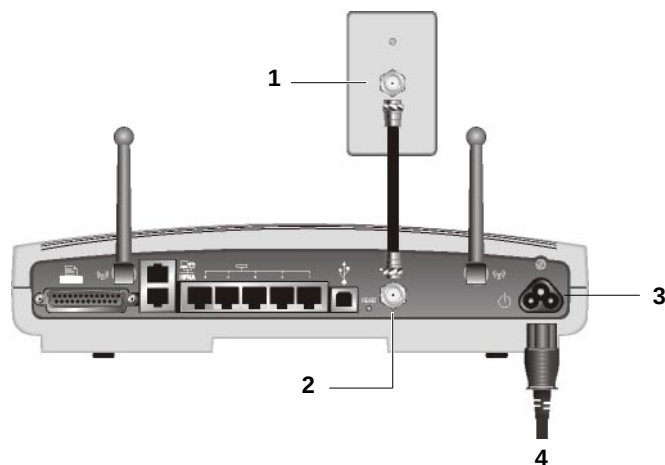


Cabling the Ethernet or HPNA LAN

After connecting to the cable system, you can connect your wired Ethernet and/or HPNA LAN. Some samples are shown in “[Wired Ethernet LAN](#)” on page 10 and “[HPNA LAN](#)” on page 13. Detailed information about network cabling is beyond the scope of this document. You must install proper drivers for the Ethernet [NIC](#) or HPNA [adapter](#).

Obtaining an IP address in Windows 98, Windows 98 SE, or Windows Me

You must do the following on each Ethernet client PC running Windows 98, Windows 98 SE, or Windows Me:

- 1 On the Windows Desktop, click **Start**.
- 2 Select **Run**. The Run window is displayed.
- 3 Type **winipcfg.exe** and click **OK**. The IP Configuration window is displayed:

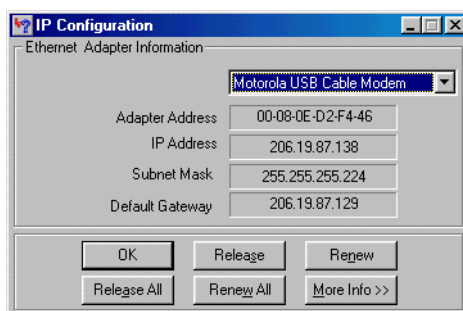

- 4 Click the **Renew** button to obtain an IP address for the PC from the DHCP server on the SBG1000.

Obtaining an IP address in Windows 2000 or Windows XP

You must do the following on each Ethernet client PC running Windows 2000 or Windows XP:

- 1 On the Windows Desktop, click **Start**.
- 2 Select **Run**. The Run window is displayed.
- 3 Type **cmd** and click **OK** to display a command prompt window.
- 4 Type **ipconfig /renew** and press ENTER to obtain an IP address for the PC from the DHCP server on the SBG1000.
- 5 Type **exit** and press ENTER to return to Windows.

Obtaining an IP address on Macintosh or UNIX Systems

Follow the instructions in your user manual.

Connecting a PC to the USB Port

You can connect a single PC running Windows 98, Windows XP, Windows Me, or Windows 2000 to the Motorola SBG1000 Wireless Cable Modem Gateway [USB](#) port.

Caution!



Before plugging in the USB cable, be sure the Motorola SBG1000 Wireless Cable Modem Gateway CD-ROM is inserted in the PC CD-ROM drive.

To connect a PC to the USB port:

- 1 Connect the USB cable to the USB port on the SBG1000.
- 2 Connect the other end to the USB port on the computer.
- 3 Install the USB driver following the appropriate procedure for "[Setting Up a USB Driver](#)" on page 95.

Setting Up the Wireless LAN

For information about wireless LAN setup, see "[Setting Up the Wireless LAN](#)" on page 67.

Connecting the Printer

Connect the printer to the Motorola SBG1000 Wireless Cable Modem Gateway printer port. If a cable was supplied with the printer, use that cable. Consult your printer documentation to determine cabling requirements from the SBG1000 to the printer.

After connecting the printer, power it on and follow the instructions for "[Configuring the Print Server](#)" on page 77.

Wall Mounting the Wireless Gateway

If you mount the SBG1000 on the wall, you must:


- Locate the unit as specified by the local or national codes governing residential or business cable TV and communications services.
- Follow all local standards for installing a network interface unit/network interface device (NIU/NID).

If possible, mount the SBG1000 to concrete, masonry, a wooden stud, or other very solid wall material. Use anchors if necessary; for example if you must mount the unit on drywall.

To mount your SBG1000 on the wall:

- 1 Print the [Wall Mounting Template](#) on page 27:

Click the Print icon or choose Print from the File menu to display the Print dialog box. (The following image is from Adobe Acrobat Reader® running on Windows 2000; there may be slight differences in your version.)

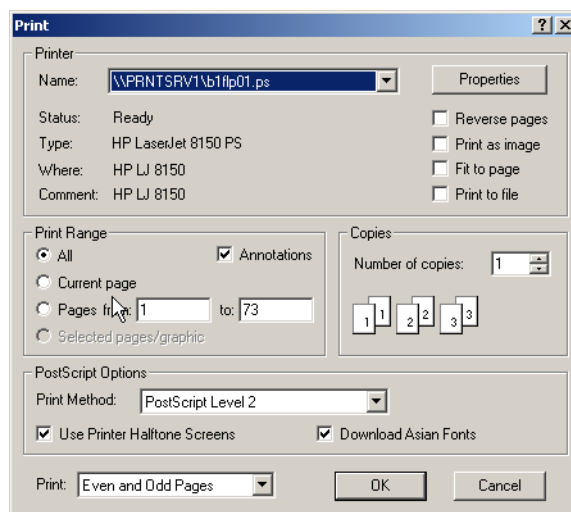

Be sure you print the template at 100% scale. Be sure Fit to page is not checked in the Print dialog box.

Click the OK button to print the template.

- 2 Measure the printed template with a ruler to ensure that it is the correct size.
- 3 Use a center punch to mark the center of the holes.
- 4 On the wall, locate the marks for the mounting holes.

Caution!




Before drilling holes, check the structure for potential damage to water, gas, or electric lines.

- 5 Drill the holes to a depth of at least 3.8 cm (1½ inches).
- 6 If necessary, seat an anchor in each hole.

Use M5 x 38 mm (#10-16 x 1¹/₂ inch) screws with a flat underside and maximum screw head diameter of 10.5 mm to mount the SBG1000.

7 Using a screwdriver, turn each screw until part of it protrudes from the wall, as shown:

- There must be 4.0 mm (.16 inches) between the wall and the underside of the screw head.
- The maximum distance from the wall to the top of the screw head is 7.6 mm (.3 in).

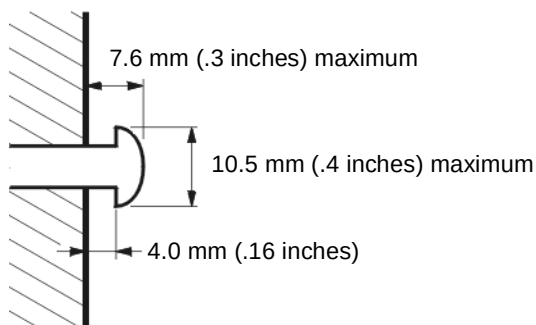

8 Place the SBG1000 so the keyholes are above the mounting screws.


9 Slide the SBG1000 down so it stops against the top of the keyhole opening.

Wall Mounting Template

You can print this page to use as a wall mounting template.

Be sure you print it at 100% scale. In Acrobat Reader, be sure that Fit To Page is not checked in the Print dialog box.

Measure the printed template with a ruler to ensure that it is the correct size.

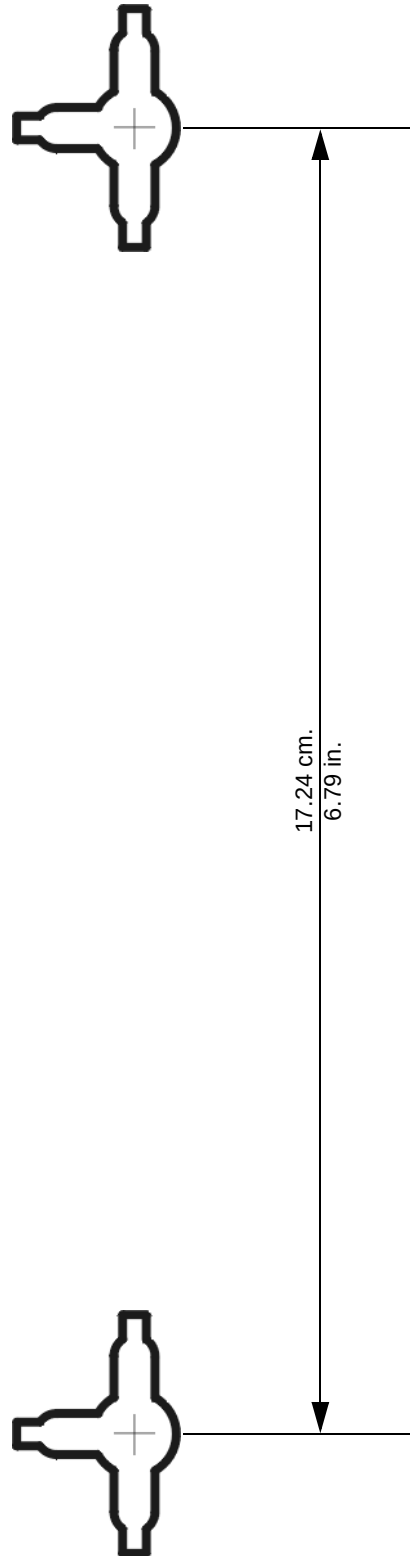

Installing the Optional External Diversity Antenna

The optional Motorola External Diversity Antennas are designed to provide an indoor operating range with [WEP](#) enabled of at least:

Distance	Data Transfer Rate
30 meters (100 feet)	11 Mbps
50 meters (165 feet)	5.5 Mbps
75 meters (230 feet)	2 Mbps
95 meters (300 feet)	1 Mbps

The maximum wireless operation distance depends on the type of materials through which the signal must pass and the location of the [diversity antennas](#) and [clients](#) (stations). *Motorola cannot guarantee wireless operation for all supported distances in all environments.*

To install the optional Motorola External Diversity Antenna:

- 1 Be sure the SBG1000 is unplugged. As with all electronic equipment, avoid potential shock by always unplugging the power cord from the wall outlet or other power source before disconnecting it from the SBG1000 rear panel.
- 2 Remove the antennas on the SBG1000 by unscrewing the connectors. You may need a pair of needle nose pliers to loosen them.


Store the antennas supplied on the SBG1000 in a safe place.

Disconnecting the antennas provided with the SBG1000



- 3 Connect the cables from the Motorola External Diversity Antenna to the connectors on the Motorola SBG1000 Wireless Cable Modem Gateway [Front Panel](#). *Hand-tighten the connectors to avoid damaging them. Using excessive force may damage the connectors.*

Connecting the Optional External Diversity Antenna to the SBG1000

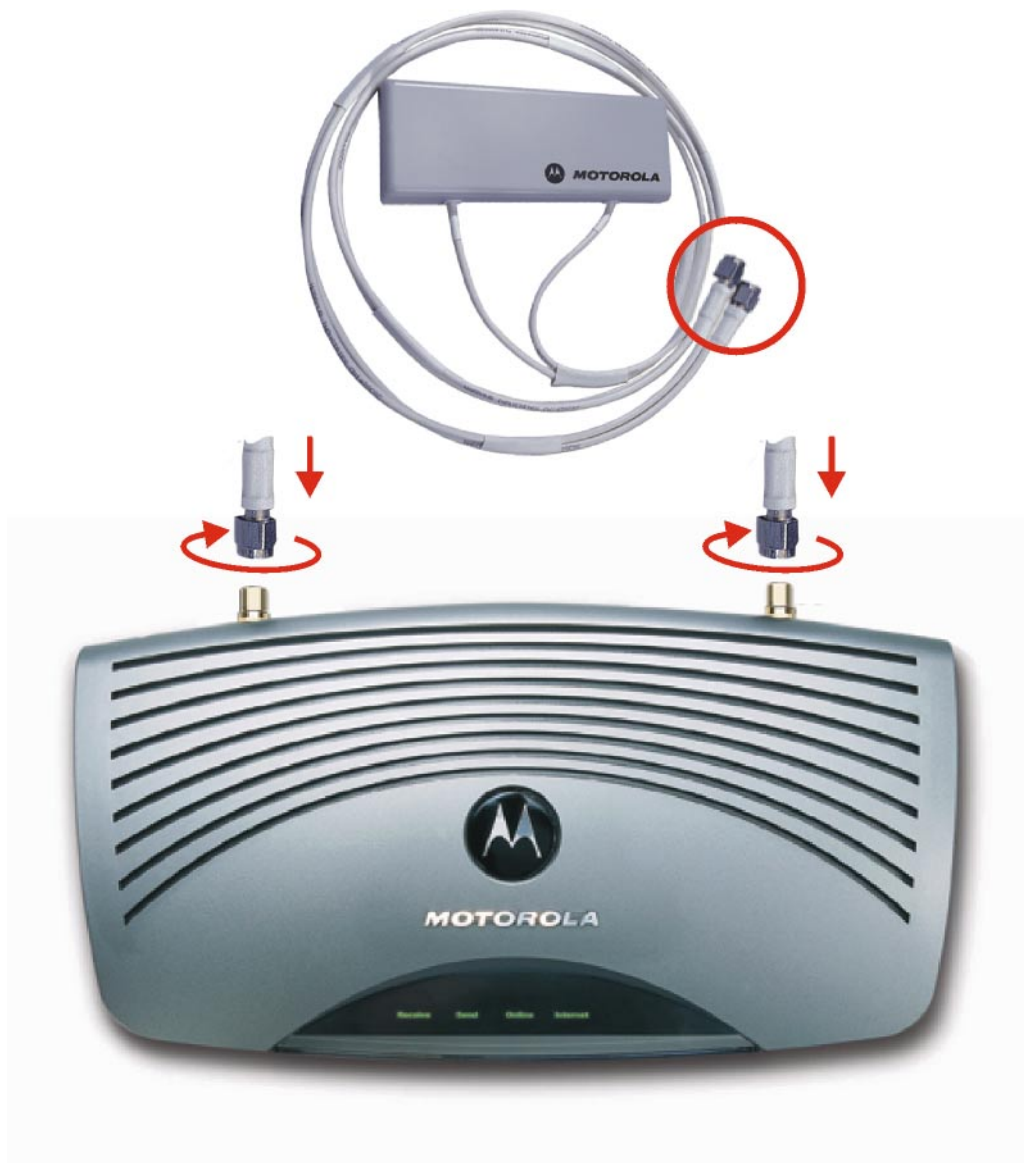

- 4 Position or mount the External Diversity Antenna in a suitable location away from the computer and monitor. *Follow the instructions provided with the External Diversity Antenna. Do not twist the antenna cables.*
To obtain optimum results, try moving the External Diversity Antennas to slightly different locations.

❖ Configuring the SBG1000

Configuring the SBG1000 includes:

- [Starting the SBG1000 Setup Program](#) (see page 32)
- [Changing the Default Password](#) (see page 34)
- [Getting Help](#) (see page 35)
- [Setting the Firewall Policy](#) (see page 36)

For more information about configuration, see [“Configuring TCP/IP”](#) on page 53, [“Setting Up the Wireless LAN”](#) on page 67, [“Configuring the Print Server”](#) on page 77, or [“Setting Up a USB Driver”](#) on page 95.

For normal operation, you do not need to change most default settings. The following caution statements summarize the issues you must be aware of:

Caution!




To prevent unauthorized configuration, change the default password *immediately* when you first configure the Motorola SBG1000 Wireless Cable Modem Gateway. See [“Changing the Default Password”](#) on page 34

[Firewalls](#) are not foolproof. Choose the most secure firewall policy you can. See [“Setting the Firewall Policy”](#) on page 36.

For a wireless LAN only, be sure you follow the instructions in [“Setting Up the Wireless LAN”](#) on page 67.

Starting the SBG1000 Setup Program

- 1 On a computer on the LAN, open a web browser.
- 2 In the Address or Location field, type **192.168.100.1** and press ENTER to display the Login window:

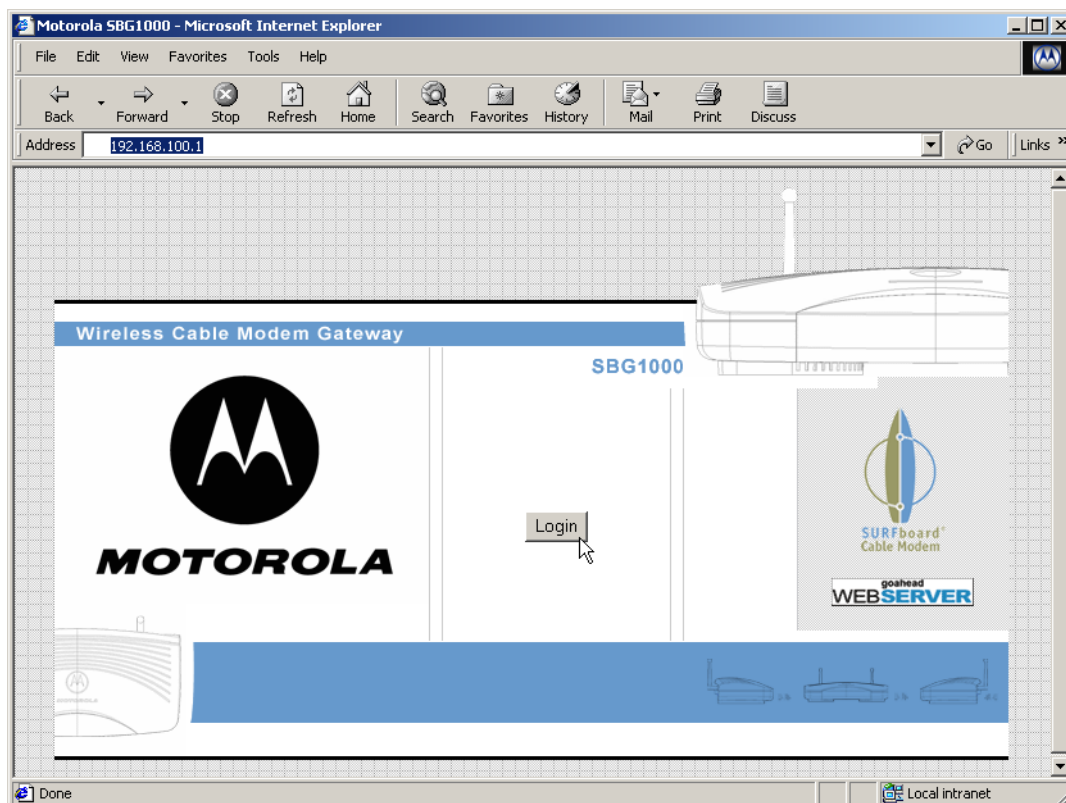


- 3 Click **Login** to display the Enter Network Password window:



- 4 In the User Name field, type the *User Name* (the default is “admin”).
- 5 In the Password field, type the *Password* (the default is “motorola”).

6 Click **OK** to display the SBG1000 Setup Program:

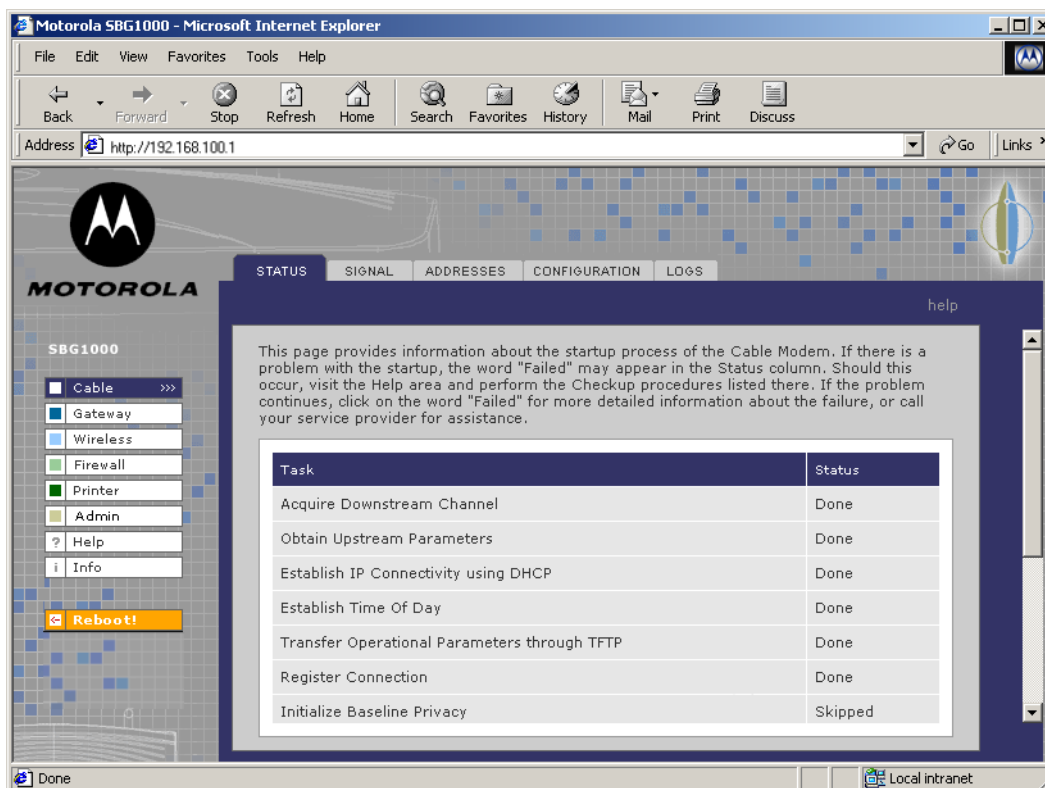

Click **To Perform**

- Cable** Configure and monitor the cable system connection
- Gateway** Configure and monitor the gateway preferences (see [“Configuring the Gateway”](#) on page 43)
- Wireless** Configure and monitor the wireless interface (see [“Setting Up the Wireless LAN”](#) on page 67)
- Firewall** Configure and monitor the firewall (see [“Setting the Firewall Policy”](#) on page 36)
- Printer** Configure the SBG1000 print server (see [“Configuring the Print Server”](#) on page 77)
- Admin** [Changing the Default Password](#) (see page 34)
- Help** Display information about the SBG1000 (see [“Getting Help”](#) on page 35)
- Info** Display information about the SBG1000 Setup Program
- Reboot** Restart the SBG1000. It is the same as pressing the reset button on the [Rear Panel](#) for less than five seconds.

*For some settings, after you edit the field and click Apply, you are warned that you must **Reboot** for your change to take effect. Rebooting takes 10 to 15 seconds. After rebooting, you must log-in again.*

Changing the Default Password


Caution!



To prevent unauthorized configuration, change the default password *immediately* when you first configure the Motorola SBG1000 Wireless Cable Modem Gateway.

To change the default password:

- 1 On the SBG1000 Setup Program screen, click **Admin** to display the ADMIN — basic page:

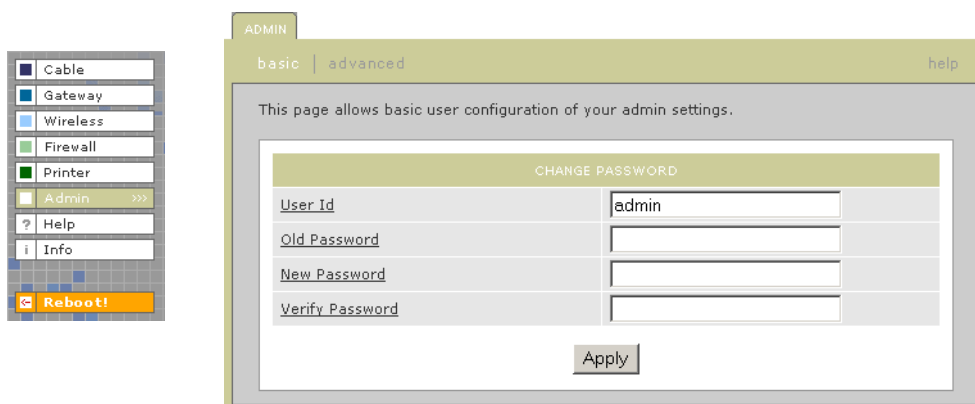


The screenshot shows the 'ADMIN' configuration page. On the left is a sidebar with navigation options: Cable, Gateway, Wireless, Firewall, Printer, Admin (highlighted with a right-pointing arrow), Help, and Info. At the bottom of the sidebar is a 'Reboot!' button. The main content area is titled 'ADMIN' and has tabs for 'basic' and 'advanced'. Below the tabs is a description: 'This page allows basic user configuration of your admin settings.' The 'CHANGE PASSWORD' section contains four input fields: 'User Id' (pre-filled with 'admin'), 'Old Password', 'New Password', and 'Verify Password'. An 'Apply' button is located at the bottom right of the form.

- 2 Type the old *password* in the **Old Password** field. (The default password is “motorola.”)
- 3 Type the new *password* in the **New Password** field.
- 4 Type the new *password* again in the **Verify Password** field.
- 5 Click **Apply** to apply your changes.

Getting Help

To get help on any underlined item, field, click the text. For example, if you click a field or the help button on the ADMIN — basic page, the following help is displayed:

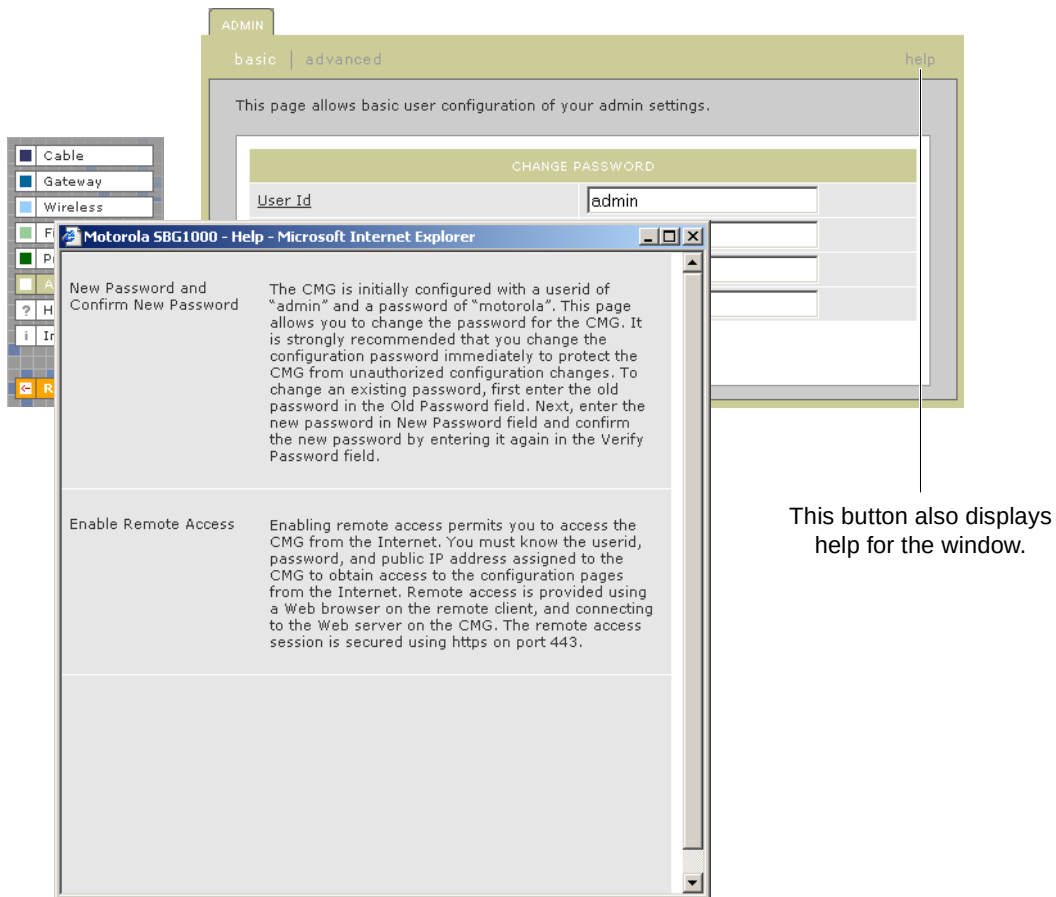

You can scroll to browse the help, or click another item to display help for that item.

Setting the Firewall Policy


Caution!



Firewalls are not foolproof. Choose the most secure firewall policy you can. To enable easy network setup, the default firewall policy is Low, which provides minimum security.

To select a predefined policy for all packets processed by the firewall:

- 1 On the SBG1000 Setup Program left panel, click **Firewall**.
- 2 Click **POLICY**.
- 3 Click **basic** to display the options for firewall policy:

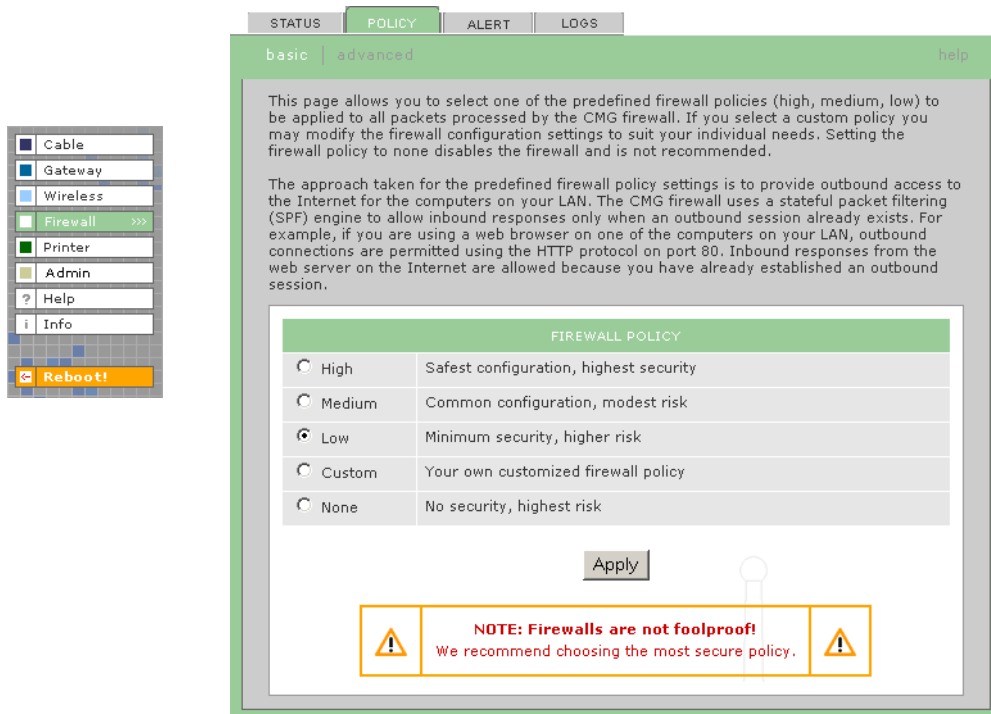

STATUS POLICY ALERT LOGS

basic advanced help

This page allows you to select one of the predefined firewall policies (high, medium, low) to be applied to all packets processed by the CMG firewall. If you select a custom policy you may modify the firewall configuration settings to suit your individual needs. Setting the firewall policy to none disables the firewall and is not recommended.

The approach taken for the predefined firewall policy settings is to provide outbound access to the Internet for the computers on your LAN. The CMG firewall uses a stateful packet filtering (SPF) engine to allow inbound responses only when an outbound session already exists. For example, if you are using a web browser on one of the computers on your LAN, outbound connections are permitted using the HTTP protocol on port 80. Inbound responses from the web server on the Internet are allowed because you have already established an outbound session.

FIREWALL POLICY	
☐ High	Safest configuration, highest security
☐ Medium	Common configuration, modest risk
☒ Low	Minimum security, higher risk
☐ Custom	Your own customized firewall policy
☐ None	No security, highest risk

Apply

NOTE: Firewalls are not foolproof!
We recommend choosing the most secure policy.

- 4 Select one of the following. *Unless you have the necessary expertise and need to setup a custom firewall, use High, Medium, or Low:*
 - High** Safest configuration, highest security. *We recommend this setting.*
 - Medium** Common configuration, modest risk
 - Low** Minimum security, higher risk
 - Custom** You can create a custom firewall policy on the [Firewall > POLICY — advanced Page](#) (see page 39). *Do not create a custom policy unless you have the necessary expertise and the need to do so.*
 - None** This setting disables the firewall and provides no security. *We do not recommend this setting.*
- 5 Click **Apply** to apply your changes.



Firewall Pages in the SBG1000 Setup Program

Use the following pages to configure the firewall:

- [Firewall > POLICY — basic Page](#) (see page 38)
- [Firewall > POLICY — advanced Page](#) (see page 39)
- [Firewall > ALERT — basic Page](#) (see page 40)
- [Firewall > ALERT — email Page](#) (see page 41)
- [Firewall > LOGS Page](#) (see page 42)

*For some settings, after you edit the field and click Apply, you are warned that you must **Reboot** for your change to take effect. Rebooting takes 10 to 15 seconds. After rebooting, you must log-in again.*

Firewall > POLICY — basic Page

Use this page to select a predefined firewall policy for all packets processed by the SBG1000 firewall, as described in “[Setting the Firewall Policy](#)” on page 36. Advanced users *only* can create a custom policy on the [Firewall > POLICY — advanced Page](#) (see page 39). The FIREWALL POLICY setting None disables the firewall and provides no security. *We do not recommend this setting.*

The predefined policies provide outbound Internet access for computers on the SBG1000 LAN.

The SBG1000 firewall uses [stateful inspection](#) to allow inbound responses when there already is an outbound session running corresponding to the data flow. For example, if you use a web browser, outbound HTTP connections are permitted on port 80. Inbound responses from the Internet are allowed because an outbound session is established. When required, the SBG1000 firewall can be configured to allow inbound packets without first establishing an outbound session.

STATUS
POLICY
ALERT
LOGS

basic | advanced | help

This page allows you to select one of the predefined firewall policies (high, medium, low) to be applied to all packets processed by the CMG firewall. If you select a custom policy you may modify the firewall configuration settings to suit your individual needs. Setting the firewall policy to none disables the firewall and is not recommended.

The approach taken for the predefined firewall policy settings is to provide outbound access to the Internet for the computers on your LAN. The CMG firewall uses a stateful packet filtering (SPF) engine to allow inbound responses only when an outbound session already exists. For example, if you are using a web browser on one of the computers on your LAN, outbound connections are permitted using the HTTP protocol on port 80. Inbound responses from the web server on the Internet are allowed because you have already established an outbound session.


FIREWALL POLICY	
☐ High	Safest configuration, highest security
☐ Medium	Common configuration, modest risk
☒ Low	Minimum security, higher risk
☐ Custom	Your own customized firewall policy
☐ None	No security, highest risk

Apply

NOTE: Firewalls are not foolproof!
 We recommend choosing the most secure policy.

Firewall > POLICY — advanced Page

Use this page to construct a custom firewall policy.

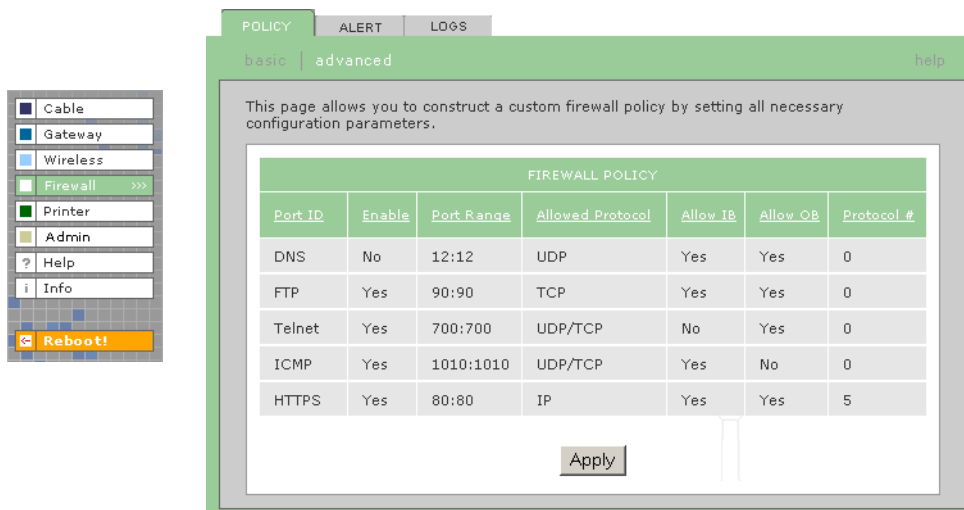

POLICY ALERT LOGS

basic | advanced help

This page allows you to construct a custom firewall policy by setting all necessary configuration parameters.

Port ID	Enable	Port Range	Allowed Protocol	Allow IB	Allow OB	Protocol #
DNS	No	12:12	UDP	Yes	Yes	0
FTP	Yes	90:90	TCP	Yes	Yes	0
Telnet	Yes	700:700	UDP/TCP	No	Yes	0
ICMP	Yes	1010:1010	UDP/TCP	Yes	No	0
HTTPS	Yes	80:80	IP	Yes	Yes	5

Apply

Firewall > POLICY — advanced page fields

Field	Description
Port ID	The name of the protocol being filtered.
Enable	Check this box to enable firewall policy filtering for the port.
Port Range (From:To)	Sets the from and to port range, which must contain all ports required by the protocol.
Allowed Protocol	The allowed protocols.
Allow IB (Inbound)	Filters inbound data from the Internet on the specified ports.
Allow OB (Outbound)	Filters outbound data to the Internet on the specified ports. Stateful inspection ensures appropriate responses for outbound sessions.
Protocol #	The protocol number associated with the IP packets to allow in the firewall policy.



Firewall > ALERT — basic Page

Use this page to set the alert mechanism for firewall intrusion detection events.

STATUS | POLICY | **ALERT** | LOGS

basic | email | SNMP help

This page allows you to select the alert mechanism to use when firewall Intrusion Detection events are detected. Select the Email check box to be alerted via an SMTP email. Note: Email alerting assumes that an SMTP server is present to receive the email and that the SMTP server does not require any authentication (e.g., user-id/password). Select the SNMP check box to have alerts sent to a local SNMP collection agent.

ALERT BASIC

☐ Intrusion Detection ☒ Email

Apply

Firewall > ALERT — basic page fields


Field or Button	Description
-----------------	-------------

Intrusion Detection	Check Email to be alerted through SMTP e-mail. An SMTP server that does not require any authentication such as a user name or password must be present to receive the e-mail.
---------------------	---

Apply	Click to apply your changes.
-------	------------------------------

Firewall > ALERT — email Page

Use this page to configure the e-mail alert parameters:

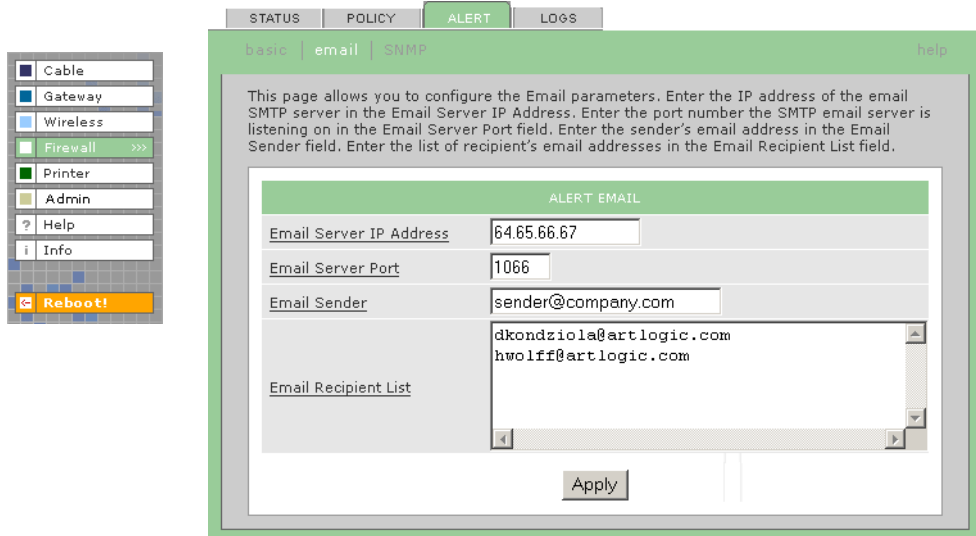

STATUS POLICY **ALERT** LOGS

basic | **email** | SNMP help

This page allows you to configure the Email parameters. Enter the IP address of the email SMTP server in the Email Server IP Address. Enter the port number the SMTP email server is listening on in the Email Server Port field. Enter the sender's email address in the Email Sender field. Enter the list of recipient's email addresses in the Email Recipient List field.

ALERT EMAIL

Email Server IP Address 64.65.66.67

Email Server Port 1066

Email Sender sender@company.com

Email Recipient List dkondziola@artlogic.com
hwolff@artlogic.com


Apply

Firewall > ALERT — email page fields

Field or Button	Description
E-mail Server IP Address	Sets the e-mail server IP address, in dotted-decimal format .
E-mail Server Port	Sets the e-mail server port number.
E-mail Sender	Sets the sender e-mail address.
E-mail Recipient List	Sets the list of e-mail addresses that receive alerts from the SBG1000 firewall.
Apply	Click to apply your changes.

Firewall > LOGS Page

Use this page to set which firewall events are logged.

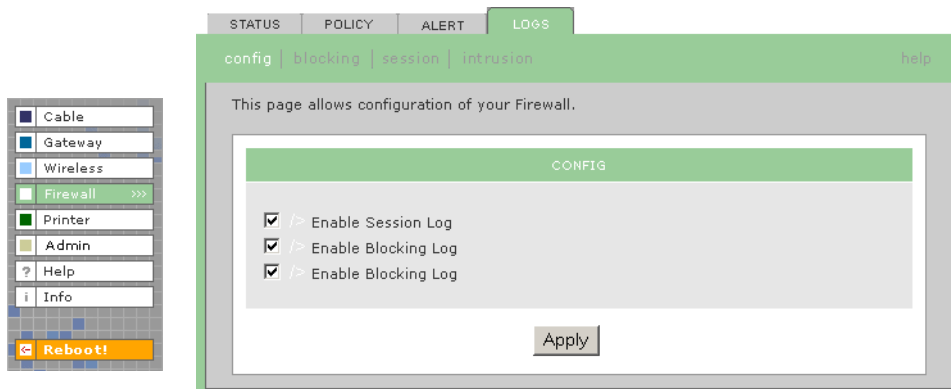

Firewall > LOGS page fields

Field or Button	Description
Enable Session Log	Check this box to log session events.
Enable Blocking Log	Check this box to log blocking events.
Enable Intrusion Log	Check this box to log intrusions.
Apply	Click to apply your changes.

Configuring the Gateway

This section describes the Gateway configuration pages in the SBG1000 Setup Program:

- [Gateway > STATUS Page](#) (see page 44)
- [Gateway > WAN Page](#) (see page 45)
- [Gateway > LAN — nat config Page](#) (see page 47)
- [Gateway > LAN — dhcp server config Page](#) (see page 48)
- [Gateway > LAN — dhcp reservations Page](#) (see page 49)
- [Gateway > LOG Page](#) (see page 51)

*For some settings, after you edit the field and click Apply, you are warned that you must **Reboot** for your change to take effect. Rebooting takes 10 to 15 seconds. After rebooting, you must log-in again.*

Gateway > STATUS Page

This page displays the gateway status information:

Cable

Gateway >>>

Wireless

Firewall

Printer

Admin

? Help

i Info

Reboot!

STATUS
WAN
LAN
ALG
LOG

[help](#)

This page lists the status information for several gateway configuration parameters.

WAN Status	Data
DNS Address 1	206.19.80.10
DNS Address 2	206.19.86.10
DNS Address 3	0.0.0.0
WAN IP Address	206.19.87.147
TCP Session Wait Timeout	300
UDP Session Wait Timeout	300
ICMP Session Wait Timeout	300

LAN Status	Data
LAN IP Address	192.168.0.1
LAN Subnet Mask	255.255.255.0
MAC Address	00:08:0E:D2:F4:47
DHCP Server Enabled	Yes

DHCP LEASE TABLE					
IP Address	Client ID	Hostname	Method	Lease Create Time	Lease Expire Time
192.168.0.10	00:10:4B:93:91:48	Micron1	Dynamic	2002-10-01 13:26:08	2002-10-01 14:26:09
192.168.0.11	00:30:65:1F:4D:CF	Applications Engineering Computer	Dynamic	2002-10-01 12:25:00	2002-10-01 14:25:05

TRANSLATED ADDRESS					
WAN IP Address	WAN Port	LAN IP Address	LAN Port	Mapping Mode	Mapping Protocol
206.19.86.10	53	206.19.87.147	1120	1	3
206.19.86.10	53	206.19.87.147	1121	1	3
206.19.86.10	53	206.19.87.147	1122	1	3
206.19.86.10	53	206.19.87.147	1123	1	3
206.19.86.10	53	206.19.87.147	1124	1	3
206.19.86.10	53	206.19.87.147	1125	1	3
206.19.86.10	53	206.19.87.147	1126	1	3
206.19.86.10	53	206.19.87.147	1127	1	3

These fields display settings that are set on the other Gateway pages. For descriptions, see the sections about those pages.



Home



Print



Exit

◀ 44 ▶

SBG1000 Wireless Cable Modem Gateway User Guide



Gateway > WAN Page

Use this page to configure the external (public) wide area network (WAN) interface:

WAN	Data
Host Name	
☒ Enable DHCP client (obtain dynamic IP address) ☐ Disable DHCP client (use static IP address)	
Static IP Address	206.19.87.147
Static IP Subnet Mask	255.255.255.224
WAN Default Gateway	206.19.87.129
DNS IP Address 1	206.19.80.10
DNS IP Address 2	206.19.86.10
DNS IP Address 3	0.0.0.0
TCP Session Wait Timeout	300
UDP Session Wait Timeout	300
ICMP Session Wait Timeout	300
Apply	

Gateway > WAN page fields

Field	Description
Host Name	If the cable service provider requires a hostname to access to their network, type the <i>hostname</i> they provided in this field. The default is None.
Enable DHCP Client	Enabling the DHCP client causes the wireless gateway to automatically obtain the public IP address , subnet mask , domain name , and DNS server(s). Most commonly, the DHCP client is enabled if the cable service provider automatically assigns a public IP address from their DHCP server. Enable DHCP Client is on by default.
Disable DHCP Client	If the cable service provider does not automatically assign a public IP address using DHCP, they must provide a static IP address . Select Disable DHCP Client. When you disable the DHCP client, you must type the static IP address, subnet mask, DNS server(s), and domain name (if necessary) in the fields provided. Disable DHCP Client is off by default.
Static IP Address	If Disable DHCP Client is on, type the static IP address provided by the cable service provider, in dotted-decimal format . The default is None.
Static IP Address Subnet Mask	If Disable DHCP Client is on, type the subnet mask associated with the static IP address, in dotted-decimal format. The default is None.
Domain Name	If the cable service provider requires a domain name, type the domain name they provided you in this field. The default is None.




Gateway > WAN page fields (continued)

Field	Description
DNS IP Address 1	The cable service provider DNS server provides name-to-IP address resolution. If the cable service provider does not automatically assign DNS addresses from their DHCP server, they must provide at least one DNS server IP address to enter in these fields, in dotted-decimal format. The default is None.
DNS IP Address 2	
DNS IP Address 3	
TCP Session Wait Timeout	Sets the maximum time in minutes to wait before assuming a TCP session has timed out. The default is 5 minutes.
UDP Session Wait Timeout	Sets the maximum time in minutes to wait before assuming a UDP session has timed out. The default is 5 minutes.
ICMP Session Wait Timeout	Sets the maximum time in minutes to wait before assuming an ICMP session has timed out. The default is 5 minutes.
Apply	Click to apply your changes.

Gateway > LAN — nat config Page

Use this page to configure NAT:

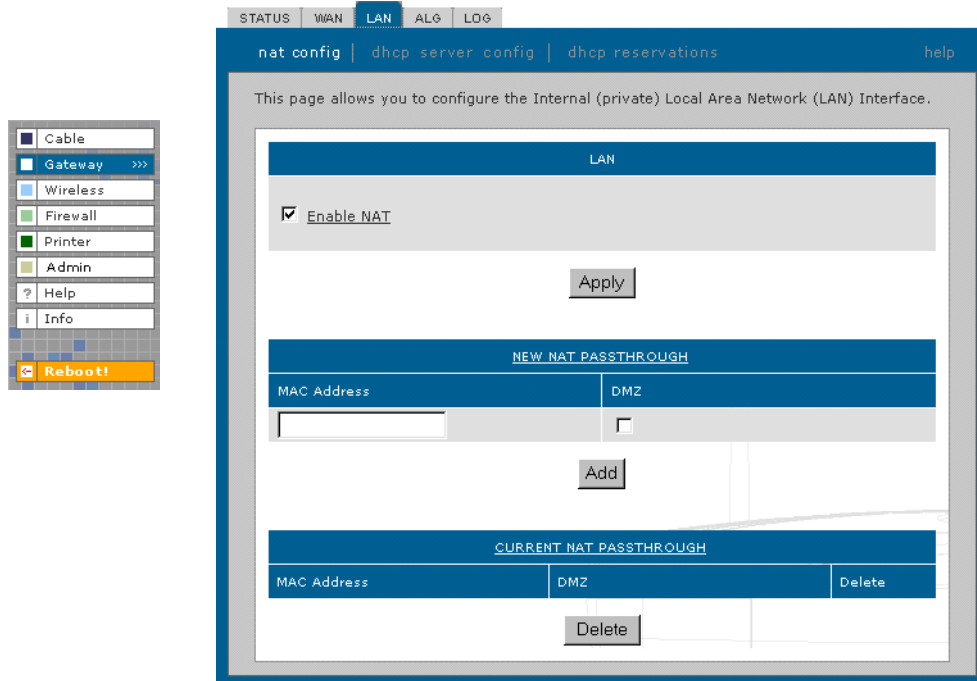


Gateway > LAN — nat config page fields

Field or Button	Description
LAN	
Enable NAT	If enabled, the single HFC IP Address (public IP address) assigned by the cable service provider is mapped to many private IP addresses on the SBG1000 LAN.
Apply	Click to apply your changes. You must reboot the SBG1000.
NEW NAT PASSTHROUGH	
MAC Address	Sets the MAC address of the passthrough client. The format is 16 hexadecimal numerals.
DMZ	Check the box to set the MAC address as a de-militarized zone (DMZ) client. A DMZ is a computer on the LAN that can be accessed from the public Internet.
Add	Click to add the IP address to the reserved IP address table.
CURRENT NAT PASSTHROUGH	
Delete	Click to delete the MAC address from the NAT passthrough list.

Gateway > LAN — dhcp server config Page

Experienced network administrators *only* can use this page to perform advanced DHCP server configuration:

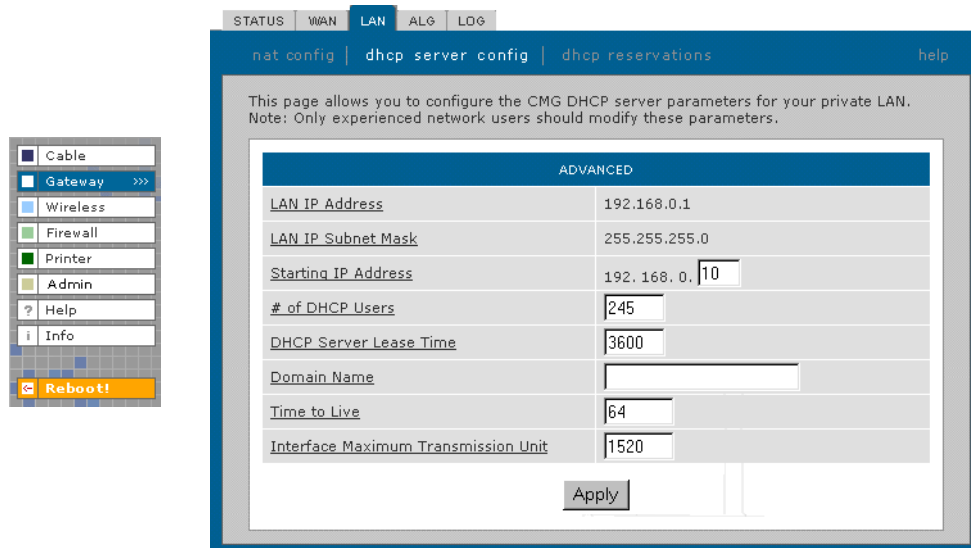

STATUS | WAN | **LAN** | ALG | LOG

nat config | **dhcp server config** | dhcp reservations | help

This page allows you to configure the CMG DHCP server parameters for your private LAN.
Note: Only experienced network users should modify these parameters.

ADVANCED	
LAN IP Address	192.168.0.1
LAN IP Subnet Mask	255.255.255.0
Starting IP Address	192.168.0.10
# of DHCP Users	245
DHCP Server Lease Time	3600
Domain Name	
Time to Live	64
Interface Maximum Transmission Unit	1520

Apply

CAUTION!




Do not modify these settings unless you are an experienced network administrator with strong knowledge of IP addressing, subnetting, and DHCP.

Gateway > LAN — advanced page fields

Field	Description
LAN IP Address	Sets the SBG1000 LAN IP address, in dotted-decimal format . The default is 192.168.0.1.
LAN IP Subnet Mask	Sets the subnet mask , in dotted-decimal format. The default is 255.255.255.0
Starting IP Address	Sets the starting IP address assigned by the SBG1000 DHCP server to clients, in dotted-decimal format. The default is 192.168.0.2.
# of DHCP Users	Sets the number of clients for the SBG1000 DHCP server to assign a private IP address. There are 253 possible client addresses. The default is 253.
DHCP Server Lease Time	Sets the time in seconds that the SBG1000 DHCP server leases an IP address to a client. The default is 60 seconds.
Domain Name	Sets the domain name for the SBG1000 LAN. The default is None.
Time To Live	Sets the TTL (hop limit) for outbound packets . The default is 64.
Interface Maximum Transmission Unit	Sets the SBG1000 LAN MTU , in bytes. The minimum is 68 bytes. The default is 1500 bytes.
Apply	Click to apply your changes. You must reboot the SBG1000.

Gateway > LAN — dhcp reservations Page

Use this page to configure DHCP reservations:

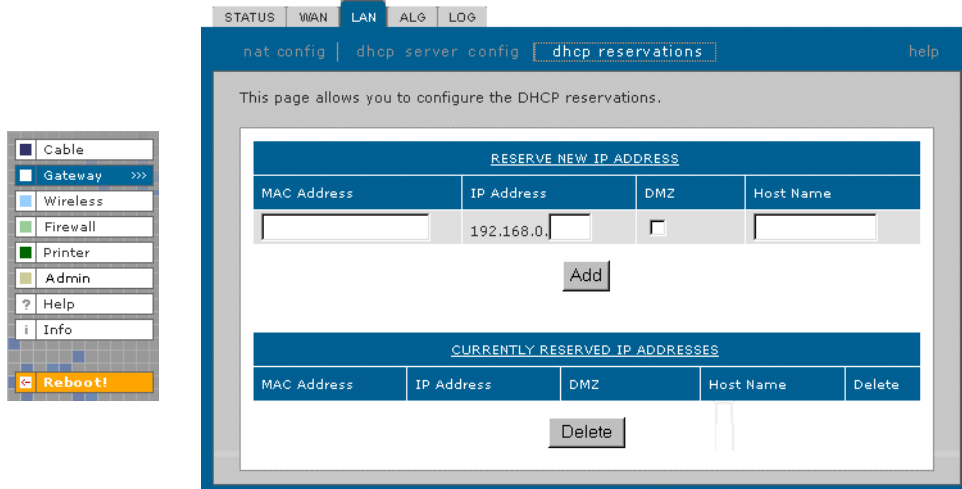

Gateway > LAN — dhcp reservations page fields

Field	Description
RESERVE NEW IP ADDRESS	You can reserve up to 32 IP addresses assigned by the SBG1000 DHCP server for specific LAN clients. For example, you can reserve an IP address for a private FTP server to ensure that it always receives the same private IP address.
MAC Address	Type the MAC address of the DHCP client for which a reserved IP address is required. The format is 16 hexadecimal numerals.
IP Address	Sets the host portion of the reserved IP address for the LAN client having the specified MAC address. When the LAN client requests an IP address, the SBG1000 DHCP server assigns the client this IP address.
DMZ	Check this box if you want the host to bypass NAT and be exposed directly to the Internet. When configuring a client as a NAT passthrough device, you can specify whether it should be a de-militarized zone (DMZ) host. A DMZ host is completely exposed to the Internet. <i>Any device configured as a DMZ is open to Internet hackers and should be used with extreme caution.</i>
Host Name	If your ISP requires a hostname to access their network, enter the hostname provided to you in the Host Name field.
Add	Click Add to reserve a new IP address.

Gateway > LAN — dhcp reservations page fields (continued)

Field	Description
CURRENTLY RESERVED IP ADDRESSES	Displays all DHCP clients that have specific IP addresses reserved for their use by MAC and IP address.
MAC Address	Displays the reserved MAC addresses.
IP Address	Displays the reserved IP addresses.
DMZ	Displays whether the client is configured as a DMZ.
Host Name	Displays the host name.
Delete	Click this box to remove the reserved IP address for the client.
Delete	Click this button to remove the reserved IP addresses for clients designated by the Delete box.

Gateway > ALG — basic Page


This may not be supported in your code release. For the most recent documentation, visit the [Product Documentation](#) page on www.motorola.com/broadband.

Gateway > ALG — advanced Page

This may not be supported in your code release. For the most recent documentation, visit the [Product Documentation](#) page on www.motorola.com/broadband.

Gateway > LOG Page

Use this page to:

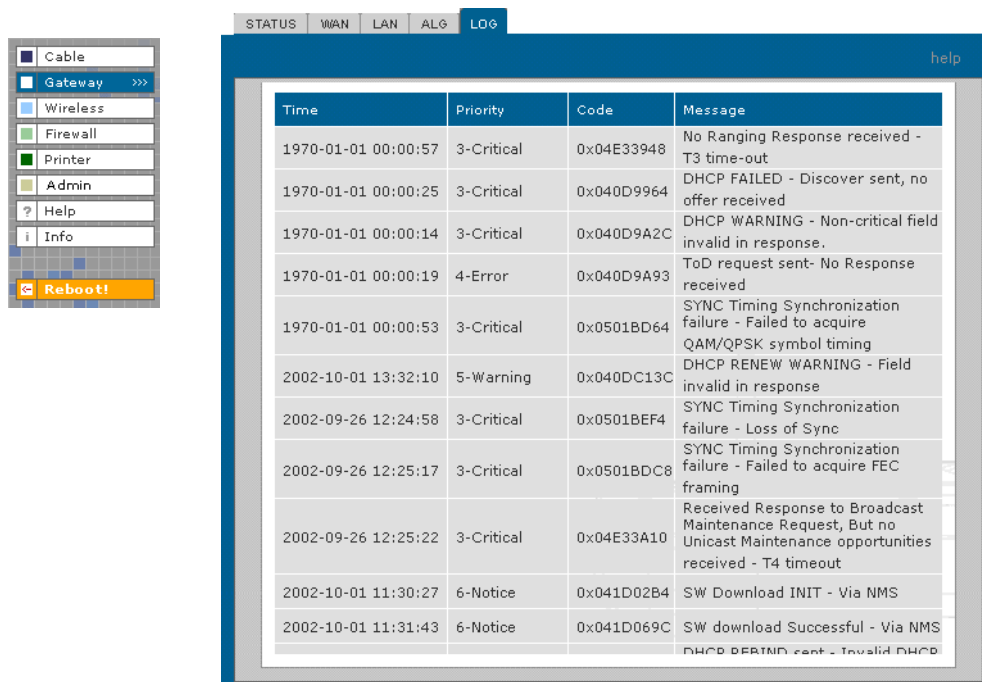

Time	Priority	Code	Message
1970-01-01 00:00:57	3-Critical	0x04E33948	No Ranging Response received - T3 time-out
1970-01-01 00:00:25	3-Critical	0x040D9964	DHCP FAILED - Discover sent, no offer received
1970-01-01 00:00:14	3-Critical	0x040D9A2C	DHCP WARNING - Non-critical field invalid in response.
1970-01-01 00:00:19	4-Error	0x040D9A93	ToD request sent- No Response received
1970-01-01 00:00:53	3-Critical	0x0501BD64	SYNC Timing Synchronization failure - Failed to acquire QAM/QPSK symbol timing
2002-10-01 13:32:10	5-Warning	0x040DC13C	DHCP RENEW WARNING - Field invalid in response
2002-09-26 12:24:58	3-Critical	0x0501BEF4	SYNC Timing Synchronization failure - Loss of Sync
2002-09-26 12:25:17	3-Critical	0x0501BDC8	SYNC Timing Synchronization failure - Failed to acquire FEC framing
2002-09-26 12:25:22	3-Critical	0x04E33A10	Received Response to Broadcast Maintenance Request, But no Unicast Maintenance opportunities received - T4 timeout
2002-10-01 11:30:27	6-Notice	0x041D02B4	SW Download INIT - Via NMS
2002-10-01 11:31:43	6-Notice	0x041D069C	SW download Successful - Via NMS
			DHCP RENEW sent - Invalid DHCP

Gateway > LOG page fields

Field	Description
Time	The data and time in the format yyyy-mm-dd hh:mm:ss (hours hh are 00 to 23)
Priority	Indicates the importance of the message.
Code	
Message	Describes the event.

Configuring TCP/IP

You must be sure all client computers are configured for [TCP/IP](#) (a protocol for communication between computers). Perform *one* of:


- “[Configuring TCP/IP in Windows 95, Windows 98, or Windows Me](#)” on page 54
- “[Configuring TCP/IP in Windows 2000](#)” on page 56
- “[Configuring TCP/IP in Windows XP](#)” on page 60
- Follow the instructions in your Macintosh or UNIX user manual

After configuring TCP/IP, perform *one* of the following to verify the [IP address](#):

- “[Verifying the IP Address in Windows 95, Windows 98, or Windows Me](#)” on page 64
- “[Verifying the IP Address in Windows 2000 or Windows XP](#)” on page 65
- Follow the instructions in your Macintosh or UNIX user manual


Configuring TCP/IP in Windows 95, Windows 98, or Windows Me

- 1 On the Windows Desktop, click **Start**.
- 2 Select **Settings** and then **Control Panel** from the pop-up menus to display the Control Panel window.
- 3 Double-click the **Network** icon to display the Network window:

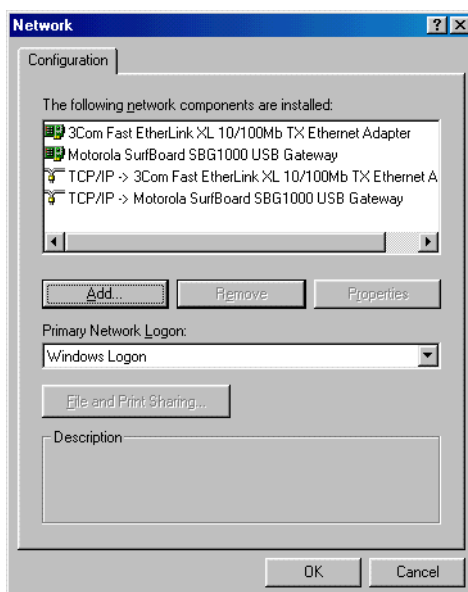


Although your SBG model number may be different than in the images in this guide, the procedure is the same.

- 4 Select the **Configuration** tab.
- 5 Verify that TCP/IP is installed for the adapter used to connect to the SBG1000. If TCP/IP is installed, skip to step 10. If TCP/IP is not installed for the adapter, continue with step 6.
- 6 Select the adapter to use for the SBG1000 connection and click **Add**. The Select Network Component Type window is displayed:

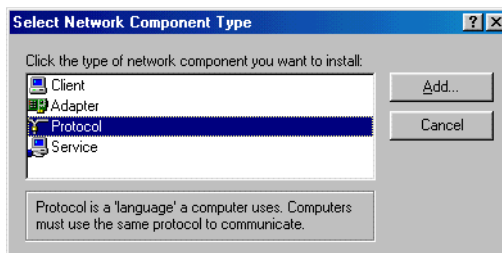


- 7 Click **Protocol** and click the **Add** button.

- 8 Click **Microsoft** in the Manufacturers section and click **TCP/IP** in the Network Protocol section of Select Network Protocol window:

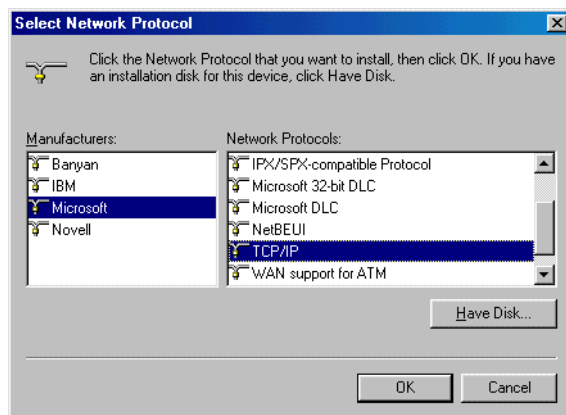

- 9 Click **OK**.
- 10 Click **TCP/IP** on the Network window. If there is more than one TCP/IP entry, choose the one for the Ethernet card or USB port connected to the SBG1000.
- 11 Click **Properties**. The TCP/IP Properties window is displayed:

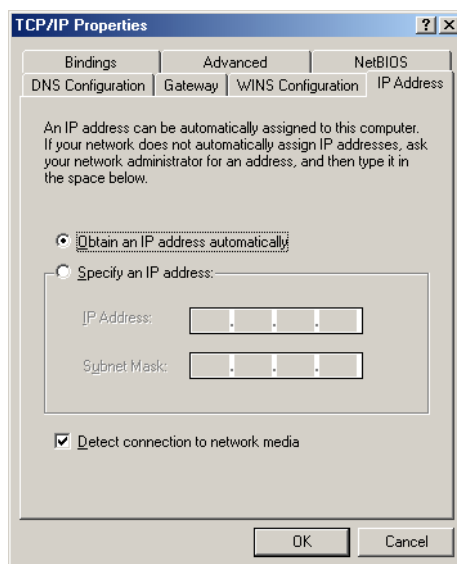


- 12 Click the **IP Address** tab.
- 13 Click **Obtain an IP address automatically**.
- 14 Click **OK** to accept the TCP/IP settings.
- 15 Click **OK** to close the Network window.
- 16 Click **OK** when prompted to restart the computer and click **OK** again.


When you complete TCP/IP configuration, go to ["Verifying the IP Address in Windows 95, Windows 98, or Windows Me"](#) on page 64.

Configuring TCP/IP in Windows 2000


- 1 On the Windows Desktop, click **Start**.
- 2 Select **Settings** and then **Control Panel** from the pop-up menus to display the Control Panel window:

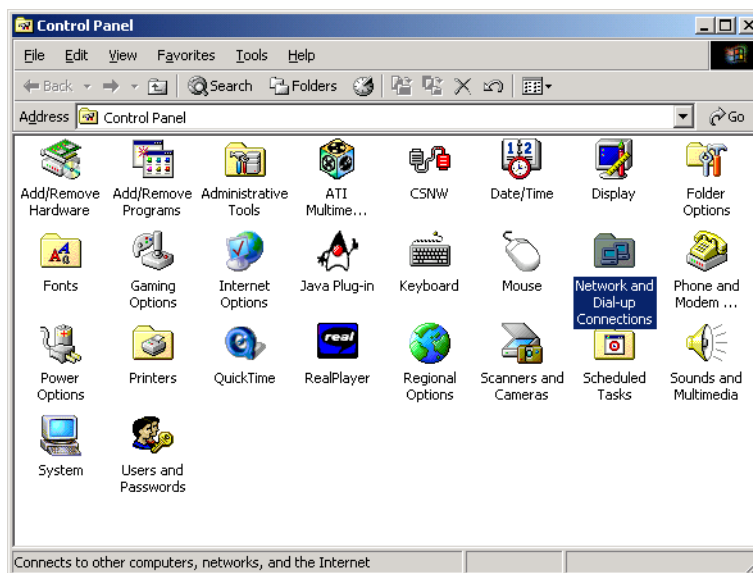


- 3 Double-click the **Network and Dial-up Connections** icon to display the Network and Dial-up Connections window:

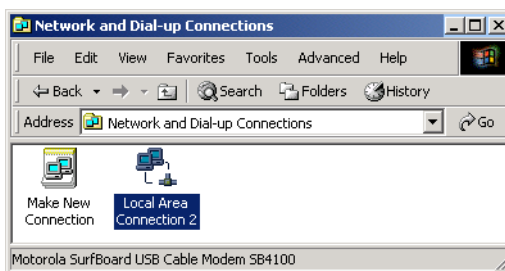

- 4 Click **Local Area Connection number**. The value of *number* varies from system to system. The Local Area Connection *number* Status window is displayed:

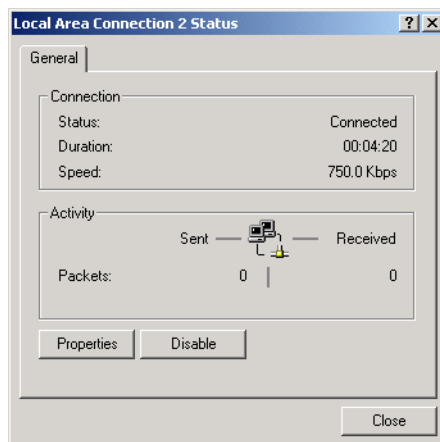


- 5 Click **Properties**. Information similar to the following window is displayed:

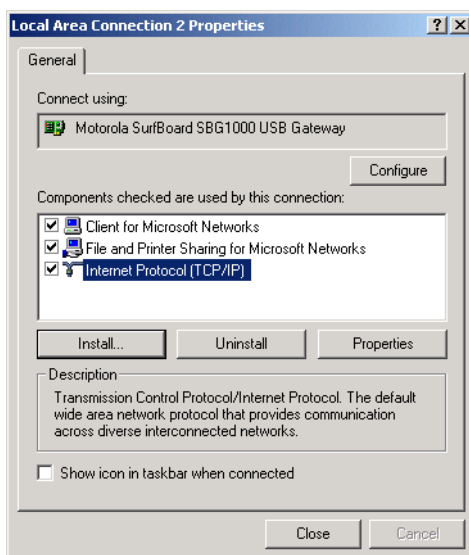


- 6 If Internet Protocol (TCP/IP) is in the list of components, TCP/IP is installed. You can skip to step 10.


If Internet Protocol (TCP/IP) is not in the list, click **Install**. The Select Network Component Type window is displayed:

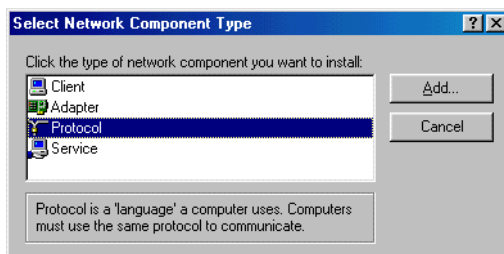

- 7 Click **Protocol** on the Select Network Component Type window and click **Add**. The Select Network Protocol window is displayed:

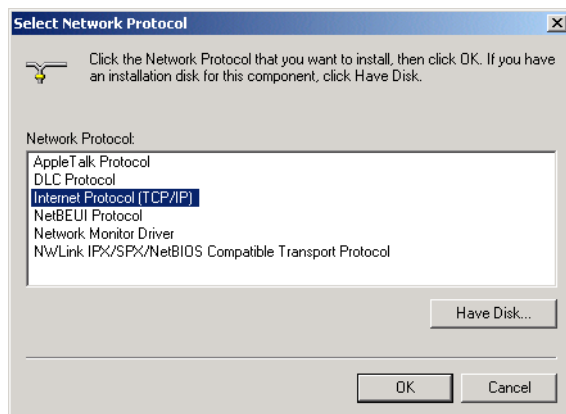


- 8 Click **Internet Protocol (TCP/IP)**.
- 9 Click **OK**. The Local Area Connection *number* Properties window is re-displayed.

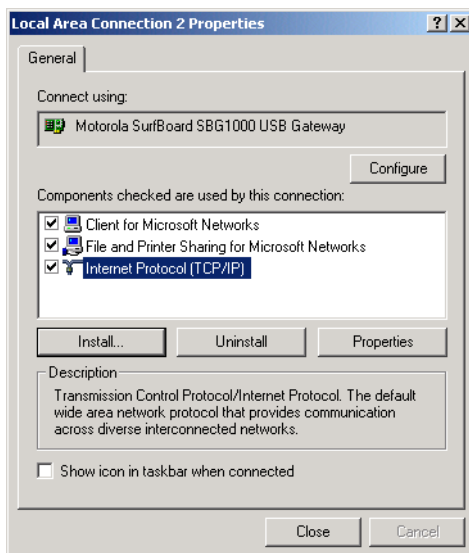

- 10 Be sure the box next to Internet Protocol (TCP/IP) is checked.

- 11** Click **Properties**. The Internet Protocol (TCP/IP) Properties window is displayed:

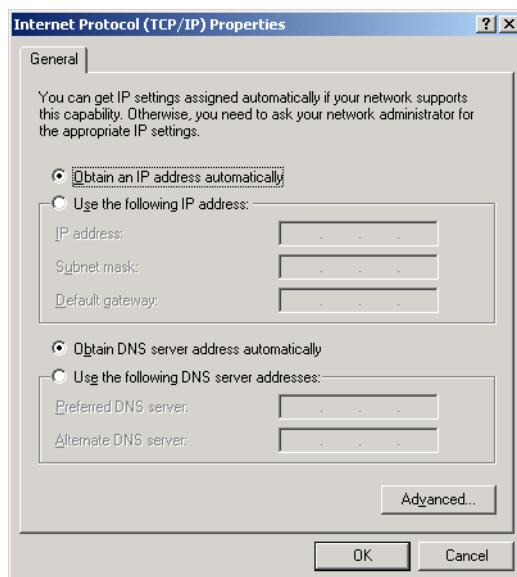

- 12** Be sure **Obtain IP address automatically** and **Obtain DNS server address automatically** are selected.

- 13** Click **OK** to accept the TCP/IP settings.


- 14** Click **OK** to close the Local Area Connection *number* Properties window.

- 15** Click **OK** when prompted to restart the computer and click **OK** again.


When you complete the TCP/IP configuration, go to "[Verifying the IP Address in Windows 2000 or Windows XP](#)" on page 65.

Configuring TCP/IP in Windows XP


- 1 On the Windows desktop, click **Start** to display the Start window:

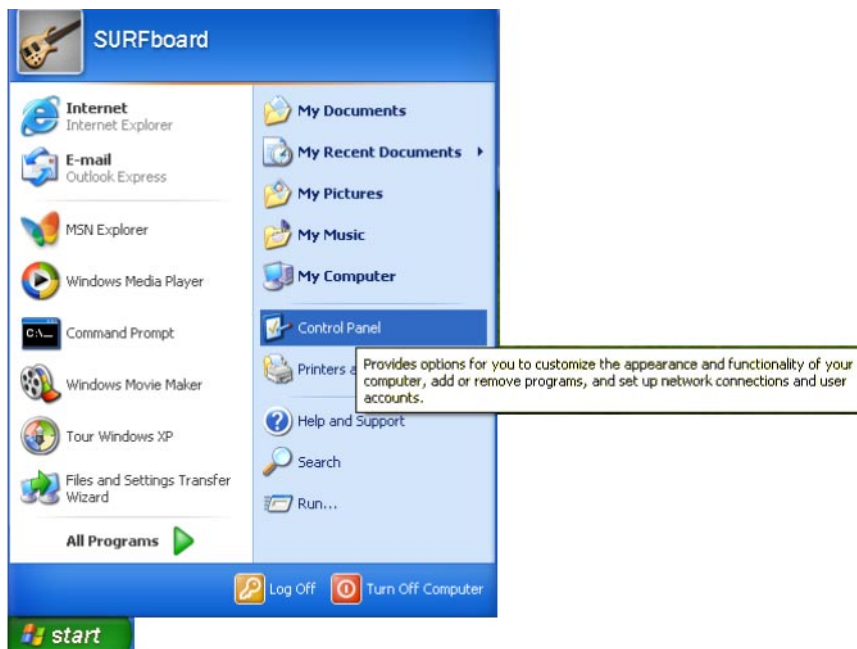


- 2 Click **Control Panel** to display the Control Panel window. The display varies, depending on the Windows XP view options. If the display is a Category view as shown below, continue with step 3. Otherwise, skip to step 5.

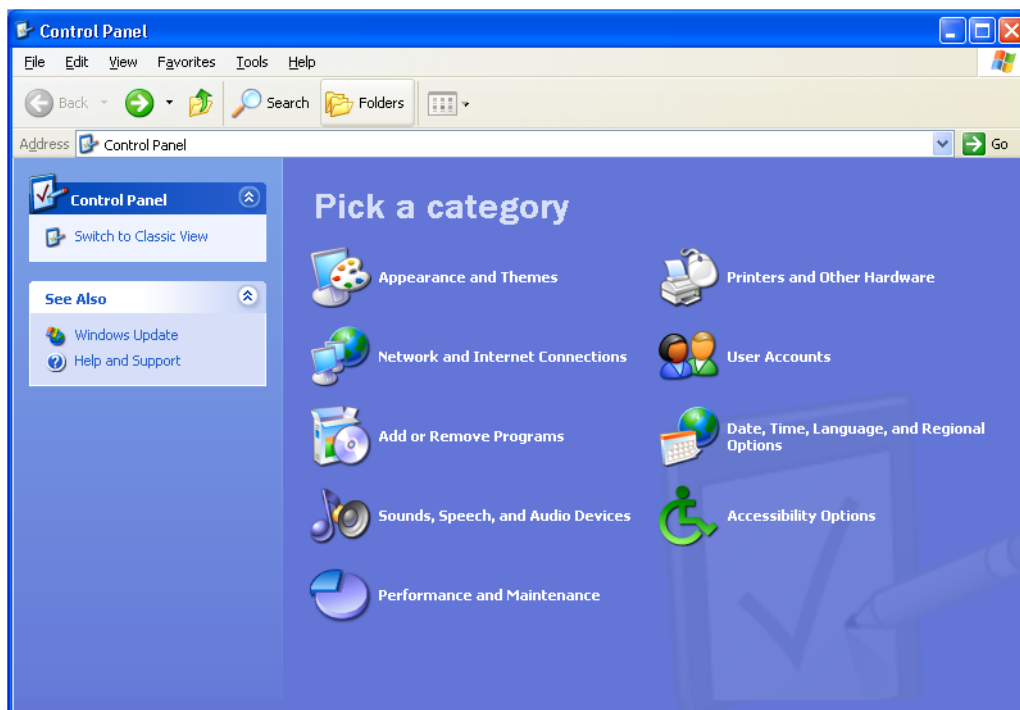


- 3 Click **Network and Internet Connections** to display the Network and Internet Connections window:

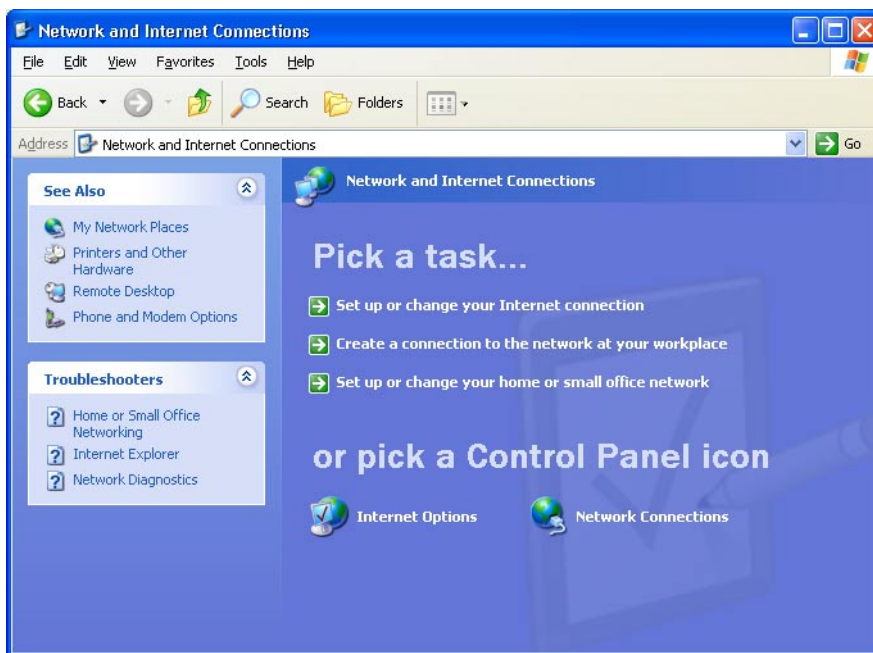


- 4 On the Network and Internet Connections window in the "or pick a Control Panel icon", click **Network Connections** to display the LAN or High-speed Internet connections. Skip to step 6.
- 5 If a classic view similar to below is displayed, click **Network Connections** to display the LAN or High-speed Internet connections:

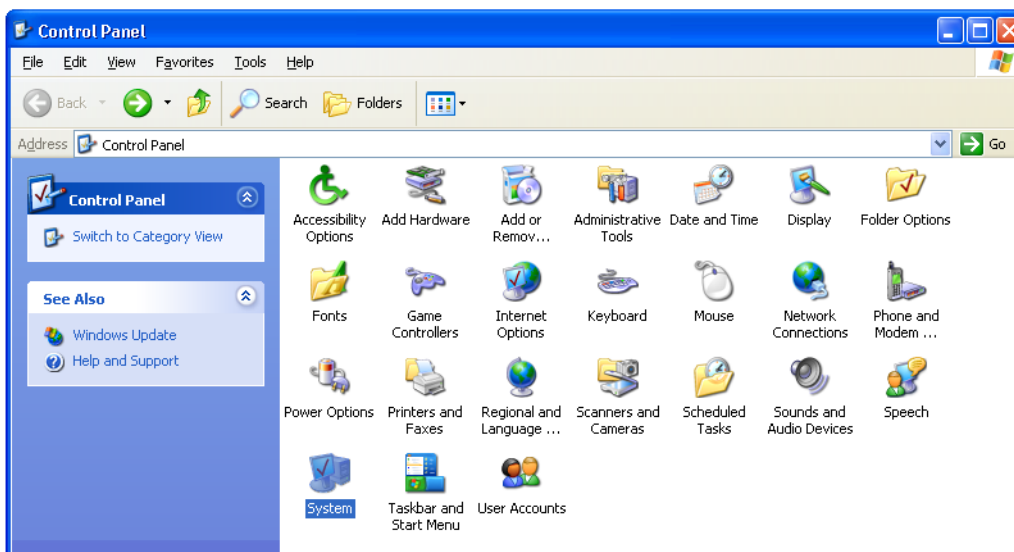

- 6 Right-click on the network connection. If more than one connection is displayed, be sure to select the one for your network interface:

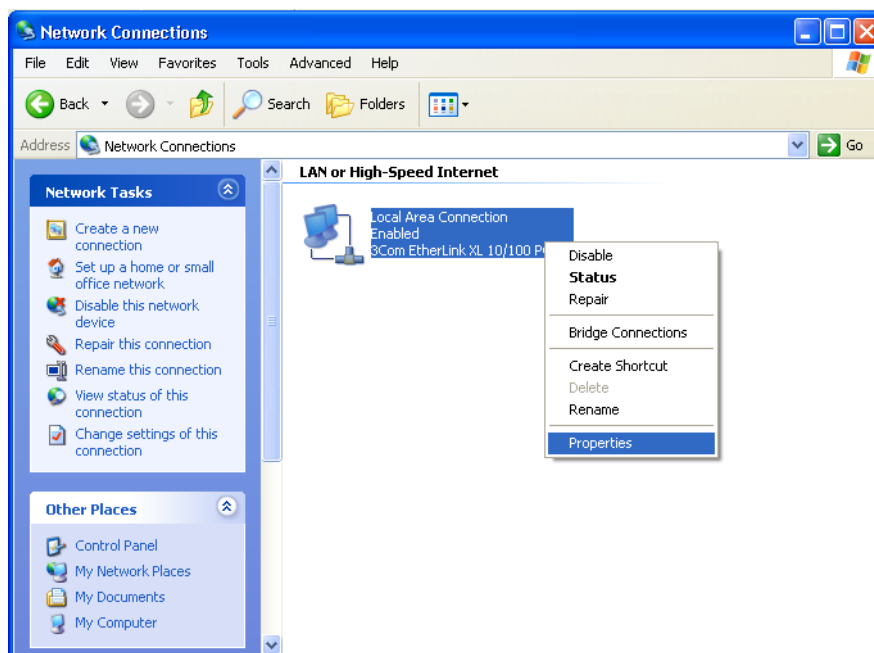


- 7 Select **Properties** from the pop-up menu to display the Local Area Connection Properties window:

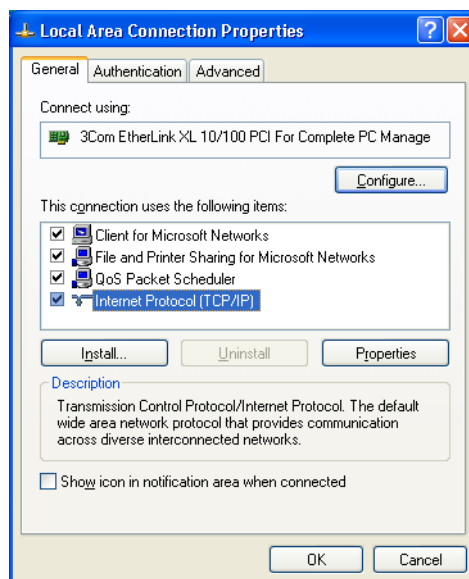

- 8 On the Local Area Connection Properties window, be sure Internet Protocol (TCP/IP) is checked. If it is not checked, check it.

- 9 Select **Internet Protocol (TCP/IP)** and click **Properties** to display the Internet Protocol (TCP/IP) Properties window:

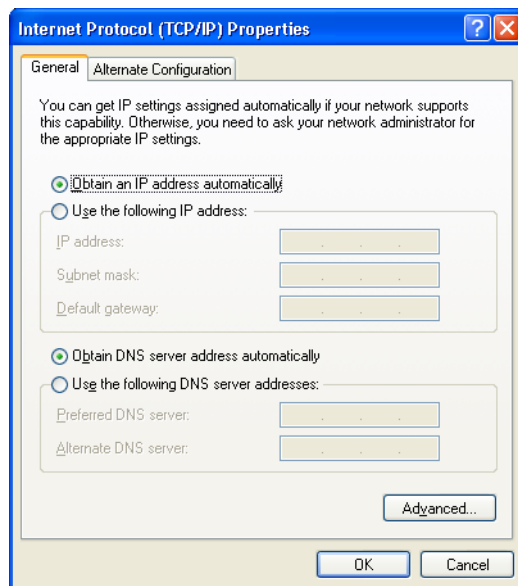


- 10 On the Internet Protocol (TCP/IP) Properties window, verify that the settings are correct, as shown above.
- 11 Click **OK** to close the TCP/IP Properties window.
- 12 Click **OK** to close the Local Area Connection Properties window.

When you complete the TCP/IP configuration, go to [“Verifying the IP Address in Windows 2000 or Windows XP”](#) on page 65.

Verifying the IP Address in Windows 95, Windows 98, or Windows Me

To check the IP address:

- 1 On the Windows Desktop, click **Start**.
- 2 Select **Run**. The Run window is displayed.
- 3 Type **winipcfg.exe** and click **OK**. The IP Configuration window is displayed. The Ethernet Adpater Information field will vary depending on the system, as shown in the following examples:

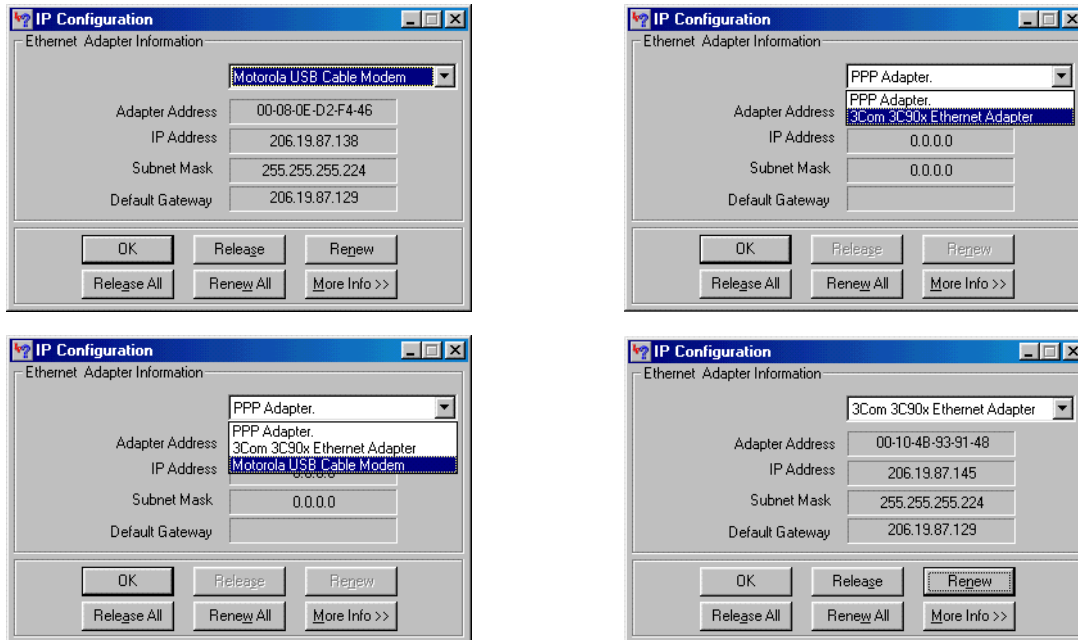

The values for Adapter Address, IP Address, Subnet Mask, and Default Gateway on the PC will be different than in the image.

In Windows 98, if "Autoconfiguration" is displayed before the IP Address as in the following image, call your service provider.

Adapter Address	00-80-C6-E7-59-E6
IP Autoconfiguration Address	169.254.191.251


- 4 Select the adapter name — the Ethernet card or USB device.
- 5 Click **Renew**.
- 6 Click **OK** after the system displays an IP address.

If after performing this procedure the computer cannot access the Internet, call your cable service provider for help.

Verifying the IP Address in Windows 2000 or Windows XP

To check the IP address:

- 1 On the Windows Desktop, click **Start**.
- 2 Select **Run**. The Run window is displayed.
- 3 Type **cmd** and click **OK** to display a command prompt window.
- 4 Type **ipconfig** and press ENTER to display the IP configuration. A display similar to the following indicates a normal configuration:

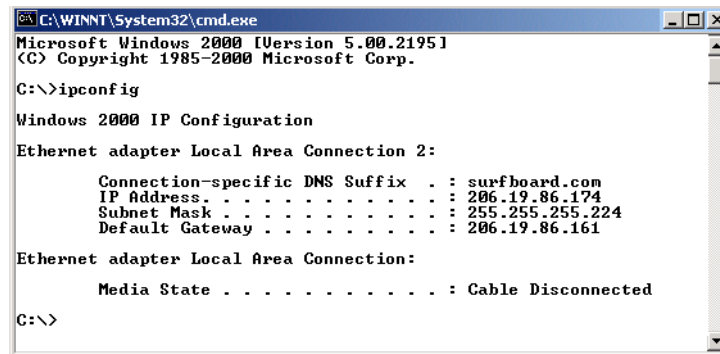

```

C:\WINNT\System32\cmd.exe
Microsoft Windows 2000 [Version 5.00.2195]
(C) Copyright 1985-2000 Microsoft Corp.

C:\>ipconfig

Windows 2000 IP Configuration

Ethernet adapter Local Area Connection 2:


    Connection-specific DNS Suffix  . : surfboard.com
    IP Address. . . . .               : 206.19.86.174
    Subnet Mask . . . . .             : 255.255.255.224
    Default Gateway . . . . .         : 206.19.86.161

Ethernet adapter Local Area Connection:

    Media State . . . . .             : Cable Disconnected

C:\>
  
```

If an Autoconfiguration IP Address is displayed as in the following window, there is an incorrect connection between the PC and the SBG1000 or there are cable network problems. Check the cable connections and determine if you can view cable-TV channels on your television:

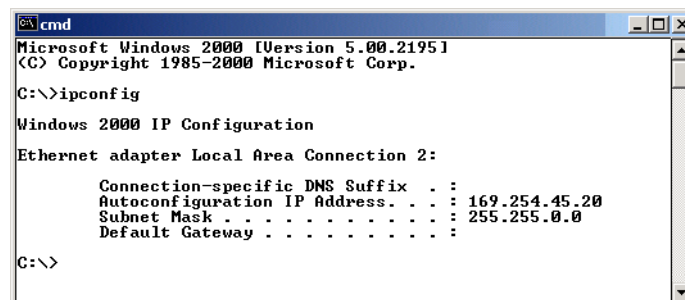

```

cmd
Microsoft Windows 2000 [Version 5.00.2195]
(C) Copyright 1985-2000 Microsoft Corp.

C:\>ipconfig

Windows 2000 IP Configuration

Ethernet adapter Local Area Connection 2:


    Connection-specific DNS Suffix  . : 
    Autoconfiguration IP Address. . . : 169.254.45.20
    Subnet Mask . . . . .             : 255.255.0.0
    Default Gateway . . . . .         : 

C:\>
  
```

After verifying the cable connections and proper cable-TV operation, renew the IP address.

To renew the IP address:

- 1 Type **ipconfig /renew** and press ENTER. If a valid IP address is displayed as shown, Internet access should be available.

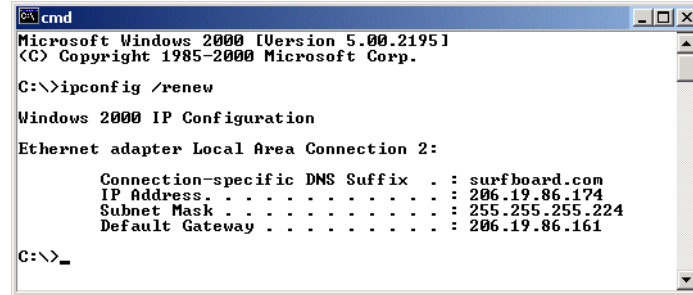

```
cmd
Microsoft Windows 2000 [Version 5.00.2195]
(C) Copyright 1985-2000 Microsoft Corp.

C:\>ipconfig /renew

Windows 2000 IP Configuration

Ethernet adapter Local Area Connection 2:

    Connection-specific DNS Suffix  . : surfboard.com
    IP Address. . . . . : 206.19.86.174
    Subnet Mask . . . . . : 255.255.255.224
    Default Gateway . . . . . : 206.19.86.161

C:\>
```

- 2 Type **exit** and press ENTER to return to Windows.

If after performing this procedure the computer cannot access the Internet, call your cable service provider for help.