

6. TESTED SYSTEM DETAILS

6.1 Peripherals and Others:

<i>Description</i>	<i>Model Name</i>	<i>Serial No.</i>	<i>Manufacturer</i>	<i>FCC ID</i>
Personal Computer	12XL212	1V08FHNJE1N5	Compaq Computer Co., Ltd.	DOC
PC Monitor	M2978	CY52401HF3CV	LG Electronics, Inc.	BEJCA500
Video Monitor	PVM-8040	2029411	Sony Corp.	N/A
Scanner	AS-1	0009	Fuji Photo Film Co., Ltd.	F5GAS-1
Mouse	M-BB48	LZE01271677	Logitech	DOC
AC Adapter (for PC)	LE-9702B-01	177625-001	Compaq Computer Co., Ltd.	N/A
AC Adaptor (for EUT)	AC-5VS	9956	Fuji Photo Film Co., Ltd.	N/A

(for AC Adapter of EUT, Input: 120VAC, 60Hz / Output: 5VDC)

Note:

*DOC: Declaration of Conformity by Manufacturer, Compaq Computer Co., Ltd., or Logitech.

* N/A: Equipment required for the Verification.

6.2 List of Cables :

<i>Description</i>	<i>Length</i>	<i>Type of shield</i>	<i>Ferrite Core</i>
Mouse / Personal Computer	1.9 m	Shielded	N/A
AC Power Cord (PC Monitor)	1.7 m	Non-shielded	N/A
PC Monitor / Personal Computer	1.65 m	Shielded	Provided
Scanner / Personal Computer	1.5 m	Shielded	Provided
EUT / Personal Computer	1.5 m	Shielded	Add
DC Power Cord (PC/AC adaptor)	1.5 m	Shielded	Provided
AC Power Cord (PC/AC adapter)	1.7 m	Non-shielded	N/A
DC Power Cord (EUT/AC adaptor)	1.9 m	Shielded	Add
AC Power Cord (Scanner)	1.8 m	Non-shielded	N/A
EUT / Video Monitor	1.4 m	Shielded	Add
AC Power Cord (Video Monitor)	1.5 m	Non-shielded	N/A

Note:

* Provided : The cable is an accessory for Personal Computer, Scanner or PC Monitor which was attached a ferrite core.



FUJIFILM

FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,
MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934


Facsimile: (03) 3406-9967

page 7 of 7

FCC ID : F5GFP-4800

Part 15 Subpart B Class B Digital Device

Figure 6-1 System Configuration Diagram :

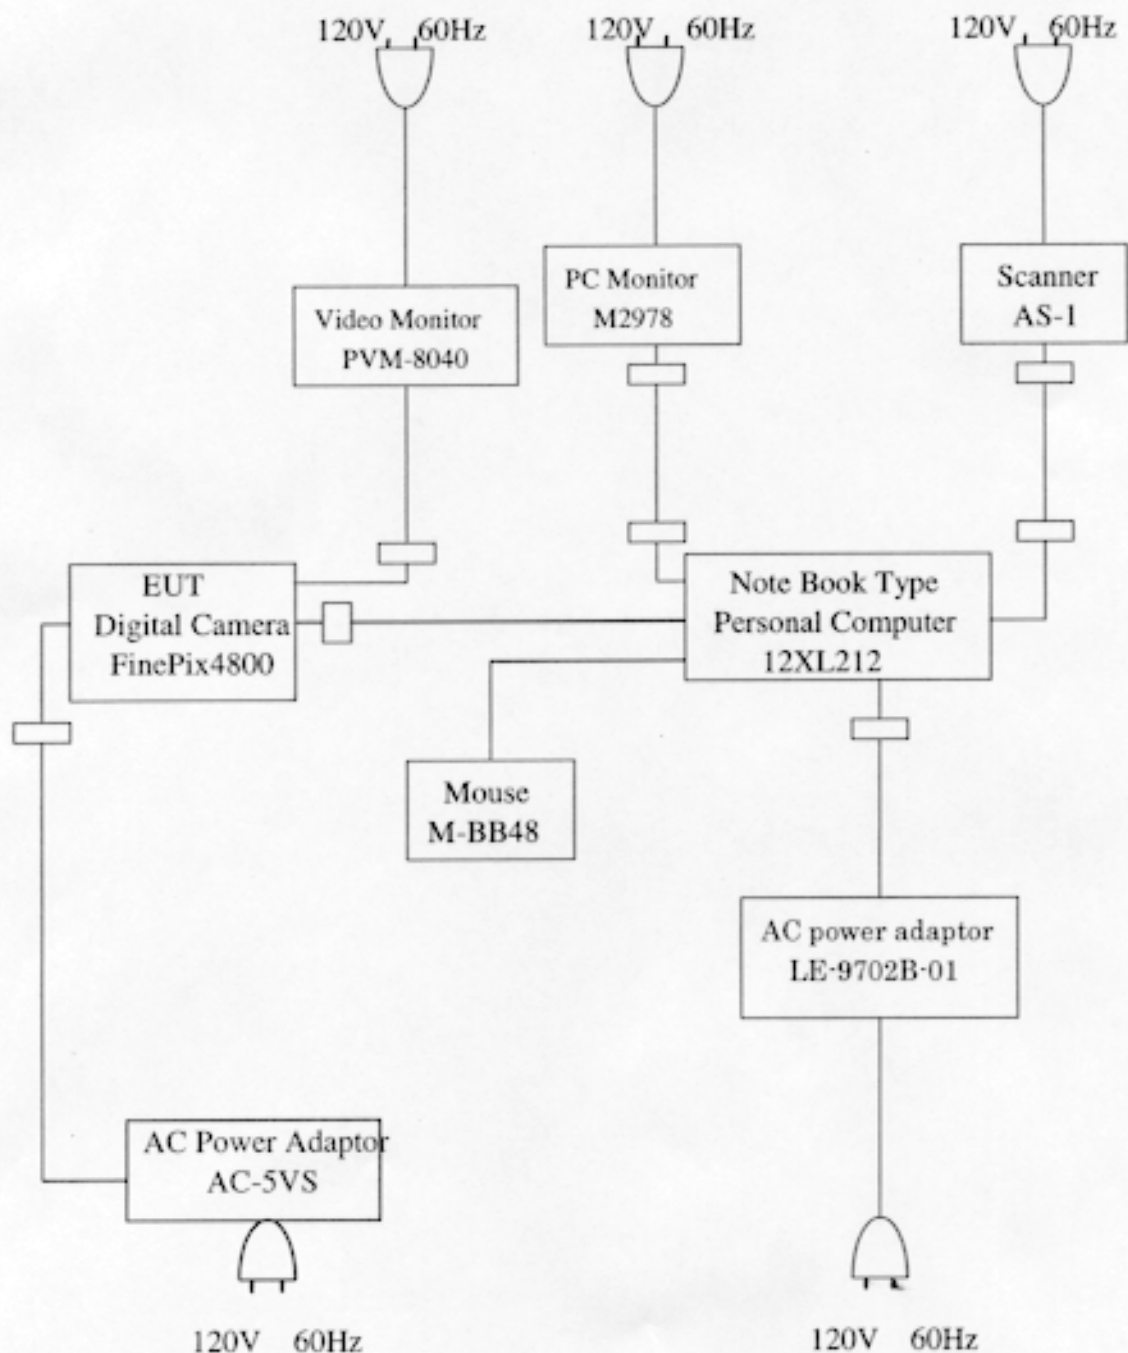



FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,

MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimile: (03) 3406-9967

FCC ID : F5GFP-4800

Part 15 Sub.part B Class B Digital Device

7. TEST RESULTS

7.1 Conducted Radio Noise Measurement

7.1.1 Measurement Instrumentation Used:

(Model / Serial No. / Manufacturer)

Test Receiver ----- (ESCS 30 / 825788-007 / Rohde & Schwarz)

L. I. S. N ----- (KNW-407 / 8-823-10 / Kyoritsu Electrical)

L. I. S. N ----- (KNW-407 / 8-680-7 / Kyoritsu Electrical)

Spectrum Analyzer System ----- (8568S / 2445A00924 / Hewlett Packard)

7.1.2 Measurement Procedure:

The power line conducted interference measurements were performed in a shield enclosure with peripherals placed on a table, 80cm high over a metal floor.

It was located more than required distance away from the shielded enclosure wall.

The EUT was plugged into the L.I.S.N. and the frequency range of interest scanned.

FCC ID : F5GFP-4800

Part 15 Sub.part B Class B Digital Device

7.1.3 Test Data

Table 7.1-1 Conducted Radio Noise Measurement Results:

Operating mode: Camera Mode Date of measurement: February 19, 2001
Test Procedure: ANSI C63.4-1992 Temperature: 18 degree C
Humidity: 65 %

Frequency (MHz)	Results		Results	Limit	Margin
	Meter Reading.		Emission Level		
	VA.	VB.			
	(dBuV/m)		(dBuV/m)	(dBuV/m)	(dBuV/m)
0.5000	31.3	35.9	35.9	47.9	12.0
1.3900	34.3	33.7	34.3	47.9	13.6
2.5300	33.6	32.7	33.6	47.9	14.3
6.4000	33.6	33.0	33.6	47.9	14.3
10.3600	29.1	27.5	29.1	47.9	18.8
19.0000	24.0	25.8	25.8	47.9	22.1

Note:

- 1) Emission Levels are higher levels of VA or VB of Meter Readings + Correction Factor.
- 2) VA: Between one end of the power cable and the grounded.
VB: Between the other end of power cable and the grounded.

7.1.4 Conducted Radio Noise Calculation

The conducted radio noise is calculated by adding the calibration factor to the measured reading. The basic equation and a sample calculation are as follows:

$$CRN = TRM + CF$$

$$Margin = Limit - CRN$$

where CRN = Conducted Radio Noise (dBuV)

TRM = Test Receiver Reading (dBuV)

CF : Correction Factor (dB/m)

The Correction factor includes cable loss and LISN factor.



FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,

MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimile: (03) 3406-9967

FCC ID : F5GFP-4800

Part 15 Sub.part B Class B Digital Device

7.2 Radiated Radio Noise Measurement

7.2.1 Measurement Instrumentation Used :

(Model / Serial No. / Manufacturer)

Test Receiver ----- (ESCS 30 / 834115-020 / Rohde & Schwarz)

Bi-Conical Antenna ----- (BBA9106 / D-6901 No.2 / Schwarzbeck)

Log-Periodic Antenna ----- (UHALP9107 / 424-517 / Schwarzbeck)

Spectrum Analyzer System ----- (8568S / 2445A00924 / Hewlett Packard)

7.2.2 Measurement Procedure:

The EUT was placed in a 80cm high table along with the peripherals.

The turn table was separated from the antenna at a distance of 3 meter. Cables were placed in a position to produce maximum emission as determined by experimentation, and operation mode was selected for maximum.

The frequencies and amplitudes of maximum emission were measured at varying azimuths, antenna heights and antenna polarities.

FCC ID : F5GFP-4800
Part 15 Sub.part B Class B Digital Device

7.2.3 Test Data

Table 7.2-1 Radiated Radio Noise Measurement Results:

Operating mode: Camera

Date of measurement: February 19, 2001

Test Procedure: ANSI C63.4-1992

Temperature: 15 degree C

Humidity: 56 %

Frequency	Correction	Results		Results	Limit	Margin
	Factor	Meter Reading.		Emission Level		
(Mhz)	(dB)	(dBuV/m)		(dBuV/m)	(dBuV/m)	(dBuV/m)
		Hori.	Vert.			
53.640	11.3	-	27.0	27.0	40.0	13.0
69.550	7.8	24.3	-	24.3	40.0	15.7
71.660	7.7	-	28.7	28.7	40.0	11.3
261.820	21.1	30.6	32.0	32.0	46.0	14.0
304.260	19.7	37.5	-	37.5	46.0	8.5
311.420	19.8	41.2	34.8	41.2	46.0	4.8
320.050	20.0	37.9	-	37.9	46.0	8.1
327.280	20.2	-	34.5	34.5	46.0	11.5
336.020	20.3	-	35.4	35.4	46.0	10.6
360.000	20.8	36.5	36.0	36.5	46.0	9.5
499.810	23.6	34.1	40.2	40.2	46.0	5.8
520.070	24.0	36.8	-	36.8	46.0	9.2
540.080	24.4	37.9	-	37.9	46.0	8.1
600.980	26.0	-	34.7	34.7	46.0	11.3
699.780	27.6	-	35.9	35.9	46.0	10.1
787.500	28.5	-	34.9	34.9	46.0	11.1
899.830	31.8	42.5	39.8	42.5	46.0	3.5

Note: 1) Meter Readings are corrected by all Correction Factors.

2) Emission Levels are higher levels of Hori. or Vert. of Meter Readings.

3) Margin = Limit - Emission Level.



FUJIFILM

FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,

MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimile: (03) 3406-9967

FCC ID : F5GFP-4800

Part 15 Sub.part B Class B Digital Device

7.2.4 Radiated Radio Noise Calculation

The radiated radio noise is calculated by adding the correction factor to the measured reading. The basic equation and a sample of calculation are as follows;

$$\text{RRN} = \text{TRM} + \text{CF}$$

$$\text{Margin} = \text{Limit} - \text{RRN}$$

where RRN = Radiated Radio Noise (dBuV)

TRM = Test Receiver Reading (dBuV)

CF : Correction Factor (dB/m), The correction factor includes pre-amplifier gain, cable loss and antenna factor.