

TDK CORPORATION
QUALITY ASSURANCE DEPARTMENT
2-15-7 HIGASHI-OWADA , ICHIKAWA-SHI
CHIBA 272-0026 , JAPAN

TDK EMC CENTER CHIKUMAGAWA OPEN SITE

543 OTAI SAKU-CITY NAGANO JAPAN

REPORT OF MEASUREMENTS ON DIGITAL DEVICE

Date : December 17 ,2001


Issued in : Saku-city , JAPAN

TDK APPLICATION No.: TDC-01-1206

1. Applicant : FUJI PHOTO FILM CO. , LTD
13-45 , SENZUI 3 - CHOME , ASAKA - SHI , SAITAMA
351 - 8585 JAPAN
2. Factory : FUJI FILM PHOTONIX CO. , LTD
1 - 6 , MATSUZAKADAIRA TAIWA - CHO ,
KUROKAWA - GUN , MIYAGI - KEN , 981 - 3492 JAPAN
3. Description of Equipment Under Test (EUT)
- 3-1. EUT : DIGITAL CAMERA
3-2. Category : FCC Class B Digital Device
3-3. FCC ID No. : F5GFP-F601
3-4. Trade Name : FUJIFILM
3-5. Model No. : Fine Pix F601 ZOOM
3-6. Serial No. : P0007
3-7. Date of Manufacture : December ,2001
3-8. Power Supply : 120 V AC , 60Hz
4. Regulation Applied : FCC Part 15 Subpart B CLASS B 3m
5. Measurement Procedure Used : FCC Part 15 Subpart B CLASS B 3m
6. Place of Measurement : TDK EMC CENTER CHIKUMAGAWA OPEN SITE
7. Date of Measurement : December 14 ,2001
8. Measurement Results : The test results show that EUT conform to regulations
applied as shown in the attached sheets.

Note : (1) The test results relate only to items tested.

(2) This report shall not be reproduced except in full without the written approval of testing
laboratory.



Nobuyuki Ono

Chief of TDK CHIKUMAGAWA OPEN SITE

Phone : 047-378-9470

FAX : 047-378-9780

TDK Application No. : TDC-01-1206

MEASUREMENT RESULTS OF RADIATED RADIO NOISE at 3m

Date : December 14, 2001

Temp. : 15 °C ; Humi. : 40 %

Test Receiver : Rohde & Schwarz ESCS 30
 Operation Mode : Detector function : CISPR Quasi-Peak
 6dB Band width : 120kHz

External Attenuator : none

Description of Equipment DIGITAL CAMERA

Model No. : Fine Pix F601 ZOOM

Test Condition of Equipment Under Test (EUT)

1) Configuration of EUT : Refer to sheet No.5, 6 and 7.

2) EUT Grounding : None.

3) Operating Condition : USB PC CAMERA Mode .


Frequency (MHz)	Correction Factor (dB)	Meter Reading (dB μ V/m)		Limit (dB μ V/m)	Emission Level (dB μ V/m)		Margin (dB)
		Hor.	Ver.		Hor.	Ver.	
66.440	8.2	---	27.5	40.0	---	27.5	12.5
68.220	8.0	29.1	---	40.0	29.1	---	10.9
71.970	7.7	---	27.2	40.0	---	27.2	12.8
196.370	19.2	34.7	35.2	43.5	34.7	35.2	8.3
220.910	20.3	33.2	33.4	46.0	33.2	33.4	12.6
245.460	20.7	34.5	---	46.0	34.5	---	11.5
311.420	19.8	42.7	34.2	46.0	42.7	34.2	3.3
319.090	20.0	27.7	---	46.0	27.7	---	18.3
320.050	20.0	41.1	---	46.0	41.1	---	4.9
343.640	20.5	---	33.2	46.0	---	33.2	12.8
415.230	21.8	---	32.9	46.0	---	32.9	13.1
520.080	24.0	37.0	---	46.0	37.0	---	9.0
540.080	24.4	36.3	---	46.0	36.3	---	9.7
560.080	24.9	34.3	---	46.0	34.3	---	11.7
613.640	26.3	35.3	---	46.0	35.3	---	10.7
615.680	26.3	32.7	---	46.0	32.7	---	13.3
662.730	27.1	33.9	40.2	46.0	33.9	40.2	5.8

Note : 1) Meter Readings include Correction Factor (Antenna factor , Cable loss).

2) Margin = Limit — Emission Level.

Tested by : *Fumihiko Oa*
 Engineer of TDK Chikumagawa Open Site

FCC 15B CLASS B RADIATED 3m
EUT : Fine Pix F601 ZOOM 120V/60Hz
MODE : USB PC CAMERA Mode
Frequency : 30 ~ 1000 MHz

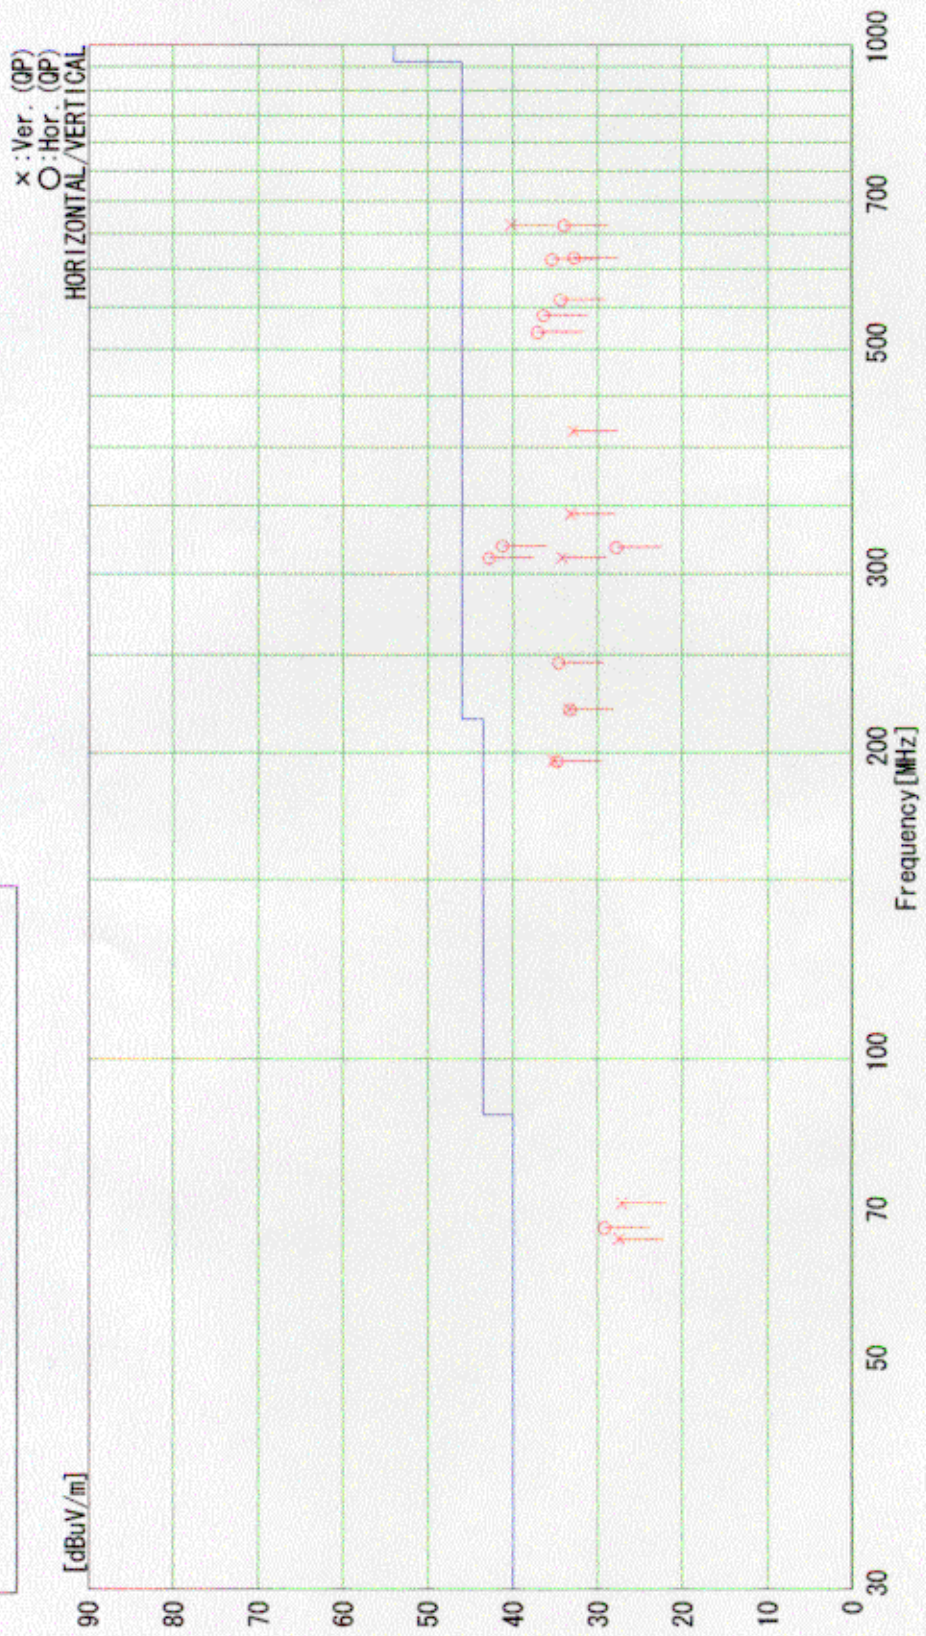

TDK Application No. : TDC-01-1206

MEASUREMENT RESULTS OF RADIATED RADIO NOISE at 3m

Date : December 14 ,2001

Temp. : 15 °C ; Humi. : 40 %

Test Receiver : Rohde & Schwarz ESCS 30
 Operation Mode : Detector function : CISPR Quasi-Peak
 6dB Band width : 120kHz

External Attenuator : none

Description of Equipment DIGITAL CAMERA

Model No. : Fine Pix F601 ZOOM

Test Condition of Equipment Under Test (EUT)

1) Configuration of EUT : Refer to sheet No.5, 6 and 7.

2) EUT Grounding : None.

3) Operating Condition : CAMERA Mode .


Frequency (MHz)	Correction Factor (dB)	Meter Reading (dB μ V/m)		Limit (dB μ V/m)	Emission Level (dB μ V/m)		Margin (dB)
		Hor.	Ver.		Hor.	Ver.	
66.440	8.2	---	27.5	40.0	---	27.5	12.5
68.220	8.0	29.4	---	40.0	29.4	---	10.6
71.970	7.7	---	27.2	40.0	---	27.2	12.8
196.370	19.2	34.5	32.4	43.5	34.5	32.4	9.0
220.910	20.3	32.8	32.9	46.0	32.8	32.9	13.1
245.460	20.7	34.5	---	46.0	34.5	---	11.5
311.420	19.8	42.7	32.4	46.0	42.7	32.4	3.3
319.090	20.0	27.7	---	46.0	27.7	---	18.3
320.050	20.0	41.1	---	46.0	41.1	---	4.9
343.640	20.5	---	32.4	46.0	---	32.4	13.6
415.230	21.8	---	33.1	46.0	---	33.1	12.9
520.080	24.0	37.0	---	46.0	37.0	---	9.0
540.080	24.4	36.3	---	46.0	36.3	---	9.7
552.280	24.7	---	34.5	46.0	---	34.5	11.5
560.080	24.9	34.3	---	46.0	34.3	---	11.7
613.640	26.3	35.3	---	46.0	35.3	---	10.7
615.680	26.3	32.7	---	46.0	32.7	---	13.3
662.730	27.1	33.9	40.2	46.0	33.9	40.2	5.8

Note : 1) Meter Readings include Correction Factor (Antenna factor , Cable loss).


2) Margin = Limit — Emission Level.

Tested by : *Junichi Gai*
 Engineer of TDK Chikumagawa Open Site

FCC 15B CLASS B RADIATED 3m
EUT : Fine Pix F601 ZOOM 120V/60Hz
MODE : CAMERA Mode
Frequency : 30 ~ 1000 MHz

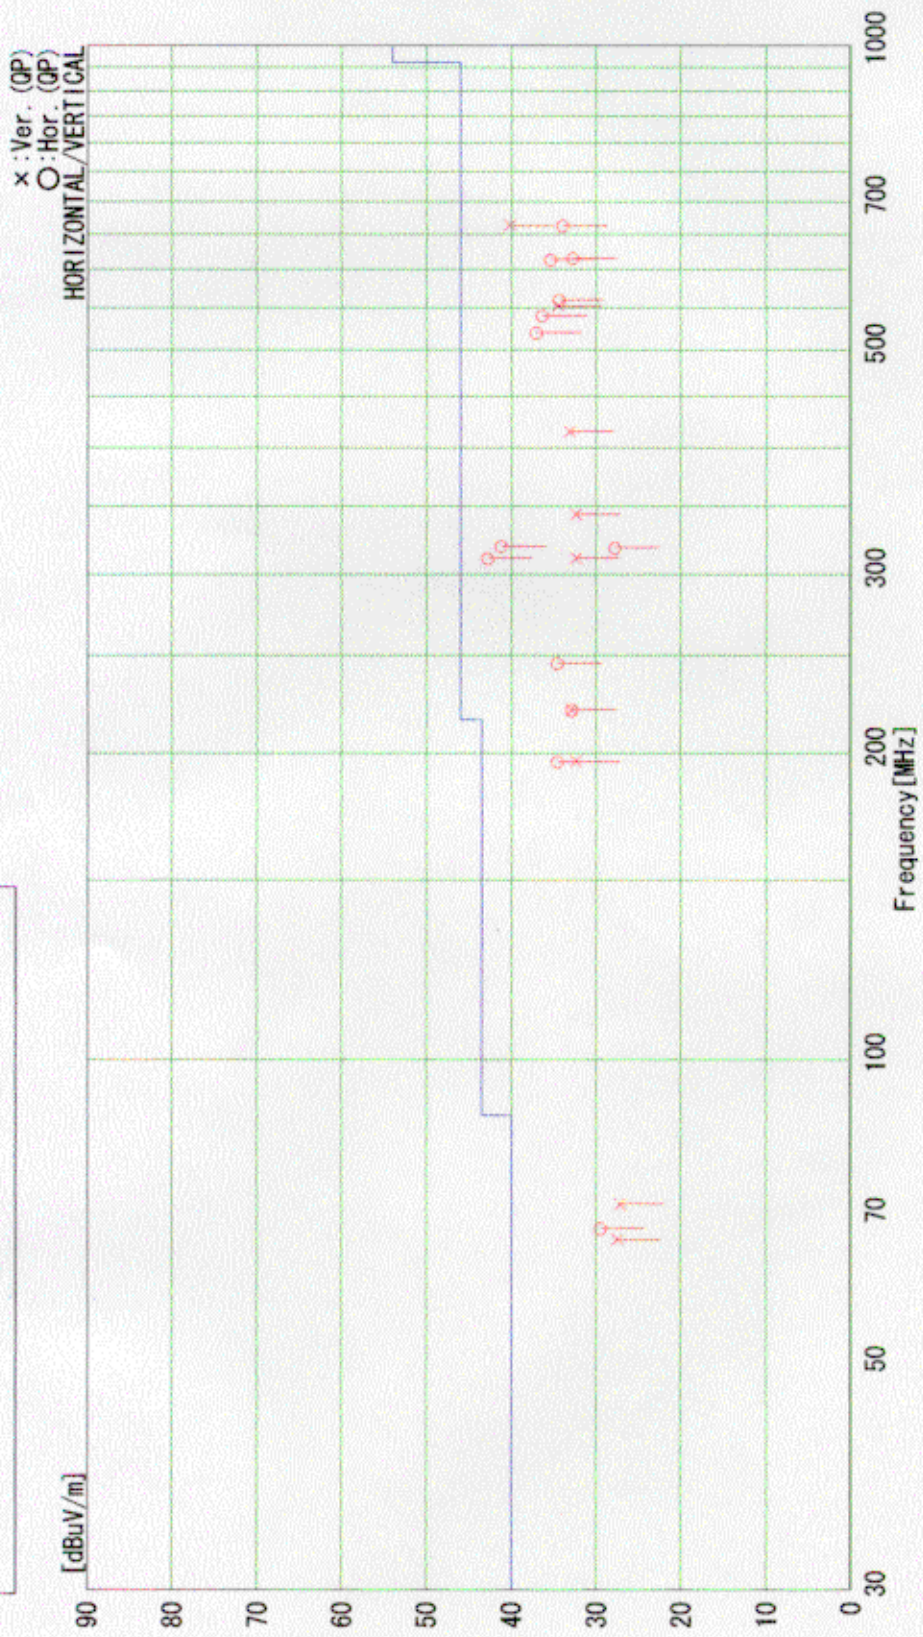

EUT's Test Arrangement of Radiation
 Non Metallic (F. R. P.) Dome (W 8.0m × D 6.3m × H 5.5m)

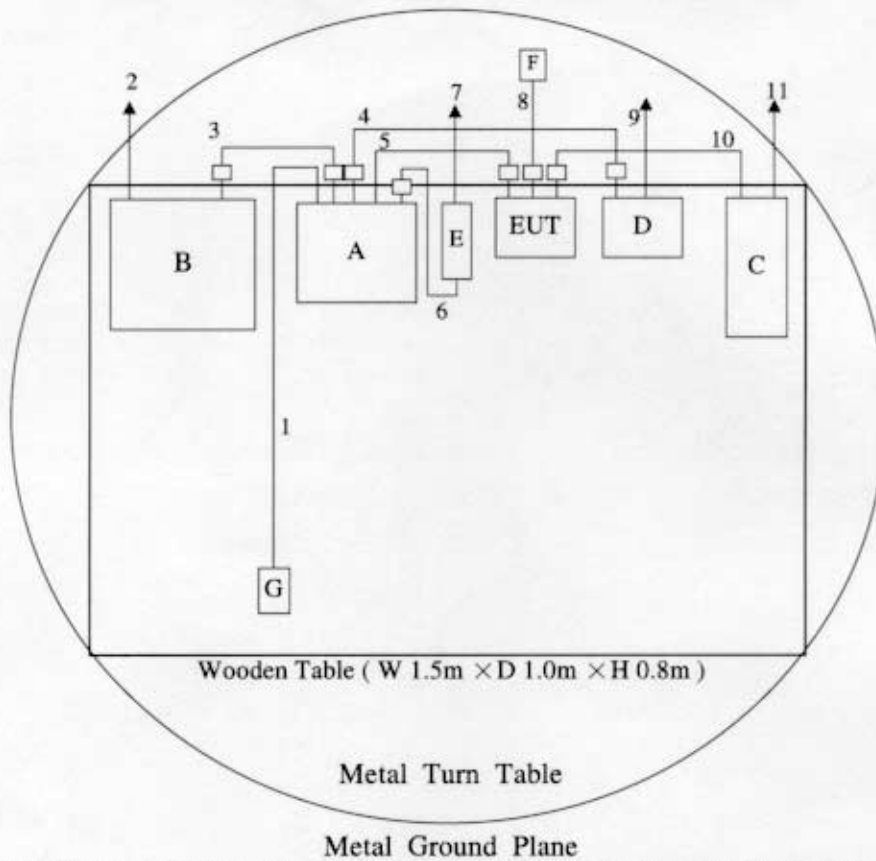

Test Configuration

No.	Device	MODEL No.	FCC ID	S/N	Manufacturer
EUT	DIGITAL CAMERA	Fine Pix F601 ZOOM	F5GFP-F601	P0007	FUJI PHOTO FILM CO. , LTD
A	NOTE BOOK COMPUTER	PRESARIO 12XL212	DOC	1V08FHNJE1N5	COMPAQ COMPUTER CO. ,LTD.
B	PC MONITOR	M2978	BEJCA500	CY52401HF3CV	LG ELECTRONICS
C	VIDEO MONITOR	PVM-8040	-----	2029411	SONY
D	SCANNER	AS1	F5GAS-1	0009	FUJI PHOTO FILM CO. , LTD
E	AC ADAPTER (PC)	LE-9702B-01	DOC	177625-001	COMPAQ COMPUTER CO. ,LTD.
F	AC ADAPTER (EUT)	AC-5VS	-----	9956	FUJI PHOTO FILM CO. , LTD
G	MOUSE	M-BB48	DOC	LZE01271677	LOGITECH

TDK Application No : TDC-01-1206

Connection Cables

No.	I/F & Power Cable	Model No.	Cable Length	Feraite Core	Manufacturer
1	MOUSE CABLE	-----	1.90 m		SHIELD YES
2	PC MONITOR POWER CABLE	-----	1.70 m		
3	PC MONITOR CABLE	-----	1.65 m	YES	SHIELD YES
4	SCSI CABLE	-----	1.50 m	YES	SHIELD YES
5	USB CABLE	-----	1.50 m	YES	SHIELD YES
6	AC ADAPTOR CABLE	-----	1.50 m	YES	SHIELD YES
7	ADAPTOR POWER CABLE	-----	1.70 m		
8	EUT ADAPTOR CABLE	-----	1.90 m	YES	SHIELD YES
9	AC CABLE(SCANNER)	-----	1.80 m		
10	AV CABLE	-----	1.40 m	YES	SHIELD YES
11	AC CABLE(VIDEO MONITOR)	-----	1.50 m		

RADIATION MEASUREMENT

EUT : DIGITAL CAMERA

MODEL No. Fine Pix F601 ZOOM

CONFIGURATION FRONT VIEW



CONFIGURATION REAR VIEW



TDK Application No. : TDC-01-1206

MEASUREMENT RESULTS OF RADIATED RADIO NOISE at 3m

Date : December 14 ,2001

Temp. : 15 °C ; Humi. : 40 %

Test Receiver : Rohde & Schwarz ESCS 30
 Operation Mode : Detector function : CISPR Quasi-Peak
 6dB Band width : 120kHz

External Attenuator : none

Description of Equipment DIGITAL CAMERA

Model No. : Fine Pix F601 ZOOM

Test Condition of Equipment Under Test (EUT)

1) Configuration of EUT : Refer to sheet No.12, 13 and 14.

2) EUT Grounding : None.

3) Operating Condition : USB PC CAMERA Mode .


Frequency (MHz)	Correction Factor (dB)	Meter Reading (dB μ V/m)		Limit (dB μ V/m)	Emission Level (dB μ V/m)		Margin (dB)
		Hor.	Ver.		Hor.	Ver.	
66.440	8.2	---	28.9	40.0	---	28.9	11.1
68.220	8.0	27.1	---	40.0	27.1	---	12.9
71.970	7.7	---	26.8	40.0	---	26.8	13.2
196.370	19.2	33.8	35.2	43.5	33.8	35.2	8.3
220.910	20.3	33.2	32.8	46.0	33.2	32.8	12.8
245.460	20.7	33.2	---	46.0	33.2	---	12.8
311.420	19.8	41.2	---	46.0	41.2	---	4.8
319.090	20.0	28.3	---	46.0	28.3	---	17.7
320.050	20.0	38.5	---	46.0	38.5	---	7.5
343.640	20.5	---	31.4	46.0	---	31.4	14.6
415.230	21.8	---	23.4	46.0	---	23.4	22.6
520.080	24.0	37.0	---	46.0	37.0	---	9.0
540.080	24.4	36.3	---	46.0	36.3	---	9.7
560.080	24.9	34.3	---	46.0	34.3	---	11.7
613.640	26.3	35.3	---	46.0	35.3	---	10.7
615.680	26.3	32.7	---	46.0	32.7	---	13.3
662.730	27.1	33.9	41.0	46.0	33.9	41.0	5.0

Note : 1) Meter Readings include Correction Factor (Antenna factor , Cable loss).

2) Margin = Limit - Emission Level.

Tested by : *Jumihito Goe*
 Engineer of TDK Chikumagawa Open Site

FCC 15B CLASS B RADIATED 3m
EUT : Fine Pix F601 ZOOM 120V/60Hz
MODE : USB PC CAMERA Mode
Frequency : 30 ~ 1000 MHz

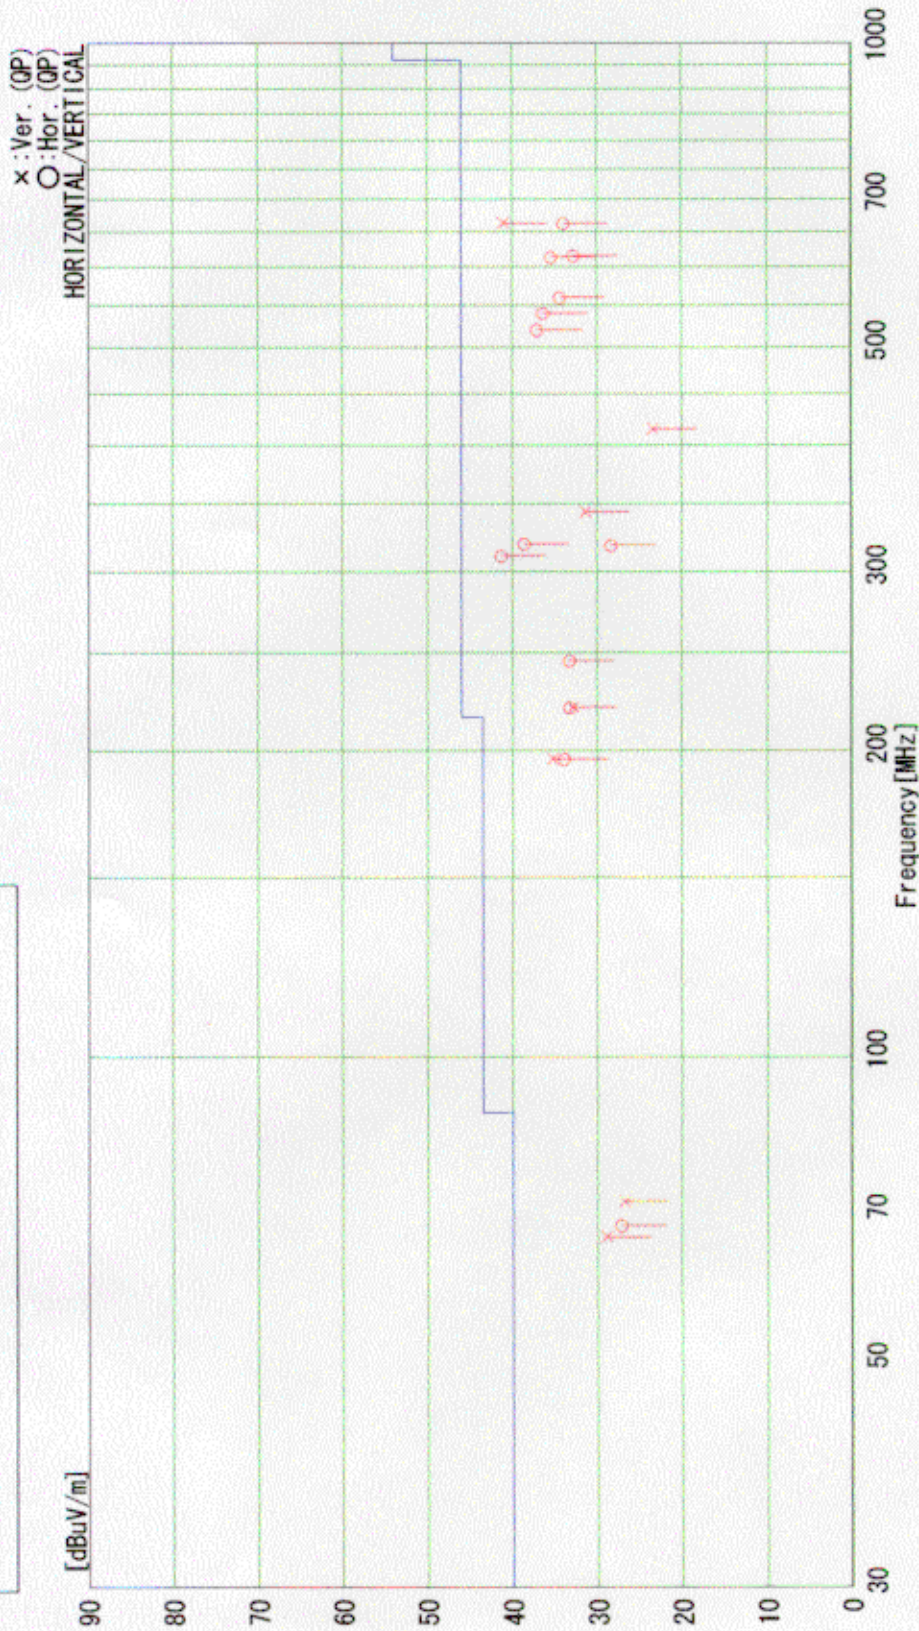

TDK Application No. : TDC-01-1206

MEASUREMENT RESULTS OF RADIATED RADIO NOISE at 3m

Date : December 14 ,2001

Temp. : 15 °C ; Humi. : 40 %

Test Receiver : Rohde & Schwarz ESCS 30

Operation Mode : Detector function : CISPR Quasi-Peak

6dB Band width : 120kHz

External Attenuator : none

Description of Equipment DIGITAL CAMERA

Model No. : Fine Pix F601 ZOOM

Test Condition of Equipment Under Test (EUT)

1) Configuration of EUT : Refer to sheet No.12, 13 and 14.

2) EUT Grounding : None.

3) Operating Condition : CAMERA Mode .


Frequency (MHz)	Crrection Factor (dB)	Meter Reading (dB μ V/m)		Limit (dB μ V/m)	Emission Level (dB μ V/m)		Margin (dB)
		Hor.	Ver.		Hor.	Ver.	
66.440	8.2	---	29.1	40.0	---	29.1	10.9
68.220	8.0	26.5	---	40.0	26.5	---	13.5
71.970	7.7	---	32.4	40.0	---	32.4	7.6
196.370	19.2	31.7	33.5	43.5	31.7	33.5	10.0
220.910	20.3	30.2	28.0	46.0	30.2	28.0	15.8
245.460	20.7	34.6	---	46.0	34.6	---	11.4
311.420	19.8	41.2	---	46.0	41.2	---	4.8
319.090	20.0	28.3	---	46.0	28.3	---	17.7
320.050	20.0	38.5	---	46.0	38.5	---	7.5
343.640	20.5	---	31.4	46.0	---	31.4	14.6
415.230	21.8	---	23.4	46.0	---	23.4	22.6
520.080	24.0	37.0	---	46.0	37.0	---	9.0
540.080	24.4	36.3	---	46.0	36.3	---	9.7
560.080	24.9	35.5	---	46.0	35.5	---	10.5
613.640	26.3	36.5	---	46.0	36.5	---	9.5
615.680	26.3	32.7	---	46.0	32.7	---	13.3
662.730	27.1	38.9	41.0	46.0	38.9	41.0	5.0

Note : 1) Meter Readings include Correction Factor (Antenna factor , Cable loss).


2) Margin = Limit - Emission Level.

Tested by : 
Engineer of TDK Chikumagawa Open Site

FCC 15B CLASS B RADIATED 3m
 EUT : Fine Pix F601 ZOOM 120V/60Hz
 MODE : CAMERA Mode
 Frequency : 30 ~ 1000 MHz

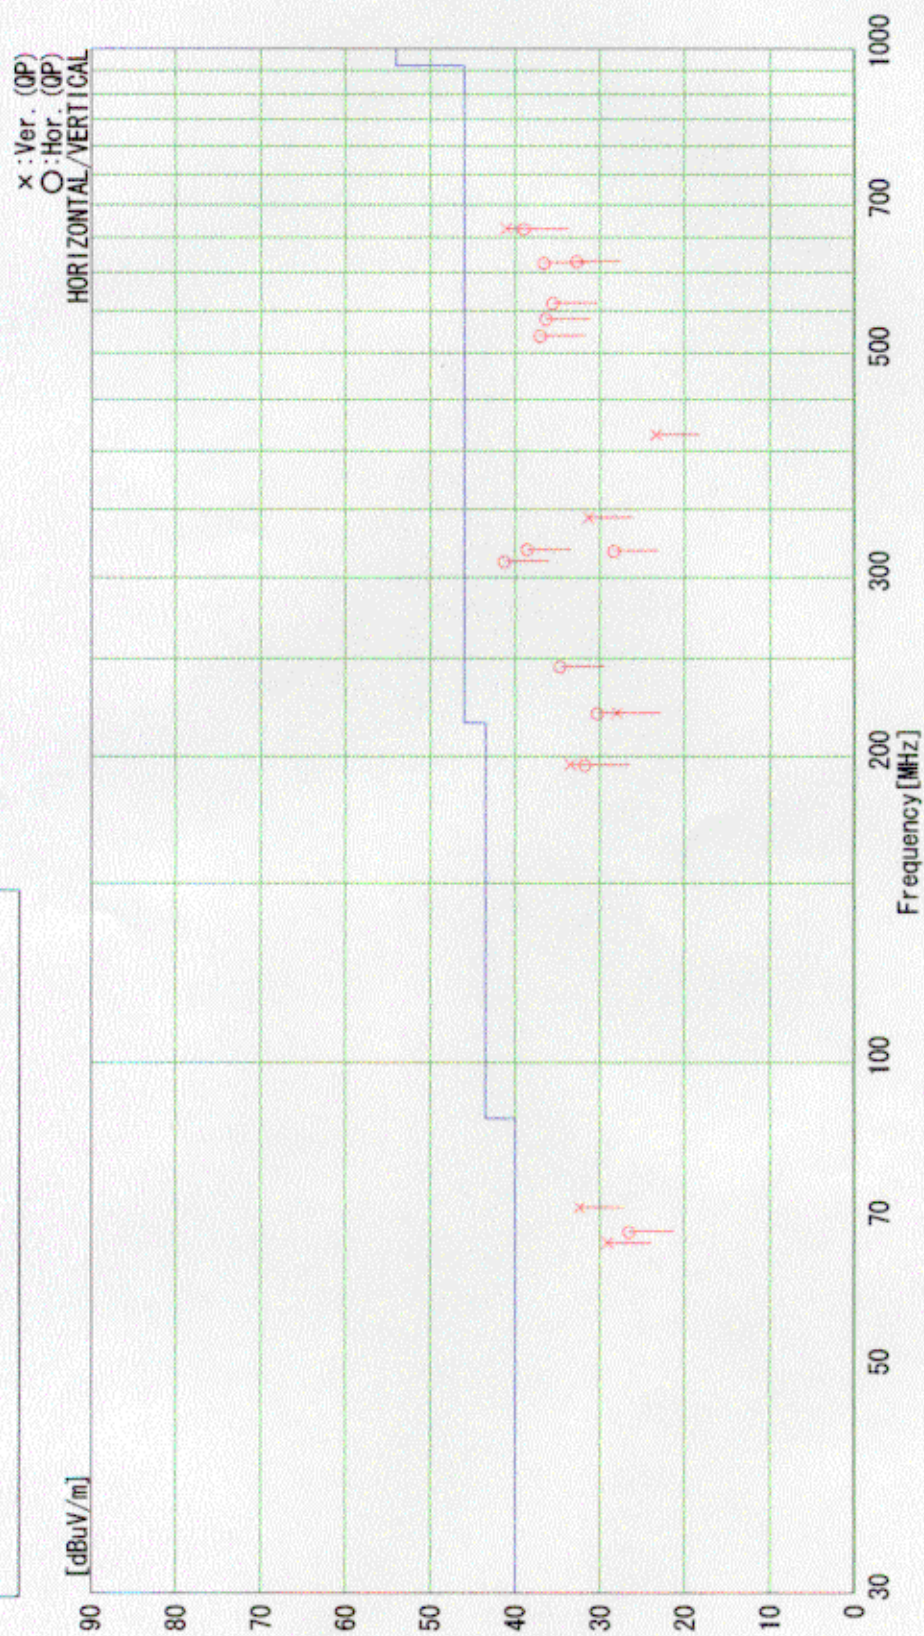

EUT's Test Arrangement of Radiation
 Non Metallic (F. R. P.) Dome (W 8.0m × D 6.3m × H 5.5m)

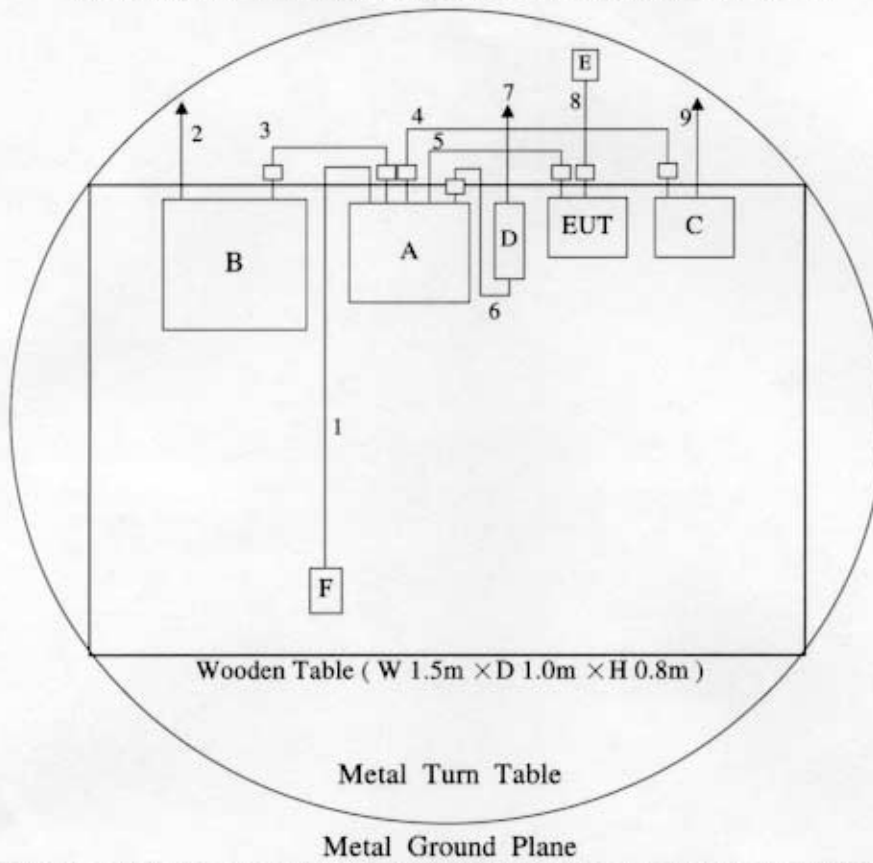

Test Configuration

No.	Device	MODEL No.	FCC ID	S/N	Manufacturer
EUT	DIGITAL CAMERA	Fine Pix F601 ZOOM	F5GFP-F601	P0007	FUJI PHOTO FILM CO. , LTD
A	NOTE BOOK COMPUTER	PRESARIO 12XL212	DOC	1V08FHNJE1N5	COMPAQ COMPUTER CO. ,LTD.
B	PC MONITOR	M2978	BEJCA500	CY52401HF3CV	LG ELECTRONICS
C	SCANNER	AS1	F5GAS-1	0009	FUJI PHOTO FILM CO. , LTD
D	AC ADAPTER (PC)	LE-9702B-01	DOC	177625-001	COMPAQ COMPUTER CO. ,LTD.
E	AC ADAPTER (EUT)	AC-5VS	-----	9956	FUJI PHOTO FILM CO. , LTD
F	MOUSE	M-BB48	DOC	LZE01271677	LOGITECH

TDK Application No : TDC-01-1206

Connection Cables

No.	I/F & Power Cable	Model No.	Cable Length		Feraite Core	Manufacturer
1	MOUSE CABLE	-----	1.90	m		SHIELD YES
2	PC MONITOR POWER CABLE	-----	1.70	m		
3	PC MONITOR CABLE	-----	1.65	m	YES	SHIELD YES
4	SCSI CABLE	-----	1.50	m	YES	SHIELD YES
5	USB CABLE	-----	1.50	m	YES	SHIELD YES
6	AC ADAPTOR CABLE	-----	1.50	m	YES	SHIELD YES
7	ADAPTOR POWER CABLE	-----	1.70	m		
8	EUT ADAPTOR CABLE	-----	1.90	m	YES	SHIELD YES
9	AC CABLE(SCANNER)	-----	1.80	m		

RADIATION MEASUREMENT

EUT : DIGITAL CAMERA

MODEL No. Fine Pix F601 ZOOM

CONFIGURATION FRONT VIEW




CONFIGURATION REAR VIEW




EUT's Test Arrangement of Radiation

Fig 1

Non metallic (F. R. P.) Dome (W 8.0m × D 6.3m × H 5.5m)

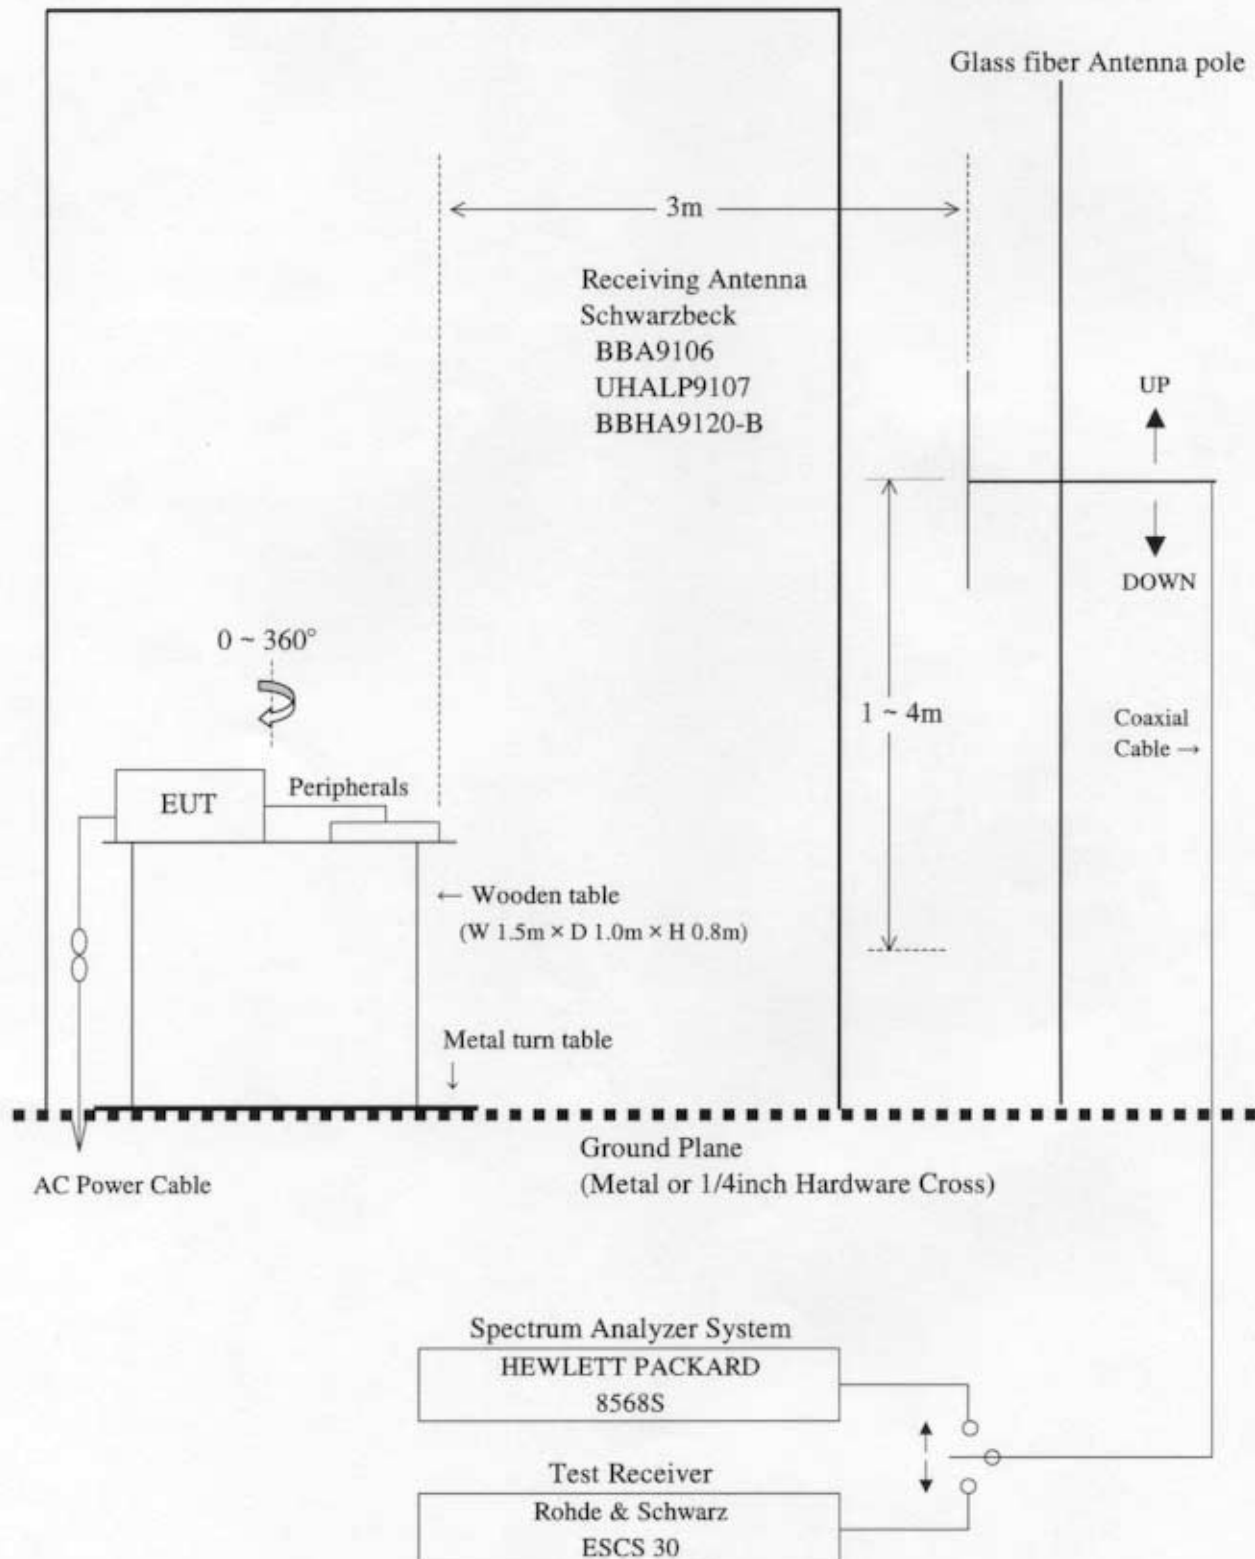

FCC 15B CLASS B CONDUCTED
EUT : Fine Pix F601 ZOOM 120V/60Hz
MODE : USB PC CAMERA Mode
Frequency : 0.45 ~ 30 MHz

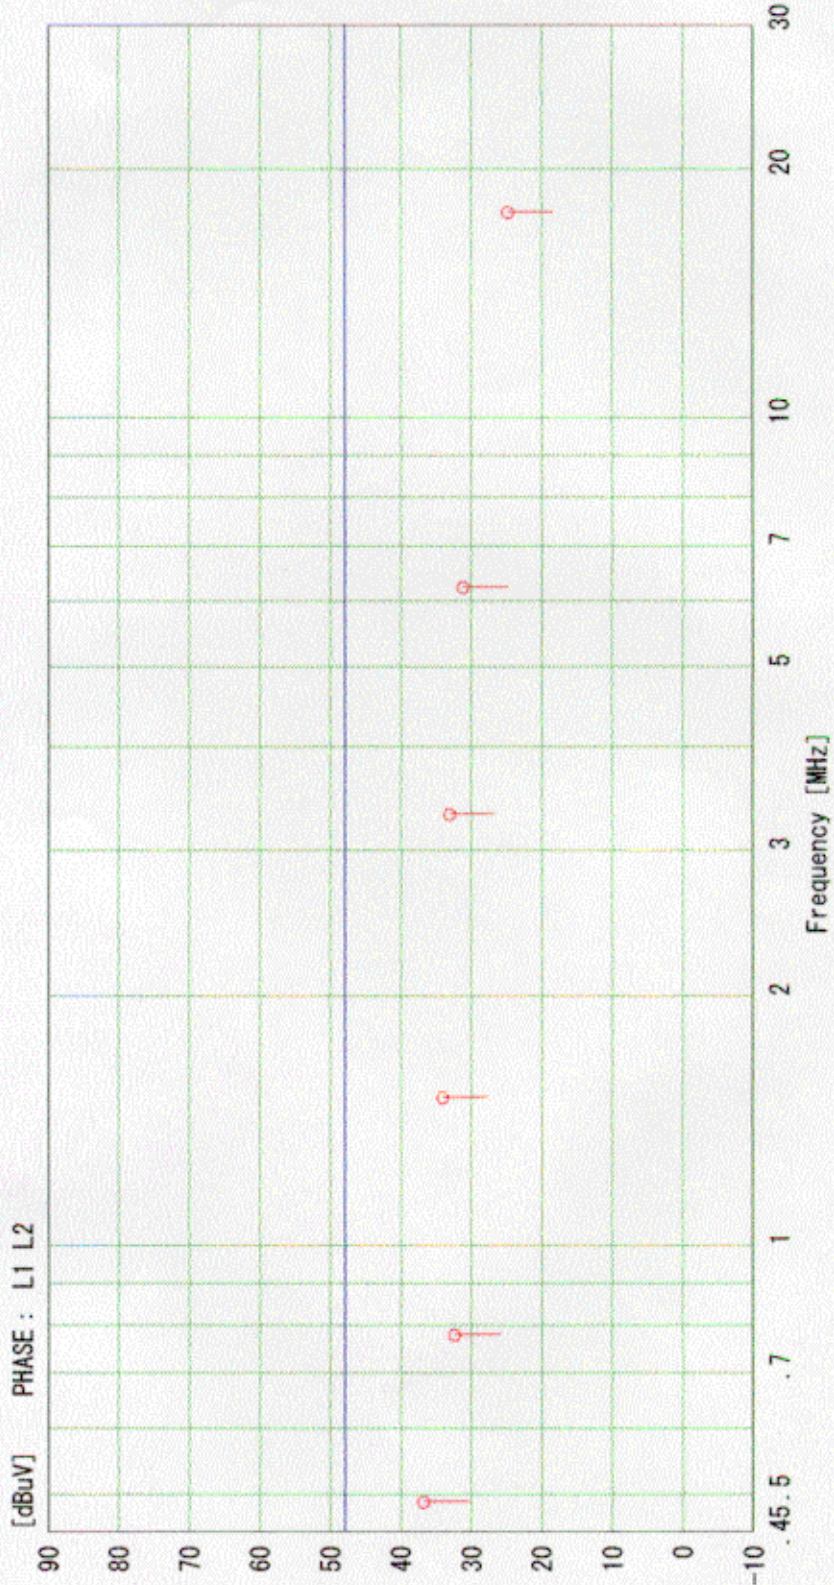

Temp. : 15 °C ; Humi. : 40 %

External Attenuator : none

Model No. : Fine Pix F601 ZOOM ; Type : Desk Top


3) Operating Condition : CAMERA Mode .

Note :


- 1) Correction Factor include LISN Factor and cable loss for 7 meters.
Meter Readings include Correction Factor.
- 2)VA : Between one end of the power cable and the grounded.
VB : Between the other end of the power cable and the grounded.
- 3)Margin = Limit — Emission Level.

Tested by : Fumihiko Oa
Engineer of TDK Chikumagawa Open Site

FCC 15B CLASS B CONDUCTED
EUT : Fine Pix F601 ZOOM 120V/60Hz
MODE : CAMERA Mode
Frequency : 0.45 ~ 30 MHz

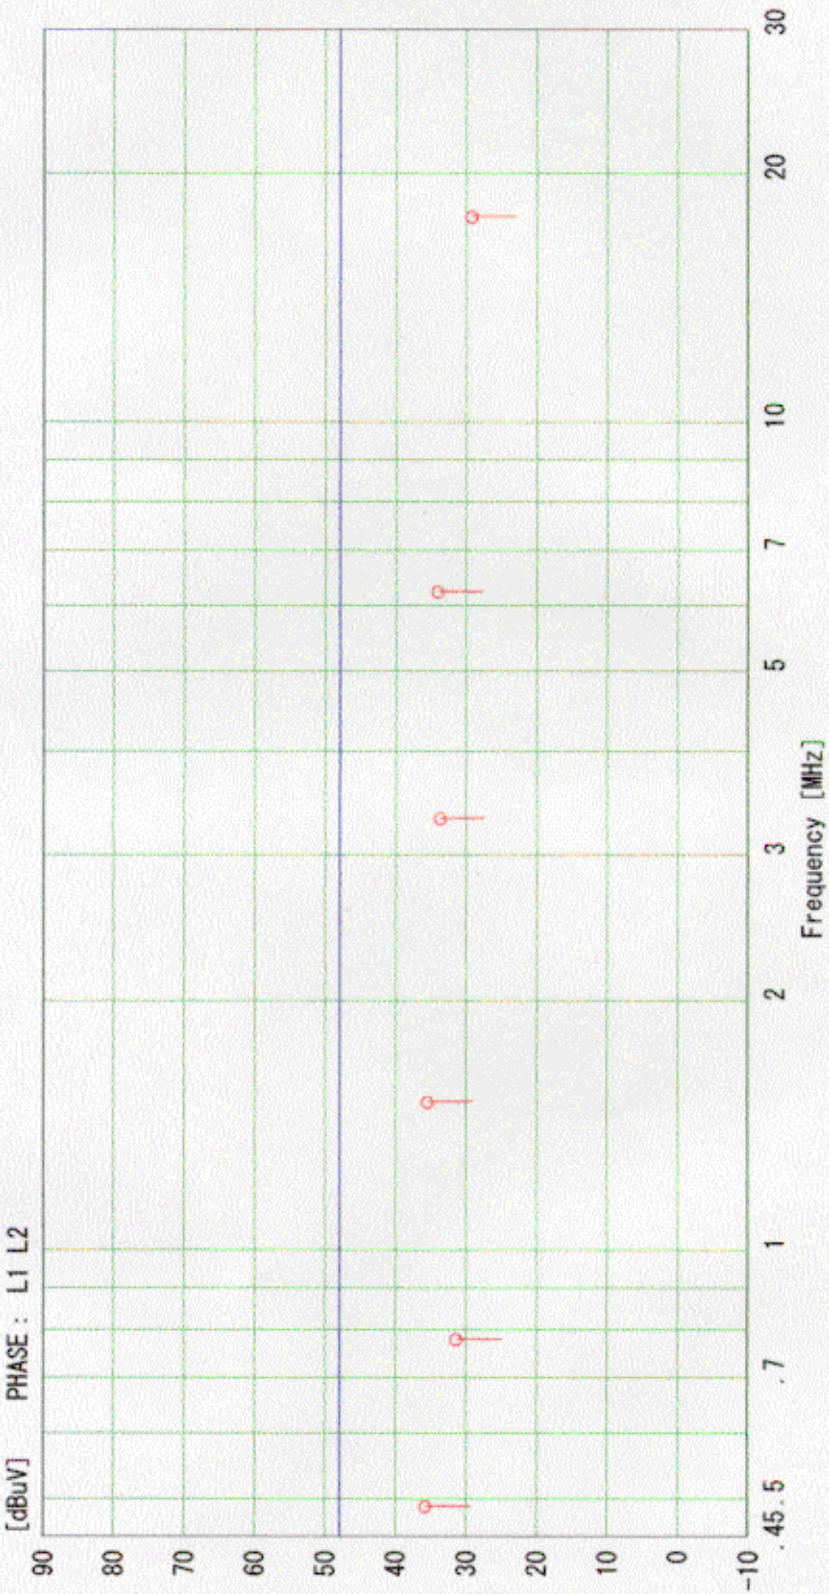

Compact Anechoic Chamber (W 3.0m × D 7.0m × H 3.0m)



No.	Device	MODEL No.	FCC ID	S/N	Manufacturer
EUT	DIGITAL CAMERA	Fine Pix F601 ZOOM	F5GFP-F601	P0007	FUJI PHOTO FILM CO. , LTD
A	NOTE BOOK COMPUTER	PRESARIO 12XL212	DOC	1V08FHNJE1N5	COMPAQ COMPUTER CO. ,LTD.
B	PC MONITOR	M2978	BEJCA500	CY52401HF3CV	LG ELECTRONICS
C	VIDEO MONITOR	PVM-8040	-----	2029411	SONY
D	SCANNER	AS1	F5GAS-1	0009	FUJI PHOTO FILM CO. , LTD
E	AC ADAPTER (PC)	LE-9702B-01	DOC	177625-001	COMPAQ COMPUTER CO. ,LTD.
F	AC ADAPTER (EUT)	AC-5VS	-----	9956	FUJI PHOTO FILM CO. , LTD
G	MOUSE	M-BB48	DOC	LZE01271677	LOGITECH

Connection Cables

No.	I/F & Power Cable	Model No.	Cable Length	Feraite Core	Manufacturer
1	MOUSE CABLE	-----	1.90 m		SHIELD YES
2	PC MONITOR POWER CABLE	-----	1.70 m		
3	PC MONITOR CABLE	-----	1.65 m	YES	SHIELD YES
4	SCSI CABLE	-----	1.50 m	YES	SHIELD YES
5	USB CABLE	-----	1.50 m	YES	SHIELD YES
6	AC ADAPTOR CABLE	-----	1.50 m	YES	SHIELD YES
7	ADAPTOR POWER CABLE	-----	1.70 m		
8	EUT ADAPTOR CABLE	-----	1.90 m	YES	SHIELD YES
9	AC CABLE(SCANNER)	-----	1.80 m		
10	AV CABLE	-----	1.40 m	YES	SHIELD YES
11	AC CABLE(VIDEO MONITOR)	-----	1.50 m		

CONDUCTION MEASUREMENT


EUT : DIGITAL CAMERA

MODEL No. Fine Pix F601 ZOOM


CONFIGURATION FRONT VIEW




CONFIGURATION SIDE VIEW

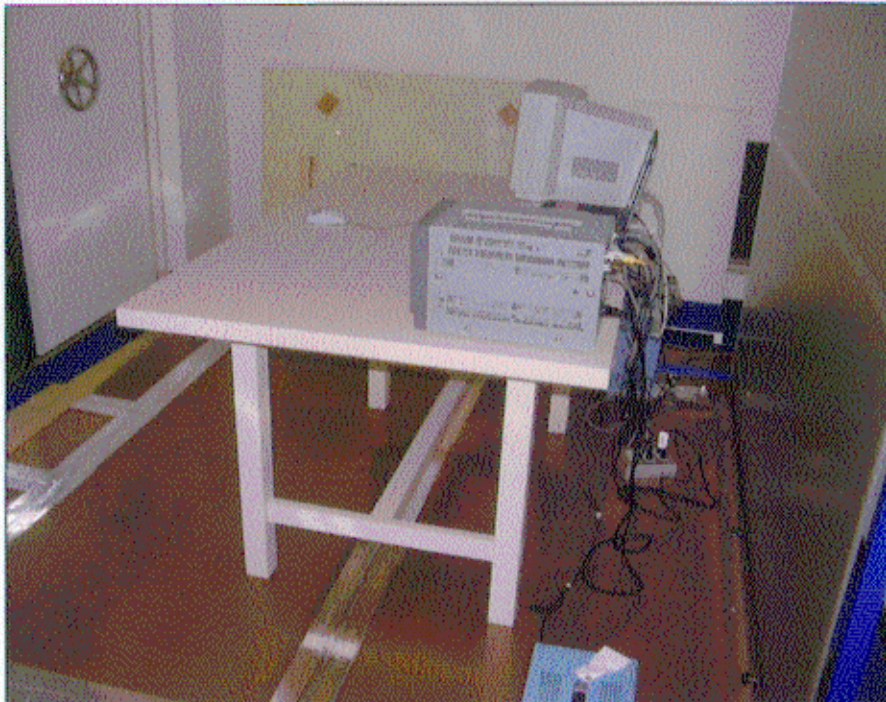


FCC 15B CLASS B CONDUCTED
EUT : Fine Pix F601 ZOOM 120V/60Hz
MODE : USB PC CAMERA Mode
Frequency : 0.45 ~ 30 MHz

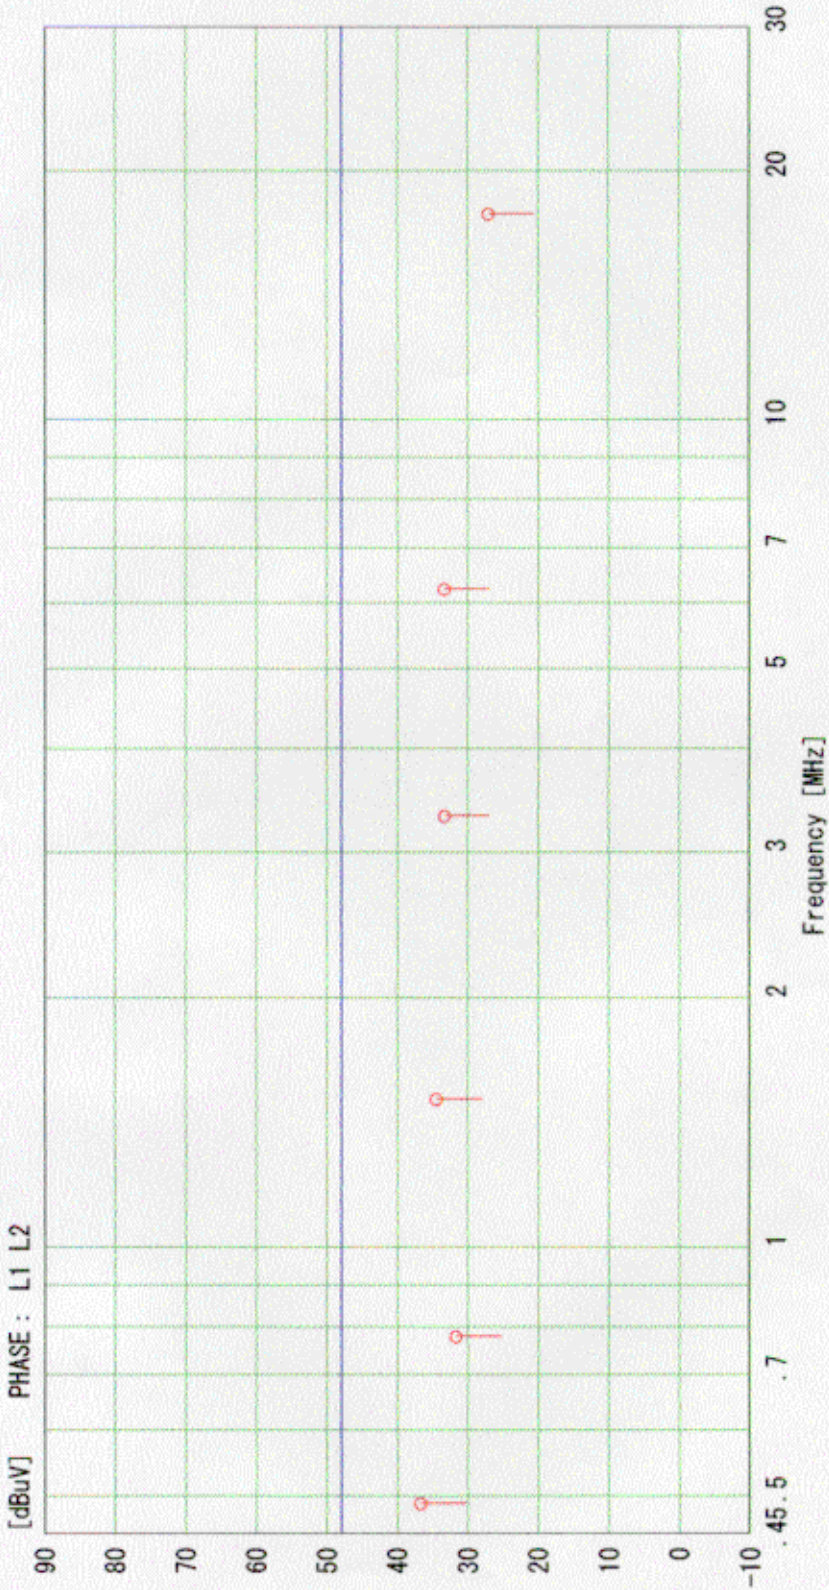

FCC 15B CLASS B CONDUCTED
EUT : Fine Pix F601 ZOOM 120V/60Hz
MODE : CAMERA Mode
Frequency : 0.45 ~ 30 MHz

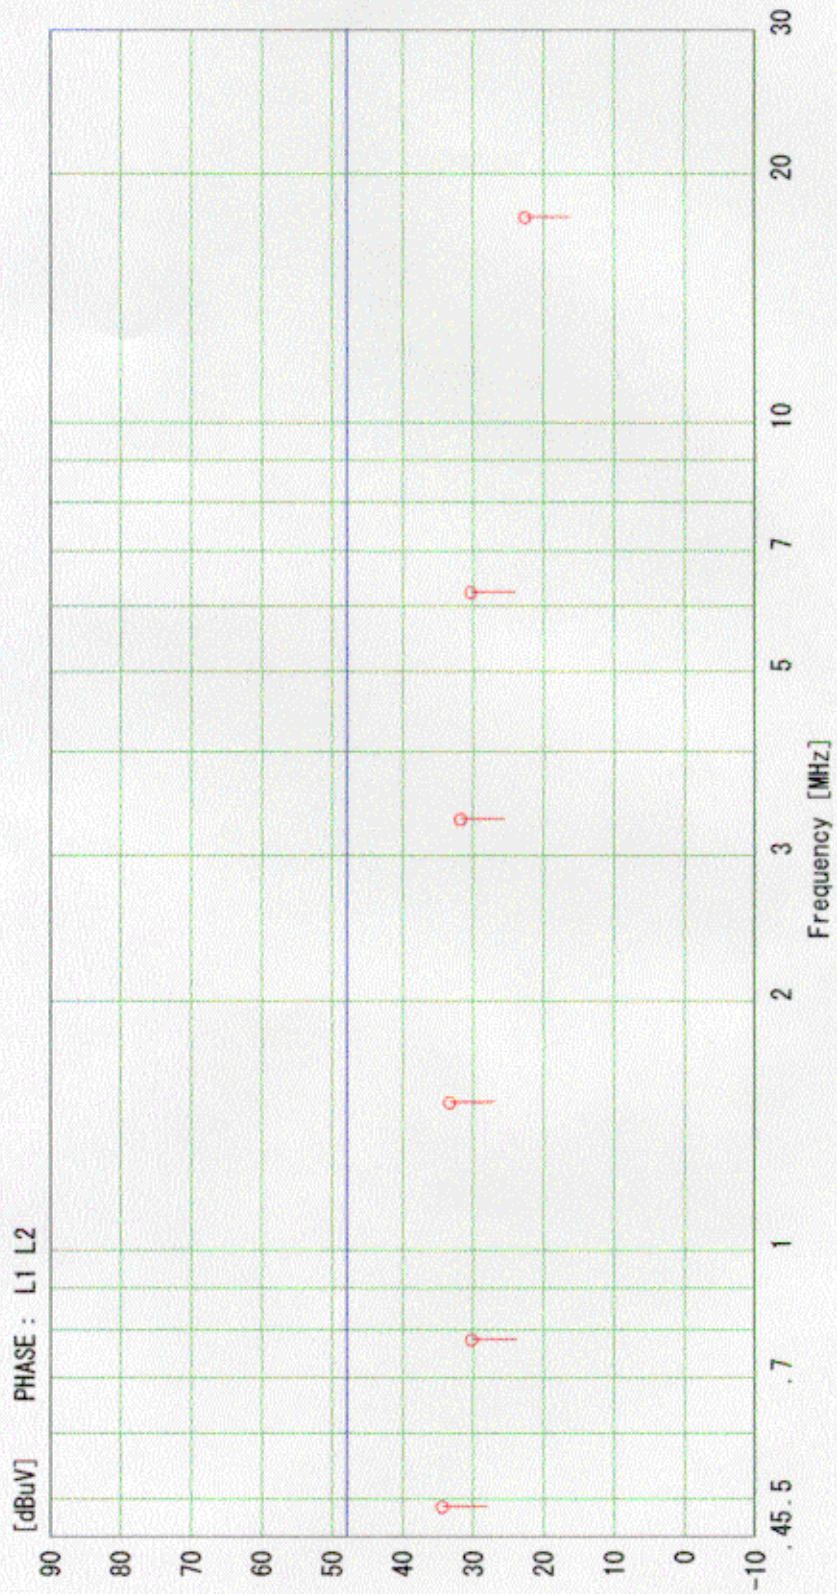

Compact Anechoic Chamber (W 3.0m × D 7.0m × H 3.0m)



No.	Device	MODEL No.	FCC ID	S/N	Manufacturer
EUT	DIGITAL CAMERA	Fine Pix F601 ZOOM	F5GFP-F601	P0007	FUJI PHOTO FILM CO. , LTD
A	NOTE BOOK COMPUTER	PRESARIO 12XL212	DOC	1V08FHNJE1N5	COMPAQ COMPUTER CO. ,LTD.
B	PC MONITOR	M2978	BEJCA500	CY52401HF3CV	LG ELECTRONICS
C	SCANNER	AS1	F5GAS-1	0009	FUJI PHOTO FILM CO. , LTD
D	AC ADAPTER (PC)	LE-9702B-01	DOC	177625-001	COMPAQ COMPUTER CO. ,LTD.
E	AC ADAPTER (EUT)	AC-5VS	-----	9956	FUJI PHOTO FILM CO. , LTD
F	MOUSE	M-BB48	DOC	LZE01271677	LOGITECH

TDK Application No : TDC-01-1206

Connection Cables

No.	I/F & Power Cable	Model No.	Cable Length		Feraite Core	Manufacturer
1	MOUSE CABLE	-----	1.90	m		SHIELD YES
2	PC MONITOR POWER CABLE	-----	1.70	m		
3	PC MONITOR CABLE	-----	1.65	m	YES	SHIELD YES
4	SCSI CABLE	-----	1.50	m	YES	SHIELD YES
5	USB CABLE	-----	1.50	m	YES	SHIELD YES
6	AC ADAPTOR CABLE	-----	1.50	m	YES	SHIELD YES
7	ADAPTOR POWER CABLE	-----	1.70	m		
8	EUT ADAPTOR CABLE	-----	1.90	m	YES	SHIELD YES
9	AC CABLE(SCANNER)	-----	1.80	m		

TDK Application No. : TDC-01-1206

CONDUCTION MEASUREMENT

EUT : DIGITAL CAMERA

MODEL No. Fine Pix F601 ZOOM

CONFIGURATION FRONT VIEW



CONFIGURATION SIDE VIEW




Temp. : 15 °C ; Humi. : 40 %

EUT's Test Arrangement of Conduction

Fig 2

Compact Anechoic Chamber (W 3.0m × D 7.0m × H 3.0m)

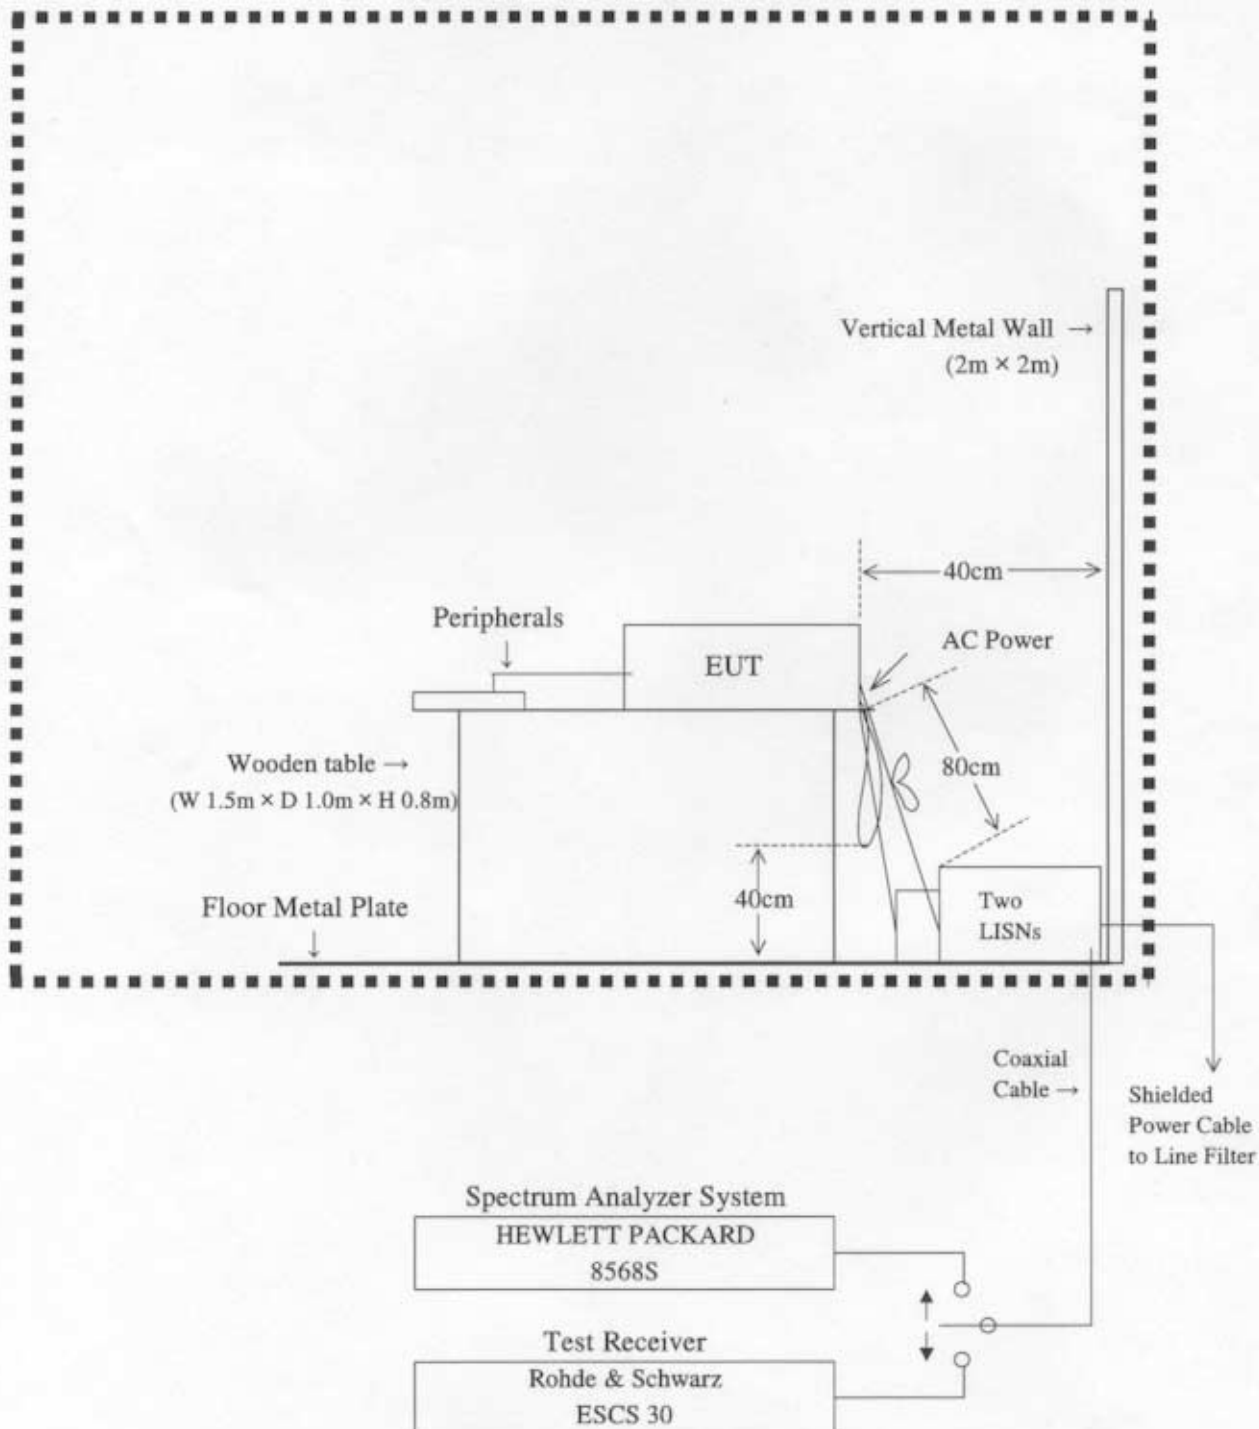

TDC Application No. : TDC-01-1206

MEASURING INSTRUMENT USED

TDC APPLICATION No. : TDC-01-1206

☐	<u>Instrument</u>	<u>Model No.</u>	<u>Manufacturer</u>	<u>ID No.</u>	<u>Last Calibration Date</u>	<u>Period</u>
☒	Spectrum Analyzer	8568B	Hewlett-Packard	2445A00924	Mar. 2001	1 year
☒	RF-Preselector	85685A	Hewlett-Packard	2648A00481	Mar. 2001	1 year
☒	Field Strength Meter	ESCS 30	Rohde & Schwarz	825788/007	Feb. 2001	1 year
☒	Field Strength Meter	ESCS 30	Rohde & Schwarz	834115/020	Feb. 2001	1 year
☐	Field Strength Meter	ESMI	Rohde & Schwarz	61360008	Oct. 2001	1 year
☒	Pre - Amplifier	8447D	Hewlett-Packard	2443A04539	Mar. 2001	1 year
☐	Pre - Amplifier	8449B	Hewlett-Packard	3008A01391	Mar. 2001	1 year
☒	Biconical Antenna	BBA9106	Schwarzbeck	D-6901 No.2	Apr. 2001	1 year
☒	Log-Periodic Antenna	UHALP9107	Schwarzbeck	424/517	Apr. 2001	1 year
☐	Dipole Antenna	VHA9103	Schwarzbeck	D-6901 No.3	Apr. 2001	1 year
☐	Dipole Antenna	UHA9105	Schwarzbeck	29-14066	Apr. 2001	1 year
☒	LISN (50 μ H/50 Ω)	KNW-407	Kyoritsu Electrical Work	8-680-7	Mar. 2001	1 year
☒	LISN (50 μ H/50 Ω)	KNW-407	Kyoritsu Electrical Work	8-823-10	Mar. 2001	1 year
☐	LISN (50 μ H/50 Ω)	KNW-408	Kyoritsu Electrical Work	8-652-35	Mar. 2001	1 year
☐	LISN (50 μ H/50 Ω)	ESH2-Z5	Rohde & Schwarz	881 362/011	Mar. 2001	1 year
☒	Open Test Site	TCO-10	TDK Corporattion	GD-0043-5	May. 2001	1 year
☒	Co-axial Cable	AK9513	Schwarzbeck	N-C007	Apr. 2001	1 year
☐	Co-axial Cable	8D-2V	Shinagawa Densen	N-C012	Apr. 2001	1 year
☐	Co-axial Cable	8D-2V	Shinagawa Densen	N-C013	Apr. 2001	1 year
☒	Co-axial Cable	8D-2V	Shinagawa Densen	N-C014	Apr. 2001	1 year
☒	Co-axial Cable	8D-2V	Shinagawa Densen	N-C016	Apr. 2001	1 year
☒	Co-axial Cable	5D-2W	Shinagawa Densen	N-C017	Apr. 2001	1 year
☒	RF Switch (EMI Interface)	MP59B	Anritsu	N-C025	Apr. 2001	1 year