



FUJI PHOTO FILM CO.,LTD.

26-30, NISHIAZABU 2-CHOME,

MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimile : (03) 3406-9967

File No. DF-98-006

Federal Communications Commission

TECHNICAL DOCUMENTATION FILE OF DIGITAL CAMERA MODEL MX-600

FCC ID : F5GMX-600
Category : Part 15 Sub.part B Class B Digital Device
Date of Issue : December 1st, 1998

A handwritten signature in black ink, appearing to read 'Hiromi Hayashida', written over a horizontal line.

Hiromi Hayashida
Product Safety Engineer
Fuji Photo Film Co., Ltd.



FUJI PHOTO FILM CO.,LTD.

26-30, NISHIAZABU 2-CHOME,

MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimile : (03) 3406-9967

page 1 of 6

FCC ID : F5GMX-600

Part 15 Sub.part B Class B Digital Device

Contents

	<i>Page</i>
1. APPLICANT AND FACTORY	2
2. DESCRIPTION OF DEVICE	2
3. SUMMARY OF OPERATION AND FUNCTION	4
4. TEST FACILITY	4
5. SUMMARY OF TEST RESULTS	4
6. TESTED SYSTEM DETAILS	5
7. DESCRIPTION OF THE MARKED AVAILABLE CONFIGURATION	Exhibit A
8. PHOTOGRAPH OF EUT	Exhibit B
9. TEST RESULTS	Exhibit C
10. SYSTEM CONTROL BLOCK DIAGRAM	Exhibit D
11. SCHEMATIC DIAGRAM	Exhibit E
12. DRAFT OF OWNER'S MANUAL	Exhibit F



FUJI PHOTO FILM CO.,LTD

26-30, NISHIAZABU 2-CHOME,

MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimile : (03) 3406-9967

page 2 of 6

FCC ID : F5GMX-600

Part 15 Sub.part B Class B Digital Device

1.APPLICANT AND FACTORY

- (1) Applicant: Fuji Photo Film Co., Ltd.
26-30, Nishiazabu 2-chome, Minato-ku, Tokyo 106 Japan
- (2) Factory: FUJIX CO., LTD.
1-6, Matsuzakadaira, Taiwa-Cho, Kurokawa-Gun,
Miyagi-Ken 981-36 Japan

2. DESCRIPTION OF DEVICE

- (1) Kind of Equipment: DIGITAL CAMERA
- (2) Category: Class B Digital Device
- (3) FCC ID: F5GMX-600
- (4) Trade Mark: FUJIFILM
- (5) Model No.: MX-600
- (6) Type of Sample Tested: Pre-Production
- (7) High Frequency Used: 4.1900MHz (CPU Clock for Main / IC308)
24.5454MHz (Camera System / IC312)
32.7680KHz (CPU Clock for Calendar / IC308)
- (8) Rating Power Supply: 5Vdc (DC Power was controlled by AC Adaptor)
- (9) Tested Power Supply: 120V AC, 60Hz
- (10) Date of Manufacture: September, 1998
- (11) Description of the marked and available configuration: Refer to "Exhibit A"
- (12) Description of Operation The worst operation mode is "Camera Mode".



FUJI PHOTO FILM CO.,LTD.

26-30, NISHIAZABU 2-CHOME,
MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934



Facsimile : (03) 3406-9967

page 3 of 6

FCC ID : F5GMX-600

Part 15 Sub.part B Class B Digital Device

(13) Overall Appearance:

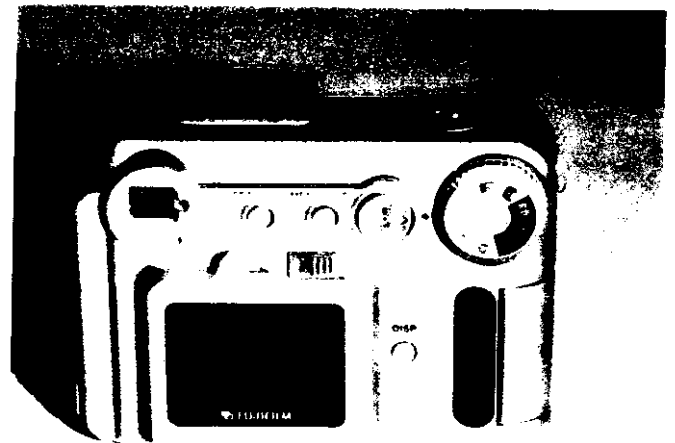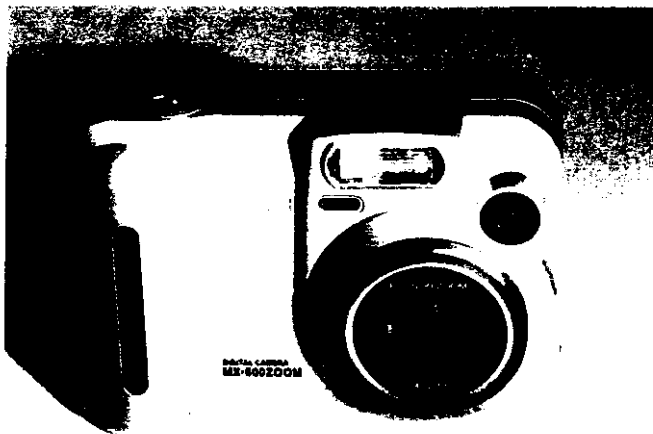

(14) Rating Plate including FCC ID and the statement per Sec. 15.19(a)(3):


“ Rating Plate “

“ Owner’s Manual ”



FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.





FUJI PHOTO FILM CO.,LTD.

26-30, NISHIAZABU 2-CHOME,
MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimile : (03) 3406-9967

page 4 of 6

FCC ID : F5GMX-600

Part 15 Sub.part B Class B Digital Device

3. SUMMARY OF OPERATION AND FUNCTION

FUJIFILM, Model MX-600 is a digital still camera that captures high-quality, highly digital images at 1.5 million-pixels and records them onto an image memory card, SSFDC (Solid-State Floppy Disk Card).

This camera has features of a high-speed 1/1,000-sec. shutter that is suited to high-resolution photography, as well as the 3 X zoom with autofocus to easy-use.

This can take photographs while the image is viewed on a 2-inch LCD monitor or the external TV monitor during either Manual or Auto Camera mode.

The user can select one of 3 kinds of compression ratio to record as Exif-JPEG files for image data recording.

Featuring a high-performance RISC microprocessor, the MX-600 takes only 5 sec. to store an image. It's much faster than other megapixel digital camera.

This digital camera MX-600 can play back color images from an image memory card SSFDC and transfer the image data on the SSFDC to a personal computer.

4. TEST FACILITY

The test site and conducted measurement facility of Japan Quality Assurance Organization used to collect the radiated data is located in 21-25, Kinuta 1-Chome, Setagaya-Ku, Tokyo 157 Japan.

This test site and conducted measurement facility has been fully described in a report dated May 14, 1996 that they have submitted to your office, and accepted in your letter dated June 7th, 1996 (31040 / SIT).

5. SUMMARY OF TEST RESULTS

Radiated Radio Noise Measurement -----**PASS**

Conducted Radio Noise Measurement -----**PASS**

6. TESTED SYSTEM DETAILS

6.1 Peripherals and Others :

<i>Description</i>	<i>Model Name</i>	<i>Serial No.</i>	<i>Manufacturer</i>	<i>FCC ID</i>
PC Monitor	M2978	CY5430HF3CV	LG Electronics, Inc.	BEJCA500
Personal Computer	XpiP133ST	98417	Dell Computer Corp.	E2KXPE2KXPT
Video Monitor	CMM43A1	M-55894034	Shibasoku	N/A
Scanner	AS-1	100027	Fuji Photo Film Co., Ltd.	F5GAS-1
Mouse	2.1A	-	Micro Soft Corp.	C3KKMP3
AC Adapter(for PC)	ZVC65N	4360	Dell Computer Corp.	N/A
AC Adaptor(for EUT)	AC-5V	7237	Fuji Photo Film Co., Ltd.	N/A
(for AC Adaptor of Digital Camera, Input: 120VAC, 60Hz, Output: 5VDC)				

Note:

* N/A: Equipment required for the Verification.

6.2 List of Cables :

<i>Description</i>	<i>Length</i>	<i>Type of shield</i>	<i>Ferrite Core</i>
EUT / Personal Computer	1.95 m	Shielded	Add ✖
Scanner / Personal Computer	1.5 m	Shielded	N/A
EUT / Video Monitor	1.5 m	Shielded	Add ✖
Personal Computer / TV Monitor	1.5 m	Shielded	Provided
Mouse / Personal Computer	1.8 m	Shielded	N/A
DC Power Cord (PC/AC adaptor)	1.9 m	Shielded	Provided
DC Power Cord (EUT/AC adaptor)	1.8 m	Non-shielded	Add ✖
AC Power Cord (PC/AC adaptor)	1.8 m	Non-shielded	N/A
AC Power Cord (Video Monitor)	1.7 m	Non-shielded	N/A
AC Power Cord (PC Monitor)	1.7 m	Non-shielded	N/A
AC Power Cord (Scanner)	1.7 m	Non-shielded	N/A

Note:

* Provided : The cable is an accessory for Personal Computer or PC Monitor which was attached a ferrite core.

Figure 6-1 System Configuration Diagram :
