

EMC TEST REPORT

No. 2204601STO-101

Electromagnetic disturbances

EQUIPMENT UNDER TEST

Equipment: Table standing luminaire with LED
Type/Model: B2107 Brummig
Manufacturer: IKEA of Sweden AB
Tested by request of: IKEA of Sweden AB

SUMMARY

Referring to the emission limits, and the operating mode during the tests specified in this report, the equipment complies with the requirements according to the following standards:

FCC 47 CFR Part 15: Radio frequency devices, Subpart B: Unintentional radiators. Class B equipment.

ICES-005 Issue 5: Lighting Equipment, Class B. (2018)

For details, see clause 2 – 4.

Date of issue: May 24, 2022

Tested by:

Ann-Christine Norrström
Ann-Christine Norrström

Approved by:

Per Granberg
Per Granberg

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Revision History

Test report no.	Release no.	Date of issue	Description
2105712STO-101	1	November 16, 2021	
2204601STO-101	2	May 24, 2022	Editorial changes on page 1.

Terms, definition and abbreviations

The following terms, definitions and abbreviations may be used throughout the report.

Term/definition/abbreviation	Meaning
AAN	Asymmetrical Artificial Network
AC	Alternating Current
AE	Associated Equipment
AMN	Artificial Mains Network
AV	Average
BW	Bandwidth
CAV	CISPR Average
CM	Common Mode
CMAD	Common Mode Absorption Device
DC	Direct Current
DM	Differential Mode
EM	Electromagnetic
EMC	Electromagnetic Compatibility
EUT	Equipment Under Test
F	Fail
FAR	Fully Anechoic Room
F_x	Highest fundamental frequency generated or used within the EUT, or highest frequency at which it operates
H	Horizontal
ISN	Impedance Stabilizing Network
MU	Measurement Uncertainty
N/A	Not Applicable
P	Pass
PE	Protective Earth
PK	Peak
Pol.	Polarisation
QP / QPK	Quasi-Peak
RBW	Resolution Bandwidth
RF	Radio Frequency
RGP	Reference Ground Plane
RH	Relative Humidity
RMS	Root Mean Square
Rx	Receiver / Receiving
SAC	Semi-Anechoic Chamber
Tx	Transmitter / Transmitting
V	Vertical
VBW	Video Bandwidth

CONTENTS

	Page
1. Client Information	5
2. Equipment under test (EUT).....	5
2.1 Identification of the EUT	5
2.2 Test set up and EUT photos	6
2.3 Additional information about the EUT	7
2.4 Associated/auxiliary equipment	7
2.5 Decision rule	7
3. Test Specifications	8
3.1 Additions, deviations and exclusions from standards and accreditation	8
3.2 Test site	8
3.3 Mode of operation during the test	8
4. Test Summary	9
5. Conducted continuous disturbances	10
5.1 Test results, AC Power input port, Class B, Mode 1	11
5.2 Test results, AC Power input port, Class B, Mode 2.....	12
5.3 Test equipment	13
6. Radiated rf Emission in the frequency-range 30 MHz – 1 GHz	14
6.1 Test results, 30 – 1000 MHz, FCC, Class B, Mode 1	16
6.2 Test results, 30 – 1000 MHz, FCC, Class B, Mode 2	17
6.3 Test equipment	18

1. CLIENT INFORMATION

The EUT has been tested by request of

Company	IKEA of Sweden AB
Name of contact	Christian Truedsson
Client observer	

2. EQUIPMENT UNDER TEST (EUT)

2.1 Identification of the EUT

Equipment:	Table standing luminaire with LED														
Type/Model:	B2107 Brummig														
Brand name:	IKEA														
S/N:	-														
Manufacturer:	IKEA of Sweden AB Box 702 SE-343 81 Älmhult Sweden														
Highest clock frequency, F_X:	< 108 MHz														
Software version:	-														
Hardware version:	-														
Mounting position: (during normal use)	☒ Table-top ☐ Floor-standing ☐ Wall/ceiling ☐ Hand-held ☐ Other:														
Supplementary information:															
Input ratings	Voltage [V]	Freq. [Hz]	Current [A]	Power [W]	Coupling										
☐ AC*	100-240	50/60	0,05	4	<table> <tr> <td>L1</td><td>L2</td><td>L3</td><td>N</td><td>PE</td></tr> <tr> <td>☒</td><td>☐</td><td>☐</td><td>☒</td><td>☐</td></tr> </table>	L1	L2	L3	N	PE	☒	☐	☐	☒	☐
L1	L2	L3	N	PE											
☒	☐	☐	☒	☐											
☒ DC	24			3	<table> <tr> <td>V+</td><td>V-</td><td></td><td></td><td>PE</td></tr> <tr> <td>☒</td><td>☒</td><td></td><td></td><td>☐</td></tr> </table>	V+	V-			PE	☒	☒			☐
V+	V-			PE											
☒	☒			☐											
☐ Battery					<table> <tr> <td>V+</td><td>V-</td><td></td><td></td><td>PE</td></tr> <tr> <td>☐</td><td>☐</td><td></td><td></td><td>☐</td></tr> </table>	V+	V-			PE	☐	☐			☐
V+	V-			PE											
☐	☐			☐											
☐ Other:															
Supplementary information:	* LED-driver														



Conforms to: UL Std 153
Certified to: CSA Std C22.2
No. 250.4 CAN ICES-005 (B) /
NMB-005 (B)

Type No. B2107

Brummig

Made in

Sup. No. 00000



Photo/copy of marking/rating plate(s)

2.2 Test set up and EUT photos

Test set up and EUT photos are enclosed in Annex 1 to this test report.

2.3 Additional information about the EUT

The EUT was tested in table-top configuration.

The EUT consists of the following units:

Unit	Type designation	Description
Lamp	M2107 Brummig	-

The EUT has the following ports:

Port type	Port name	Length [m]	Shielded
AC I/O			
☒ AC power input	*AC-mains plug	-	☐
☐ AC power output			☐
DC I/O			
☒ DC power input	DC cord	1.75	☐
☐ DC power output			☐
Signal/control I/O			
☐ Signal/control			☐
☐ Telecom/network			☐
Supplementary information: * Port of LED-driver			

The EUT ports were connected according to the following:

Port name	Cable type	Connected to
AC	Plug-in	LED driver
DC	Two-core	Lamp

2.4 Associated/auxiliary equipment

Auxiliary

Equipment needed for correct operation of the EUT and is part of the system under test.

Equipment	Manufacturer	Type/Model	S/N
LED-driver	IKEA	ICPSW24-3-2	-

2.5 Decision rule

The statements of conformity are reported as:

Passed – When the measured values are within the specified limits.

Failed – When one or more measures values are outside the specified limits.

3. TEST SPECIFICATIONS

3.1 Additions, deviations and exclusions from standards and accreditation

The following editions of basic standards were applied instead of the standards referenced in FCC 47 CFR Part 15 and ICES-005:

Referenced	Applied
ANSI C63.4-2014	ANSI C63.4-2014
CISPR 15:2015	CISPR 15:2018

3.2 Test site

Measurements were performed at:

Intertek Semko AB.
Torshamnsgatan 43,
P.O. Box 1103
SE-164 22 Kista

Intertek Semko AB is an FCC listed test site with site registration number 90913
Intertek Semko AB is an FCC accredited conformity assessment body with designation number SE0002

Intertek Semko AB is an Industry Canada listed test facility with IC assigned code 2042G

Measurement chambers

Measurement Chamber	Type of chamber	IC Site filing #
☒ STORA HALLEN	Semi-anechoic 10 m and 3 m	2042G-2
☐ BJÖRKHALLEN	Semi-anechoic 3 m	2042G-1
☐ 5 m CHAMBER	Semi-anechoic 5 m	2042G-3

3.3 Mode of operation during the test

Mode no.	Supply	Description
1	120 V AC/24 V DC	Light on
2	120 V AC/24 V DC	Stand by

Test	Mode of operation
Conducted continuous emission	1,2
Radiated emission of EM fields	1,2

4. TEST SUMMARY

The test has been carried out at the Intertek Semko AB premises in Kista, Sweden.

The results in this report apply only to sample tested.

Result: P – F – N/A

EMISSION TESTS					
Chapter	Standard(s)	Description	Port type(s)	Note(s)	Verdict
5	ANSI C63.4	Conducted continuous emission	AC input	-	P
6	ANSI C63.4	Radiated emission of EM fields	Enclosure	-	P
Supplementary information:					


5. CONDUCTED CONTINUOUS DISTURBANCES in the frequency-range 0.15 – 30 MHz

Date of test	Temp. [°C]	Humidity [%RH]	Tested by
October 04, 2021	22	51	ACI
November 09, 2021	22	29	ACI

Test setup and procedure:	EUT was placed 0.8 m from the AMN /ISN. Overview sweeps were performed for each lead of the cable(s). AE requiring mains power to operate was/were connected to AMN /ISN terminated with 50 Ω , when applicable.		
EUT position:	☒ Table-top (EUT 0.4 m from the RGP) ☐ Floor-standing (EUT 12 mm from the RGP) ☐ Other:		
Tested port type(s):	Coupling device	Measurement uncertainty	
		Frequency range	Value
☒ AC power*	☒ AMN	0.15 – 30 MHz	± 3.3 dB
Supplementary information: Measurement uncertainty is calculated in accordance with CISPR 16-4-2:2011. The measurement uncertainty is given with a confidence of 95 %. * Port of LED-driver			

Port	Frequency [MHz]	Voltage limits [dBμV] (2)	
		QP	AV
Limits FCC Part 15 subpart B and ICES-005			
□ AC power input Class A	0.15 – 0.50	79	66
	0.50 – 30.0	73	60
☒ AC power input Class B	0.15 – 0.50	66 – 56 (1)	56 – 46 (1)
	0.50 – 5.00	56	46
	5.00 – 30.0	60	50
Supplementary information: (1) The limits decrease linearly with the logarithm of the frequency. (2) At transitional frequencies the lower limit applies.			

5.1 Test results, AC Power input port, Class B, Mode 1

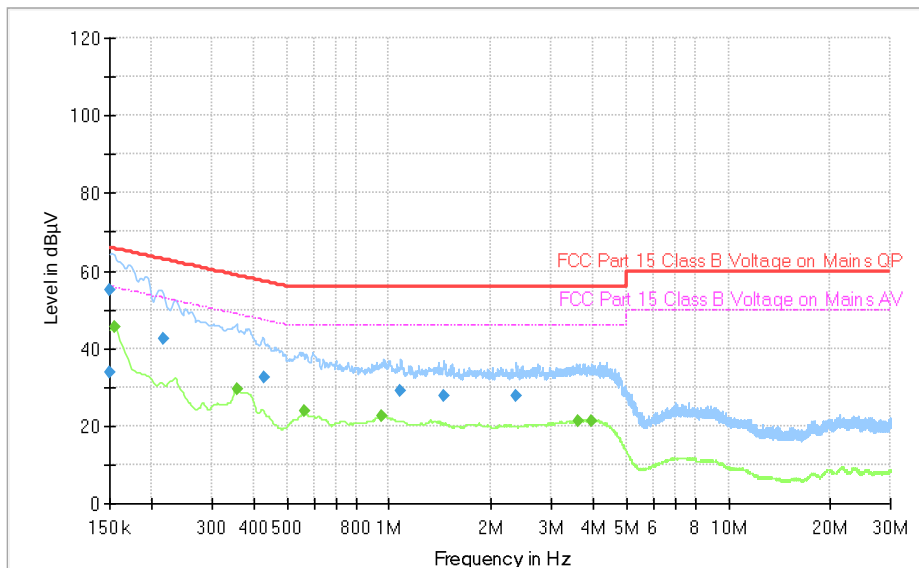

Diagram, Peak and AV overview sweep

Measurement results, Quasi-peak


Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Line	Margin (dB)
0.150	55.0	66.0	L1	11.0

Measurement results, Average

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Line	Margin (dB)
0.154	45.5	55.8	N	10.3
0.355	29.5	48.8	N	19.3

All other measured disturbances have a margin of more than 20 dB to the limits.
 Result [dBµV] = Analyser reading [dBµV] + cable loss [dB] + LISN insertion loss [dB]

5.2 Test results, AC Power input port, Class B, Mode 2

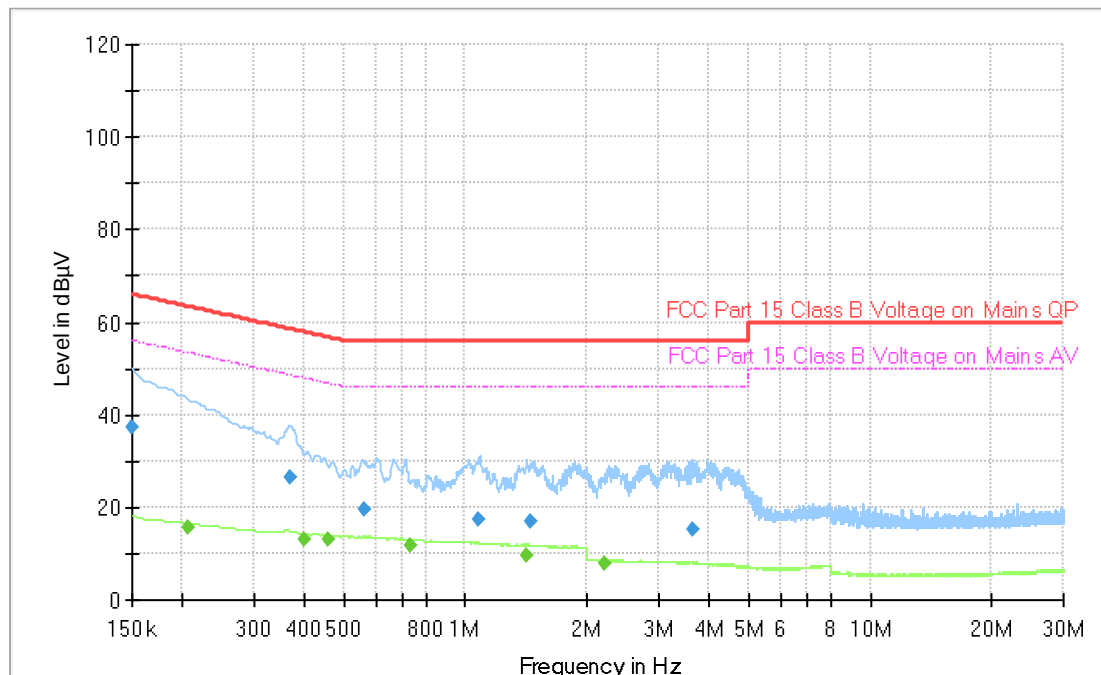

Diagram, Peak and AV overview sweep

Measurement results, Quasi-peak

All measured disturbances have a margin of more than 20 dB to the limits.

Measurement results, Average

All measured disturbances have a margin of more than 20 dB to the limits.

Result [dBµV] = Analyser reading [dBµV] + cable loss [dB] + LISN insertion loss [dB]

5.3 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Last Cal. date	Cal. interval
Measurement software	Rohde & Schwarz	EMC32 - V.10.50.40	--	--	--
Test receiver	Rohde & Schwarz	ESU 8	12866	07-2021	1 year
AMN / LISN	Rohde & Schwarz	ESH3-Z5	2728	07-2021	1 year
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	4623	07-2021	1 year
Cable	SUHNER	G03232 D-01	9701	06-2021	1 year
Cable	HUBER+SUHNER	RG 223/U	9815	06-2021	1 year

6. RADIATED RF EMISSION IN THE FREQUENCY-RANGE 30 MHz – 1 GHz


Date of test	Temp. [°C]	Humidity [%RH]	Tested by
September 24, 2021	21	41	ACI

Test setup and procedure:	The EUT was placed on a non-conductive support on the RGP. Overview sweeps were performed with the measurement receiver in max hold mode and the peak detector activated in the frequency range 30 – 1000 MHz. Above 1 GHz, both the peak and average detectors were activated, when applicable. During height scan above 1 GHz the EUT was kept in antennas cone of radiation.	
EUT position:	☒ Table-top (EUT 0.8 m from the RGP) ☐ Floor-standing (EUT 12 mm from the RGP) ☐ Other:	
Highest measured frequency:	☒ $F_X \leq 108$ MHz: 1 GHz ☐ $108 \text{ MHz} < F_X \leq 500$ MHz: 2 GHz ☐ $500 \text{ MHz} < F_X \leq 1$ GHz: 5 GHz ☐ $F_X > 1$ GHz: $5 \times F_X$ up to a max. of 40 GHz ☐ F_X is unknown: 40 GHz	
Frequency range:	Measuring distance	Measurement uncertainty
☐ 30 to 1000 MHz	3 m	± 5.1 dB
☒ 30 to 1000 MHz	10 m	± 5.0 dB
☐ 1.0 to 18 GHz	3 m	± 4.5 dB
☐ 18 to 26 GHz	3 m	± 4.8 dB
☐ 26 to 40 GHz	3 m	± 5.7 dB
Supplementary information: Measurement uncertainty is calculated in accordance with CISPR 16-4-2:2011. The measurement uncertainty is given with a confidence of 95 %.		

Test	Freq. [MHz]	Meas. angle [°]	Antenna			RBW [kHz]			VBW [kHz]
			Type	Height	Pol.	QP	PK	AV	PK
Preview	30 – 1000	0 – 359	Bilog	1 – 4 m	V and H	-	120	-	1000
Final						120	-	-	-
Preview	1000 – 40000	0 – 359	Horn	1 – 4 m		-	1000	1000	3000
Final						-	1000	1000	-

Measurement distance [m]	Frequency [MHz]	Limits [dBµV/m]		
		QP	PK	AV
Limits, FCC, Class A				
☐ 3 / ☐ 10	30 – 88	49.5 / 39.1	-	-
	88 – 216	54.0 / 43.5	-	-
	216 – 960	56.9 / 46.4	-	-
	960 – 1000	60.0 / 49.5	-	-
☐ 3	Above 1000	-	80.0	60.0
Limits, FCC, Class B				
☐ 3 / ☒ 10	30 – 88	40.0 / 29.5	-	-
	88 – 216	43.5 / 33.1	-	-
	216 – 960	46.0 / 35.6	-	-
	960 – 1000	54.0 / 43.5	-	-
☐ 3	Above 1000	-	74.0	54.0
Limits, ICES-005 Class A				
☐ 3 / ☐ 10	30 – 88	49.5 / 39.1	-	-
	88 – 216	54.0 / 43.5	-	-
	230 – 1000	56.9 / 46.4	-	-
Limits, ICES-005, Class B				
☐ 3 / ☒ 10	30 – 88	40.0 / 29.5	-	-
	88 – 216	43.5 / 33.1	-	-
	230 – 1000	46.0 / 35.6	-	-

6.1 Test results, 30 – 1000 MHz, FCC and ICES-005, Class B, Mode 1

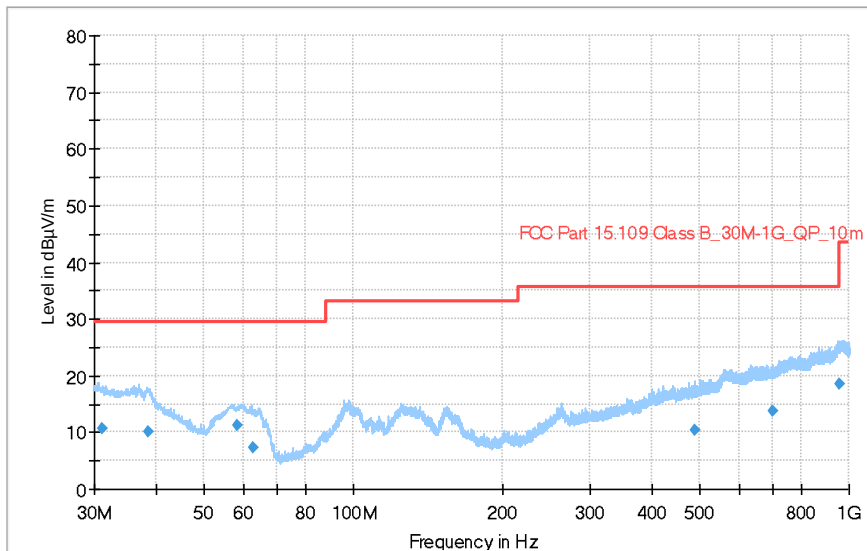

Diagram, Peak overview sweep

Measurement results, Quasi-peak, Mode 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Pol	Margin* (dB)
31.080	10.6	29.5	V	18.9
38.610	10.0	29.5	V	19.5
58.500	11.2	29.5	V	18.3
955.650	18.5	35.6	H	17.1

*The EUT also fulfil the limit for ICES-005, see limit in table page 15.

All other measured disturbances have a margin of more than 20 dB to the limits.

Result [dBµV/m] = Analyser reading [dBµV] + Antenna factor [1/m] - Amplifier gain [dB] + Cable loss [dB]

6.2 Test results, 30 – 1000 MHz, FCC and ICES-005, Class B, Mode 2

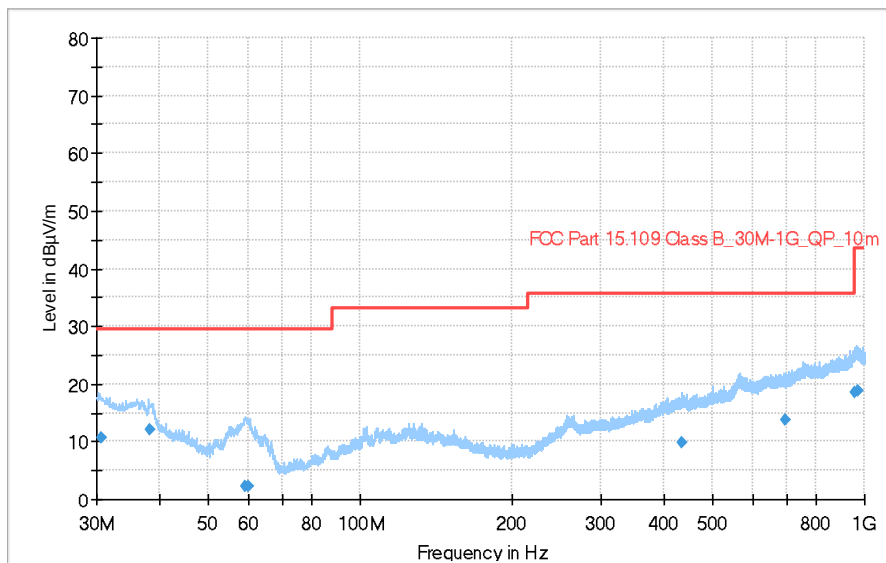

Diagram, Peak overview sweep

Measurement results, Quasi-peak

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Pol	Margin* (dB)
30.690	10.6	29.5	H	18.9
38.370	12.0	29.5	V	17.5
955.620	18.5	35.6	H	17.1

*The EUT also fulfil the limit for ICES-005, see limit in table page 15.

All other measured disturbances have a margin of more than 20 dB to the limits.

Result [dBµV/m] = Analyser reading [dBµV] + Antenna factor [1/m] - Amplifier gain [dB] + Cable loss [dB]

6.3 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Last Cal. date	Cal. interval
Antenna bilog	TESEQ	CBL 6111D	34200	03-2020	3 Years
Preamplifier	SEMKO	AM1331	7992	09-2021	1 Year
Coaxial cable	ROSENBERGER	LA5-S003-10000 (UFB293C)	39163	02-2021	1 Year
Coaxial cable	ROSENBERGER	LA5-S003-8500	39148	05-2021	1 Year
Coaxial cable	Huber+Suhner	SUCOFLEX 106	39122	05-2021	1 Year
Measurement receiver	Rohde & Schwarz	ESW 44	33890	07-2021	1 Year
Temp and moisture	Vaisala	HMI 41	31215	07-2021	1 Year