

Prüfbericht-Nr.: <i>Test report no.:</i>	CN26NH92 001	Auftrags-Nr.: <i>Order no.:</i>	326179757	Seite 1 von 32 <i>Page 1 of 32</i>
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	1288983	Auftragsdatum: <i>Order date:</i>	2026-03-31	
Auftraggeber: <i>Client:</i>	IKEA of Sweden AB Box 702, SE-343 81 Älmhult, Sweden			
Prüfgegenstand: <i>Test item:</i>	Table lamp			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	B2512			
Auftrags-Inhalt: <i>Order content:</i>	TÜV Rheinland EMC service			
Prüfgrundlage: <i>Test specification:</i>	FCC 47 CFR Part 15, Subpart B:2024 Class B ICES-005:2018			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2026-04-28	Refer to the EUT photos file		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A004258898-006			
Prüfzeitraum: <i>Testing period:</i>	2026-05-21			
Ort der Prüfung: <i>Place of testing:</i>	Refer to clause 1.1			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shanghai) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	Trancy Gong		genehmigt von: <i>authorized by:</i>	Hexiong Liu
Datum: <i>Date:</i>	2026-06-22		Ausstellungsdatum: <i>Issue date:</i>	2026-06-22
Stellung / Position:	Project engineer		Stellung / Position:	Authorizer
Sonstiges / <i>Other:</i>	FCC ID: FHO- B2512 Test Firm Name: TÜV Rheinland (Shanghai) Co., Ltd. Designation Number: CN1396 Test Firm Registration Number: 930979			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN26NH92 001
Test report no.:

Seite 2 von 32
Page 2 of 32

Anmerkungen Remarks

- | | |
|---|--|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.
Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p> |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature</p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.
Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.
Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p> |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p> |

Prüfbericht - Nr.: CN26NH92 001

Test Report No.:

Seite 3 von 32

Page 3 of 32

Revision history of test report:

Report number	Issue date	Contents and reason for change if appropriate
CN26NH92 001	2026-06-22	Initial release.

Contents

1	TEST SITES	5
1.1	TEST FACILITIES.....	5
2	GENERAL PRODUCT INFORMATION.....	6
2.1	PRODUCT FUNCTION AND INTENDED USE.....	6
2.2	RATINGS AND SYSTEM DETAILS.....	6
2.3	INDEPENDENT OPERATION MODES.....	6
2.4	DESCRIPTION OF INTERCONNECTING CABLES	6
2.5	NOISE GENERATING AND NOISE SUPPRESSING PARTS	6
2.6	HIGHEST FREQUENCY GENERATED OR USED IN THE DEVICE OR ON WHICH THE DEVICE OPERATES OR TUNES.....	6
2.7	SUBMITTED DOCUMENTS.....	6
3	TEST SET-UP AND OPERATION MODES.....	7
3.1	PRINCIPLE OF CONFIGURATION SELECTION	7
3.2	EQUIPMENT AND CABLE ARRANGEMENT.....	7
3.3	TEST SOFTWARE	8
3.4	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	8
3.5	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	8
4	CONFORMITY DECISION RULE.....	9
5	TEST RESULTS EMISSION	10
5.1	EMISSION IN THE FREQUENCY RANGE UP TO 30 MHz	10
5.1.1	Conducted emission	10
5.2	EMISSION IN THE FREQUENCY RANGE ABOVE 30 MHz.....	16
5.2.1	Radiated emission (30-1000 MHz).....	16
6	PHOTOGRAPHS OF THE TEST SET-UP.....	30
7	LIST OF TEST AND MEASUREMENT INSTRUMENTS	31
8	LIST OF FIGURES.....	32

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:

Seite 5 von 32
Page 5 of 32

1 Test Sites

1.1 Test Facilities

Laboratory: TÜV Rheinland (Shanghai) Co., Ltd.

Address: Workshop 14, North Half of Workshop 10 and Workshop 16, Pingqian (Taicang) Modern Industrial Park, No. 525, Yuewang Lingang South Road, Shaxi, Taicang, Jiangsu, China

The test equipment used are in accordance with CISPR 16-1 series standards for measurement of radio interference.

Refer to Clause 7 for test and measurement instruments.

2 General Product Information

2.1 Product Function and Intended Use

The EUT (equipment under test) is an ordinary table lamp. For further information, refer to the user's manual.

2.2 Ratings and System Details

Rated input : DC 5 V, 5 W
Rechargeable Li-Ion Battery : DC 7.2 V, 2600 mAh
Rechargeable Li-Ion Battery : ICBL7.2-18-B1
model ICBL7.2-18-USBC-B1

Identities and differences:

Above model has two kinds of Rechargeable Li-Ion Battery ICBL7.2-18-B1 and ICBL7.2-18-USBC-B1. Therefore, the EMC tests were performed on sample #1 (ICBL7.2-18-B1) and sample #2 (ICBL7.2-18-USBC-B1) respectively.

2.3 Independent Operation Modes

The basic operation modes are: "Charging", "Lighting on" and "Off".

The test mode as follows:

"Charging"

Mode 1: EUT was charged with the power supply by the USB type C port.

"Lighting On"

Mode 2: EUT was illuminated by battery powered and with max. lighting output.

Mode 3: EUT was illuminated by battery powered and with min. lighting output.

2.4 Description of interconnecting cables

None.

2.5 Noise Generating and Noise Suppressing Parts

Refer to the circuit diagram for further information.

2.6 Highest frequency generated or used in the device or on which the device operates or tunes

The highest frequency used in the EUT is 16 MHz.

2.7 Submitted Documents

Circuit diagram, user's manual and rating label.

3 Test Set-up and Operation Modes

3.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible emission level. The test conditions were adapted accordingly in reference to the instructions for use.


Refer to the related paragraph of this report.

The sequence of testing:


1. Conducted emission tests were performed on 2026-05-09.
2. Radiated emission tests were performed on 2026-05-09.

3.2 Equipment and cable arrangement

Block diagram for both conducted emission and radiated emission tests is as follows:

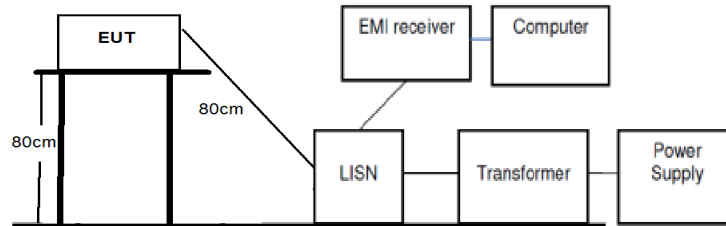

(Conducted emission)

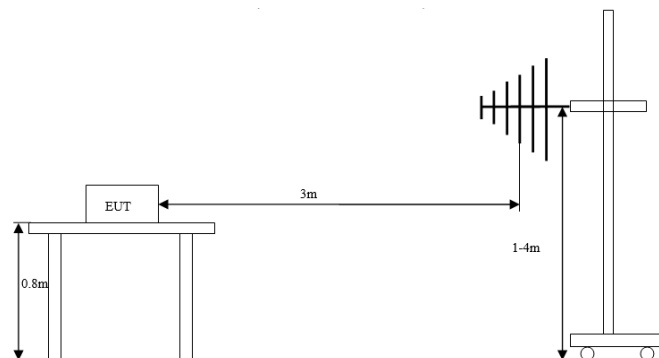

(Radiated emission 30-1000 MHz)

Also refer to photographs on clause 6 for test setups for both conducted emission test and radiated emission tests.

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:

Seite 8 von 32
Page 8 of 32

3.3 Test Software

Refer to the related paragraph of this report. No software was used.

3.4 Special Accessories and Auxiliary Equipment

During tests, the LED power supply (model: ICPSW5-5NA-1, input: AC 100-240 V, 50/60 Hz Max. 0.2 A, output: DC 5.0 V, max. 1.0 A, 5.0 W) was used.

3.5 Countermeasures to achieve EMC Compliance

No other special measure is employed to achieve the requirement.

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:**Seite 9 von 32**
Page 9 of 32

4 Conformity Decision Rule

For all EMI tests included in this report, as measurement uncertainties are less than the values U_{CISPR} given in CISPR 16-4-2, compliance with the limits is determined by comparing measurement results directly with corresponding limits without taking into consideration of measurement uncertainties.

5 Test Results EMISSION

5.1 Emission in the Frequency Range up to 30 MHz

5.1.1 Conducted emission

Result:		Passed
Date of testing	: 2026-05-09	
Test procedure	: FCC 47 CFR Part 15, Subpart B:2024, ICES-005:2018, ANSI C63.4-2014 and CISPR 16-2-1	
Frequency range	: 0.15 – 30 MHz	
Limits	: Quasi-peak limit: 0.15 – 0.5 MHz, 66 to 56 dB μ V (decrease with the logarithm of frequency); 0.5 – 5 MHz, 56 dB μ V; 5 – 30 MHz, 60 dB μ V Average limit: 0.15 – 0.5 MHz, 56 to 46 dB μ V (decrease with the logarithm of frequency); 0.5 – 5 MHz, 46 dB μ V; 5 – 30 MHz, 50 dB μ V	
Bandwidth of EMI receiver for final measurement	: 9 kHz	
Measurement time for final measurement	: 1 s	
Kind of test site	: Shielded room	
Input voltage	: AC 120 V, 60 Hz for LED power supply	
EUT's configuration	: Sample #1 and Sample #2, defined in clause 2.2	
Operational mode	: Mode 1, defined in clause 2.3.	
Ambient condition	: Temperature: 17.2 °C; Relative humidity: 45.4 %	
Expanded measurement uncertainty ($k=2$)	: 2.33 dB The minimum margin to the limit is 7.87 dB at 0.494250 MHz. The margin is higher than expanded measurement uncertainty.	
Test setup photo	: Photograph 1 of Attachment 3	

The measurement setup was made according to ANSI C63.4-2014 in a shielded room. The measurement equipment like test receivers, quasi-peak detector and artificial mains network (AMN) are in compliance with CISPR 16-1 series standards.

The tested object was set-up on a wooden support. The EUT was set 0.8 m away from the AMN. The cord longer than necessary to be connected to the AMN was folded forth and back parallel so as to form a bundle with a length between 0.3 m and 0.4 m. The disturbance voltage test was performed on the neutral line and phase line of the power supply of the EUT respectively.

The following figures and tables were measured by an automatic measuring system. Both quasi-peak and average measurements were performed. In the following spectral diagram, “*” means Quasi-Peak Value and “*” means Average Value results.

Prüfbericht - Nr.: CN26NH92 001

Seite 11 von 32

Test Report No.:

Page 11 of 32

Notes on following tables of conducted emission results and conversions:

Level (dB μ V): final measurement results by using quasi-peak detector and average detector


Transd (dB): transducer factor including cable loss, insertion loss of artificial mains network and gain of pre-amplifier (if used)

Margin: Limit (dB μ V) - Level (dB μ V)

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:

Seite 12 von 32
Page 12 of 32

Figure 1: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, sample #1, L Line

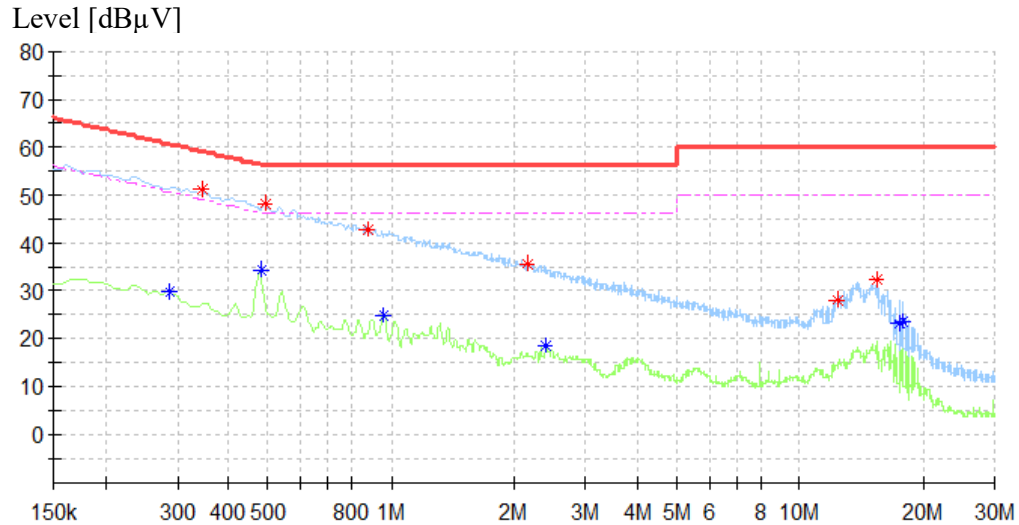


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.287250	---	29.57	50.60	21.03	L1	10.4
0.345750	50.95	---	59.06	8.12	L1	10.4
0.480750	---	34.20	46.33	12.12	L1	10.4
0.494250	48.22	---	56.10	7.87	L1	10.4
0.881250	42.89	---	56.00	13.11	L1	10.4
0.957750	---	24.83	46.00	21.17	L1	10.4
2.168250	35.76	---	56.00	20.24	L1	10.4
2.388750	---	18.28	46.00	27.72	L1	10.4
12.306750	28.21	---	60.00	31.79	L1	10.9
15.389250	32.48	---	60.00	27.52	L1	11.0
17.486250	---	23.19	50.00	26.81	L1	11.1
17.900250	---	23.62	50.00	26.38	L1	11.1

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:

Seite 13 von 32
Page 13 of 32

Figure 2: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, sample #1, N Line

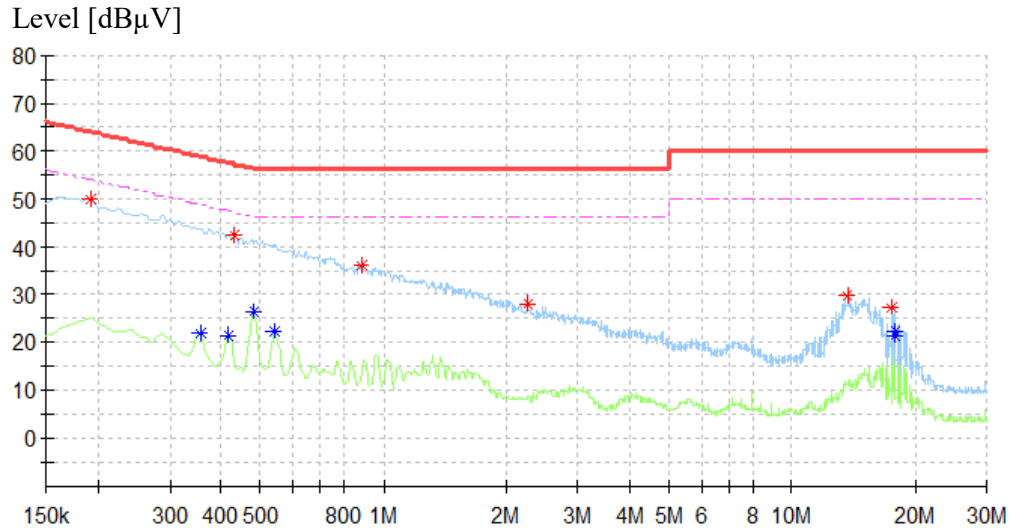


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.192750	49.83	---	63.92	14.09	N	10.3
0.354750	---	21.67	48.85	27.18	N	10.3
0.417750	---	21.45	47.49	26.05	N	10.3
0.431250	42.53	---	57.23	14.70	N	10.3
0.480750	---	26.45	46.33	19.88	N	10.3
0.543750	---	22.38	46.00	23.62	N	10.3
0.885750	36.06	---	56.00	19.94	N	10.3
2.258250	28.02	---	56.00	27.98	N	10.4
13.719750	29.59	---	60.00	30.41	N	10.9
17.531250	27.34	---	60.00	32.66	N	11.1
17.891250	---	22.25	50.00	27.75	N	11.1
17.954250	---	21.50	50.00	28.50	N	11.1

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:

Seite 14 von 32
Page 14 of 32

Figure 3: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, sample #2, L Line

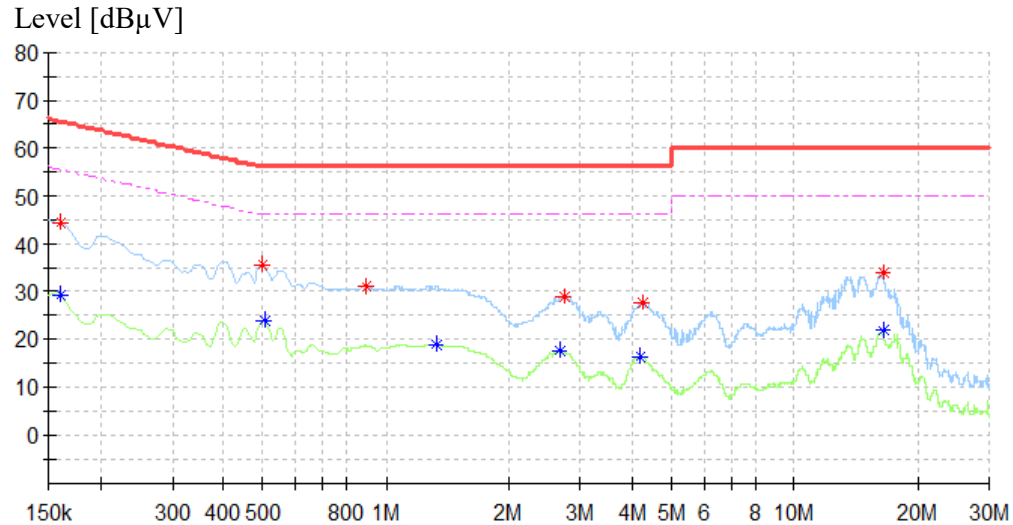


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.161250	44.44	---	65.40	20.96	L1	10.4
0.161250	---	29.43	55.40	25.97	L1	10.4
0.498750	35.48	---	56.02	20.54	L1	10.4
0.503250	---	23.91	46.00	22.09	L1	10.4
0.894750	31.08	---	56.00	24.92	L1	10.4
1.335750	---	18.94	46.00	27.06	L1	10.4
2.676750	---	17.70	46.00	28.30	L1	10.4
2.726250	29.13	---	56.00	26.87	L1	10.4
4.211250	---	16.50	46.00	29.50	L1	10.4
4.215750	27.64	---	56.00	28.36	L1	10.4
16.478250	34.14	---	60.00	25.86	L1	11.1
16.478250	---	21.70	50.00	28.30	L1	11.1

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:

Seite 15 von 32
Page 15 of 32

Figure 4: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, sample #2, N Line

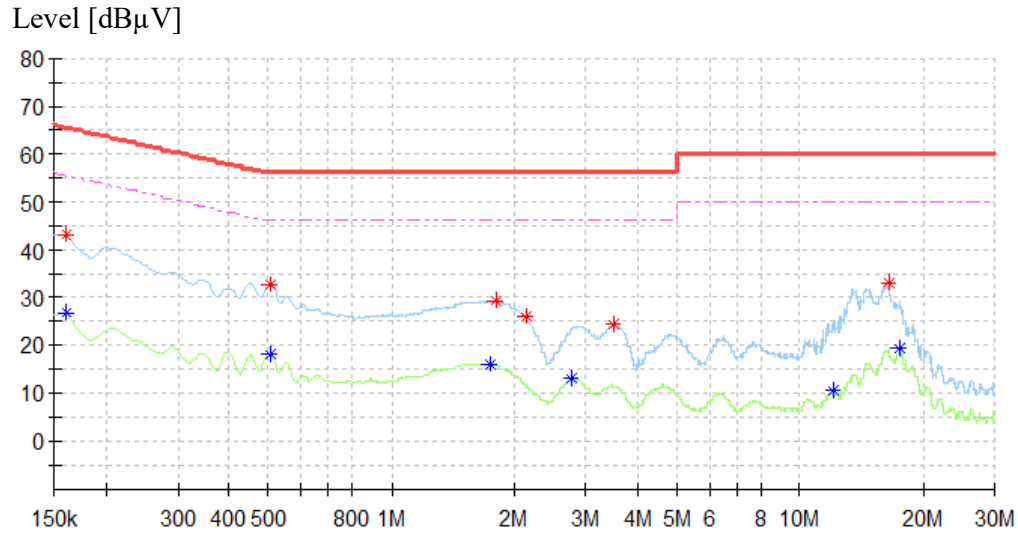

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.161250	42.97	---	65.40	22.43	N	10.3
0.161250	---	26.64	55.40	28.76	N	10.3
0.503250	32.82	---	56.00	23.18	N	10.3
0.503250	---	18.24	46.00	27.76	N	10.3
1.745250	---	16.09	46.00	29.91	N	10.4
1.794750	29.54	---	56.00	26.46	N	10.4
2.123250	25.80	---	56.00	30.20	N	10.4
2.757750	---	12.87	46.00	33.13	N	10.4
3.504750	24.13	---	56.00	31.87	N	10.4
12.027750	---	10.33	50.00	39.67	N	10.9
16.473750	33.08	---	60.00	26.92	N	11.0
17.571750	---	19.51	50.00	30.49	N	11.1

5.2 Emission in the Frequency Range above 30 MHz

5.2.1 Radiated emission (30-1000 MHz)

Result:	Passed
----------------	---------------

Date of testing	: 2026-05-09
Test procedure	: FCC 47 CFR Part 15, Subpart B:2024, ICES-005:2018, ANSI C63.4-2014 and CISPR 16-2-3
Product classification	: Class B
Frequency range	: 30 – 1000 MHz (see Note 1)
Limits	: Quasi-peak limits (3 m distance): 30 – 88 MHz, 40 dB μ V/m; 88 – 216 MHz, 43.5 dB μ V/m; 216 – 1000 MHz, 46 dB μ V/m (see Note 2)
Bandwidth of EMI receiver for final measurement	: 120 kHz
Measurement time for final measurement	: 1 s
Kind of test site	: Semi-anechoic chamber
Input voltage	: AC 230 V, 50 Hz for power supply DC 7.2 V for battery
EUT's configuration	: Sample #1 and Sample #2, defined in clause 2.2
Operational mode	: Mode 1~Mode 3, defined in clause 2.3.
Ambient condition	: Temperature: 17.8 °C; Relative humidity: 44.5 %
Expanded measurement uncertainty ($k=2$)	: 5.40 dB The minimum margin to the limit is 8.5 dB at 52.188750 MHz. The margin is higher than expanded measurement uncertainty.
Test setup photo	: Photograph 2 of Attachment 3

The radiated disturbance test was carried out in a semi-anechoic chamber. The test distance from the receiving antenna to the EUT is 3 m. The normalized site attenuation of the semi-anechoic chamber is regularly calibrated to ensure the radiated disturbance test results are valid. During the test, the EUT was placed on an 80 cm wooden support above the reference ground plane. The wooden support was rotated 360° around and the height of the antenna varied from 1 m to 4 m to find the maximum disturbance. The test was performed with the antenna both in its horizontal and vertical polarizations.

The following figures and tables were measured by an automatic measurement system. A preview test was first performed with peak detector. The final test was performed with quasi-peak at those critical frequencies during the preview test. In the following spectral diagram, “x” means quasi-peak test results.

Notes on following tables of radiated emission results and conversions:
QuasiPeak (dB μ V/m): final measurement results by using quasi-peak detector
Corr. (dB): correction factor including: antenna factor, cable loss, and gain of pre-amplifier (if used)
Margin: Limit (dB μ V/m) - QuasiPeak (dB μ V/m)

Prüfbericht - Nr.: CN26NH92 001

Test Report No.:


Seite 17 von 32

Page 17 of 32

Note 1: The highest frequency in the EUT is less than 108 MHz. According to FCC Part 15 subpart B §15.33 (b) (1), the upper frequency for radiated emission measurement is 1000 MHz.

Note 2: The class B limits of ICES-005:2018 are stricter than those FCC 47 CFR Part 15, Subpart B:2024 for 3 m test distance. Therefore, the former limits are used in following figures and tables.

Figure 5: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, horizontal polarization, sample #1, mode 1

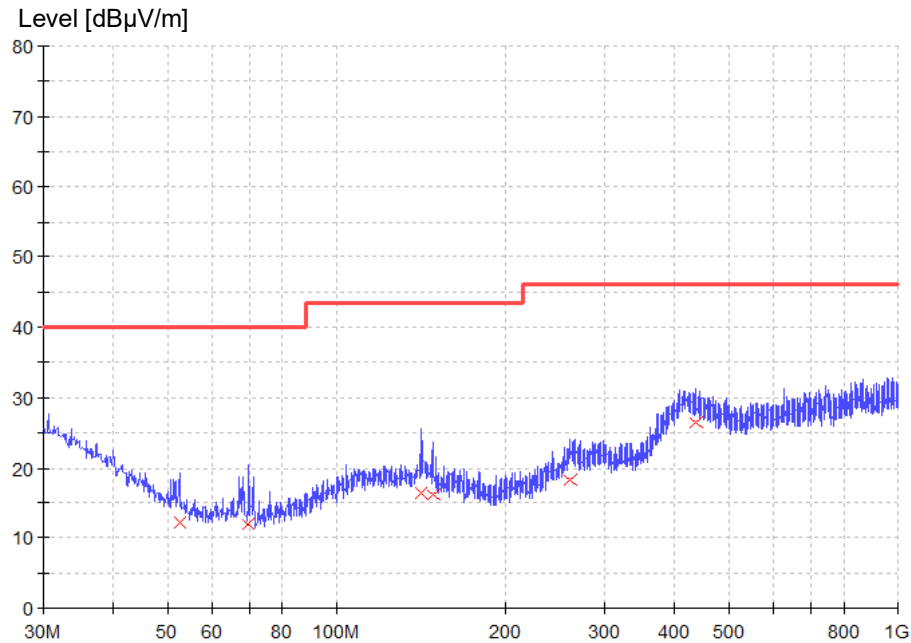


Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
52.552500	12.1	120.000	139.0	H	-136.0	13.9	27.9	40.0
69.527500	11.9	120.000	175.0	H	55.0	12.8	28.2	40.0
141.065000	16.4	120.000	148.0	H	142.0	17.9	27.1	43.5
148.703750	16.1	120.000	147.0	H	-12.0	17.2	27.4	43.5
260.496250	18.2	120.000	187.0	H	120.0	21.5	27.8	46.0
436.066250	26.4	120.000	121.0	H	-151.0	23.7	19.6	46.0

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:

Seite 19 von 32
Page 19 of 32

Figure 6: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, vertical polarization, sample #1, mode 1

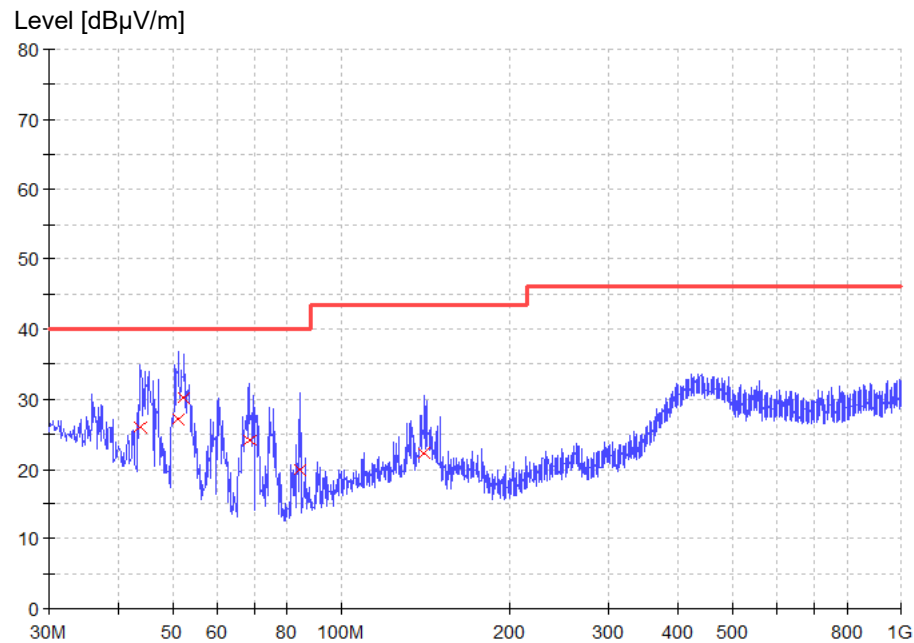


Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
43.822500	25.9	120.000	147.0	V	-24.0	17.7	14.1	40.0
51.097500	27.2	120.000	100.0	V	-109.0	14.4	12.9	40.0
52.310000	30.2	120.000	109.0	V	-132.0	14.0	9.8	40.0
68.678750	24.1	120.000	196.0	V	-151.0	12.8	16.0	40.0
84.077500	19.8	120.000	200.0	V	114.0	14.3	20.2	40.0
140.580000	22.2	120.000	145.0	V	0.0	18.0	21.3	43.5

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:

Seite 20 von 32
Page 20 of 32

Figure 7: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, horizontal polarization, sample #1, mode 2

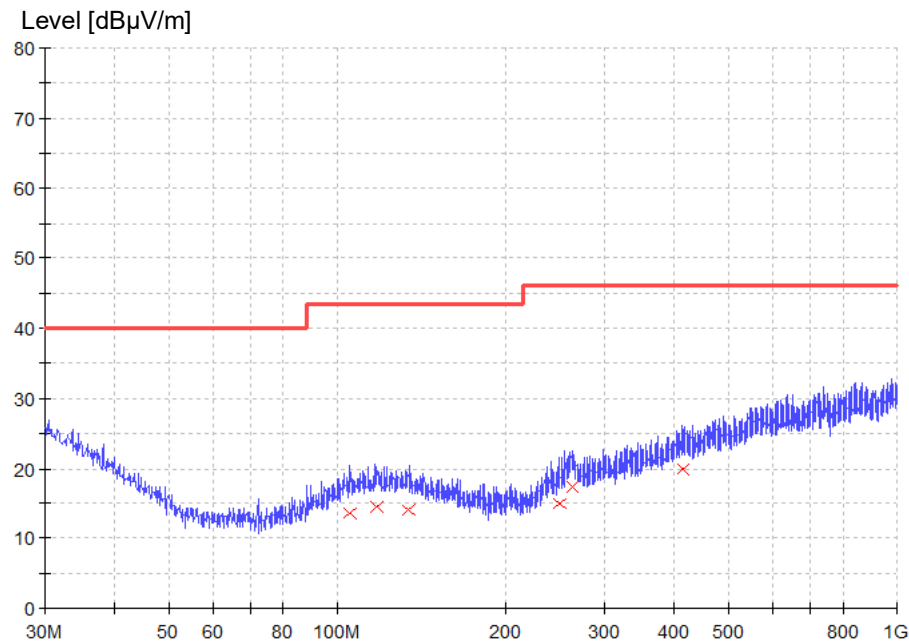


Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
105.538750	13.7	120.000	111.0	H	30.0	18.1	29.8	43.5
117.906250	14.5	120.000	174.0	H	-74.0	18.8	29.0	43.5
134.638750	14.0	120.000	140.0	H	26.0	18.3	29.5	43.5
249.947500	15.0	120.000	193.0	H	97.0	19.3	31.0	46.0
262.921250	17.3	120.000	100.0	H	100.0	21.6	28.7	46.0
415.575000	20.0	120.000	197.0	H	137.0	23.9	26.0	46.0

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:

Seite 21 von 32
Page 21 of 32

Figure 8: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, vertical polarization, sample #1, mode 2

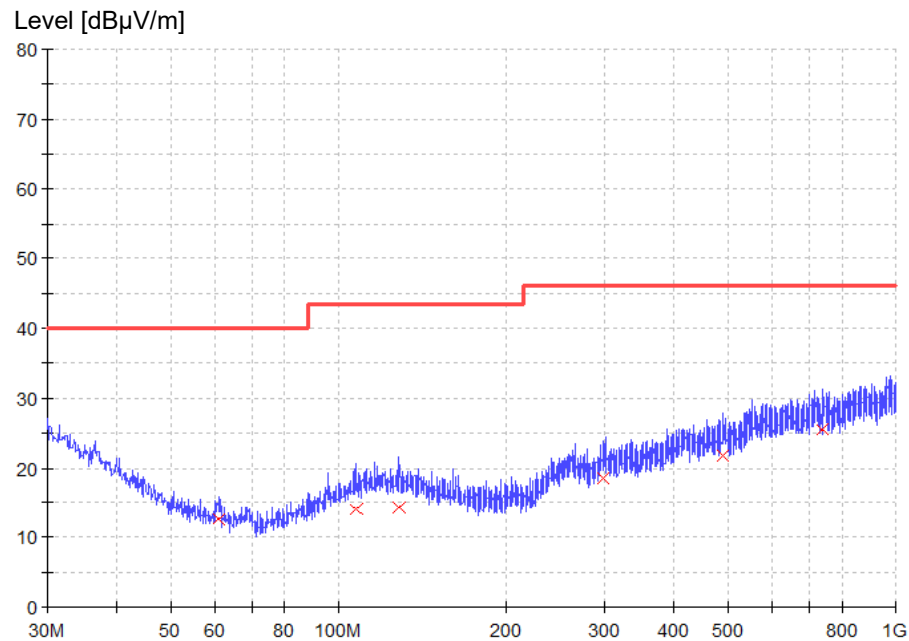


Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
60.918750	12.6	120.000	74.0	V	66.0	12.6	27.4	40.0
107.842500	14.0	120.000	-56.0	V	-23.0	18.4	29.6	43.5
128.818750	14.3	120.000	158.0	V	-105.0	18.6	29.2	43.5
298.811250	18.4	120.000	-129.0	V	-28.0	20.7	27.6	46.0
489.901250	21.8	120.000	-84.0	V	-75.0	25.5	24.2	46.0
741.252500	25.4	120.000	-1.0	V	-156.0	28.4	20.6	46.0

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:

Seite 22 von 32
Page 22 of 32

Figure 9: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, horizontal polarization, sample #1, mode 3

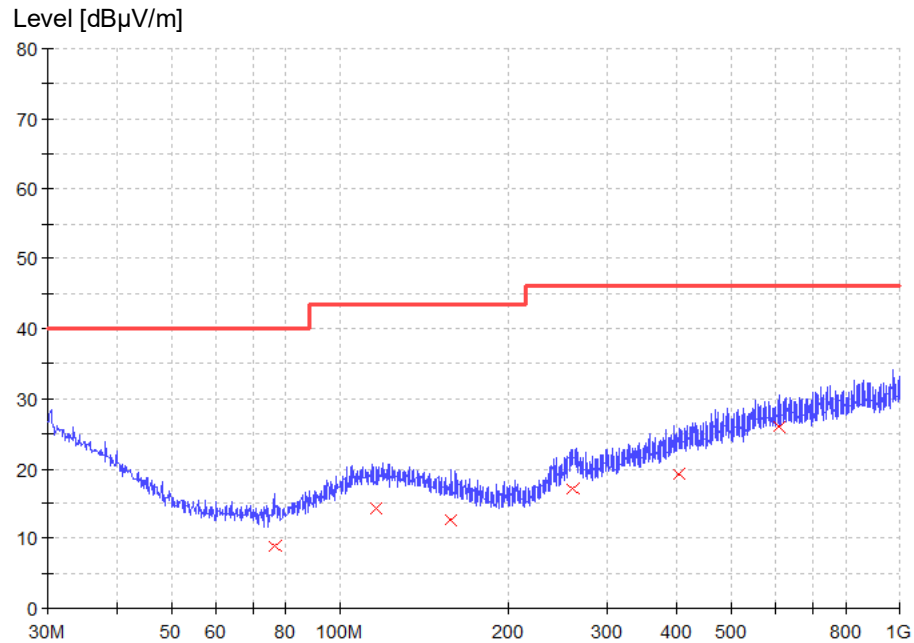


Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
76.438750	9.0	120.000	104.0	H	-158.0	13.3	31.0	40.0
115.723750	14.3	120.000	152.0	H	77.0	18.8	29.2	43.5
158.161250	12.6	120.000	154.0	H	167.0	16.9	30.9	43.5
261.102500	17.1	120.000	120.0	H	-2.0	21.6	28.9	46.0
404.298750	19.3	120.000	118.0	H	-10.0	23.2	26.8	46.0
607.998750	26.0	120.000	184.0	H	-118.0	26.4	20.0	46.0

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:

Seite 23 von 32
Page 23 of 32

Figure 10: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, vertical polarization, sample #1, mode 3

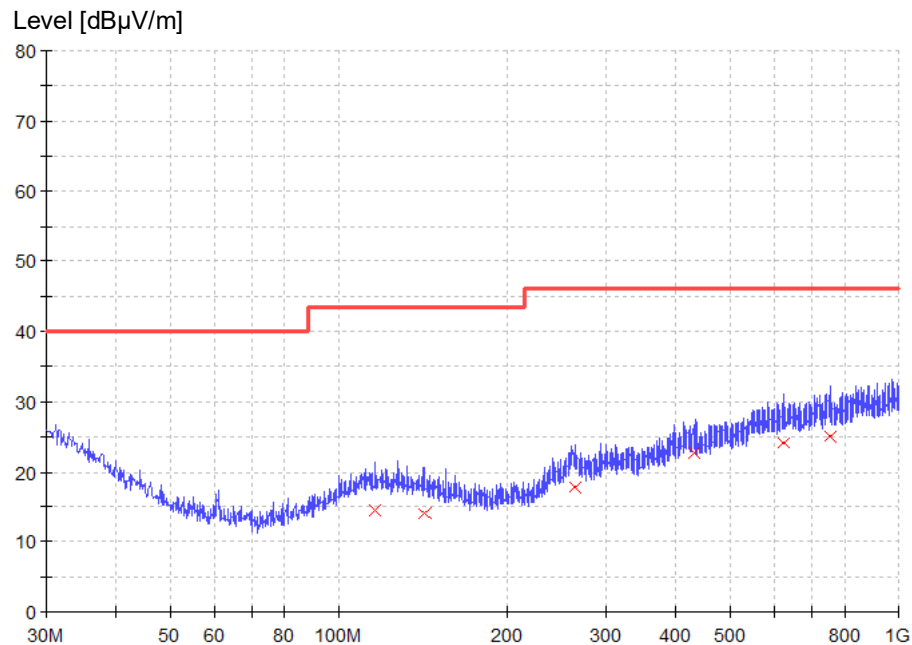


Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
116.087500	14.4	120.000	134.0	V	120.0	18.8	29.1	43.5
141.913750	14.0	120.000	171.0	V	-165.0	17.8	29.5	43.5
264.133750	17.8	120.000	194.0	V	126.0	21.4	28.2	46.0
429.518750	22.6	120.000	145.0	V	-112.0	23.9	23.4	46.0
624.852500	24.0	120.000	136.0	V	-2.0	26.9	22.0	46.0
753.013750	25.1	120.000	158.0	V	-104.0	28.1	20.9	46.0

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:

Seite 24 von 32
Page 24 of 32


Figure 11: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, horizontal polarization, sample #2, mode 1

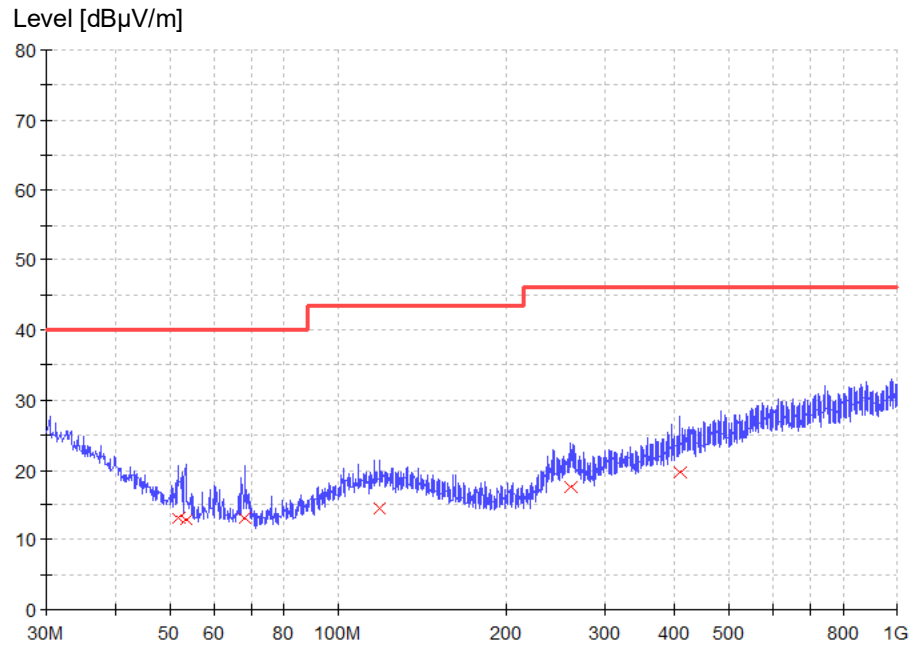

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
51.825000	13.2	120.000	152.0	H	38.0	14.1	26.8	40.0
53.280000	12.9	120.000	123.0	H	120.0	13.7	27.2	40.0
67.951250	13.2	120.000	152.0	H	128.0	12.7	26.8	40.0
118.391250	14.6	120.000	189.0	H	134.0	18.8	28.9	43.5
261.830000	17.6	120.000	187.0	H	-167.0	21.7	28.4	46.0
408.421250	19.6	120.000	161.0	H	161.0	23.5	26.4	46.0

Figure 12: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, vertical polarization, sample #2, mode 1

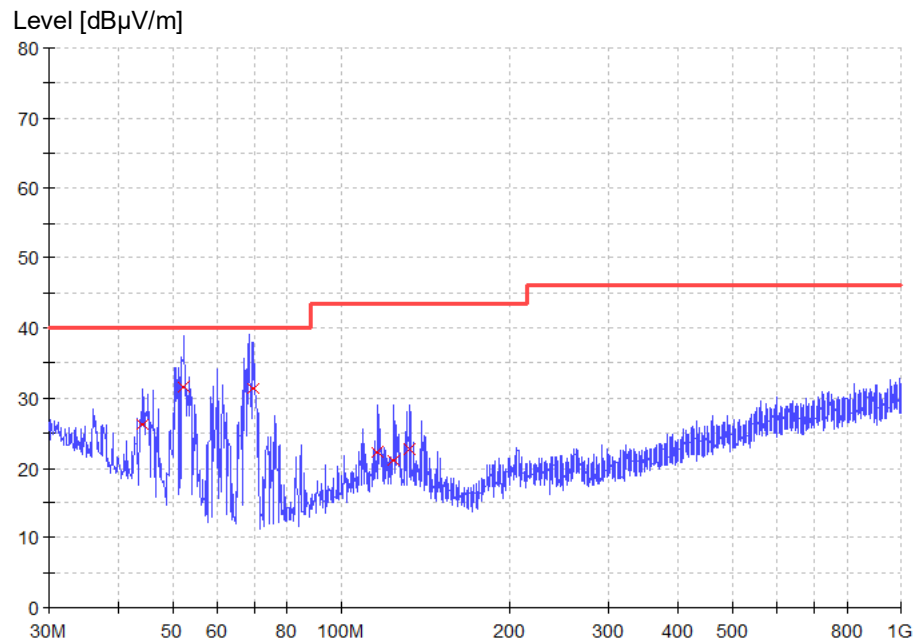


Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
44.186250	26.2	120.000	184.0	V	-157.0	17.5	13.8	40.0
52.188750	31.5	120.000	192.0	V	129.0	14.0	8.5	40.0
69.406250	31.3	120.000	179.0	V	178.0	12.8	8.7	40.0
116.208750	22.3	120.000	129.0	V	73.0	18.8	21.2	43.5
123.483750	21.1	120.000	104.0	V	0.0	18.7	22.4	43.5
132.335000	22.6	120.000	142.0	V	151.0	18.5	20.9	43.5

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:

Seite 26 von 32
Page 26 of 32

Figure 13: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, horizontal polarization, sample #2, mode 2

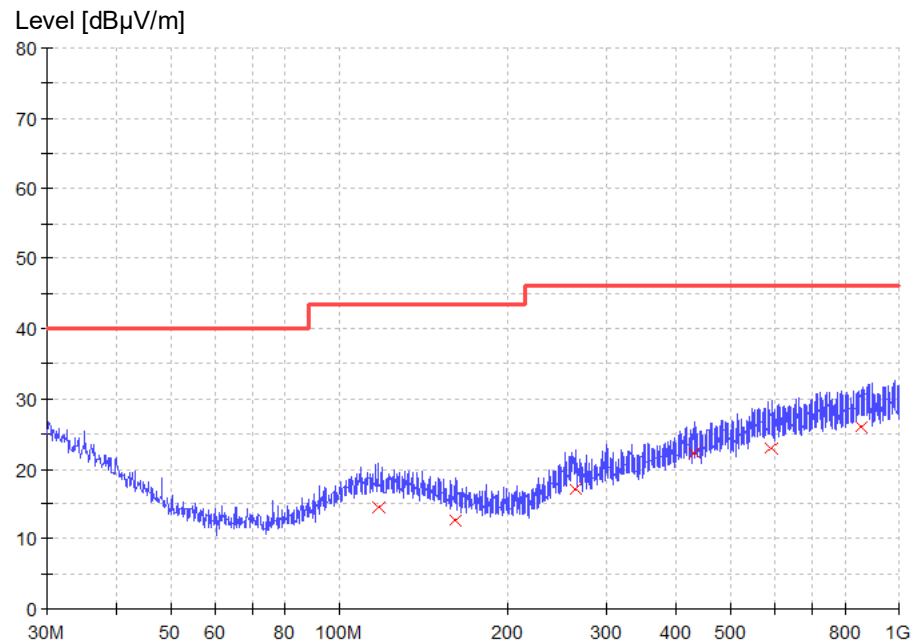


Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
117.300000	14.5	120.000	113.0	H	-122.0	18.8	29.0	43.5
161.677500	12.6	120.000	144.0	H	79.0	16.9	30.9	43.5
264.740000	17.0	120.000	112.0	H	18.0	21.3	29.0	46.0
429.518750	22.3	120.000	139.0	H	30.0	23.9	23.7	46.0
590.902500	23.0	120.000	181.0	H	169.0	26.4	23.0	46.0
858.016250	26.1	120.000	101.0	H	134.0	29.0	20.0	46.0

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:

Seite 27 von 32
Page 27 of 32


Figure 14: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, vertical polarization, sample #2, mode 2

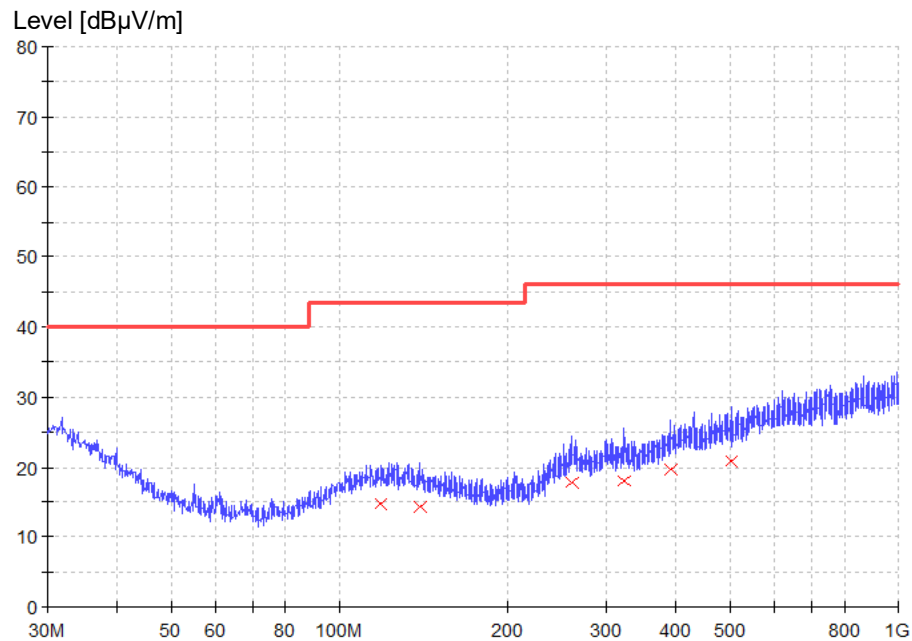

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
118.755000	14.7	120.000	49.0	V	126.0	18.8	28.8	43.5
139.610000	14.4	120.000	60.0	V	-69.0	18.0	29.1	43.5
260.860000	17.9	120.000	93.0	V	-11.0	21.6	28.1	46.0
324.395000	18.0	120.000	157.0	V	127.0	21.2	28.0	46.0
390.718750	19.7	120.000	13.0	V	-42.0	22.8	26.3	46.0
504.087500	20.9	120.000	-99.0	V	171.0	24.6	25.2	46.0

Figure 15: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, horizontal polarization, sample #2, mode 3

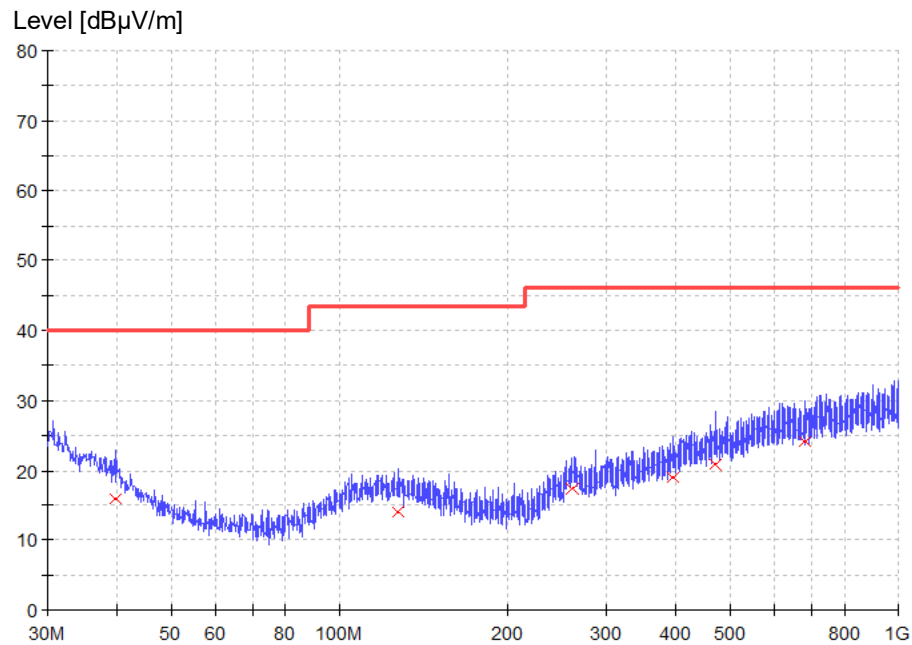


Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
39.578750	15.9	120.000	142.0	H	51.0	20.0	24.1	40.0
127.606250	14.1	120.000	129.0	H	-159.0	18.6	29.4	43.5
261.345000	17.2	120.000	131.0	H	144.0	21.7	28.8	46.0
394.235000	19.0	120.000	142.0	H	36.0	22.9	27.0	46.0
472.320000	20.8	120.000	114.0	H	47.0	24.8	25.2	46.0
682.203750	24.0	120.000	113.0	H	46.0	27.0	22.0	46.0

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:

Seite 29 von 32
Page 29 of 32

Figure 16: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, vertical polarization, sample #2, mode 3

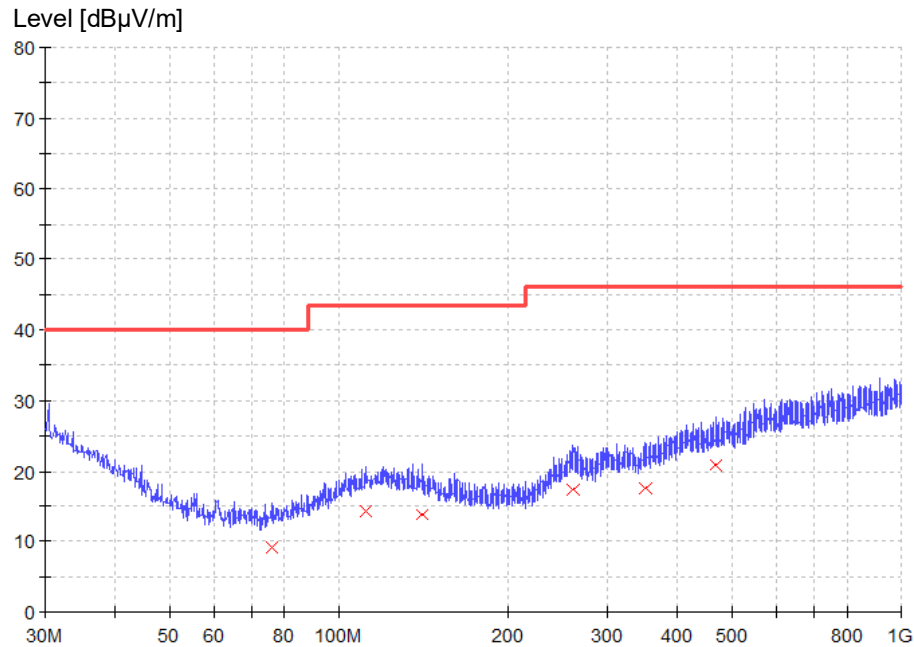

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
75.953750	9.2	120.000	156.0	V	71.0	13.3	30.8	40.0
111.358750	14.4	120.000	179.0	V	16.0	18.7	29.1	43.5
140.701250	13.7	120.000	175.0	V	-29.0	18.0	29.8	43.5
261.830000	17.3	120.000	187.0	V	-24.0	21.7	28.7	46.0
349.493750	17.4	120.000	158.0	V	167.0	21.5	28.6	46.0
468.561250	20.8	120.000	128.0	V	9.0	24.7	25.3	46.0

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:

Seite 30 von 32
Page 30 of 32

6 Photographs of the Test Set-Up

Refer to the test setup file.

Prüfbericht - Nr.: CN26NH92 001
Test Report No.:

Seite 31 von 32
Page 31 of 32

7 List of Test and Measurement Instruments

Equip. no.	Equipment name	Model	Serial no.	Manufacturer	Cal. date	Due date
EMC-S-028	EMI measurement software	EMC32-E+ (10.60.20)	100150	Rohde & Schwarz	N/A	N/A
EMC-C-366	Thermohygrometer	608-H1	2485149174	testo	2025-07-11	2026-07-11
EMC-C-195	EMI test receiver	ESR3	102794	Rohde & Schwarz	2025-08-02	2026-08-02
EMC-C-190	Artificial mains network	ENV432	101514	Rohde & Schwarz	2025-09-02	2026-09-02
EMC-S-032	EMI measurement software	EMC32-MEB (10.60.20)	100697	Rohde & Schwarz	N/A	N/A
EMC-C-155	BiLog antenna	CBL 6112D	40530	Teseq	2025-03-24	2026-09-24
EMC-C-121	Thermohygrometer	608-H1	1241320265	testo	2025-06-05	2026-06-05
EMC-C-066	EMI test receiver	ESCI	100280	Rohde & Schwarz	2025-09-28	2026-09-28
EMC-C-001	3 m semi-anechoic chamber	SAC3	FJ129002	Frankonia	2023-12-03	2026-12-03

8 List of Figures

Figure 1: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, sample #1, L Line	12
Figure 2: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, sample #1, N Line.....	13
Figure 3: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, sample #2, L Line	14
Figure 4: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, sample #2, N Line.....	15
Figure 5: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, horizontal polarization, sample #1, mode 1	18
Figure 6: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, vertical polarization, sample #1, mode 1	19
Figure 7: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, horizontal polarization, sample #1, mode 2	20
Figure 8: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, vertical polarization, sample #1, mode 2	21
Figure 9: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, horizontal polarization, sample #1, mode 3	22
Figure 10: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, vertical polarization, sample #1, mode 3	23
Figure 11: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, horizontal polarization, sample #2, mode 1	24
Figure 12: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, vertical polarization, sample #2, mode 1	25
Figure 13: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, horizontal polarization, sample #2, mode 2	26
Figure 14: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, vertical polarization, sample #2, mode 2	27
Figure 15: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, horizontal polarization, sample #2, mode 3	28
Figure 16: Spectral diagrams, radiated electromagnetic disturbance, 30 – 1000 MHz, vertical polarization, sample #2, mode 3	29

End of test report