

RADIO TEST REPORT

No. 1720278STO-002, Ed. 1

RF Performance

EQUIPMENT UNDER TEST

Equipment: Remote Control
Type/Model: E1743 TRÅDFRI
Additional type/model*: E1766 TRÅDFRI
Manufacturer: IKEA of Sweden AB
Tested by request of: IKEA of Sweden AB

*See opinions and interpretations clause 2.5

SUMMARY

Referring to the emission limits, and the operating mode during the tests specified in this report, the equipment complies with the requirements according to the following standards:

47 CFR Part 15 (2016): Subpart C: Intentional radiators. Section 15.247

47 CFR Part 15 (2016): Subpart B: Unintentional radiators

RSS-GEN Issue 4 (2014): General requirements of compliance of radio apparatus (2014)

RSS-247 Issue 2 (2017): Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices

For details, see clause 2 – 4.


Date of issue: 2018-03-26

Tested by:



Daniel Nilsson

Approved by:



Stefan Andersson

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Revision History

Edition	Date	Description	Changes
1	2018-03-26	First release	

CONTENTS

	Page
1 Client Information	5
2 Equipment under test (EUT).....	5
2.1 Identification of the EUT.....	5
2.2 Additional information about the EUT	5
2.3 Peripheral equipment.....	6
2.4 Test signals and operation modes	6
2.5 Opinions and interpretations	6
3 Test Specifications	7
3.1 Standards	7
3.2 Additions, deviations and exclusions from standards and accreditation	7
3.3 Test site.....	7
4 Test Summary	8
5 Field strength of fundamental and radiated Band Edge.....	9
5.1 Test set-up and test procedure.	9
5.2 Test conditions	9
5.3 Requirement.....	10
5.4 Test results.....	10
6 Radiated rf Emission in the frequency-range 30 MHz to 25 GHz	12
6.1 Test set-up and test procedure.	12
6.2 Test conditions	12
6.3 Requirements.....	12
6.4 Test results 30 MHz – 1000 MHz, RX.....	14
6.5 Test results 1 GHz – 25 GHz, TX	15
6.6 Test results 1 GHz – 13 GHz, RX	22
7 Conducted band edge measurement.....	23
7.1 Test set-up and test procedure.	23
7.2 Test conditions	23
7.3 Requirement.....	23
7.4 Test results.....	23
8 Peak conducted output power.....	25
8.1 Test set-up and test procedure.	25
8.2 Test conditions	25
8.3 Requirements.....	25
8.4 Test results.....	26
9 Occupied 6 dB bandwidth	28
9.1 Test set-up and test procedure.	28
9.2 Test conditions	28
9.3 Requirements.....	28
9.4 Test results.....	28
10 99 % bandwidth	30
10.1 Test set-up and test procedure.	30
10.2 Test conditions	30
10.3 Test results.....	30
11 Peak power spectral density	32
11.1 Test set-up and test procedure.	32
11.2 Test conditions	32
11.3 Requirements.....	32
11.4 Test results.....	33
12 Transmitter duty cycle for pulsed transmissions	35
12.1 Test set-up and test procedure.	35

12.2 Test conditions	35
12.3 Requirement.....	35
12.4 Test results.....	35
13 Test equipment.....	37
14 Measurement uncertainty	38
15 Test set up and EUT photos.....	38

1 CLIENT INFORMATION

The EUT has been tested by request of

Company: IKEA of Sweden AB
Box 702
343 81 Älmhult
Sweden

Name of contact: M. Mauritzon HFB10 Lighting

2 EQUIPMENT UNDER TEST (EUT)

2.1 Identification of the EUT

Equipment: Remote control

Type/Model: E1743 TRÅDFRI

Brand name: IKEA

Serial number: No visible serial number

Manufacturer: IKEA of Sweden

Transmitter frequency range: 2405 - 2480 MHz

Receiver frequency range: 2405 - 2480 MHz

Frequency agile or hopping: ☐ Yes ☒ No

Antenna: ☒ Internal antenna ☐ External antenna

Antenna connector: ☒ None, internal antenna ☐ Yes

Antenna gain: 2,44 dBi

Rating RF output power: 4.5 dBm

Type of modulation: QPSK

Temperature range: ☐ Category I (General): -20°C to +55°C
☐ Category II (Portable equipment): -10°C to +55°C
☐ Category III (Equipment for normal indoor use): +5°C to +35°C
☒ Other: <0°C to +35°C

Transmitter stand by mode supported: ☒ Yes ☐ No

2.2 Additional information about the EUT

The EUT consists of the following units:

ID	Type	Hardware	Comment
BRL	E1743 TRÅDFRI	V2.0 P1.2	Internal antenna, fixed on low channel
BRM	E1743 TRÅDFRI	V2.0 P1.2	Internal antenna, fixed on on mid channel
BRH	E1743 TRÅDFRI	V2.0 P1.2	Internal antenna, fixed on high channel
BCU	E1743 TRÅDFRI	V2.0 P1.2	With temporary antenna connector and UART for conducted testing

During the tests the EUT supported following software:

Firmware	Comment
20170904	-

2.3 Peripheral equipment

Peripheral equipment is equipment needed for correct operation of the EUT, but not included as part of the testing and evaluation of the EUT.

Equipment	Type/Model	Manufacturer	Serial no.
Remote control	E1743	IKEA	-
Laptop	Latitude 5480	Dell	F1C4FH2
Power Supply	Power supply B6-10	Oltronix	-

2.4 Test signals and operation modes

The EUT supported the following operating modes:

Continuous transmission of modulated signal

Normal transmission of modulated signal

2.5 Opinions and interpretations

The following types/type are/is also included as additional types/type in this test report:

E1766 TRÅDFRI

The difference as compared to the tested type is (according to the manufacturer):

The embossed symbols on the top of the EUT are different.

The difference is considered not to imply different radio-characteristics when compared to the tested type. Therefore, this type is not tested, but considered to have the same radio-characteristics as the tested type.

3 TEST SPECIFICATIONS

3.1 Standards

Requirements:

47 CFR Part 15 (2016): Subpart C: Intentional radiators. Section 15.247

47 CFR Part 15 (2016): Subpart B: Unintentional radiators

RSS-GEN Issue 4 (2014): General requirements of compliance of radio apparatus (2014).

RSS-247 Issue 2 (2017): Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

Test methods:

ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

3.2 Additions, deviations and exclusions from standards and accreditation

RSS-247 Issue 2 (2017) is not within Intertek's scope of accreditation.

No other additions, deviations or exclusions have been made from standards and accreditation.

3.3 Test site

Measurements were performed at:

Intertek Semko AB
Torshamnsgatan 43
Box 1103
SE-164 22 Kista

Intertek Semko AB is a FCC listed test site with site registration number 90913
Intertek Semko AB is a FCC accredited conformity assessment body with designation number SE0002
Intertek Semko AB is an Industry Canada listed test facility with IC assigned code 2042G

Measurement chambers

Measurement Chamber	Type of chamber	IC Site filing #
STORA HALLEN	Semi-anechoic 10 m and 3 m	2042G-2
3M FAC	Fully-anechoic 3 m	2042G-4

4 TEST SUMMARY

The results in this report apply only to sample tested:

Requirement	Description	Result
FCC §15.203 RSS-GEN 8.3	Antenna requirement The EUT has integrated non-detachable antenna which can't be removed without breaking the EUT.	PASS
FCC §15.207, 15.107 RSS-GEN 8.8 table 3	Conducted continuous emission in the frequency range 150 kHz to 30 MHz, AC Power input port Battery operated equipment.	NA
FCC §15.247 (b)(4) RSS-247 5.4(4), 5.4(5)	Field strength of fundamental and antenna gain The EUT complies with the limits. Antenna gain is less than 6 dBi.	PASS
FCC §15.247 (d), 15.209(a), 15.109 RSS-GEN 8.9 RSS-247 5.5	Radiated emission of electromagnetic fields in the frequency range 30 – 1000 MHz The EUT complies with the limits. The margin to the limit was at least 10.4 dB at 76.803 MHz. See clause 6.4 – 6.5.	PASS
FCC §15.247(d), 15.209(a), 15.109 RSS-GEN 8.9 RSS-247 5.5	Radiated emission of electromagnetic fields in the frequency range above 1 GHz The EUT complies with the limits. The margin to the limit was at least 11.7 dB at 4961.0 MHz. See clause 6.6 – 6.7.	PASS
FCC §15.247(a)(2) RSS-GEN 6.6 RSS-247 5.2(1)	Occupied bandwidth The EUT complies with the limits. The margin to the limit is at least 1.28 MHz See clause 9.4.	PASS
FCC §15.247(b) RSS-247 5.4(4)	Conducted output power The EUT complies with the limits. The margin to the limit was at least 25.8 dB at 2480.0 MHz. See clause 8.4.	PASS
FCC §15.247(e) RSS-247 5.2(2)	Peak power spectral density The EUT complies with the limits. The margin to the limit was at least 15.1 dB at 2405.0 MHz. See clause 11.4.	PASS
FCC §15.247(e) RSS-247 5.5	Band edge The EUT complies with the limits. The margin to the limit was at least 10.7 dB at 2483.5 MHz. See clause 5.4.	PASS

5 RADIATED BAND EDGE

Date of test:	2018-02-16	Test location:	3m FAC
EUT Serial:	BRL, BRH	Ambient temp:	22 °C
Tested by:	DNI	Relative humidity:	25 %
Test result:	Pass	Margin:	10.7 dB

5.1 Test set-up and test procedure.

The test method is in accordance with ANSI C63.10-2013.

The EUT was set up in order to emit maximum disturbances.

The EUT was placed on an insulating support 1.5 m above the turntable which is part of the reference ground plane.

Overview sweeps were performed for six discrete elevation angles with the measurement receiver in max-hold mode and the peak and average detector was activated.

5.2 Test conditions

Test set-up:

Test receiver set-up:

Final test, fundamental:

Final test, band edge:

Measuring distance:

Measuring angle:

Elevation angles:

Antenna

Height above ground plane:

Polarisation:

Type:

1 GHz – 40 GHz

Peak,

Average

Peak

Average

3 m

0 – 359°

0 - 180°

RBW 1 MHz

Peak value + 20 x LOG (Duty cycle)

RBW 100 kHz

Peak value + 20 x LOG (Duty cycle)

VBW 3 MHz

VBW 300 kHz

VBW 300 kHz

VBW 300 kHz

VBW 300 kHz

VBW 300 kHz

VBW 300 kHz

VBW 300 kHz

VBW 300 kHz

VBW 300 kHz

VBW 300 kHz

5.3 Requirement

Outside the restricted bands:

Reference: CFR 47 §15.247(d), RSS-247 5.5,

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.


Within restricted bands:

Reference: CFR 47 §15.209, RSS-Gen section 8.9

Field strength of emissions must comply with limits shown in table below

Frequency range [MHz]	Field strength at 3 m (dB μ V/m)	Field strength at 10 m (dB μ V/m)	Detector (dB μ V/m)
30 – 88	40.0	29.5	Quasi Peak
88 – 216	43.5	33.0	Quasi Peak
216 – 960	46.0	35.5	Quasi Peak
960 – 1000	54.0	43.5	Quasi Peak
Above 1000	54.0 / 74.0	43.5 / 63.5	Average / Peak

5.4 Test results

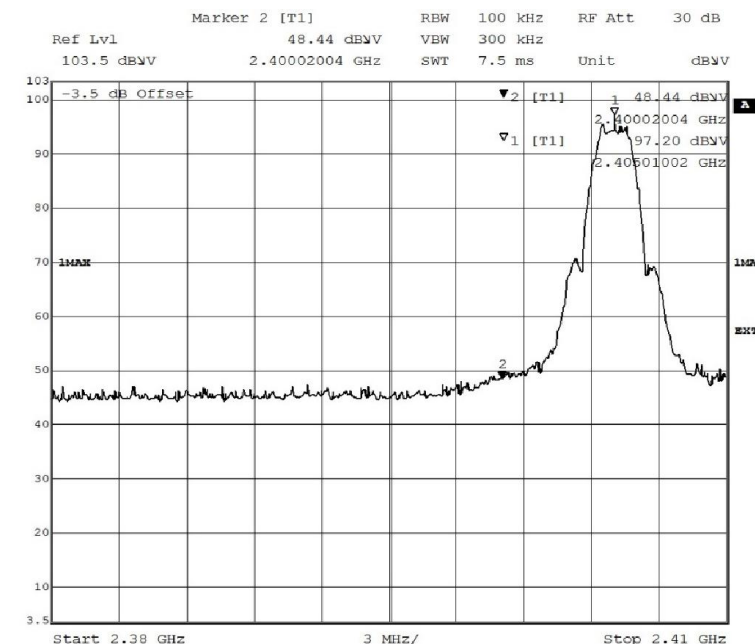


Date: 15.FEB.2018 16:30:51

Lower band edge sweep

Field strength of fundamental and band edge, low channel

Frequency [MHz]	Level [dB μ V/m]	Delta [dBc]	Limit [dBc]	Detector	Polarization H/V	Margin [dB]
2405.0	97.2		--	Peak	V	--
2400.0	48.4	48.8	20.0	Peak	V	28.8

Result [dB μ V/m] = Analyser reading [dB μ V] + Antenna factor [1/m] - Amplifier gain [dB] + Cable loss [dB]

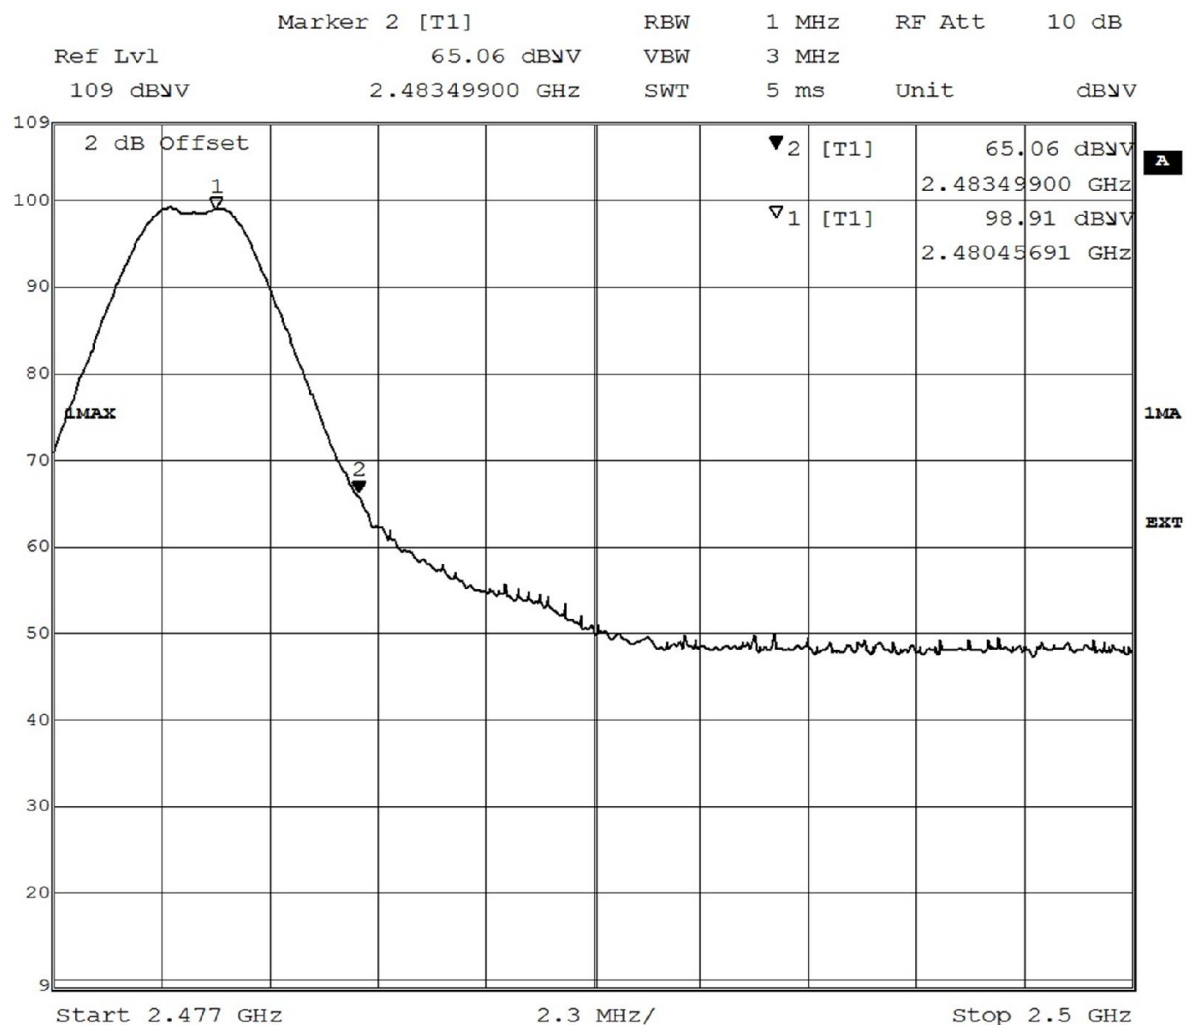

Date: 7.MAR.2018 13:17:00

Upper band edge sweep

Field strength of fundamental and band edge, high channel

Frequency [MHz]	Level [dBμV/m]	Limit [dBμV/m]	Detector	Polarization H/V	Margin [dB]
2480.0	98.9	--	Peak	V	--
2483.5	65.1	74.0	Peak	V	8.9
2480.0	87.1	--	Average	V	--
2483.5	53.3	54.0	Average	V	0.7

Result [dBμV/m] = Analyser reading [dBμV] + Antenna factor [1/m] - Amplifier gain [dB] + Cable loss [dB]

6 RADIATED RF EMISSION IN THE FREQUENCY-RANGE 30 MHZ TO 25 GHZ

Date of test:	2018-01-23, 2018-01-31, 2018-02-05	Test location:	Stora Hallen / 3m FAC
EUT Serial:	BRL, BRM, BRH	Ambient temp:	21 - 22 °C
Tested by:	DNI / RHI	Relative humidity:	14 - 25 %
Test result:	Pass	Margin:	10.4 dB

6.1 Test set-up and test procedure.

The test method is in accordance with ANSI C63.10-2013.

The EUT was set up in order to emit maximum disturbances.

The EUT was placed on an insulating support 1.5 m above the turntable which is part of the reference ground plane.

Overview sweeps were performed for with the measurement receiver in max-hold mode and the peak and average detector was activated.

6.2 Test conditions

Test set-up:

Test receiver set-up:

Preview test:

Final test:

EUT height above ground plane:

Measuring distance:

Measuring angle:

Antenna

Height above ground plane:

Polarisation:

Type:

30 MHz to 1000 MHz

Peak, RBW 120 kHz VBW 1 MHz

Quasi-Peak, RBW 120 kHz VBW 1 MHz

0.8 m

3 m

0 – 359°

1 – 4 m

Vertical and Horizontal

Bilog

Test set-up:

Test receiver set-up:

Preview test:

Final test:

EUT height above ground plane:

Measuring distance:

Measuring angle:

Elevation angles_

Antenna

Height above ground plane:

Polarisation:

Type:

Antenna tilt:

1 GHz – 26.5 GHz

Peak, RBW 1 MHz VBW 3 MHz

Average, RBW 1 MHz VBW 3 MHz

Peak, RBW 1 MHz VBW 3 MHz

Average Peak value + 20 x LOG (Duty cycle)

1.5 m

3 m

0 – 359°

0 – 180°

1.5 m

Vertical and Horizontal

Horn

Activated

6.3 Requirements

Within restricted bands and receive mode:

Reference: CFR 47 §15.209, §15.109, RSS-Gen section 8.9

Field strength of emissions must comply with limits shown in table below

Frequency range [MHz]	Field strength at 3 m (dB μ V/m)	Field strength at 10 m (dB μ V/m)	Detector (dB μ V/m)
30 – 88	40.0	29.5	Quasi Peak
88 – 216	43.5	33.0	Quasi Peak
216 – 960	46.0	35.5	Quasi Peak
960 – 1000	54.0	43.5	Quasi Peak
Above 1000	54.0 / 74.0	43.5 / 63.5	Average / Peak


The values for 10 m measuring distance are calculated by subtracting 10.5 dB from the 3 m limit. (i.e. an extrapolation factor of 20 dB/decade according to CFR 47 §15.31(f)(1))

Outside the restricted bands:

Reference: CFR 47 §15.247(d), RSS-247 5.5,

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

6.4 Test results 30 MHz – 1000 MHz, RX

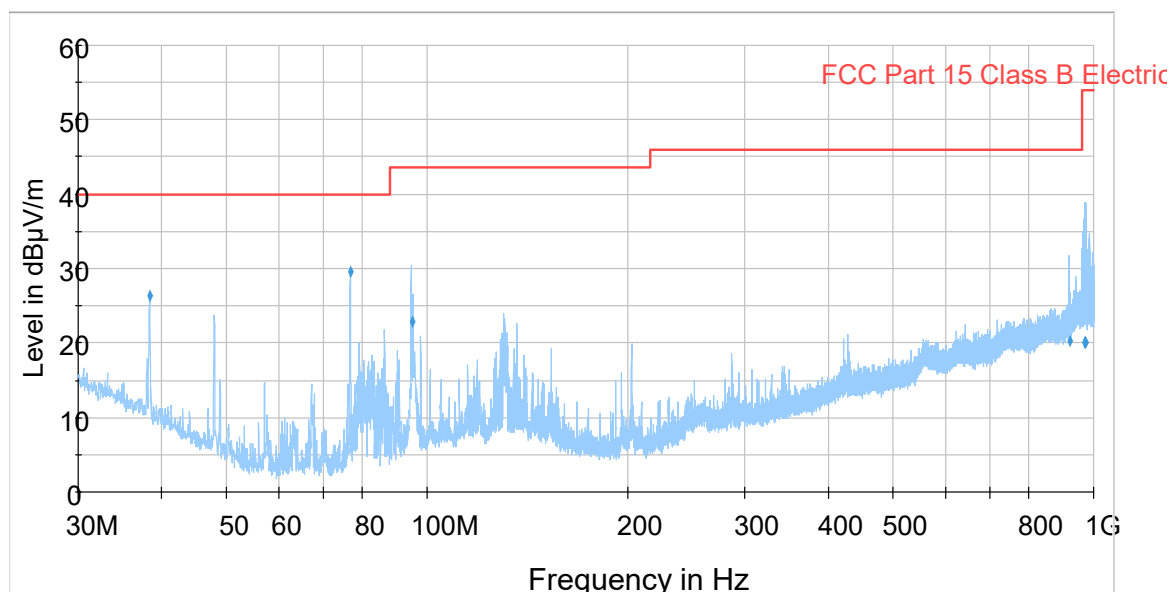

Diagram, Peak overview sweep, 30 – 1000 MHz at 3 m distance. RX.


Measurement results, Quasi Peak

Frequency [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Polarization H/V	Margin [dB]
38.396	26.4	40.0	V	13.6
76.803	29.6	40.0	V	10.4


All other measured disturbances have a margin of more than 20 dB to the limits.

Result [dBµV/m] = Analyser reading [dBµV] + Antenna factor [1/m] - Amplifier gain [dB] + Cable loss [dB]

6.5 Test results 1 GHz – 25 GHz, TX

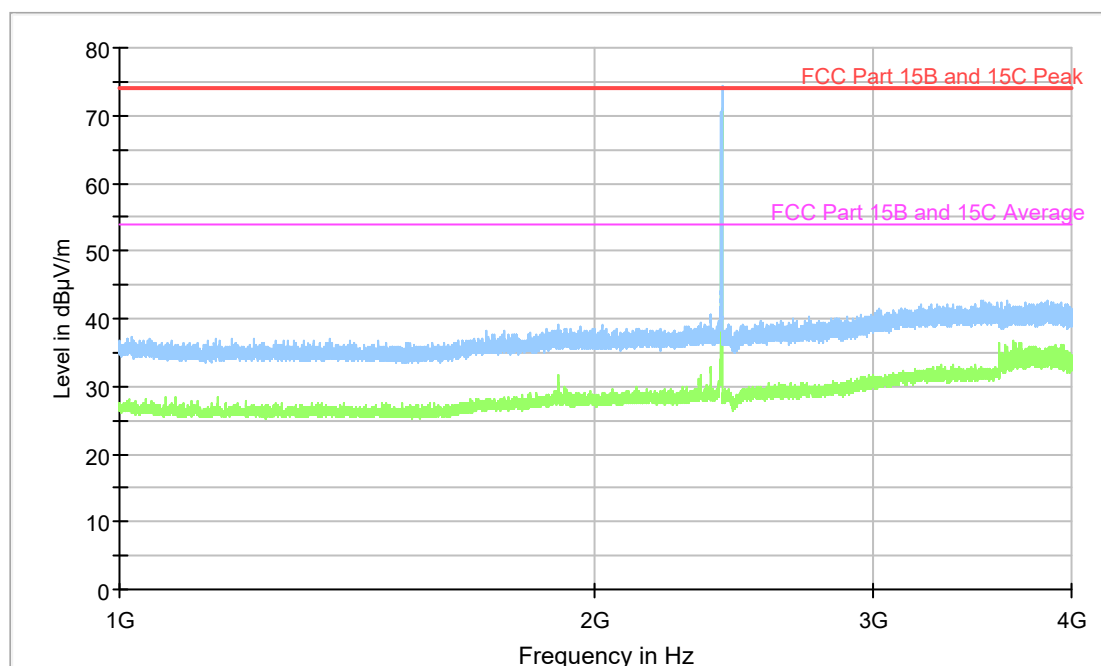


Diagram, Peak overview sweep, 1– 4 GHz at 3 m distance. TX low channel. Carrier is attenuated by band rejection filter K&L 6N45-2450/T 100-0/0.

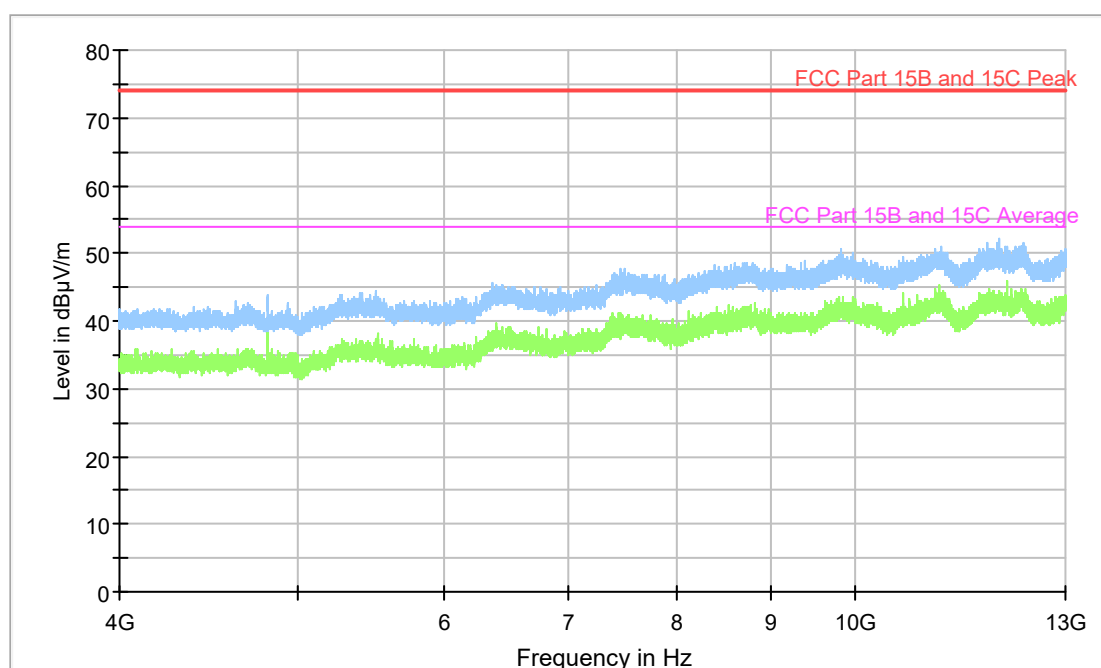


Diagram, Peak overview sweep, 4– 13 GHz at 3 m distance. TX low channel. Emissions below 4000 MHz are attenuated by high-pass filter K&L 4410-X4500/18000-0.

Full Spectrum

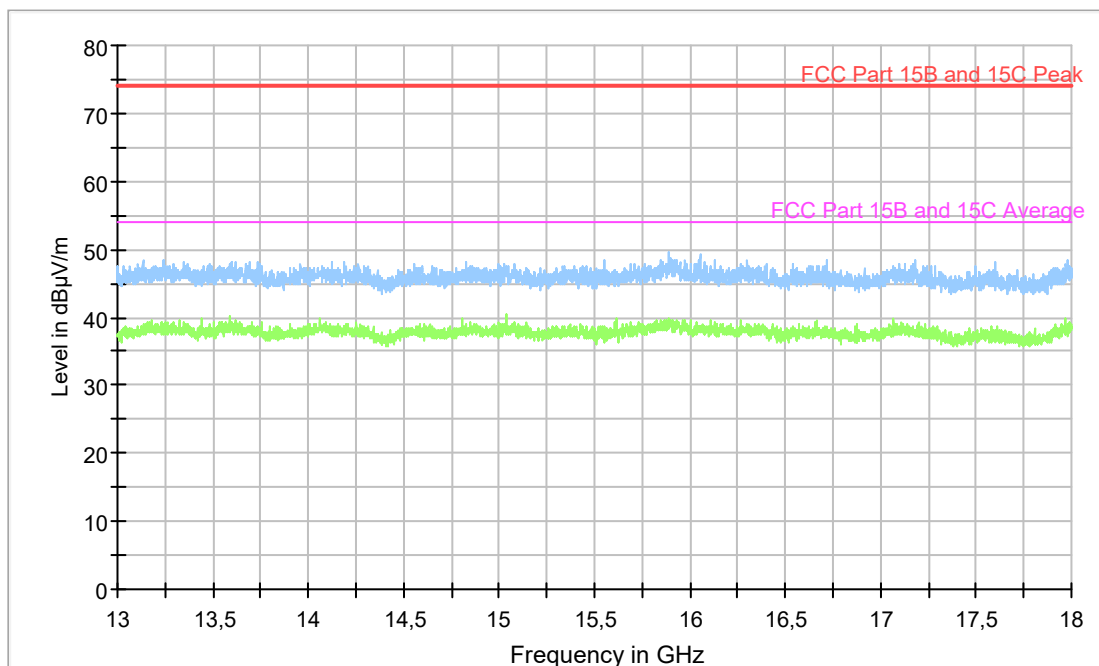


Diagram, Peak overview sweep, 13 – 18 GHz at 3 m distance. TX low channel.


Full Spectrum

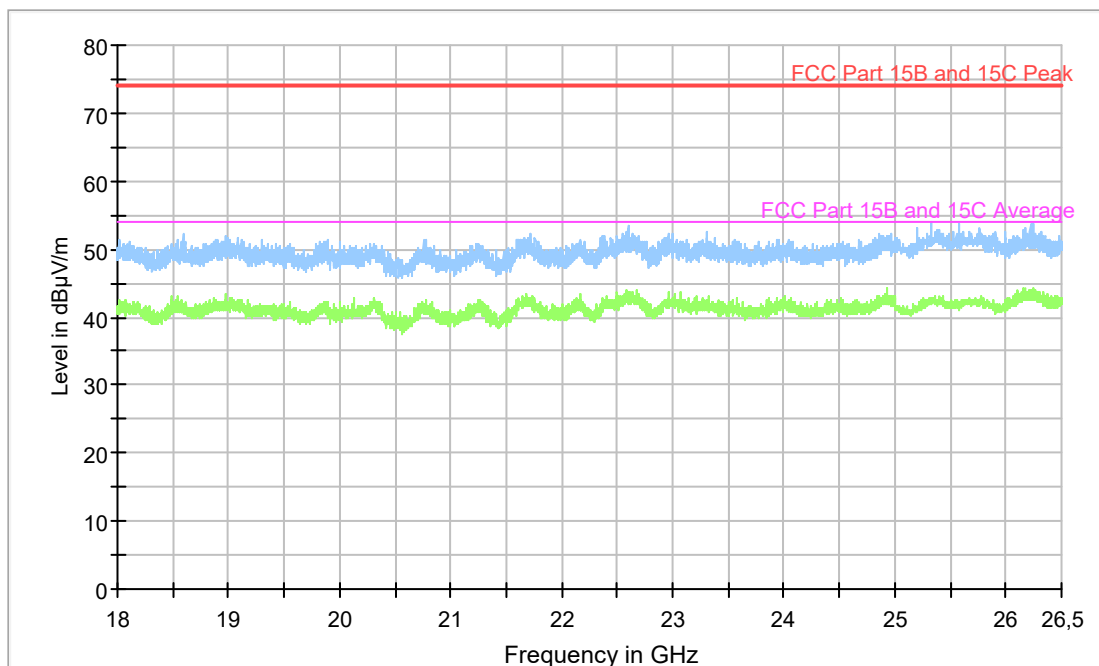

Diagram, Peak overview sweep, 18 – 25 GHz at 3 m distance. TX low channel.

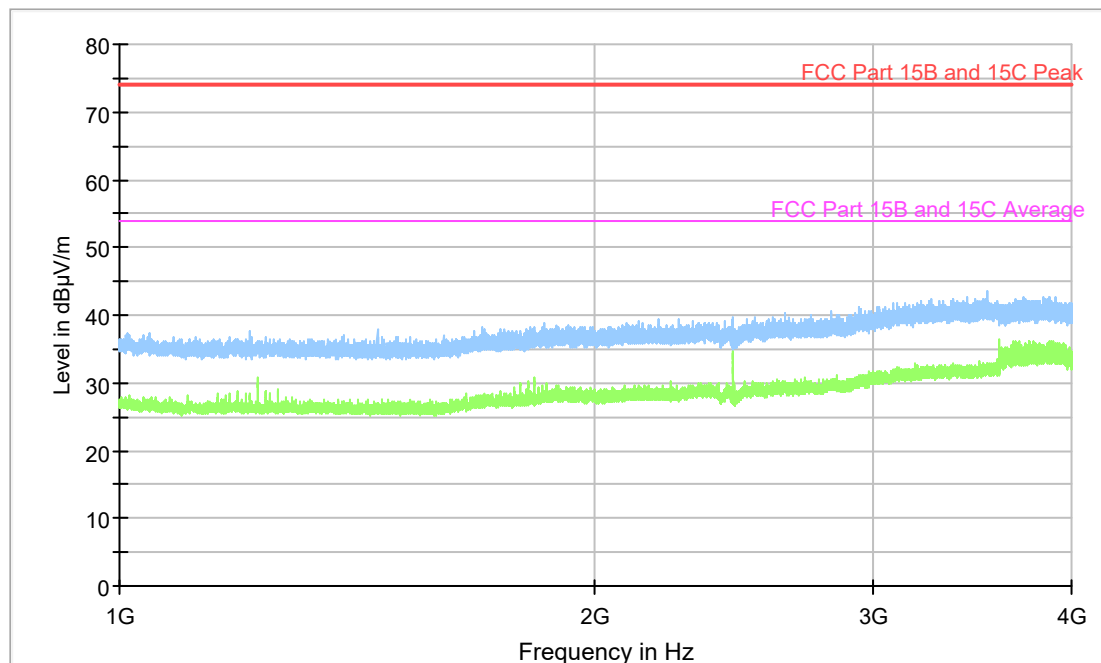


Diagram, Peak overview sweep, 1– 4 GHz at 3 m distance. TX middle channel. Carrier is attenuated by band rejection filter K&L 6N45-2450/T 100-0/0.

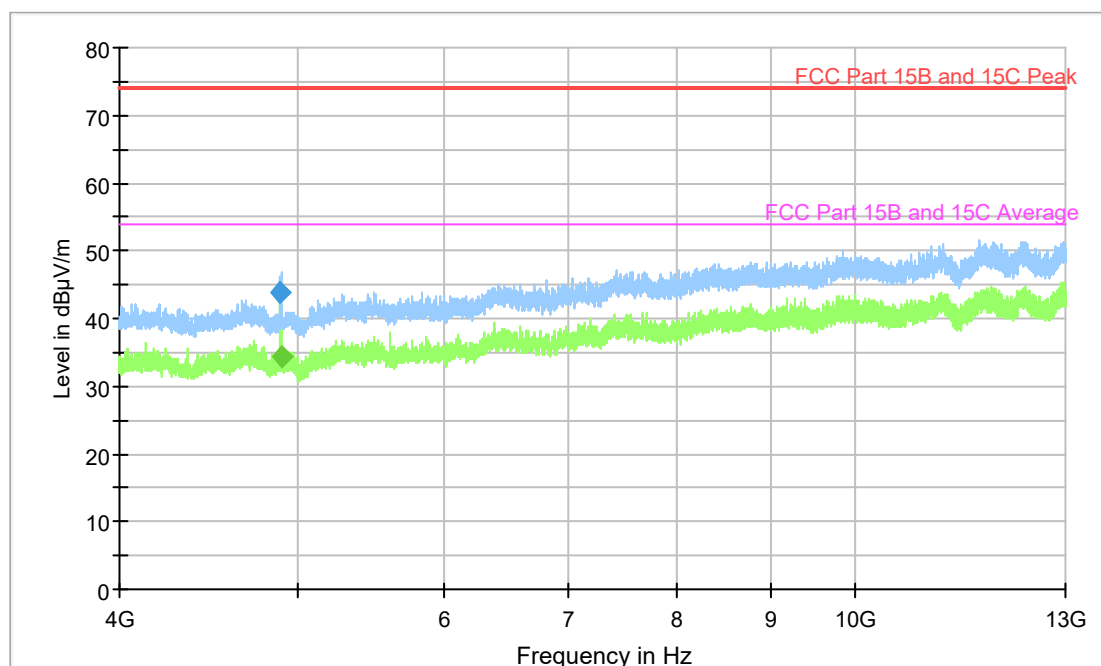


Diagram, Peak overview sweep, 4– 13 GHz at 3 m distance. TX middle channel. Emissions below 4000 MHz are attenuated by high-pass filter K&L 4410-X4500/18000-0.

Full Spectrum

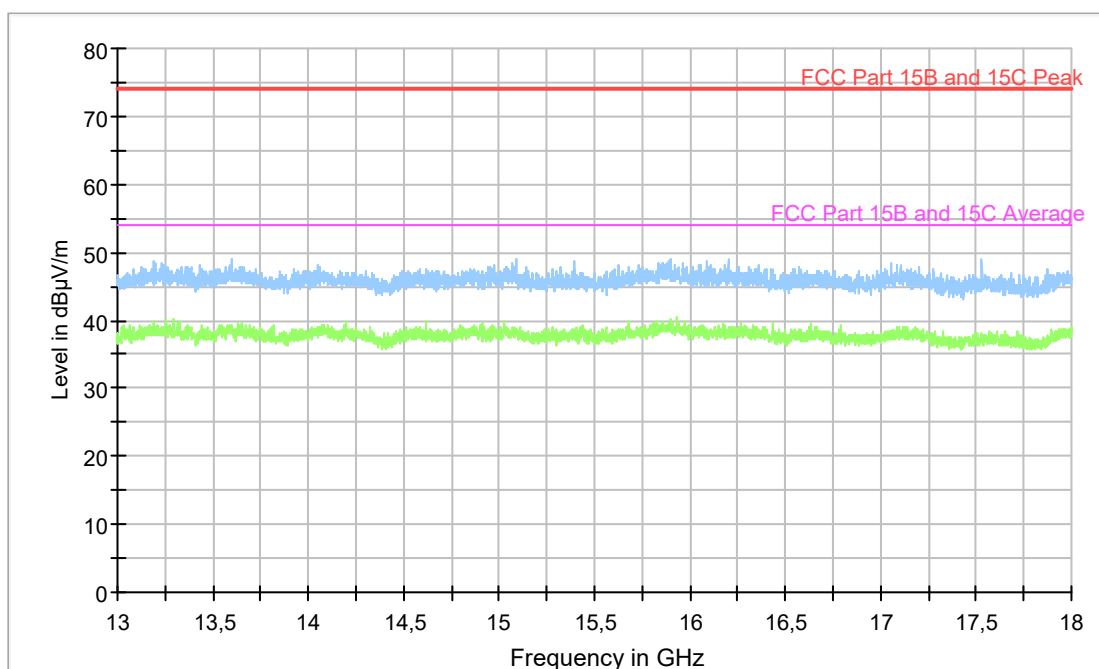


Diagram, Peak overview sweep, 13 – 18 GHz at 3 m distance. TX middle channel.


Full Spectrum

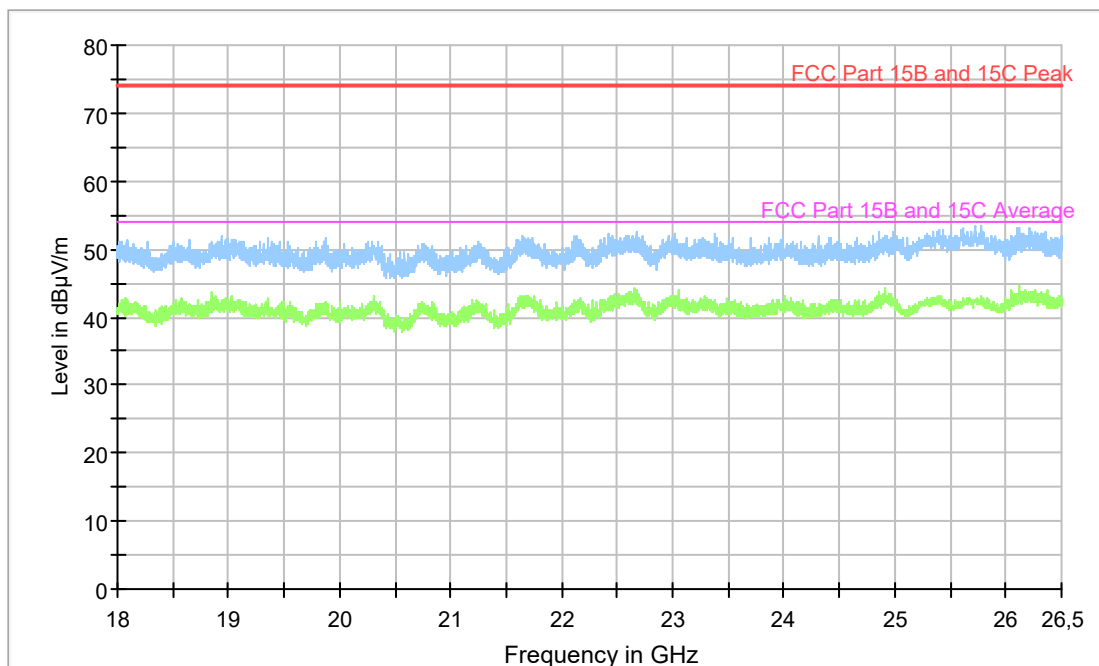

Diagram, Peak overview sweep, 18 – 25 GHz at 3 m distance. TX middle channel.

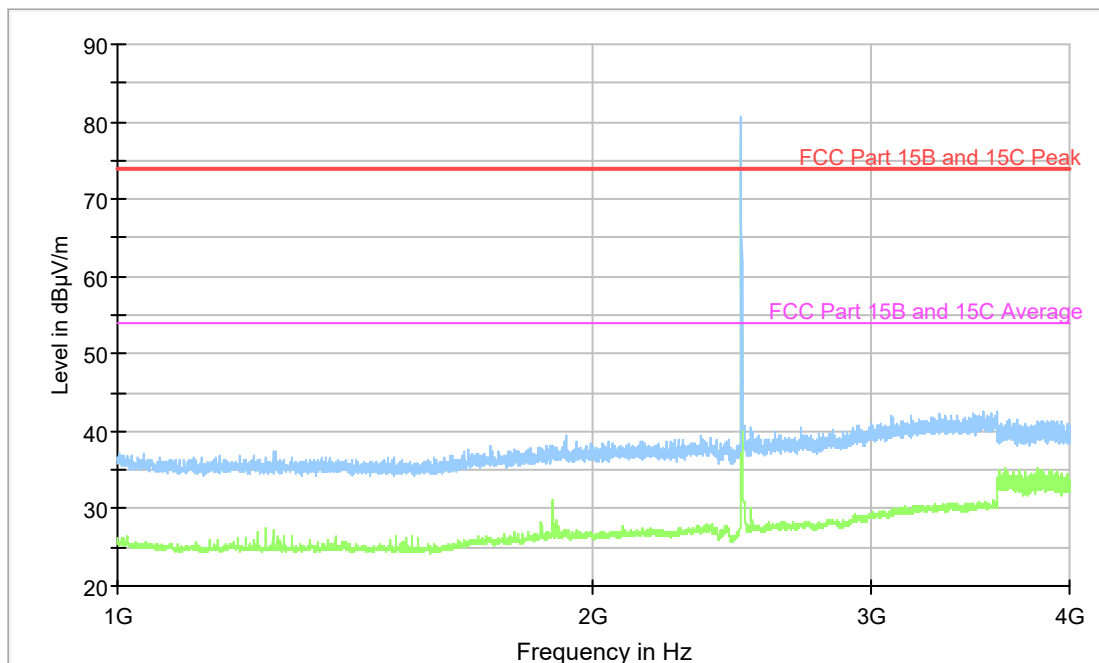


Diagram, Peak overview sweep, 1– 4 GHz at 3 m distance. TX high channel. Carrier is attenuated by band rejection filter K&L 6N45-2450/T 100-0/0.

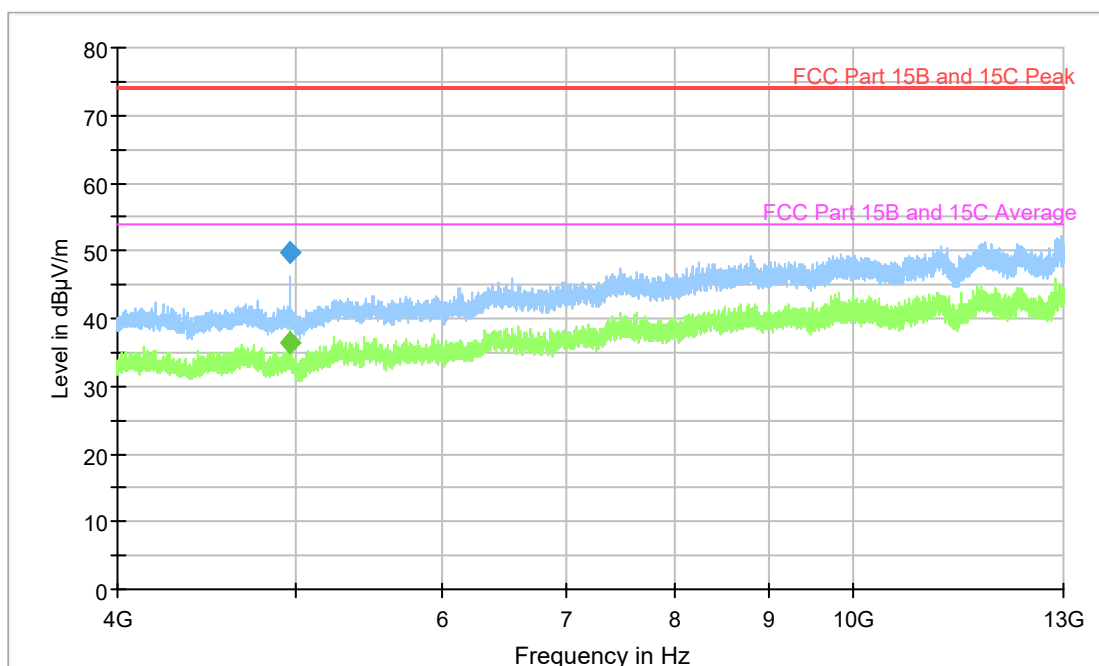


Diagram, Peak overview sweep, 4– 13 GHz at 3 m distance. TX high channel. Emissions below 4000 MHz are attenuated by high-pass filter K&L 4410-X4500/18000-0.

Full Spectrum

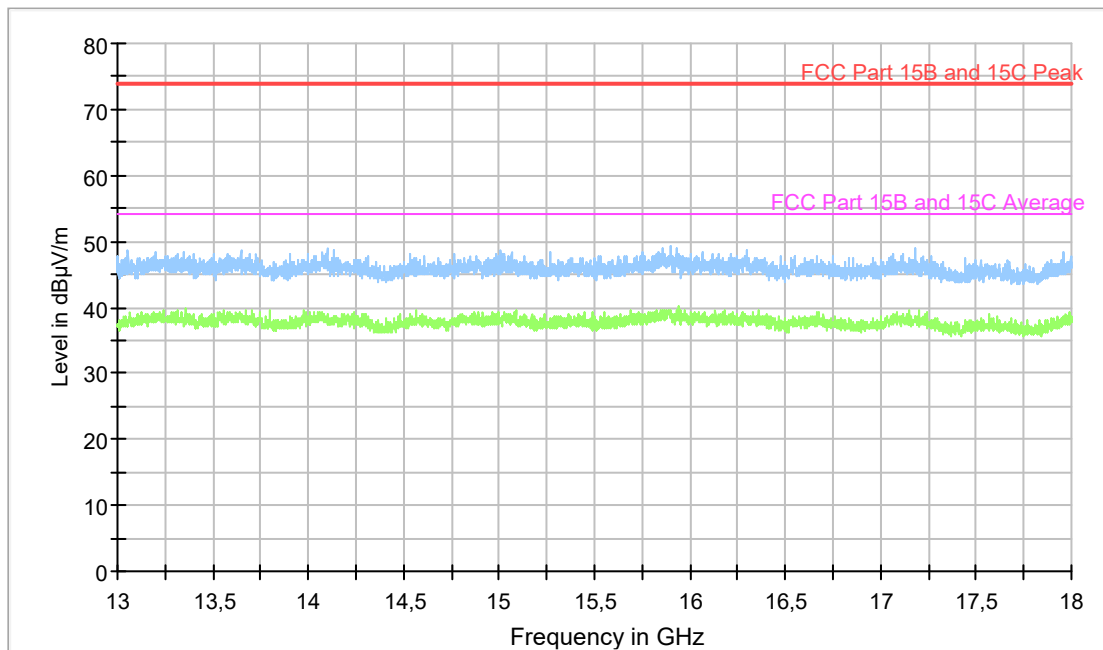

Diagram, Peak overview sweep, 13 – 18 GHz at 3 m distance. TX high channel.

Full Spectrum

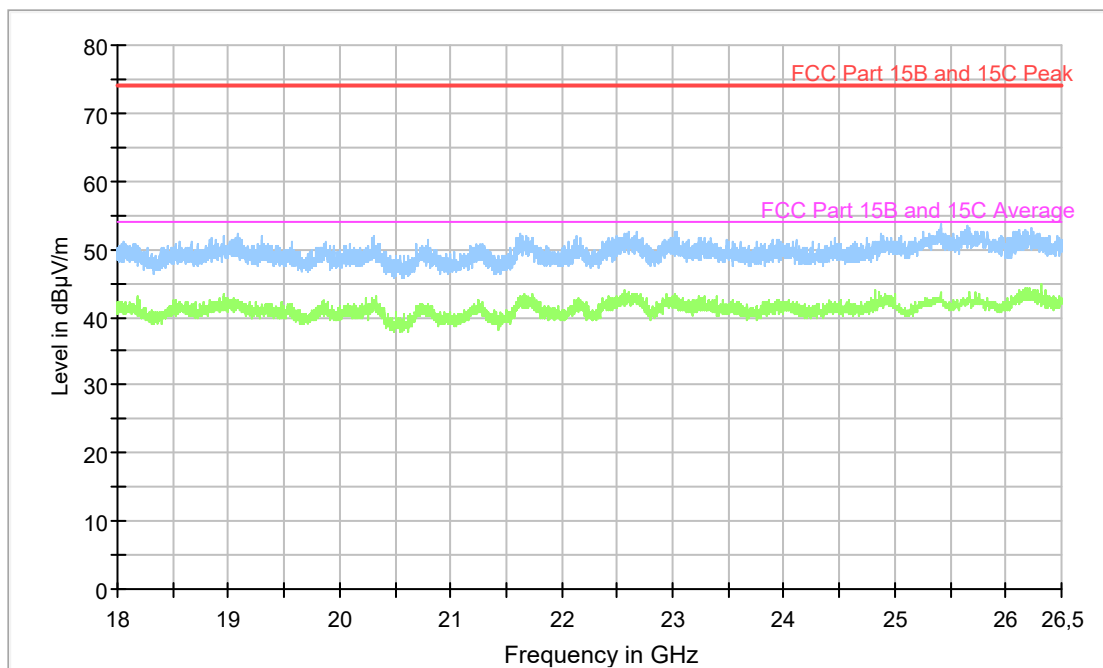

Diagram, Peak overview sweep, 18 – 25 GHz at 3 m distance. TX high channel.

Measurement results, Peak, TX

Frequency [MHz]	Level [dBμV/m]	Limit [dBμV/m]	Polarization H/V	Margin [dB]
4961.0	49.8	74.0	H	24.2


Measurement results, Average, TX

Frequency [MHz]	Level [dBμV/m]	Limit [dBμV/m]	Polarization H/V	Margin [dB]
4961.0	42.3	54.0	H	11.7

Result [dBμV/m] = Analyser reading [dBμV] + Antenna factor [1/m] - Amplifier gain [dB] + Cable loss [dB]

All other out of band emissions (peak) have a margin of atleast 20 dB to the applicable limit.

6.6 Test results 1 GHz – 13 GHz, RX

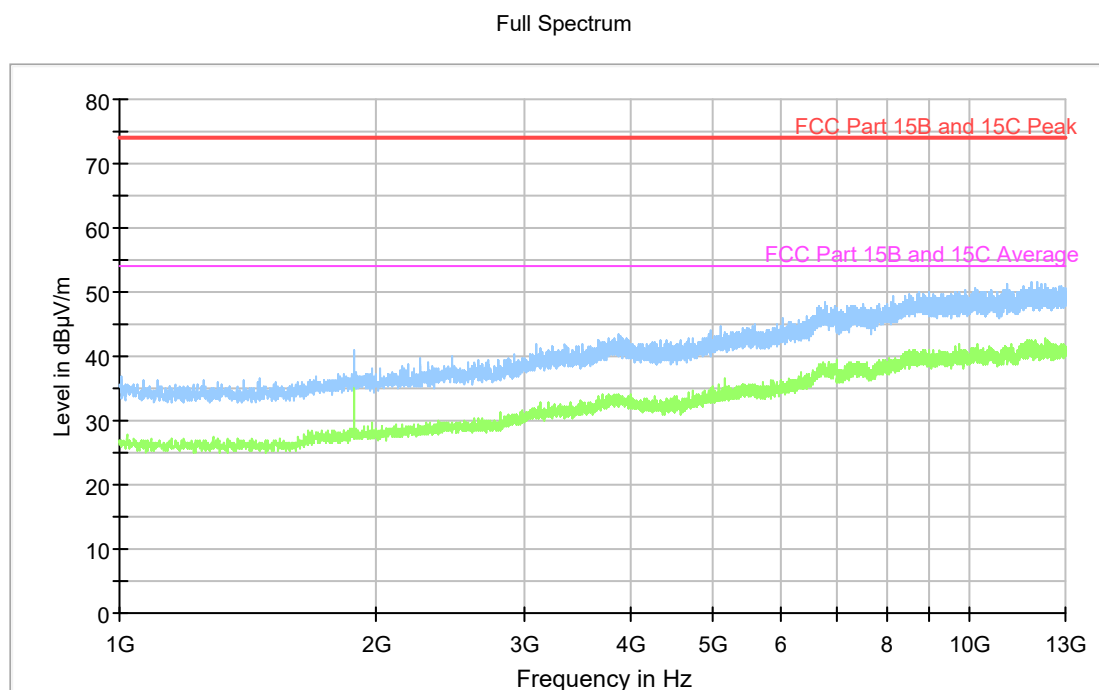

Diagram, Peak overview sweep, 1 – 13 GHz at 3 m distance. RX.

Measurement results, Peak, RX

All peak emissions are below the average limit.

7 CONDUCTED BAND EDGE MEASUREMENT

Date of test:	2018-02-13	Test location:	Wireless center
EUT Serial:	BCU	Ambient temp:	22 °C
Tested by:	DNI	Relative humidity:	25 %
Test result:	Pass	Margin:	21.8 dB

7.1 Test set-up and test procedure.

The test method is in accordance with ANSI C63.10-2013 section 6.10.4.

The EUT was connected to spectrum analyser via rf-cable and attenuator.

The EUT was set up in order to emit maximum disturbances.

7.2 Test conditions


Detector: Peak
 RBW: 100 kHz
 VBW: 300 kHz
 Span: 83.5 MHz

7.3 Requirement


Reference: CFR 47 §15.247(d), RSS-247 5.5,

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

7.4 Test results

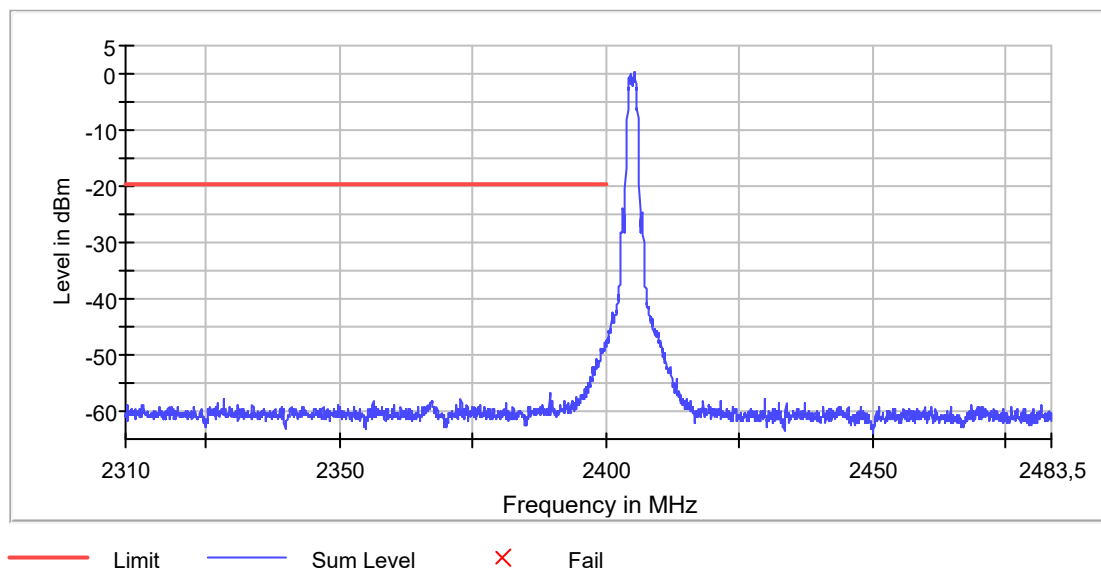

Screenshot: Lower band edge sweep, single channel

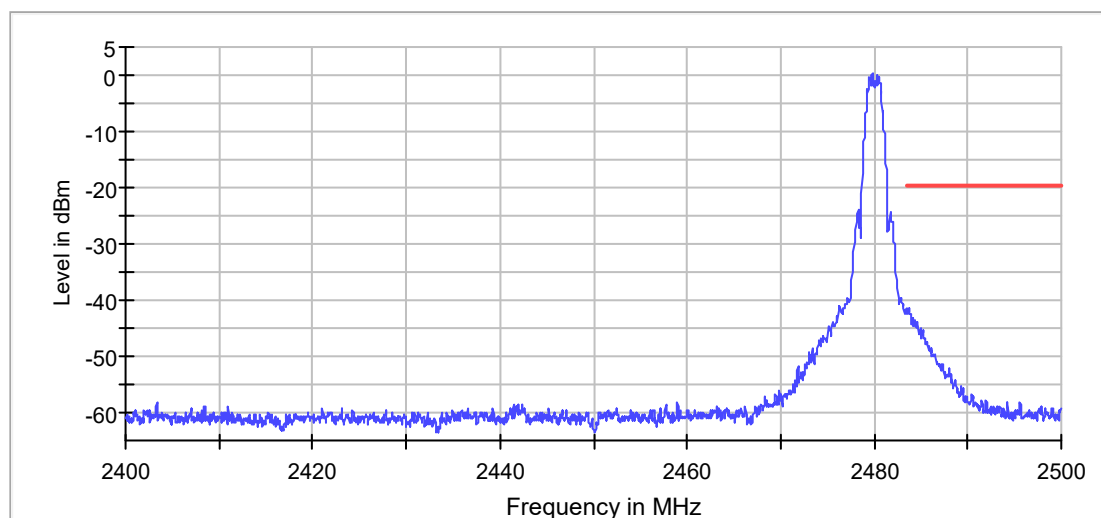

— Limit — Sum Level × Fail

Screenshot: Upper band edge sweep, single channel

Lower

Frequency	Level [dBm]	Delta [dBc]	Limit [dBc]	Margin [dB]
2405.0		--	--	--
2400.0	48.3		20.0	28.3

Frequency [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
2480.0	0.2	--	--
2483.5	-41.6	-19.8	21.8

8 PEAK CONDUCTED OUTPUT POWER

Date of test:	2018-02-13	Test location:	3m FAC
EUT Serial:	BCU	Ambient temp:	22 °C
Tested by:	DNI	Relative humidity:	25 %
Test result:	Pass	Margin:	25.8 dB

8.1 Test set-up and test procedure.

The test method is in accordance with ANSI C63.10-2013.

The EUT was connected to spectrum analyser via rf-cable and attenuator.

8.2 Test conditions

Detector: Peak,
RBW: >OBW
VBW: 3 x RBW
Span: >3 x OBW


The EUT was set up in order to emit maximum disturbances.

8.3 Requirements

Reference: CFR 47§15.247(b)(3), RSS-247 5.4


For DTSSs employing digital modulation techniques operating in the bands 902 – 128 MHz, 2400 – 2483.5 MHz and 5725 – 5850 MHz, the maximum peak conducted output power shall not exceed 1W.

8.4 Test results

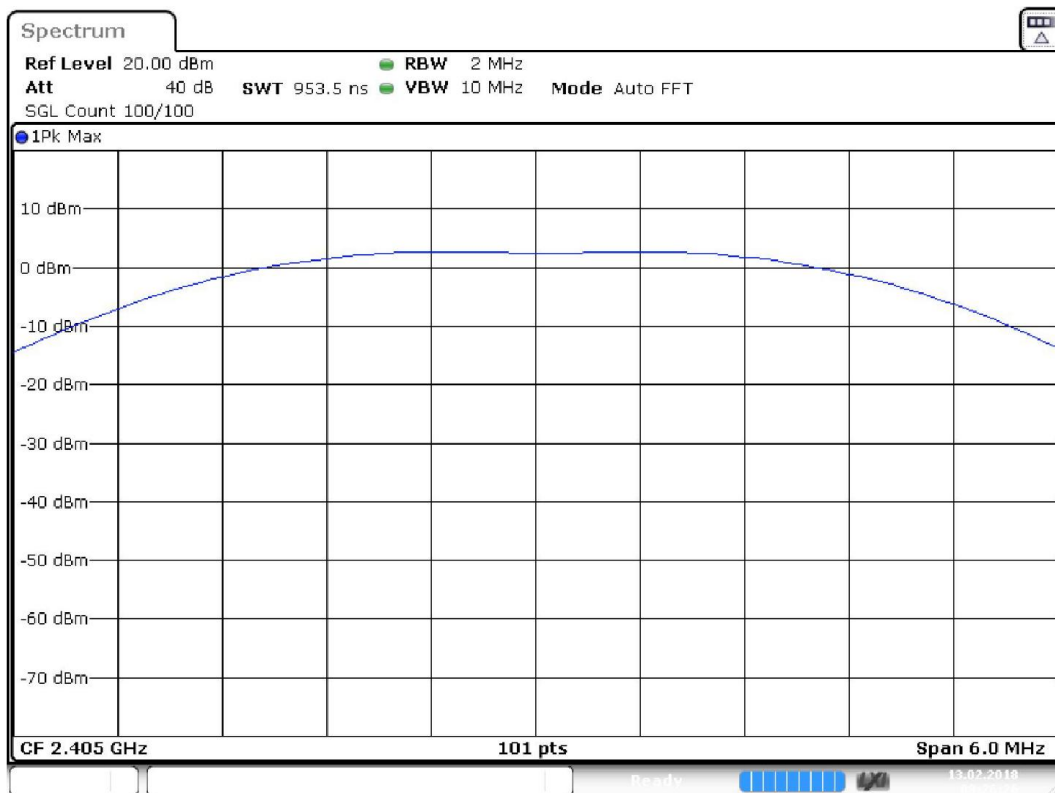


Date: 13.FEB.2018 08:26:26

Screenshot: Output power, low channel

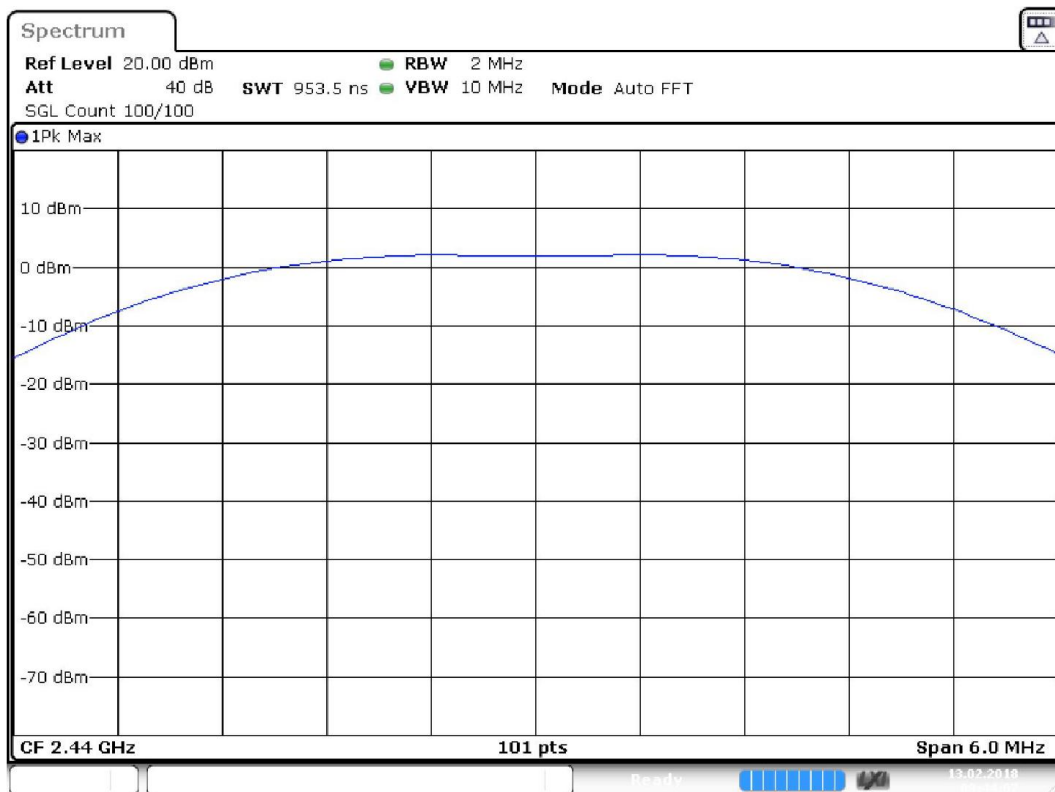

Date: 13.FEB.2018 08:44:07

Screenshot: Output power, middle channel

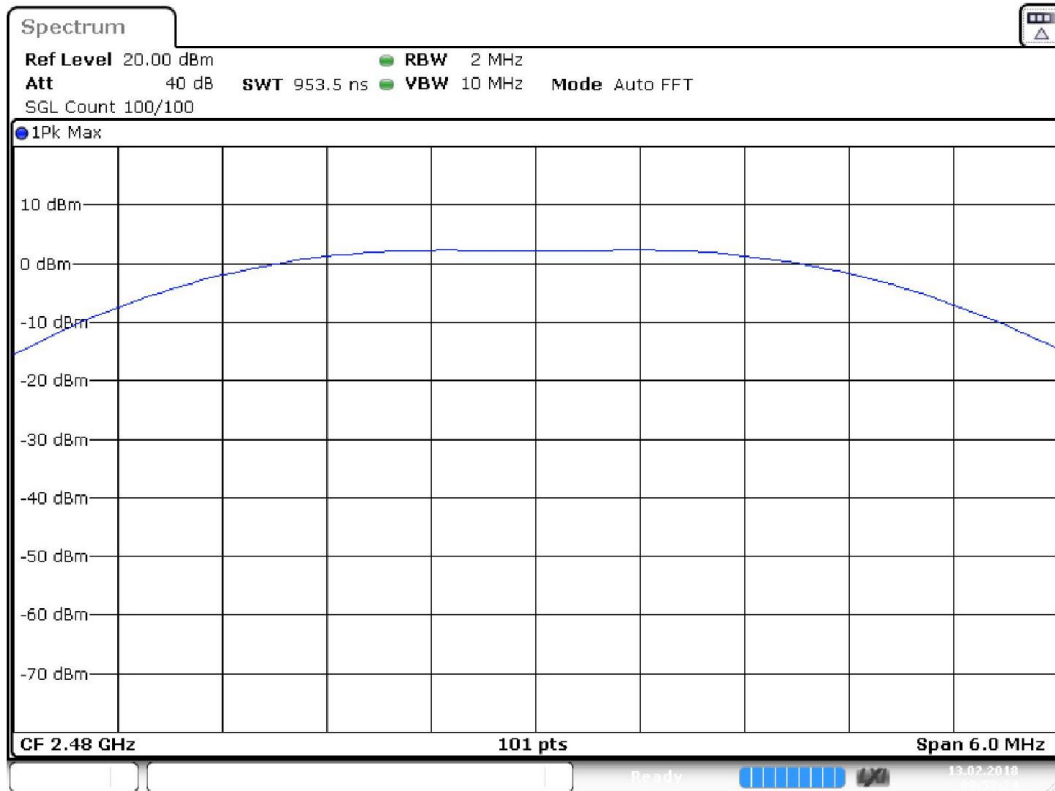

Date: 13.FEB.2018 08:53:25

Screenshot: Output power, high channel

Test result

Channel [MHz]	Output power [dBm]
2405	4.2
2440	3.6
2480	3.8

9 OCCUPIED 6 DB BANDWIDTH

Date of test:	2018-02-13	Test location:	Wireless Center
EUT Serial:	BCU	Ambient temp:	22 °C
Tested by:	DNI	Relative humidity:	25 %
Test result:	Pass	Margin:	1.28 MHz

9.1 Test set-up and test procedure.

The test method is in accordance with ANSI C63.10-2013 section.

The EUT was connected to spectrum analyser via rf-cable and attenuator.

9.2 Test conditions


Detector: Peak,
 RBW: 100 kHz
 VBW: 3 x RBW
 Span: >1,5 x OBW

The EUT was set up in order to emit maximum disturbances.


9.3 Requirements

Reference: CFR 47§15.247(a)(2), RSS-247 5.2(1)
 The minimum 6 dB bandwidth shall be 500 kHz.


9.4 Test results

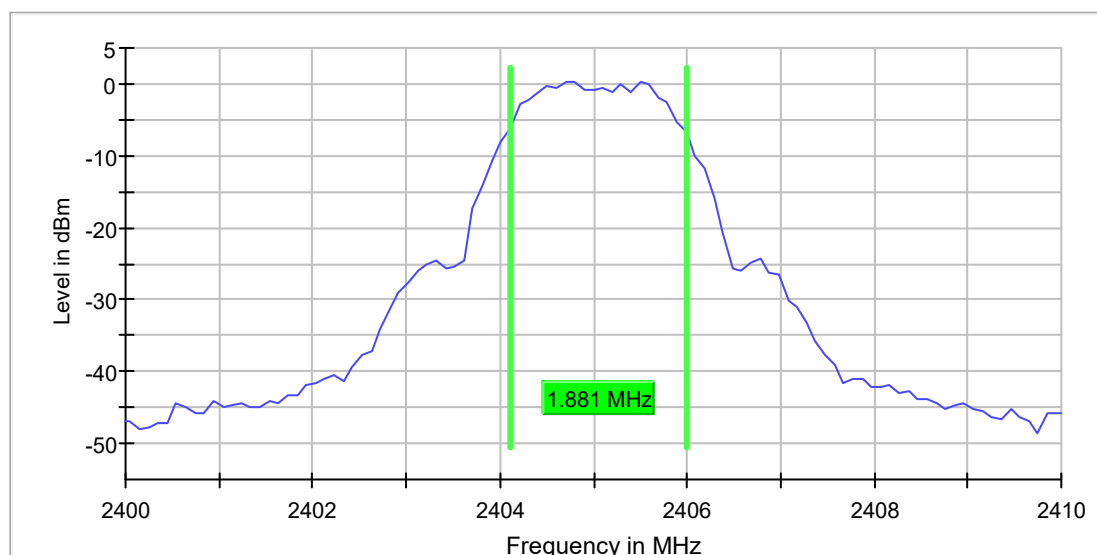

Screenshot: Occupied 6 dB bandwidth Measurement, low channel

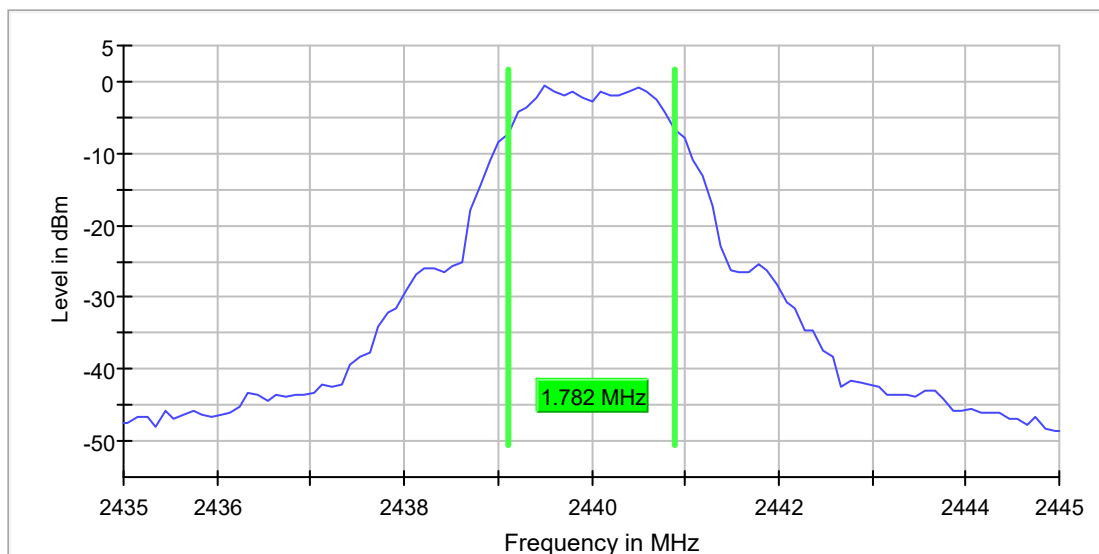

Screenshot: Occupied 6 dB bandwidth Measurement, middle channel

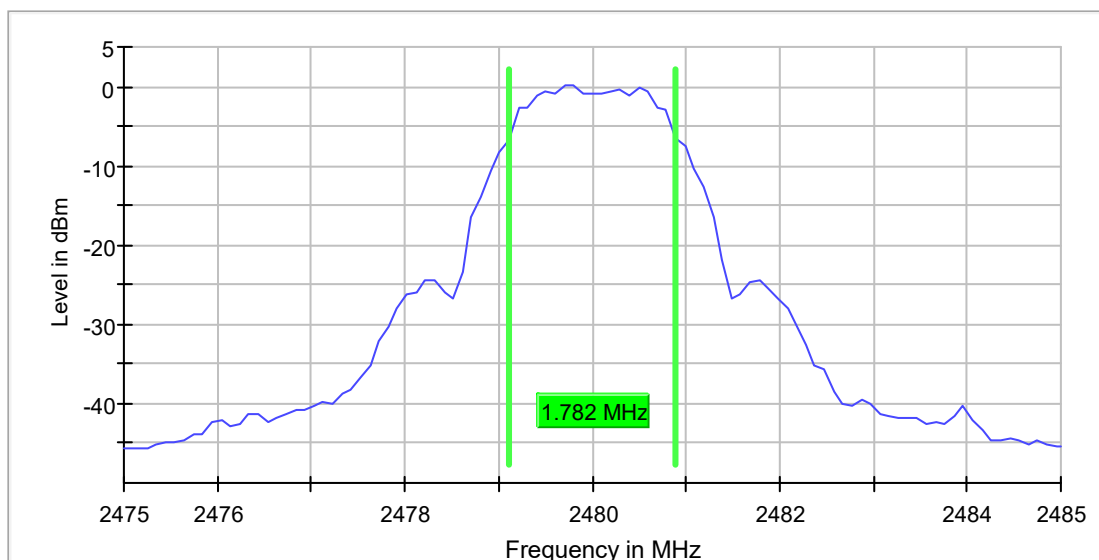

Screenshot: Occupied 6 dB bandwidth Measurement, high channel

Test result

Channel [MHz]	6 dB BW [MHz]
2405	1.88
2440	1.78
2480	1.78

10 99 % BANDWIDTH

Date of test:	2018-02-15	Test location:	Wireless Center
EUT Serial:	BCU	Ambient temp:	22 °C
Tested by:	DNI	Relative humidity:	25 %
Test result:	NA	Margin:	-

10.1 Test set-up and test procedure.

The test method is in accordance with RSS-GEN section 6.6.


The EUT was connected to spectrum analyser via rf-cable and attenuator. Spectrum analyser with occupied bandwidth measurement function is used to determine the occupied bandwidth.

10.2 Test conditions

Detector: Peak,
RBW: 1 – 5 % of OBW
VBW: 3 x RBW


The EUT was set up in order to emit maximum disturbances.

10.3 Test results

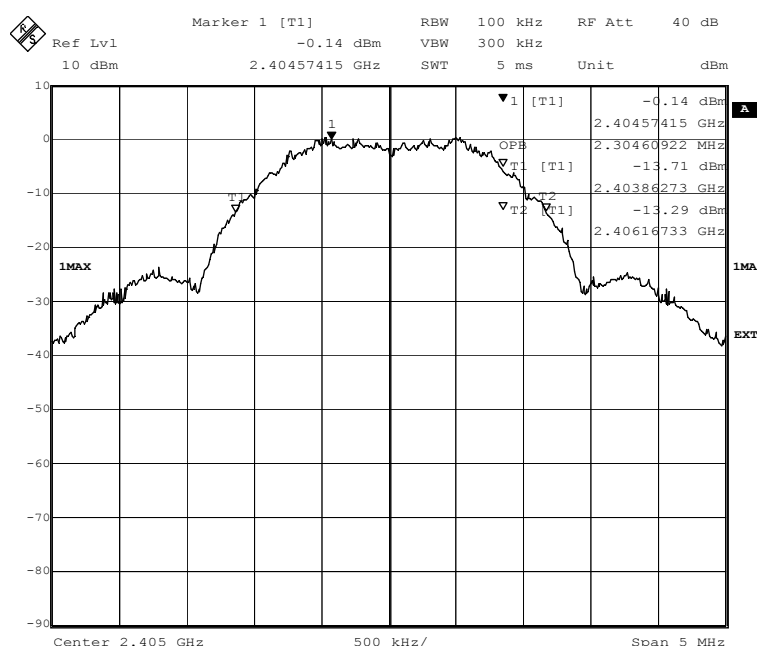


Date: 15.FEB.2018 16:02:25

Screenshot: 99 % bandwidth Measurement, low channel

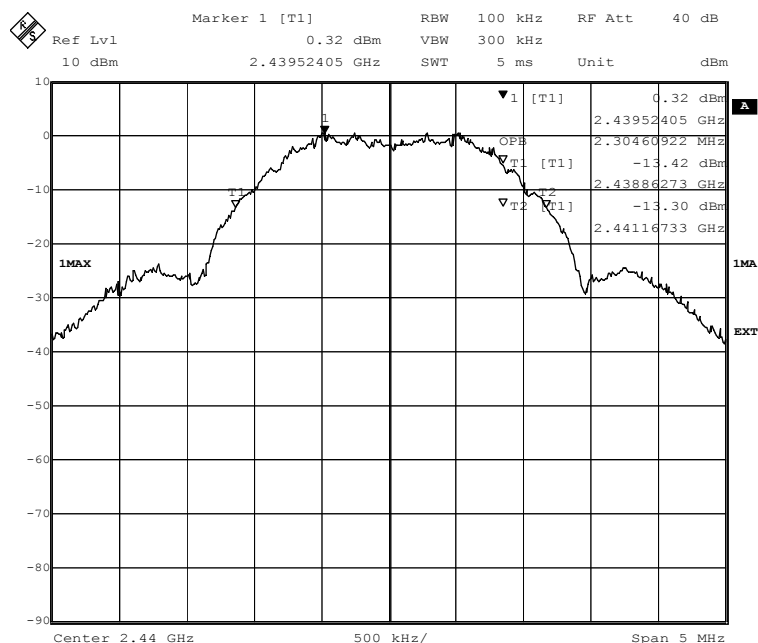

Date: 15.FEB.2018 16:01:46

Screenshot: 99 % bandwidth Measurement, middle channel

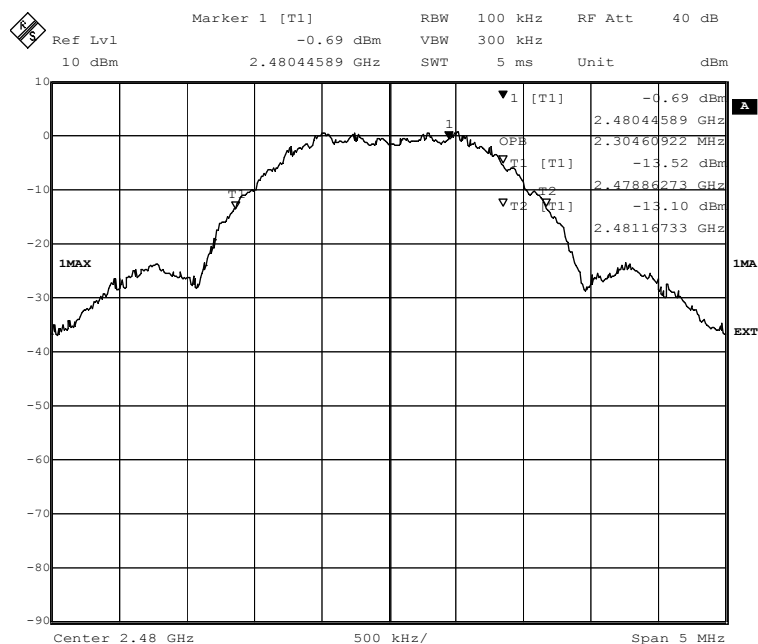

Date: 15.FEB.2018 16:00:00

Screenshot: 99 % bandwidth Measurement, high channel

Test result

Channel [MHz]	99 % BW [MHz]
2405	2.30
2440	2.30
2480	2.30

11 PEAK POWER SPECTRAL DENSITY

Date of test:	2018-02-13	Test location:	Wireless Center
EUT Serial:	BCU	Ambient temp:	22 °C
Tested by:	DNI	Relative humidity:	25 %
Test result:	Pass	Margin:	15.1 dB

11.1 Test set-up and test procedure.

The test method is in accordance with ANSI C63.10-2013 section.

The EUT was connected to spectrum analyser via rf-cable and attenuator.

11.2 Test conditions

Detector: Peak,
RBW: 3 - 100 kHz
VBW: >3 x RBW
Span: 1.5 x 6 dB bandwidth


The EUT was set up in order to emit maximum disturbances.

11.3 Requirements

Reference: CFR 47§15.247(3), RSS-247 5.2(2)


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

11.4 Test results

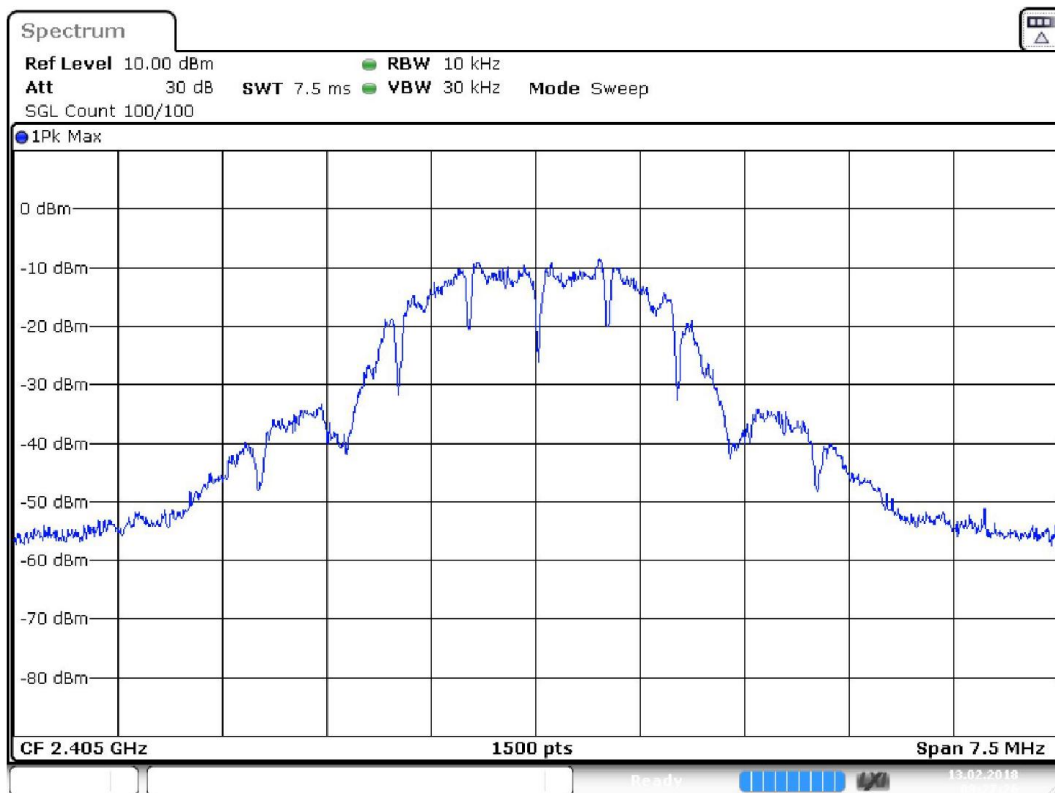


Date: 13.FEB.2018 08:27:26

Screenshot: Peak power spectral density, low channel

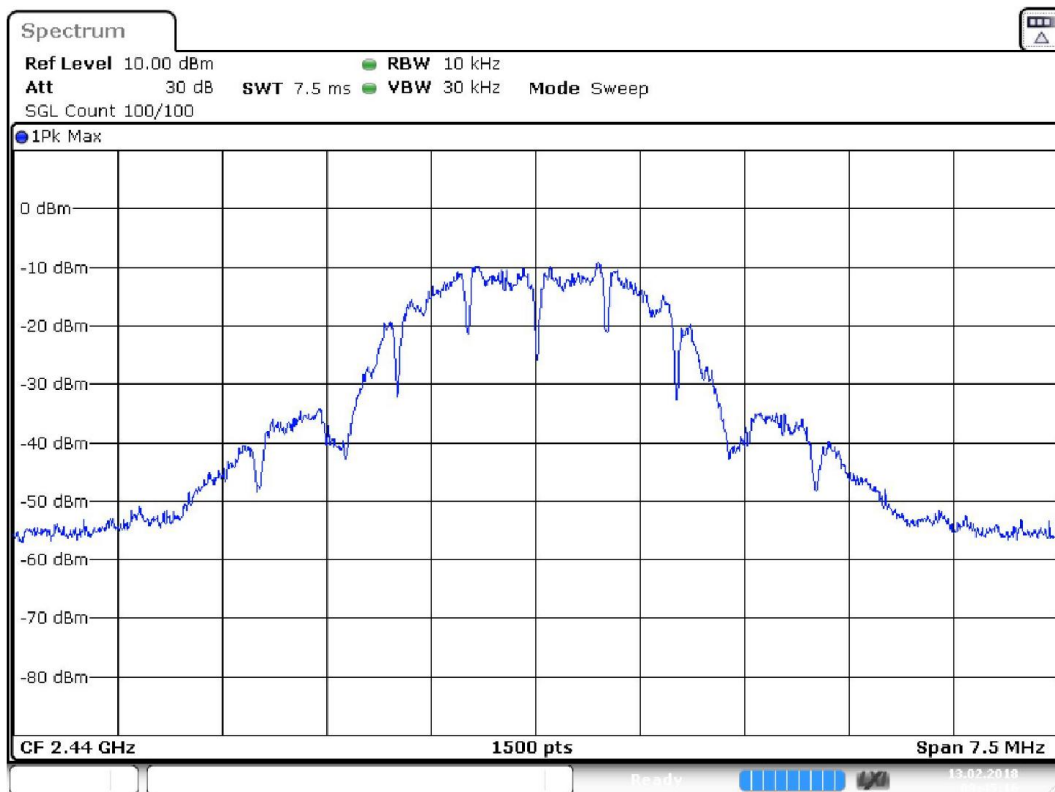

Date: 13.FEB.2018 08:45:15

Screenshot: Peak power spectral density, middle channel

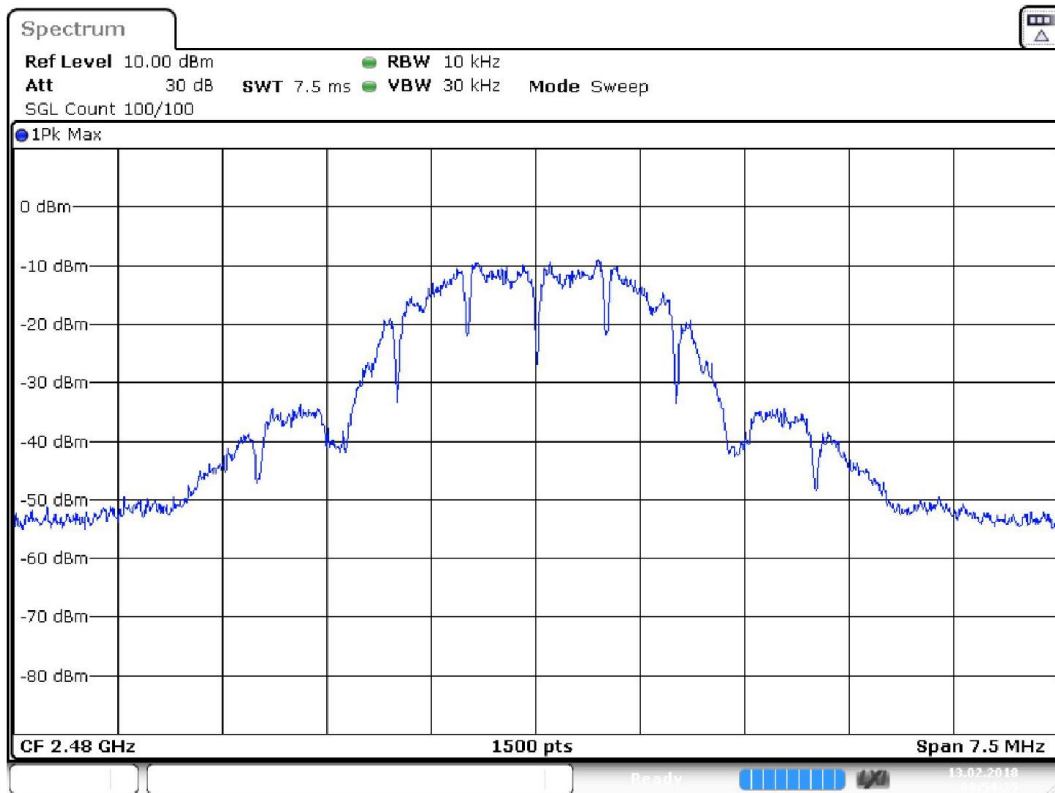

Date: 13.FEB.2018 08:54:26

Screenshot: Peak power spectral density, high channel

Test result

Channel [MHz]	PSD [dBm/3kHz]
2405	-7.1
2440	-7.7
2480	-7.5

12 TRANSMITTER DUTY CYCLE FOR PULSED TRANSMISSIONS

Date of test:	2018-03-21	Test location:	Wireless Center
EUT Serial:	BCU	Ambient temp:	22 °C
Tested by:	DNI	Relative humidity:	25 %
Test result:	Pass	Margin:	N/A

12.1 Test set-up and test procedure.

The test method is in accordance with ANSI C63.10.section 7.5

The EUT was connected to spectrum analyser via rf-cable and attenuator.

12.2 Test conditions

Detector: Peak
 RBW 3 MHz
 VBW 3 MHz
 Span 0 Hz
 Sweep time 100 ms

12.3 Requirement

CFR 47 15.35(c) and RSS-GEN section 6.10


12.4 Test results

$T_{on} = 4.28$

$N_{Burst} = 6$


Duty cycle is calculated $N_{Burst} * T_{on} / 100 \text{ ms} = 0.257$

Peak to average correction factor = $20 \text{ LOG (Duty cycle)} = -11.8$

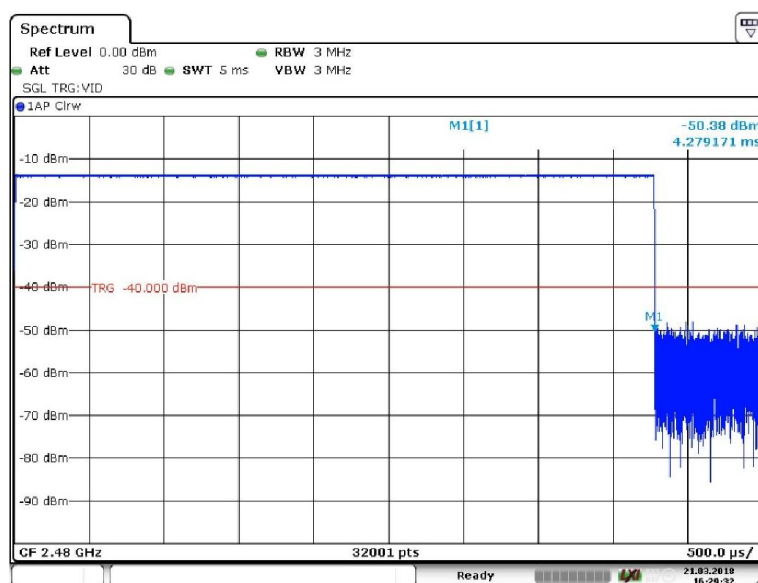

Date: 21.MAR.2018 16:29:33

Screenshot: Time of one pulse

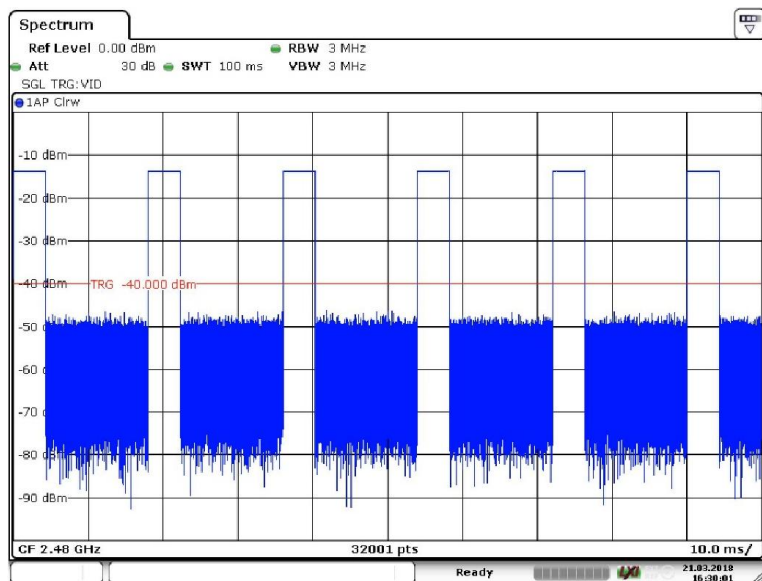

Date: 21.MAR.2018 16:30:01

Screen shot: 100 ms measurement

13 TEST EQUIPMENT

Stora Hallen

Equipment type	Manufacturer	Model	Inv. No.	Last Cal. date	Cal. interval
Receiver	Rohde & Schwarz	ESU 8	12866	2017-07	2018-07
BiLog antenna	Chase	CBL6110A	971	2017-09	2020-09
Preamplifier	SEMKO	--	7993	2017-06	2018-06

Wireless Center and 3m FAC

Equipment type	Manufacturer	Model	Inv. No.	Last Cal. date	Cal. interval
Measurement receiver	Rohde & Schwarz	ESU 40	13178	2018-01	2019-01
Signal analyzer	Rohde & Schwarz	FSIQ 40	12793	2017-07	2018-07
Horn antenna	EMCO	3115	4628	2015-11	2018-11
Preamplifier	Sangus	00101400-23-10P -6-S ; AFS44-12002400-32-10P -44	12335	2017-07	2018-07
Horn antenna	EMCO	3160-08	30099	2016-10	2019-10
Horn antenna	EMCO	3160-09	30101	2016-10	2019-10
Signal analyzer:	Rohde & Schwarz	FSV	32594	2017-07	2018-07
Signal generator:	Rohde & Schwarz	SMB100A	32592	2017-07	2018-07
1 GHz high pass filter	MICROWAVE CIRCUITS	H1G013G1	13142	2017-08	2018-07
2.4 GHz band reject filter:	K&L MICROWAVE INC	6N45-2450/T100-0/0	12389	2017-03	2018-03
4 GHz high pass filter	K&L MICROWAVE INC	4410-X4500/18000-0/0	5133	2017-08	2018-08
10 dB Attenuator:	Huber+Suhner	5910_N-50-010	32696	2017-05	2018-05

14 MEASUREMENT UNCERTAINTY

Continuous conducted disturbances with AMN in the frequency range 9 kHz to 30 MHz ± 3.7 dB

Measurement uncertainty for radiated disturbance

Uncertainty for the frequency range 30 to 1000 MHz at 3 m	± 5.1 dB
Uncertainty for the frequency range 30 to 1000 MHz at 10 m	± 5.0 dB
Uncertainty for the frequency range 1.0 to 18 GHz at 3 m	± 4.7 dB
Uncertainty for the frequency range 18 to 26 GHz at 3 m	± 4.8 dB
Uncertainty for the frequency range 26 to 40 GHz at 3 m	± 5.7 dB

Measurement uncertainty is calculated in accordance with CISPR 16-4-2:2011.

The measurement uncertainty is given with a confidence of 95 %.

15 TEST SET UP AND EUT PHOTOS

EUT photos are in separate document 1720278STO-002 Annex 1.

Test set up photos are in separate document 1720278STO-002 Annex 2.