

IKEA OF SWEDEN AB

TEST REPORT

SCOPE OF WORK:

FCC Part 15 subpart B – EMC report

Model:

ICPSW5-17NA-1

REPORT NUMBER

200502522SHA-001/Amendment1

ISSUE DATE

August 24,2022

DOCUMENT CONTROL NUMBER

TTRFFCCPART15b_V1

© 2018 Intertek



Report no. 200502522SHA-
001/Amendment1

Applicant : **IKEA OF SWEDEN AB**
Box 702, SE-343 81, Älmhult, SWEDEN

Manufacturer : **Jiangyin Wonder Electronic Co., Ltd.**
No.129, Yungu Road, Gushan Town, Jiangyin City,
Jiangsu Province, China

Manufacturer 2 : **Eaglerise Electronics (Foshan) Co., Ltd.**
No.4, East Huanzhen Road, Beijiao, Shunde, FOSHAN,
Guangdong 528000, China

Summary

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2020): Radio Frequency Devices (Subpart B)

ANSI C63.4 (2014): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

PREPARED BY:

REVIEWED BY:

Star Guo

Star Guo
Project Engineer

Andy Chen

Andy Chen
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Contents

REVISION HISTORY	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST FACILITY	7
2 TEST SPECIFICATIONS	8
2.1 STANDARDS OR SPECIFICATION	8
2.2 MODE OF OPERATION DURING THE TEST	8
2.3 TEST SOFTWARE LIST	8
2.4 TEST PERIPHERALS LIST	8
2.5 RECORD OF CLIMATIC CONDITIONS	8
2.6 INSTRUMENT LIST	9
2.7 MEASUREMENT UNCERTAINTY	9
3 CONDUCTED EMISSION	10
3.1 LIMITS	10
3.1.1 <i>Limits for conducted emission of class A device</i>	10
3.1.2 <i>Limits for conducted emission of class B device</i>	10
3.2 TEST SETUP	11
3.3 TEST SETUP AND TEST PROCEDURE	12
3.4 TEST PROTOCOL	13
4 RADIATED EMISSION	15
4.1 RADIATED EMISSION LIMITS	15
4.1.1 <i>Limits for radiated emission of class A device</i>	15
4.1.2 <i>Limits for radiated emission of class B device</i>	15
4.2 BLOCK DIAGRAM AND TEST SET UP	16
4.3 TEST SETUP AND TEST PROCEDURE	17
4.4 TEST PROTOCOL	18

Revision History

Report No.	Version	Description	Issued Date
200502522SHA-001/Amendment1	Rev. 01	Initial issue of report	August 24,2022

Measurement result summary

TEST ITEM	FCC REFERENCE	TEST RESULT	NOTE
Conducted emission	15.107	Pass	
Radiation emission	15.109	Pass	

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product Name	:	Class 2 Power Supply
Type/Model	:	ICPSW5-17NA-1
Description of EUT	:	The product covered by this report is direct plug-in class 2 power unit. Intended for using at the overvoltage category II and pollution degree 2 circumstances, for indoor use only. After technical evaluation, we selected ICPSW5-17NA-1 as typical model to test and listed its worst test data as representative.
		Amendment 1:
		The original test report ref. No. 200502522SHA-001 dated July 03,2020 was modified on August 24,2022 to include the following additions and/or changes: Update the standards to the latest edition. After evaluation, no test was performed again.
Rating	:	ta: 45°C Input: 100-240V~, 50/60Hz, 0.5A Output: 5Vdc, 2.4A per USB outlet, Max. 3.4A in total
Brand name	:	
Mains lead	:	unshielded, undetachable
Data cable	:	None
I/O Port	:	None
Category of EUT	:	Class B
EUT type	:	☒ Table top ☐ Floor standing
Highest operating frequency	:	Less than 1.705MHz
Sample received date	:	2020-05-27
Sample identification No.	:	0200527-17-001
Date of test	:	2020-05-27 ~ 2020-06-08

1.2 Description of Test Facility

Name : Intertek Testing Services Shanghai

Address : Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China

Telephone : 86 21 61278200

Telefax : 86 21 54262353

The test facility is : CNAS Accreditation Lab
recognized, certified, or Registration No. CNAS L0139
accredited by these FCC Accredited Lab
organizations Designation Number: CN1175
IC Registration Lab
CAB identifier.: CN0051
VCCI Registration Lab
Registration No.: R-14243, G-10845, C-14723, T-12252
A2LA Accreditation Lab
Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2020): Radio Frequency Device: Subpart B

ANSI C63.4 (2014): Interim Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz.

2.2 Mode of operation during the test

Within this test report, EUT was tested under all available operation modes and tested under its rating voltage and frequency. Other voltage and frequency is specified if used.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
-	-	-	-

2.5 Record of climatic conditions

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (Kpa)
Conducted emission	23	44	NA
Radiated Emission	23	44	NA

Notes: NA =Not Applicable

2.6 Instrument list

Conducted Emission / Disturbance Power / Tri-loop Test / CDN method					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Test Receiver	R&S	ESCS 30	EC 2107	2023-07-8
☒	A.M.N.	R&S	ESH2-Z5	EC 3119	2022-11-9
☒	Shielded room	Zhongyu	-	EC 2838	2023-01-11
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Test Receiver	R&S	ESIB 26	EC 3045	2022-10-19
☒	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2023-8-5
☒	Semi-anechoic chamber	Albatross project	-	EC 3048	2022-08-22
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☐	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2023-03-25
☒	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 5198	2023-03-10
☒	Pressure meter	YM3	Shanghai Mengde	EC 3320	2023-07-21

2.7 Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted emission at mains ports	9kHz ~ 150kHz	3.71 dB
	150kHz ~ 30MHz	3.31 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.04 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	4.97 dB
	6GHz ~ 18GHz	5.29 dB

3 Conducted emission

Test result: **PASS**

3.1 Limits

3.1.1 Limits for conducted emission of class A device


Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	79	66
0.5 ~ 30	73	60
Note: If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.		

3.1.2 Limits for conducted emission of class B device


Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 ~ 56 *	56 ~ 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50
Note: 1. * Means the limit decreasing linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz 2. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out. 3. At the transition frequency, the more stringent limit shall apply.		

3.2 Test setup

☐ For table top equipment

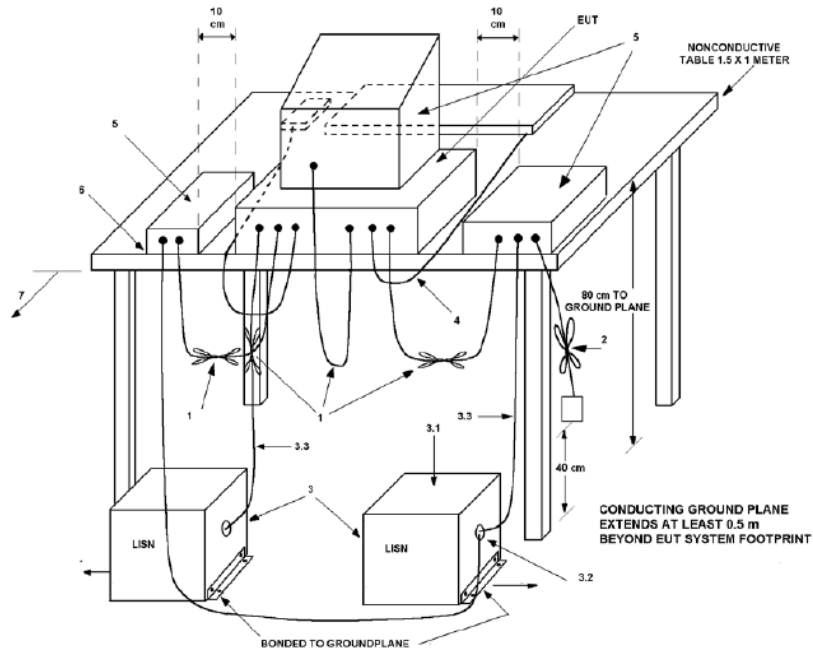

☐ For floor standing equipment

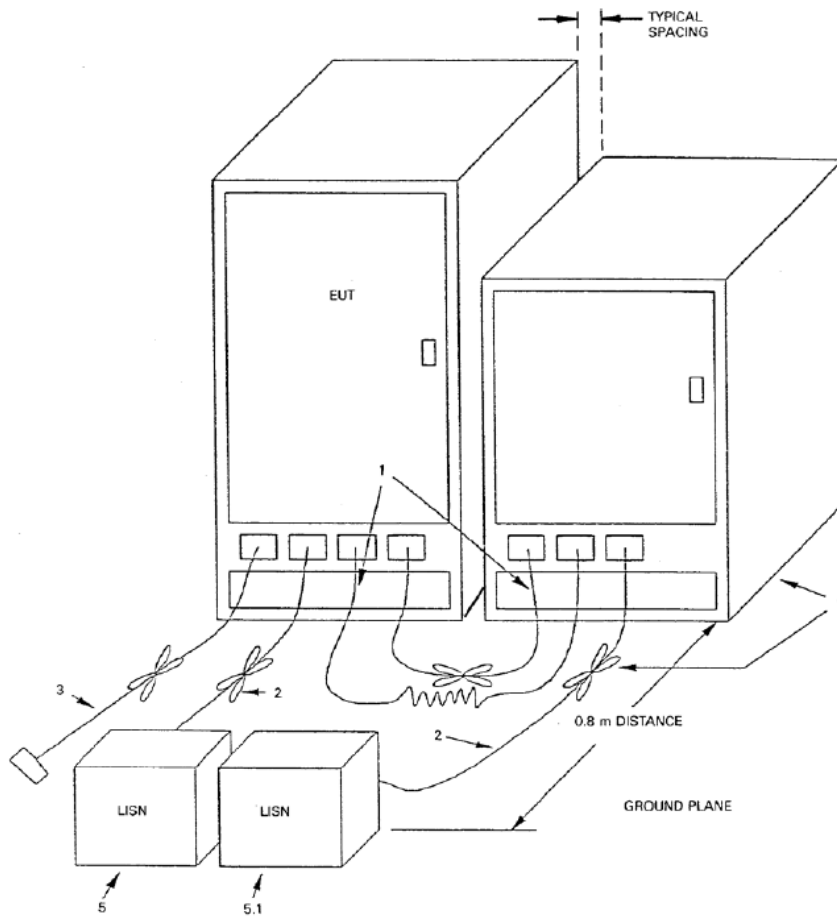

3.3 Test Setup and Test Procedure

Measurement was performed in shielded room, and instruments used were following clause 4 and clause 5 of ANSI 63.4.

Detailed test procedure was following clause 7.3 of ANSI 63.4.


EUT arrangement and operation conditions were according to clause 6 and clause 7 of ANSI 63.4.

Frequency range 150kHz – 30MHz was checked and EMI receiver measurement bandwidth was set to 9 kHz.


3.4 Test Protocol

Test Curve:

L-Line

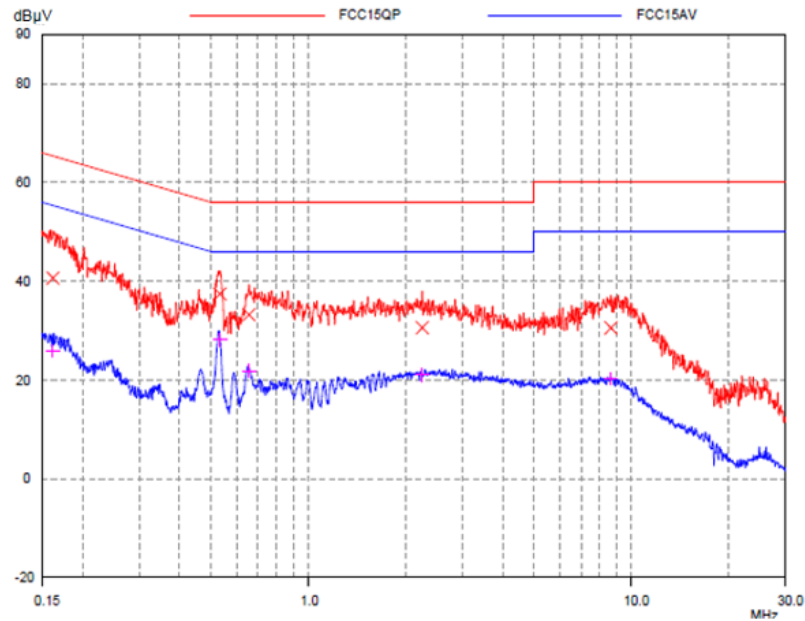

N-Line

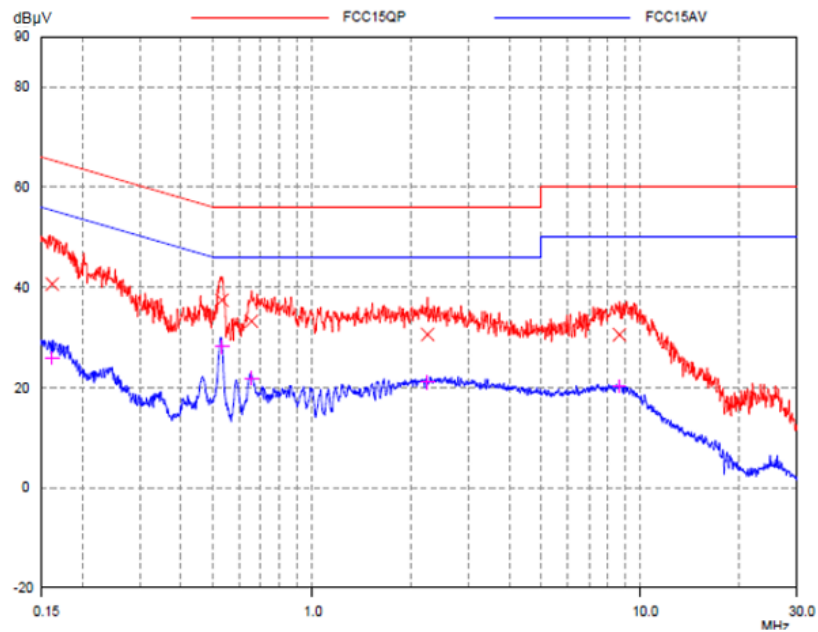

Test Data:

Frequency (MHz)	Quasi-peak			Average			Line
	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)	
0.26	*	61.26	*	*	51.26	*	L
0.33	*	59.27	*	*	49.27	*	L
0.53	*	56.00	*	27.20	46.00	18.80	L
0.62	*	56.00	*	*	46.00	*	L
2.72	*	56.00	*	*	46.00	*	L
6.21	*	60.00	*	*	50.00	*	L
0.19	*	63.94	*	*	54.01	*	N
0.25	*	61.52	*	*	51.36	*	N
0.33	*	59.27	*	*	49.24	*	N
0.53	37.42	56.00	18.58	28.14	46.00	17.86	N
5.30	*	60.00	*	*	50.00	*	N
6.21	*	60.00	*	*	50.00	*	N
Note: * means the emission level 20dB below the relevant limit.							

- Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming LISN Factor = 10.00dB, Cable Loss = 2.00dB,
 Original Receiver Reading = 10.00dBuV, Limit = 66.00dBuV.
 Then Correct Factor = 10.00 + 2.00 = 12.00dB;
 Corrected Reading = 10dBuV + 12.00dB = 22.00dBuV;
 Margin = 66.00dBuV – 22.00dBuV = 44.00dB.

4 Radiated emission

Test result: PASS

4.1 Radiated emission limits

4.1.1 Limits for radiated emission of class A device



Frequency (MHz)	Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 10m
30 ~ 88	39
88 ~ 216	43.5
216 ~ 960	46.4
Above 960	49.5
Notes: 1. for the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades. 2. At the transition frequency, the more stringent limit shall apply.	

4.1.2 Limits for radiated emission of class B device

Frequency (MHz)	Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 3m
30 ~ 88	40.0
88 ~ 216	43.5
216 ~ 960	46.0
Above 960	54.0
Notes: 1. for the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades. 2. At the transition frequency, the more stringent limit shall apply.	

4.2 Block diagram and test set up

☐ For table top equipment

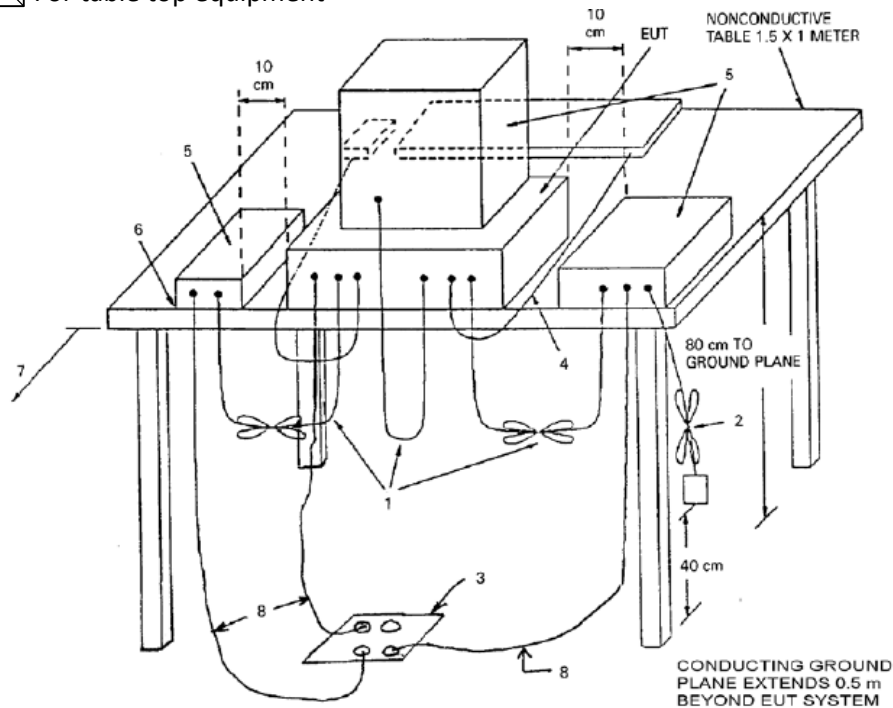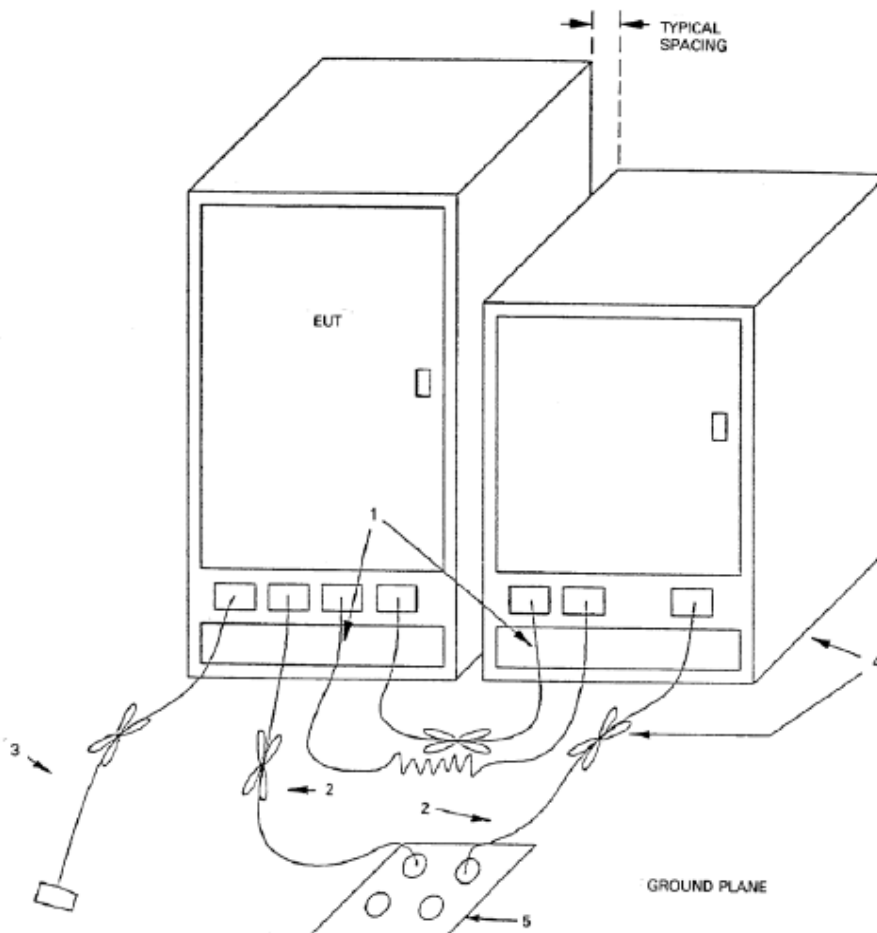☐ For floor standing equipment

4.3 Test Setup and Test Procedure

The measurement was performed in a semi-anechoic chamber.

The distance from EUT to receiving antenna is 3 meter.

Measurement was performed according to clause 4 and clause 5 of ANSI 63.4.

Test procedure was according to clause 8.3 of ANSI 63.4.



EUT arrangement and operate condition were according to clause 6 and clause 8 of ANSI 63.4.

The bandwidth setting on R&S Test Receiver was 120 kHz.

The required measurement frequency range was checked.

4.4 Test Protocol

Test Curve:

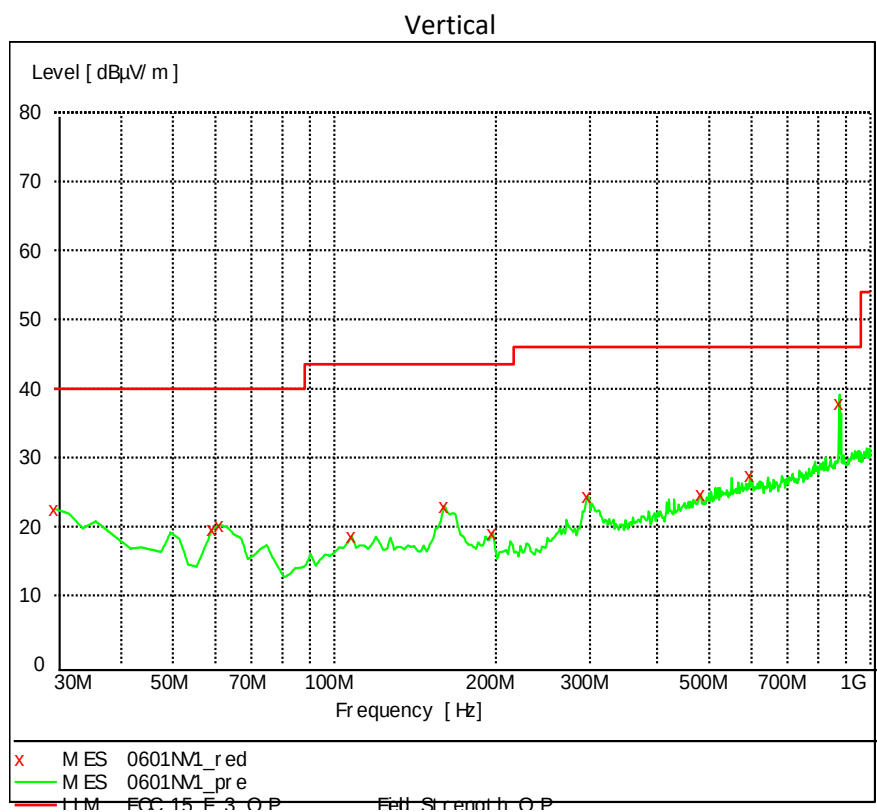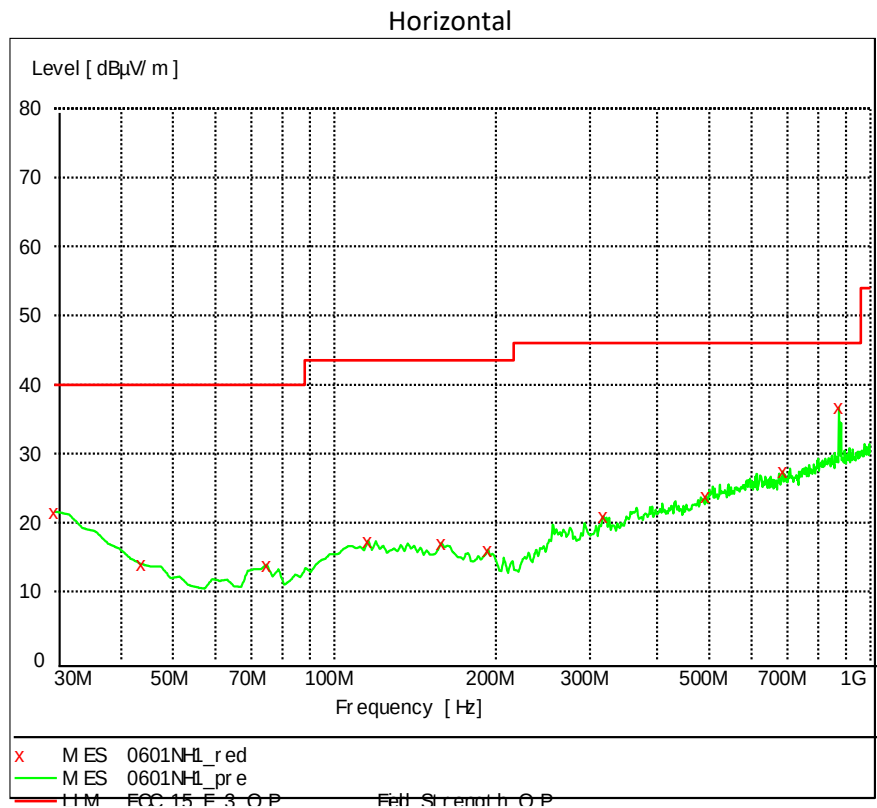

Test data:

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin	Detector
H	30.00	21.60	19.40	40.00	18.40	PK
H	105.81	*	13.30	43.50	*	PK
H	156.35	*	13.20	43.50	*	PK
H	179.67	*	10.90	43.50	*	PK
H	687.03	27.50	21.40	46.00	18.50	PK
H	873.64	36.70	23.40	46.00	9.30	PK
V	30.00	22.50	19.40	40.00	17.50	PK
V	61.10	20.20	7.30	40.00	19.80	PK
V	84.42	*	7.10	40.00	*	PK
V	105.81	*	12.30	43.50	*	PK
V	595.67	27.50	20.80	46.00	18.50	PK
V	875.59	37.90	23.40	46.00	8.10	PK
Note: * means the emission level 20dB below the relevant limit.						

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV, limit = 40.00dBuV/m.
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m; Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m; Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

*****END of the report*****